

Holly Park
Seattle

SAIC[®]

RECEIVED

SEP 20 2012

DEPT OF ECOLOGY
TCP - NWRO

September 13, 2012

Mr. Mark Horne
Chevron Environmental Management Company
6101 Bollinger Canyon Road
San Ramon, California 94583

**Subject: Third Quarter 2012 Groundwater Monitoring and Sampling Report
Former Tidewater Service Station No. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington**

Dear Mr. Horne:


SAIC Energy, Environment & Infrastructure, LLC (SAIC), on behalf of Chevron Environmental Management Company (CEMC), prepared this letter summarizing the third quarter 2012 groundwater monitoring and sampling event at former Tidewater Service Station No. 30-3189 (the site) in Seattle, Washington (Figure 1).

FIELD ACTIVITIES

Gettler-Ryan Inc. (Gettler-Ryan) conducted the groundwater monitoring and sampling field event on August 10, 2012. They collected depth-to-groundwater measurements and checked for the presence of separate-phase hydrocarbons (SPH) in three monitoring wells on site. SPH were observed in monitoring well MW-2. Groundwater flow is to the north at a gradient of approximately 0.1 feet per foot. A potentiometric map is provided as Figure 2.

Groundwater samples were collected from two of the three monitoring wells. Samples were submitted to Eurofins Lancaster Laboratories, Inc. in Lancaster, Pennsylvania for the following analyses:

- Total petroleum hydrocarbons (TPH) as gasoline-range organics (TPH-GRO) by Northwest Method NWTPH-Gx;
- TPH as diesel-range organics (TPH-DRO) and TPH as heavy oil-range organics (TPH-HRO) by Northwest Method NWTPH-Dx extended with silica-gel cleanup; and
- Benzene, toluene, ethylbenzene, and total xylenes (BTEX), and methyl tertiary butyl ether (MTBE) by United States Environmental Protection Agency Method 8021B.



Field data sheets are provided in the Gettler-Ryan groundwater monitoring and sampling data package (Attachment A).

RESULTS


Groundwater elevations are consistent with historical data reported at the site. Petroleum-hydrocarbon constituent concentrations are generally consistent with respect to historical data. SPH were detected in monitoring well MW-2 at a thickness of 0.20 feet. No analytes were detected at concentrations exceeding the laboratory reporting limits in monitoring wells MW-1 and MW-3.

Historical groundwater elevation data, SPH thickness data, and laboratory analytical results are summarized in Table 1. The laboratory analysis report is provided as Attachment B.


Gettler-Ryan will continue to perform groundwater monitoring and sampling on a quarterly basis. If you have any questions or comments, please contact me at (425) 482-3328 or via email at ottemanr@saic.com.


Sincerely,

SAIC Energy, Environment & Infrastructure, LLC



Ruth Otteman, LG
Project Manager





Kinga Kozłowska
Environmental Scientist

Enclosures:

Figure 1 – Vicinity Map

Figure 2 – Potentiometric Map

Table 1 – Groundwater Monitoring Data and Analytical Results

Attachment A – Groundwater Monitoring and Sampling Data Package

Attachment B – Laboratory Analysis Report

cc: Ms. Donna Musa – Ecology NW Region, Toxics Cleanup Program
3190 160th Avenue SE, Bellevue, WA 98008-5452
Mr. Larry Hard – Seattle Housing Authority
120 Sixth Avenue North, P.O. Box 19028, Seattle, WA 98109-1028
Project File

REPORT LIMITATIONS



This technical document was prepared on behalf of Chevron and is intended for its sole use and for use by the local, state or federal regulatory agency that the technical document was sent to by SAIC. Any other person or entity obtaining, using, or relying on this technical document hereby acknowledges that they do so at their own risk, and that SAIC shall have no responsibility or liability for the consequences thereof.

Site history and background information provided in this technical document are based on sources that may include interviews with environmental regulatory agencies and property management personnel and a review of acquired environmental regulatory agency documents and property information obtained from CEMC and others. SAIC has not made, nor has it been asked to make, any independent investigation concerning the accuracy, reliability, or completeness of such information beyond that described in this technical document.

Recognizing reasonable limits of time and cost, this technical document cannot wholly eliminate uncertainty regarding the vertical and lateral extent of impacted environmental media.

Opinions and recommendations presented in this technical document apply only to site conditions and features as they existed at the time of SAIC's site visits or site work and cannot be applied to conditions and features of which SAIC is unaware and has not had the opportunity to evaluate.

All sources of information on which SAIC has relied in making its conclusions (including direct field observations) are identified by reference in this technical document or in appendices attached to this technical document. Any information not listed by reference or in appendices has not been evaluated or relied upon by SAIC in the context of this technical document. The conclusions, therefore, represent our professional opinion based on the identified sources of information.

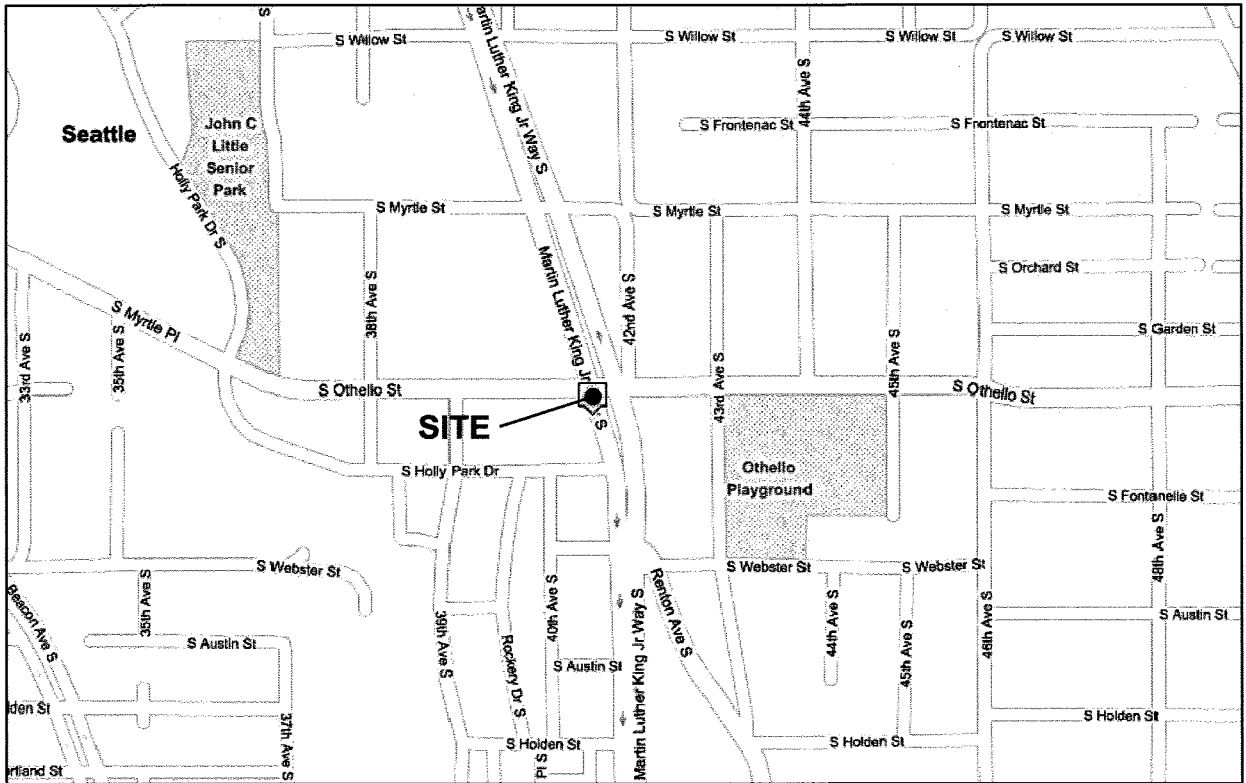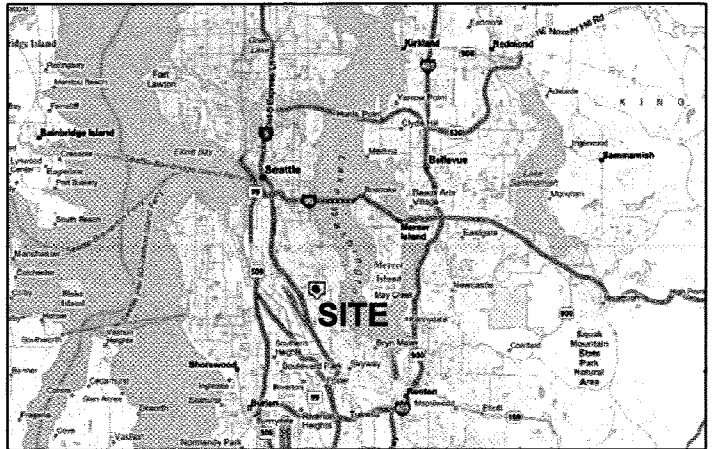

Maps Provided by Seattle.gov




Former Tidewater Service Station No. 30-3189
 7301 Martin Luther King Jr. Way South
 Seattle, Washington

FIGURE 1
 Vicinity Map

FILE NAME: 303189_VM.dwg	DATE: 10/12/2011
-----------------------------	---------------------

South Othello Street

N



Former Building

Former USTs

Former Station Building

Former Canopy Pump Island

Former Restaurant

Martin Luther King Jr. Way South

MW-1
96.64

MW-3
96.77

Legend

MW-3 Groundwater Monitoring Wells Installed 2007 (SAIC)

— x — Fence

--- Property Boundary

96.64 Groundwater Elevation in Feet

Approximate Groundwater Flow Direction at a Gradient of 0.1 feet per foot

92.00 Groundwater Elevation Contour at a 1 Foot Interval

90.87** Groundwater Elevation Corrected for the Presence of Seperate Phase Hydrocarbons



Gabriel Cisneros
Gabriel Cisneros 9/13/12

Former Tidewater Service Station No. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington

FIGURE 2
Potentiometric Map
August 10, 2012

FILE NAME:
303189 Site Map.dwg

DATE:
9/13/2012



TABLE 1
GROUNDWATER MONITORING DATA AND ANALYTICAL RESULTS¹
FORMER TIDEWATER SERVICE STATION NO. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington
Concentrations reported in µg/L

Well ID/ Date	Purge Method	TOC ² (ft.)	DTP (ft.)	DTW (ft.)	SPHT (ft.)	GWE ³ (ft.)	TPH-DRO	TPH-HRO	TPH-GRO	Benzene	Toluene	Ethyl- benzene	Total Xylenes	MTBE	Total Lead
MW-1															
08/31/07		--	--	--	--	--	930	190	<50	<0.5	<0.5	<0.5	<1.5	--	0.052
04/24/09	LFP	99.66	--	2.36	--	97.30	650	<76	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/12/09	LFP	99.66	--	4.24	--	95.42	370	<67	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/14/09	LFP	99.66	--	1.78	--	97.88	270 ²	<68 ⁵	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/11/10	LFP	99.66	--	1.92	--	97.74	560	<69	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/24/10	LFP	99.66	--	2.43	--	97.23	91	<68	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/04/10	LFP	99.66	--	3.62	--	96.04	520	<75	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/12/10	LFP	99.66	--	2.00	--	97.66	440	<68	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/11	LFP	99.66	--	2.03	--	97.63	1,000	270	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/06/11	LFP	99.66	--	2.32	--	97.34	1,100	210	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/18/11	LFP	99.66	--	4.10	--	95.56	830	210	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/22/11	LFP	99.66	--	1.88	--	97.78	<30	<70	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/12	LFP	99.66	--	1.60	--	98.06	<31	<72	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/25/12	LFP	99.66	--	1.80	--	97.86	<30	<69	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/10/12	LFP	100.66	--	4.02	--	96.64	<30	<69	<50	<0.5	<0.5	<0.5	<1.5	--	--
MW-2															
08/31/07		--	--	--	--	--	2,100	1,200	26,000	3,200	190	1,400	3,300	--	--
04/24/09	PER	99.05	--	7.34	--	91.71	-- ⁴	-- ⁴	16,000	4,100	99	1,500	2,000	<3	--
08/12/09	PER	99.05	--	8.18	--	90.87	-- ⁴	-- ⁴	27,000	4,000	100	1,300	1,900	<3	--
11/14/09	PER	99.05	--	5.75	--	93.30	-- ⁴	-- ⁴	19,000	2,800	62	950	1,300	<3	--
02/11/10	PER	99.05	--	6.98	--	92.07	-- ⁴	-- ⁴	25,000	3,400	97	1,600	2,200	<0.5	--
05/24/10	PER	99.05	--	7.42	--	91.63	-- ⁴	-- ⁴	19,000	2,900	88	1,400	2,000	<1	--
08/04/10	PER	99.05	--	7.92	--	91.13	-- ⁴	-- ⁴	16,000	3,800	110	1,700	2,700	<3	--
11/12/10	PER	99.05	--	6.16	--	92.89	-- ⁴	-- ⁴	16,000	1,900	56	660	680	<1	--
02/23/11	PER	99.05	--	6.09	--	92.96	-- ⁴	-- ⁴	12,000	2,800	60	680	780	<3	--
05/06/11	PER	99.05	--	6.98	--	92.07	-- ⁴	-- ⁴	15,000	3,100	72	1,300	1,400	<3	--
08/18/11		99.05	8.20	8.30	0.10	90.83	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	--
11/22/11		99.05	UNABLE TO MEASURE DTW OR COLLECT SAMPLE DUE TO PRESENCE OF SPH					--	--	--	--	--	--	--	--
02/23/12		99.05	1.55	1.90	0.35	97.43	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	--
05/25/12		99.05	7.10	7.85	0.75	91.80	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	--
08/10/12		99.05	8.14	8.34	0.20	90.87	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	--
MW-3															
08/31/07		--	--	--	--	--	120	<100	<50	<0.5	<0.5	<0.5	<1.5		0.055
04/24/09	LFP	100.00	--	2.13	--	97.87	58	<75	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/12/09	LFP	100.00	--	4.47	--	95.53	620	170	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/14/09	LFP	100.00	--	1.60	--	98.40	450	370	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/11/10	LFP	100.00	--	1.59	--	98.41	160	130	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/24/10	LFP	100.00	--	1.83	--	98.17	910	310	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/04/10	LFP	100.00	--	3.84	--	96.16	55	<74	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--

**TABLE 1
GROUNDWATER MONITORING DATA AND ANALYTICAL RESULTS¹
FORMER TIDEWATER SERVICE STATION NO. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington
Concentrations reported in µg/L**

Well ID/ Date	Purge Method	TOC ² (ft.)	DTP (ft.)	DTW (ft.)	SPHT (ft.)	GWE ³ (ft.)	TPH-DRO	TPH-HRO	TPH-GRO	Benzene	Toluene	Ethyl- benzene	Total Xylenes	MTBE	Total Lead
MW-3 (cont)															
11/12/10	LFP	100.00	--	1.62	--	98.38	67	<71	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/11	LFP	100.00	--	1.73	--	98.27	140	<73	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/06/11	LFP	100.00	--	1.85	--	98.15	160	82	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/18/11	LFP	100.00	--	4.38	--	95.62	56	<74	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/22/11	LFP	100.00	--	1.58	--	98.42	<30	<70	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/12	LFP	100.00	--	1.65	--	98.35	<33	<77	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/25/12	LFP	100.00	--	1.30	--	98.70	<29	<67	<50	<0.5	0.9	<0.5	<0.5	<0.5	--
08/10/12	LFP	101.00	--	4.23	--	96.77	<30	<69	<50	<0.5	<0.5	<0.5	<1.5	--	--
B-9⁷															
05/01/02		--	--	--	--	--	0.660	0.310	32	530	<100	1,600	4,300	--	--
B-10⁷															
05/01/02		--	--	--	--	--	5.10	<0.063	26	240	110	240	330	--	--
QA/TRIP BLANK															
04/24/09		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/12/09		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/14/09		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/11/10		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/24/10		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/04/10		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/12/10		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/11		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/06/11		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/18/11 ⁶		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/12		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/25/12		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/10/12		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--
Standard Laboratory Reporting Limits:							--	--	50	0.5	0.5	0.5	0.5	0.5	--
MTCA Method A Cleanup Levels:							500	500	800/1,000	5	1,000	700	1,000	0.5	15
Current Method ⁸ :							NWTPH-Dx + Extended			NWTPH-Gx and USEPA 8021B/8260B				USEPA 7421	

Abbreviations:

BTEX = Benzene, toluene, ethylbenzene, and total xylenes
DTP = Depth to Product
DTW = Depth to Water
(ft.) = Feet
GC/MS = gas chromatography/mas spectrometry
GWE = Groundwater Elevation
LFP = Low Flow Purge
MTBE = Methyl Tertiary Butyl Ether
MTCA = Model Toxics Control Act

ND = Non-detect
PER = Peristaltic Pump
QA = Quality Assurance/Trip Blank
QC = Quality control
SAIC = SAIC Energy, Environment & Infrastructure, LLC
SPH = Separate-phase hydrocarbons
SPHT = SPH Thickness
TOC = Top of Casing

TPH = Total Petroleum Hydrocarbons
TPH-DRO = TPH as diesel-range organics
TPH-GRO = TPH as gasoline-range organics
TPH-HRO = TPH as heavy oil-range organics
USEPA = United States Environmental Protection Agency
µg/L = Micrograms per liter
<= The analyte was not detected at or above the reported value
-- = Not Measured/Not Analyzed

Analytical Methods:

After April 24, 2009 and prior to August 10, 2012 BTEX analysis by USEPA Method 8260B.
TPH-GRO by Method NWTPH-Gx.
TPH-DRO and TPH-HRO by Method NWTPH-Dx with silica-gel cleanup.
BTEX and MTBE by USEPA Method 8021B.

TABLE 1
GROUNDWATER MONITORING DATA AND ANALYTICAL RESULTS¹
FORMER TIDEWATER SERVICE STATION NO. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington
Concentrations reported in µg/L

Notes:

- 1 Analytical results in bold font indicate concentrations exceed MTCA Method A cleanup levels.
- 2 TOC elevations are expressed in feet relative to an arbitrary datum.
- 3 When SPH is present, GWE has been corrected using the following formula: $GWE = [(TOC - DTW) + (SPHT \times 0.80)]$.
- 4 Not sampled due to insufficient water.
- 5 Laboratory report indicates the surrogate data is outside the QC limits. Results from the reextraction are within the limits. The hold time had expired prior to the reextraction therefore, all results are reported from the original extract. The TPH-DRO result for the re-extraction is 610 µg/L; the TPH-HRO result for the re-extraction is ND.
- 6 The initial analysis for GC.MS volatiles could not be reported due to analytical difficulties. Since only one sample vial was submitted, the analysis was repeated using the remaining sample volume which contained headspace.
- 7 Results for wells B-9 and B-10 were provided by GeoEngineers.
- 8 Laboratory analytical methods for historical dat may no be consistent with list of current analytical methods. When necessary, consult original laboratory reports to verify methods used.

Attachment A:
Groundwater Monitoring and Sampling Data Package




GETTLER-RYAN INC.



TRANSMITTAL

August 16, 2012
G-R #385862

TO: Ms. Ruth A. Otteman
SAIC
18912 North Creek Parkway, Suite 101
Bothell, WA 98011

FROM: Deanna L. Harding 
Project Coordinator
Gettler-Ryan Inc.
6747 Sierra Court, Suite J
Dublin, California 94568

RE: **Chevron Facility**
#303189
(Former Tidewater Service Stn.)
7301 MLK Jr. Way South
Seattle, Washington

WE HAVE ENCLOSED THE FOLLOWING:

COPIES	DESCRIPTION
VIA PDF	Groundwater Monitoring and Sampling Data Package Third Quarter Event of August 10, 2012

COMMENTS:

Pursuant to your request, we are providing you with copies of the above referenced data for your use.

Please provide us the updated historical data prior to the next monitoring and sampling event for our field use.

Please feel free to contact me if you have any comments/questions.

trans/303189



GETTLER - RYAN INC.

CHEVRON - SITE CHECK LIST

Facility#: **Chevron #303189** Date: **8-10-12**
 Address: **7301 Martin Luther King Jr. Way South**
 City/St.: **Seattle, WA**
 Status of Site: **VACANT LOT**

DRUMS:

Please list below ALL DRUMS @ site: i.e., drum description, condition, labeling, contents, location of drum:



#	Description	Condition	Labeling	Contents	Location
	No Drums				

WELLS:

Please check the condition of ALL WELLS @ site: i.e., well box condition, gaskets, bolts, well plug, well lock, etc.:

Well ID	Gaskets (M) Missing (R) Replaced	Bolts (M) Missing (R) Replaced	Well Plug Y/N	Well Lock Y/N	Well Box Manufacturer/Size/# of Bolts	Other
MW-1	GOOD	GOOD	GOOD	GOOD	8' MORRIS x 3	
MW-2	↓	↓	↓	↓	↓	
MW-3	↓	↓	↓	↓	↓	

Additional Comments/Observations: _____

Standard Operating Procedure, Low-Flow Purging and Sampling

Gettler-Ryan Inc. field personnel adhere to the following Standard Operating Procedure (SOP) for the collection and handling of representative groundwater samples using the Low-Flow (Minimal-Drawdown) Purging technique. This SOP incorporates purging and sampling methods discussed in U.S. EPA, Ground Water Issue, Publication Number EPA/540/S-95/504, April 1996 by Puls, R.W. and M.J. Barcelona - "*Low-Flow (Minimal-Drawdown) Ground-Water Sampling Procedures.*"

A QED Well Wizard™ (or equivalent) bladder pump or Peristaltic Pump will be used to purge and sample selected wells as outlined in the scope-of-work. An in-line flow cell or other multi-parameter meter is used to collect water quality indicating parameters during purging.

Initial Pump Discharge Test Procedures

The Static Water Level (SWL) is measured in all wells at the site prior to the installation of the pump or tubing and initiation of the test procedures in any well. In addition, the presence or absence of separate-phase hydrocarbons (SPH) is determined using an interface probe. Product thickness, if present, is measured to the nearest 0.01 foot. The SWL measurement and SPH thickness, if any, will be recorded on the field data sheet.

The bladder pump or suction inlet tubing of the peristaltic pump is then positioned with its inlet located within the screened interval of the well. The in-line flow cell is then connected to the discharge tubing. After pump installation, the SWL is allowed to recover to its original level. The pump is then started at a discharge rate between 100 ml to 300 ml per minute with the in-line flow cell connected. The water level is monitored continuously for any change from the original measurement and the discharge rate is adjusted until an optimum discharge rate (ODR) is determined. The goal for the ODR is to produce a stable drawdown of less than 0.1 meter as allowed by site conditions; however the total drawdown from the initial SWL should not exceed 25% of the distance between pump inlet location and the top of the well screen. Once achieved, the ODR will be confirmed by volumetric discharge measurement and recorded on the field data sheet.

Purging and Water Quality Parameter Measurement

When the ODR has been determined and the SWL drawdown has been established within the acceptable range, and a minimum of one pump system volume (bladder volume and/or discharge tubing volume) has been purged, field measurements for temperature (T), pH, conductivity (Ec), and if required, oxygen reduction potential (ORP) and dissolved oxygen (DO) will be collected and documented on the field data sheet. Measurements should be taken every three to five minutes until parameters stabilize for three consecutive readings. The minimum parameter subset of T ($\pm 10\%$), pH (± 0.1 unit), and Ec (± 10 uS) are required to stabilize. Additional parameters that may be required are DO (± 0.2 mg/l) and ORP (± 20 mV).

Sample Collection

When water quality parameters have stabilized, and the SWL drawdown remains established within the acceptable range, groundwater sample collection may begin. If used, the in-line flow cell and its tubing are disconnected from the discharge tubing prior to sample collection. Water samples are collected from the discharge tubing into appropriate containers. Pre-preserved containers, supplied by analytical laboratories, are used when possible. When pre-preserved containers are not available, the laboratory is instructed to preserve the sample as appropriate. Duplicate samples are collected for the laboratory to use in maintaining quality assurance/quality control standards, as directed by the scope of work. The samples are labeled to include the job number, sample identification, collection date and time, analysis, preservation (if any), and the sample collector's initials. The water samples are placed in a cooler,

maintained at 4°C for transport to the laboratory. A laboratory supplied trip blank accompanies each sampling set. The trip blank is analyzed for some or all of the same compounds as the groundwater samples. Once collected in the field, all samples are maintained under chain of custody until delivered to the laboratory.

The chain of custody document includes the job number, type of preservation, if any, analysis requested, sample identification, date and time collected, and the sample collector's name. The chain of custody is signed and dated (including time of transfer) by each person who receives or surrenders the samples, beginning with the field personnel and ending with the laboratory personnel.

A laboratory supplied trip blank accompanies each sampling set. For sampling sets greater than 20 samples, 5% trip blanks are included. The trip blank is analyzed for some or all of the same compounds as the groundwater samples.



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #303189 Job Number: 385862
 Site Address: 7301 Martin Luther King Jr. Way S Event Date: 8.10.12 (inclusive)
 City: Seattle, WA Sampler: JP

Well ID: MW-1 Date Monitored: 8.10.12
 Well Diameter: .75 in.
 Total Depth: 11.65 ft.
 Depth to Water: 4.02 ft. Check if water column is less than 0.50 ft.
7.63 xVF - = - x3 case volume = Estimated Purge Volume: - gal.

Volume Factor (VF)	<u>3/4" = 0.02</u>	1" = 0.04	2" = 0.17	3" = 0.38
	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 5.54

Purge Equipment:

Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:

Disposable Bailer _____
 Pressure Bailer _____
 Metal Filters _____
 Peristaltic Pump X
 QED Bladder Pump _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Completed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbent Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Water Removed: _____
 Product Transferred to: _____

Start Time (purge): 1100 Weather Conditions: SUN
 Sample Time/Date: 1140 / 8.10.12 Water Color: CLEAR Odor: 0 / N MILD
 Approx. Flow Rate: 1.0 mlpm Sediment Description: None
 Did well de-water? No If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: 4.16

Time (2400 hr.)	Volume (Liters)	pH	Conductivity ($\mu\text{mhos/cm} - \mu\text{S}$)	Temperature (C / F)	D.O. (mg/L)	ORP (mV)	Gauge DTW as parameters are recorded
<u>1100</u>	<u>1.8</u>	<u>6.36</u>	<u>210</u>	<u>17.2</u>	<u>.36</u>	<u>42.12</u>	<u>4.16</u>
<u>1121</u>	<u>2.1</u>	<u>6.36</u>	<u>220</u>	<u>17.3</u>	<u>.36</u>	<u>42.12</u>	<u>4.16</u>
<u>1124</u>	<u>2.4</u>	<u>6.36</u>	<u>220</u>	<u>17.4</u>	<u>.36</u>	<u>42.12</u>	<u>4.16</u>

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-1	<u>3</u> x vva vial	YES	HCL	LANCASTER	NWTPH-Gx/BTEX(8021)
	<u>2</u> x 1 liter ambers	YES	HCL	LANCASTER	NWTPH-Dx w/sgc

COMMENTS: Depth Pump Set At: 8-9'

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER - RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #303189 Job Number: 385862
 Site Address: 7301 Martin Luther King Jr. Way S Event Date: 8.10.12 (inclusive)
 City: Seattle, WA Sampler: J.P.

Well ID: MW-1
 Well Diameter: .75 in.
 Total Depth: 9.65 ft.
 Depth to Water: 8.34 ft.
1.31 xVF = - = - x3 case volume = Estimated Purge Volume: - gal.

Date Monitored: 8.10.12

Volume Factor (VF)	<u>3/4" = 0.02</u>	1" = 0.04	2" = 0.17	3" = 0.38
	<u>4" = 0.66</u>	5" = 1.02	6" = 1.50	12" = 5.80

Check if water column is less than 0.50 ft.

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: -

Purge Equipment:

Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:

Disposable Bailer _____
 Pressure Bailer _____
 Metal Filters _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Time Started: 1030 (2400 hrs)
 Time Completed: 1045 (2400 hrs)
 Depth to Product: 8.14 ft
 Depth to Water: 8.34 ft
 Hydrocarbon Thickness: .20 ft
 Visual Confirmation/Description: THICK BLACK SLUDGE
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: 0 gal
 Amt Removed from Well: 0 gal
 Water Removed: 0
 Product Transferred to: 0

Start Time (purge): _____ Weather Conditions: _____
 Sample Time/Date: / Water Color: _____ Odor: Y / N
 Approx. Flow Rate: _____ mlpm Sediment Description: _____
 Did well de-water? _____ If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: _____

Time (2400 hr.)	Volume (Liters)	pH	Conductivity (µmhos/cm - µS)	Temperature (C / F)	D.O. (mg/L)	ORP (mV)	Gauge DTW as parameters are recorded

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-	x voa vial	YES	HCL	LANCASTER	NWTPH-Gx/BTEX(8021)
	x 1 liter ambers	YES	HCL	LANCASTER	NWTPH-Dx w/sgc

COMMENTS: Depth Pump Set At: SPH

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #303189 Job Number: 385862
 Site Address: 7301 Martin Luther King Jr. Way S Event Date: 8.10.12 (inclusive)
 City: Seattle, WA Sampler: JF

Well ID: MW-3 Date Monitored: 8.10.12
 Well Diameter: .75 in.
 Total Depth: 9.60 ft.
 Depth to Water: 4.23 ft. Check if water column is less than 0.50 ft.
5.37 xVF - = - x3 case volume = Estimated Purge Volume: - gal.

Volume Factor (VF)	<u>3/4" = 0.02</u>	1" = 0.04	2" = 0.17	3" = 0.38
	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 5.30

Purge Equipment:
 Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump X
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:
 Disposable Bailer _____
 Pressure Bailer _____
 Metal Filters _____
 Peristaltic Pump X
 QED Bladder Pump _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Completed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Water Removed: _____
 Product Transferred to: _____

Start Time (purge): 1200 Weather Conditions: SUN
 Sample Time/Date: 1240 / 8.10.12 Water Color: CLEAR Odor: Y / N
 Approx. Flow Rate: 1.5 mlpm Sediment Description: NONE
 Did well de-water? NO If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: 4.45

Time (2400 hr.)	Volume (Liters)	pH	Conductivity ($\mu\text{mhos/cm} - \mu\text{S}$)	Temperature (C F)	D.O. (mg/L)	ORP (mV)	Gauge DTW as parameters are recorded
<u>1218</u>	<u>1.8</u>	<u>6.40</u>	<u>.230</u>	<u>17.0</u>	<u>0</u>	<u>-38.2</u>	<u>4.46</u>
<u>1221</u>	<u>2.1</u>	<u>6.40</u>	<u>.230</u>	<u>17.1</u>	<u>0</u>	<u>-38.2</u>	<u>4.45</u>
<u>1224</u>	<u>2.4</u>	<u>6.40</u>	<u>.230</u>	<u>17.1</u>	<u>0</u>	<u>-38.3</u>	<u>4.45</u>

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-3</u>	<u>2</u> x vva vial	YES	HCL	LANCASTER	NWTPH-Gx/BTEX(8021)
	<u>2</u> x 1 liter ambers	YES	HCL	LANCASTER	NWTPH-Dx w/sgc

COMMENTS: Depth Pump Set At: 7-9

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____

Chevron Northwest Region Analysis Request/Chain of Custody



For Lancaster Laboratories use only

Acct. #: _____ Group # _____ Sample # _____

Facility #: 557303189-OML G-R/385862
 Site Address: 7301 Martin Luther King Jr. Way South, SEATTLE, WA
 WBS: _____
 Chevron PM: MHO SAICRO Otteman
 Lead Consultant: _____
 Consultant/Office: G-R, Inc., 6747 Sierra Court, Suite J, Dublin, CA 94568
 Consultant Prj. Mgr.: Deanna L. Harding (deanna@grinc.com)
 Consultant Phone #: 925-551-7555 Fax #: 925-551-7899
 Sampler: J. Payne

Sample Identification				Matrix			Total Number of Containers	Analyses Requested										SCR #: _____						
				Soil	Water	Oil		Preservation Codes																
Date Collected	Time Collected	Grab	Composite	Soil	Water	Oil		BTEX	8260 full scan	Oxygenates	NMTPH GX	NMTPH DX	Silica Gel Cleanup	Lead	Total	Dis. Method	WAVPH	WAEPH	NMTPH H-HCID	quantification				
<u>Q.A.</u>	<u>8-10-12</u>	<u>X</u>			<u>X</u>		<u>2</u>	<u>X</u>			<u>X</u>													
<u>RAW-1</u>	<u>✓</u>	<u>11:10</u>			<u>X</u>		<u>5</u>	<u>X</u>			<u>X</u>		<u>X</u>											
<u>RAW-3</u>	<u>✓</u>	<u>17:40</u>			<u>X</u>		<u>5</u>	<u>X</u>			<u>X</u>		<u>X</u>											

- Results in Dry Weight
- J value reporting needed
- Must meet lowest detection limits possible for 8260 compounds
- 8021 MTBE Confirmation
- Confirm MTBE + Naphthalene
- Confirm highest hit by 8260
- Confirm all hits by 8260
- Run ___ oxy's on highest hit
- Run ___ oxy's on all hits

Comments /Remarks

Please forward the lab results directly to the Lead Consultant and cc: G-R.

Turnaround Time Requested (TAT) (please circle) STD. TAT <u>24 hour</u> 72 hour 48 hour 4 day 5 day EDE/EDD	Relinquished by: <u>[Signature]</u>	Date: <u>8-10-12</u>	Time: <u>17:00</u>	Received by: _____	Date: _____	Time: _____
	Relinquished by: _____	Date: _____	Time: _____	Received by: _____	Date: _____	Time: _____
Data Package Options (please circle if required) GC Summary Type I - Full Type VI (Raw Data)	Relinquished by: _____	Date: _____	Time: _____	Received by: _____	Date: _____	Time: _____
	Relinquished by Commercial Carrier: UPS <u>FedEx</u> Other _____	Temperature Upon Receipt _____ C°		Received by: _____	Date: _____	Time: _____
				Custody Seals Intact?	Yes	No

Attachment B:
Laboratory Analysis Report

ANALYTICAL RESULTS

Prepared by:

Lancaster Laboratories
2425 New Holland Pike
Lancaster, PA 17605-2425

Prepared for:

Chevron
6001 Bollinger Canyon Road
L4310
San Ramon CA 94583

August 22, 2012

Project: 303189

Submittal Date: 08/11/2012
Group Number: 1328263
PO Number: 0015103600
Release Number: HORNE
State of Sample Origin: WAClient Sample DescriptionQA Water Sample
MW-1 Grab Water Sample
MW-3 Grab Water SampleLancaster Labs (LLI) #6752143
6752144
6752145

The specific methodologies used in obtaining the enclosed analytical results are indicated on the Laboratory Sample Analysis Record.

ELECTRONIC COPY TO SAIC c/o Gettler-Ryan
ELECTRONIC COPY TO SAIC
ELECTRONIC COPY TO SAICAttn: Rachelle Munoz
Attn: Jamalyn Green
Attn: Ruth Otteman



Lancaster
Laboratories

Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2661 • www.lancasterlabs.com

Respectfully Submitted,

A handwritten signature in cursive script that reads "Jill M. Parker".

Jill M. Parker
Senior Specialist

(717) 556-7262

Sample Description: QA Water Sample
 Facility# 303189 Job# 385862
 7301 Martin Luther King Jr. Way South-Seattle, WA

LLI Sample # WW 6752143
 LLI Group # 1328263
 Account # 11260

Project Name: 303189

Collected: 08/10/2012

Chevron
 6001 Bollinger Canyon Road
 L4310
 San Ramon CA 94583

Submitted: 08/11/2012 09:45

Reported: 08/22/2012 23:11

MLSQA

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Dilution Factor
GC Volatiles					
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx n.a.	ug/l N.D.	ug/l 50	1
GC Volatiles					
02102	Benzene	SW-846 8021B 71-43-2	ug/l N.D.	ug/l 0.5	1
02102	Ethylbenzene	100-41-4	N.D.	0.5	1
02102	Toluene	108-88-3	N.D.	0.5	1
02102	Total Xylenes	1330-20-7	N.D.	1.5	1

General Sample Comments

State of Washington Lab Certification No. C259

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx	1	12228A94A	08/16/2012 14:26	Laura M Krieger	1
02102	Method 8021 Water Master	SW-846 8021B	1	12228A94A	08/16/2012 14:26	Laura M Krieger	1
01146	GC VOA Water Prep	SW-846 5030B	1	12228A94A	08/16/2012 14:26	Laura M Krieger	1

Sample Description: MW-1 Grab Water Sample
 Facility# 303189 Job# 385862
 7301 Martin Luther King Jr. Way South-Seattle, WA

LLI Sample # WW 6752144
 LLI Group # 1328263
 Account # 11260

Project Name: 303189

Collected: 08/10/2012 11:40 by JP

Chevron
 6001 Bollinger Canyon Road
 L4310
 San Ramon CA 94583

Submitted: 08/11/2012 09:45

Reported: 08/22/2012 23:11

MLS-1

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Dilution Factor
GC Volatiles					
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTTPH-Gx n.a.	ug/l N.D.	ug/l 50	1
GC Volatiles					
02102	Benzene	SW-846 8021B 71-43-2	ug/l N.D.	ug/l 0.5	1
02102	Ethylbenzene	100-41-4	N.D.	0.5	1
02102	Toluene	108-88-3	N.D.	0.5	1
02102	Total Xylenes	1330-20-7	N.D.	1.5	1
GC Petroleum Hydrocarbons w/Si					
12005	DRO C12-C24 w/Si Gel	ECY 97-602 NWTTPH-Dx modified n.a.	ug/l N.D.	ug/l 30	1
12005	HRO C24-C40 w/Si Gel	n.a.	N.D.	69	1
The reverse surrogate, capric acid, is present at <1%.					

General Sample Comments

State of Washington Lab Certification No. C259

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx	1	12228B53A	08/17/2012 16:55	Marie D John	1
02102	Method 8021 Water Master	SW-846 8021B	1	12228B53A	08/17/2012 16:55	Marie D John	1
01146	GC VOA Water Prep	SW-846 5030B	1	12228B53A	08/17/2012 16:55	Marie D John	1
12005	NWTPH-Dx water w/ 10g Si Gel	ECY 97-602 NWTPH-Dx modified	1	122270001A	08/21/2012 01:56	Elizabeth J Marin	1
12007	NW Dx water w/ 10g column	ECY 97-602 NWTPH-Dx 06/97	1	122270001A	08/14/2012 11:30	Olivia Arosemena	1



Sample Description: MW-3 Grab Water Sample
 Facility# 303189 Job# 385862
 7301 Martin Luther King Jr. Way South-Seattle, WA

LLI Sample # WW 6752145
 LLI Group # 1328263
 Account # 11260

Project Name: 303189

Collected: 08/10/2012 12:40 by JP

Chevron

6001 Bollinger Canyon Road

Submitted: 08/11/2012 09:45

L4310

Reported: 08/22/2012 23:11

San Ramon CA 94583

MLS-3

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Dilution Factor
GC Volatiles					
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx n.a.	ug/l N.D.	ug/l 50	1
GC Volatiles					
02102	Benzene	SW-846 8021B 71-43-2	ug/l N.D.	ug/l 0.5	1
02102	Ethylbenzene	100-41-4	N.D.	0.5	1
02102	Toluene	108-88-3	N.D.	0.5	1
02102	Total Xylenes	1330-20-7	N.D.	1.5	1
GC Petroleum Hydrocarbons w/Si					
ECY 97-602 NWTPH-Dx modified					
12005	DRO C12-C24 w/Si Gel	n.a.	N.D.	30	1
12005	HRO C24-C40 w/Si Gel	n.a.	N.D.	69	1

The reverse surrogate, capric acid, is present at <1%.

General Sample Comments

State of Washington Lab Certification No. C259

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx	1	12228B53A	08/17/2012 17:22	Marie D John	1
02102	Method 8021 Water Master	SW-846 8021B	1	12228B53A	08/17/2012 17:22	Marie D John	1
01146	GC VOA Water Prep	SW-846 5030B	1	12228B53A	08/17/2012 17:22	Marie D John	1
12005	NWTPH-Dx water w/ 10g Si Gel	ECY 97-602 NWTPH-Dx modified	1	122270001A	08/21/2012 02:19	Elizabeth J Marin	1
12007	NW Dx water w/ 10g column	ECY 97-602 NWTPH-Dx 06/97	1	122270001A	08/14/2012 11:30	Olivia Arosemena	1

Quality Control Summary

Client Name: Chevron
Reported: 08/22/12 at 11:11 PM

Group Number: 1328263

Matrix QC may not be reported if insufficient sample or site-specific QC samples were not submitted. In these situations, to demonstrate precision and accuracy at a batch level, a LCS/LCSD was performed, unless otherwise specified in the method.

All Inorganic Initial Calibration and Continuing Calibration Blanks met acceptable method criteria unless otherwise noted on the Analysis Report.

Laboratory Compliance Quality Control

<u>Analysis Name</u>	<u>Blank Result</u>	<u>Blank MDL</u>	<u>Report Units</u>	<u>LCS %REC</u>	<u>LCSD %REC</u>	<u>LCS/LCSD Limits</u>	<u>RPD</u>	<u>RPD Max</u>
Batch number: 12228A94A	Sample number(s): 6752143							
Benzene	N.D.	0.5	ug/l	100	103	80-120	2	30
Ethylbenzene	N.D.	0.5	ug/l	102	103	80-120	1	30
NWTPH-Gx water C7-C12	N.D.	50.	ug/l	98	101	75-135	3	30
Toluene	N.D.	0.5	ug/l	103	104	80-120	1	30
Total Xylenes	N.D.	1.5	ug/l	105	106	80-120	1	30
Batch number: 12228B53A	Sample number(s): 6752144-6752145							
Benzene	N.D.	0.5	ug/l	106	106	80-120	0	30
Ethylbenzene	N.D.	0.5	ug/l	107	107	80-120	0	30
NWTPH-Gx water C7-C12	N.D.	50.	ug/l	97	97	75-135	1	30
Toluene	N.D.	0.5	ug/l	107	107	80-120	0	30
Total Xylenes	N.D.	1.5	ug/l	109	109	80-120	0	30
Batch number: 122270001A	Sample number(s): 6752144-6752145							
DRO C12-C24 w/Si Gel	N.D.	30.	ug/l	62	67	50-120	8	20
HRO C24-C40 w/Si Gel	N.D.	70.	ug/l					

Surrogate Quality Control

Surrogate recoveries which are outside of the QC window are confirmed unless attributed to dilution or otherwise noted on the Analysis Report.

Analysis Name: Method 8021 Water Master

Batch number: 12228A94A

Trifluorotoluene-P Trifluorotoluene-F

6752143	86	72
Blank	86	76
LCS	86	88
LCSD	86	91

Limits: 51-120 63-135

Analysis Name: Method 8021 Water Master

Batch number: 12228B53A

Trifluorotoluene-P Trifluorotoluene-F

6752144	87	73
6752145	87	76

* - Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The unspiked result was more than four times the spike added.

Quality Control SummaryClient Name: Chevron
Reported: 08/22/12 at 11:11 PM

Group Number: 1328263

Surrogate Quality Control

Blank	86	75
LCS	87	92
LCSD	86	90

Limits: 51-120 63-135

Analysis Name: NWTPH-Dx water w/ 10g Si Gel
Batch number: 122270001A
Orthoterphenyl

6752144	85
6752145	74
Blank	85
LCS	91
LCSD	94

Limits: 50-150

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The unspiked result was more than four times the spike added.

Chevron Northwest Region Analysis Request/Chain of Custody



For Lancaster Laboratories use only

Acct. #: 11260 Group # 1328263 Sample #: 6752143-45

Facility #: <u>SS#303189-OML G-R#385862</u> Site Address: <u>7301 Martin Luther King Jr. Way South, SEATTLE, WA</u> Chevron PM: <u>MHO</u> Lead Consultant: <u>SAICRO Otteman</u> Consultant/Office: <u>G-R, Inc., 6747 Sierra Court, Suite J, Dublin, CA 94568</u> Consultant Prj. Mgr.: <u>Deanna L. Harding (deanna@grinc.com)</u> Consultant Phone #: <u>925-551-7555</u> Fax #: <u>925-551-7899</u> Sampler: <u>J. Payne</u>				Analyses Requested SCR #: _____																																																																																																						
Matrix <input type="checkbox"/> Potable <input type="checkbox"/> NPDES <input type="checkbox"/> Water <input type="checkbox"/> Air				Preservation Codes <input type="checkbox"/> BTEX <input type="checkbox"/> 8021 <input type="checkbox"/> 8260 <input type="checkbox"/> Naphth <input type="checkbox"/> 8260 full scan <input type="checkbox"/> Oxygenates <input checked="" type="checkbox"/> NWTPH GX <input checked="" type="checkbox"/> NWTPH DX <input checked="" type="checkbox"/> Silica Gel Cleanup <input type="checkbox"/> Lead Total <input type="checkbox"/> Diss. <input type="checkbox"/> Method <input type="checkbox"/> WAPVPH <input type="checkbox"/> WAEPH <input type="checkbox"/> quantification <input type="checkbox"/> NWTPH H CID																																																																																																						
Sample Identification Date Collected: <u>8.10.12</u> Time Collected: _____ Grab: <input checked="" type="checkbox"/> Composite: _____ Soil: _____ Water: <input checked="" type="checkbox"/> Oil: <input checked="" type="checkbox"/> Air: _____ Total Number of Containers: <u>2</u>			<input checked="" type="checkbox"/> 8260 <input checked="" type="checkbox"/> 8021 <input checked="" type="checkbox"/> NWTPH GX <input checked="" type="checkbox"/> NWTPH DX <input checked="" type="checkbox"/> Silica Gel Cleanup <input type="checkbox"/> Lead Total <input type="checkbox"/> Diss. <input type="checkbox"/> Method <input type="checkbox"/> WAPVPH <input type="checkbox"/> WAEPH <input type="checkbox"/> quantification <input type="checkbox"/> NWTPH H CID																																																																																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Sample ID</th> <th>Date Collected</th> <th>Time Collected</th> <th>Grab</th> <th>Composite</th> <th>Soil</th> <th>Water</th> <th>Oil</th> <th>Air</th> <th>Total Number of Containers</th> <th>BTEX</th> <th>8021</th> <th>8260</th> <th>Naphth</th> <th>Oxygenates</th> <th>NWTPH GX</th> <th>NWTPH DX</th> <th>Silica Gel Cleanup</th> <th>Lead Total</th> <th>Diss.</th> <th>Method</th> <th>WAPVPH</th> <th>WAEPH</th> <th>quantification</th> <th>NWTPH H CID</th> </tr> </thead> <tbody> <tr> <td><u>Q.A</u></td> <td><u>8.10.12</u></td> <td></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td><u>2</u></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td></td> <td></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td><u>MW.1</u></td> <td></td> <td><u>1140</u></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td><u>5</u></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td></td> <td></td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td><u>MW.3</u></td> <td></td> <td><u>1240</u></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td><u>5</u></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td></td> <td></td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>			Sample ID	Date Collected	Time Collected	Grab	Composite	Soil	Water	Oil	Air	Total Number of Containers	BTEX	8021	8260	Naphth	Oxygenates	NWTPH GX	NWTPH DX	Silica Gel Cleanup	Lead Total	Diss.	Method	WAPVPH	WAEPH	quantification	NWTPH H CID	<u>Q.A</u>	<u>8.10.12</u>		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<u>2</u>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>										<u>MW.1</u>		<u>1140</u>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<u>5</u>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>									<u>MW.3</u>		<u>1240</u>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<u>5</u>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>									Comments / Remarks Please forward the lab results directly to the Lead Consultant and cc: G-R.			
Sample ID	Date Collected	Time Collected	Grab	Composite	Soil	Water	Oil	Air	Total Number of Containers	BTEX	8021	8260	Naphth	Oxygenates	NWTPH GX	NWTPH DX	Silica Gel Cleanup	Lead Total	Diss.	Method	WAPVPH	WAEPH	quantification	NWTPH H CID																																																																																		
<u>Q.A</u>	<u>8.10.12</u>		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<u>2</u>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>																																																																																											
<u>MW.1</u>		<u>1140</u>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<u>5</u>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>																																																																																										
<u>MW.3</u>		<u>1240</u>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<u>5</u>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>																																																																																										
Turnaround Time Requested (TAT) (please circle) STD. TAT: <u>24 hour</u> 72 hour 48 hour 4 day 5 day			Relinquished by: <u>[Signature]</u> Date: <u>8.10.12</u> Time: <u>1740</u>		Received by: _____ Date: _____ Time: _____																																																																																																					
Data Package Options (please circle if required) EDF/EDD QC Summary Type I – Full Type VI (Raw Data)			Relinquished by: _____ Date: _____ Time: _____		Received by: _____ Date: _____ Time: _____																																																																																																					
			Relinquished by Commercial Carrier: UPS <input checked="" type="checkbox"/> FedEx <input type="checkbox"/> Other _____		Received by: <u>[Signature]</u> Date: <u>8/10/12</u> Time: <u>1745</u>																																																																																																					
			Temperature Upon Receipt: <u>12.7</u> °C		Custody Seals intact? <input checked="" type="checkbox"/> Yes No																																																																																																					

Explanation of Symbols and Abbreviations

The following defines common symbols and abbreviations used in reporting technical data:

RL	Reporting Limit	BMQL	Below Minimum Quantitation Level
N.D.	none detected	MPN	Most Probable Number
TNTC	Too Numerous To Count	CP Units	cobalt-chloroplatinate units
IU	International Units	NTU	nephelometric turbidity units
umhos/cm	micromhos/cm	ng	nanogram(s)
C	degrees Celsius	F	degrees Fahrenheit
meq	milliequivalents	lb.	pound(s)
g	gram(s)	kg	kilogram(s)
µg	microgram(s)	mg	milligram(s)
mL	milliliter(s)	L	liter(s)
m³	cubic meter(s)	µL	microliter(s)
		pg/L	picogram/liter

< less than - The number following the sign is the limit of quantitation, the smallest amount of analyte which can be reliably determined using this specific test.

> greater than

ppm parts per million - One ppm is equivalent to one milligram per kilogram (mg/kg), or one gram per million grams. For aqueous liquids, ppm is usually taken to be equivalent to milligrams per liter (mg/l), because one liter of water has a weight very close to a kilogram. For gases or vapors, one ppm is equivalent to one microliter of gas per liter of gas.

ppb parts per billion

Dry weight basis Results printed under this heading have been adjusted for moisture content. This increases the analyte weight concentration to approximate the value present in a similar sample without moisture. All other results are reported on an as-received basis.

Data Qualifiers:

C – result confirmed by reanalysis.

J - estimated value – The result is \geq the Method Detection Limit (MDL) and $<$ the Limit of Quantitation (LOQ).

U.S. EPA CLP Data Qualifiers:

Organic Qualifiers		Inorganic Qualifiers	
A	TIC is a possible aldol-condensation product	B	Value is $<$ CRDL, but \geq IDL
B	Analyte was also detected in the blank	E	Estimated due to interference
C	Pesticide result confirmed by GC/MS	M	Duplicate injection precision not met
D	Compound quantitated on a diluted sample	N	Spike sample not within control limits
E	Concentration exceeds the calibration range of the instrument	S	Method of standard additions (MSA) used for calculation
N	Presumptive evidence of a compound (TICs only)	U	Compound was not detected
P	Concentration difference between primary and confirmation columns $>$ 25%	W	Post digestion spike out of control limits
U	Compound was not detected	*	Duplicate analysis not within control limits
X,Y,Z	Defined in case narrative	+	Correlation coefficient for MSA $<$ 0.995

Analytical test results meet all requirements of NELAC unless otherwise noted under the individual analysis.

Measurement uncertainty values, as applicable, are available upon request.

Tests results relate only to the sample tested. Clients should be aware that a critical step in a chemical or microbiological analysis is the collection of the sample. Unless the sample analyzed is truly representative of the bulk of material involved, the test results will be meaningless. If you have questions regarding the proper techniques of collecting samples, please contact us. We cannot be held responsible for sample integrity, however, unless sampling has been performed by a member of our staff. This report shall not be reproduced except in full, without the written approval of the laboratory.

Times are local to the area of activity. Parameters listed in the 40 CFR part 136 Table II as "analyze immediately" are not performed within 15 minutes.

WARRANTY AND LIMITS OF LIABILITY - In accepting analytical work, we warrant the accuracy of test results for the sample as submitted. THE FOREGOING EXPRESS WARRANTY IS EXCLUSIVE AND IS GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. WE DISCLAIM ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING A WARRANTY OF FITNESS FOR PARTICULAR PURPOSE AND WARRANTY OF MERCHANTABILITY. IN NO EVENT SHALL LANCASTER LABORATORIES BE LIABLE FOR INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFIT OR GOODWILL REGARDLESS OF (A) THE NEGLIGENCE (EITHER SOLE OR CONCURRENT) OF LANCASTER LABORATORIES AND (B) WHETHER LANCASTER LABORATORIES HAS BEEN INFORMED OF THE POSSIBILITY OF SUCH DAMAGES. We accept no legal responsibility for the purposes for which the client uses the test results. No purchase order or other order for work shall be accepted by Lancaster Laboratories which includes any conditions that vary from the Standard Terms and Conditions, and Lancaster hereby objects to any conflicting terms contained in any acceptance or order submitted by client.

Holly Park

Seattle

FS ID

8747316

SAIC

RECEIVED

FEB 11 2013

DEPT OF ECOLOGY
TOP - NWRO

February 05, 2013

Mr. Mark Horne
Chevron Environmental Management Company
6101 Bollinger Canyon Road
San Ramon, California 94583

**Subject: Fourth Quarter 2012 Groundwater Monitoring and Sampling Report
Former Tidewater Service Station No. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington**

Dear Mr. Horne:

SAIC Energy, Environment & Infrastructure, LLC (SAIC), on behalf of Chevron Environmental Management Company (CEMC), prepared this letter summarizing the fourth quarter 2012 groundwater monitoring and sampling event at former Tidewater Service Station No. 30-3189 (the site) in Seattle, Washington (Figure 1).

FIELD ACTIVITIES

Gettler-Ryan Inc. (Gettler-Ryan) conducted the groundwater monitoring and sampling field event on November 15, 2012. They collected depth-to-groundwater measurements and checked for the presence of separate-phase hydrocarbons (SPH) in three monitoring wells on site. SPH were observed in monitoring well MW-2. Groundwater flow is to the north at a gradient of approximately 0.1 feet per foot. A potentiometric map is provided as Figure 2.

Groundwater samples were collected from two of the three monitoring wells. Samples were submitted to Eurofins Lancaster Laboratories, Inc. in Lancaster, Pennsylvania for the following analyses:

- Total petroleum hydrocarbons (TPH) as gasoline-range organics (TPH-GRO) by Northwest Method NWTPH-Gx;
- TPH as diesel-range organics (TPH-DRO) and TPH as heavy oil-range organics (TPH-HRO) by Northwest Method NWTPH-Dx extended with silica-gel cleanup; and
- Benzene, toluene, ethylbenzene, and total xylenes (BTEX) by United States Environmental Protection Agency Method 8021B.

6/14/13

SAIC Energy, Environment & Infrastructure, LLC

18912 North Creek Parkway | Suite 101 | Bothell, WA 98011 | tel: (425) 485-5800 | fax: (425) 485-5566 | saic.com/eeandi

REPORT LIMITATIONS



This technical document was prepared on behalf of Chevron and is intended for its sole use and for use by the local, state or federal regulatory agency that the technical document was sent to by SAIC. Any other person or entity obtaining, using, or relying on this technical document hereby acknowledges that they do so at their own risk, and that SAIC shall have no responsibility or liability for the consequences thereof.

Site history and background information provided in this technical document are based on sources that may include interviews with environmental regulatory agencies and property management personnel and a review of acquired environmental regulatory agency documents and property information obtained from CEMC and others. SAIC has not made, nor has it been asked to make, any independent investigation concerning the accuracy, reliability, or completeness of such information beyond that described in this technical document.

Recognizing reasonable limits of time and cost, this technical document cannot wholly eliminate uncertainty regarding the vertical and lateral extent of impacted environmental media.

Opinions and recommendations presented in this technical document apply only to site conditions and features as they existed at the time of SAIC's site visits or site work and cannot be applied to conditions and features of which SAIC is unaware and has not had the opportunity to evaluate.

All sources of information on which SAIC has relied in making its conclusions (including direct field observations) are identified by reference in this technical document or in appendices attached to this technical document. Any information not listed by reference or in appendices has not been evaluated or relied upon by SAIC in the context of this technical document. The conclusions, therefore, represent our professional opinion based on the identified sources of information.

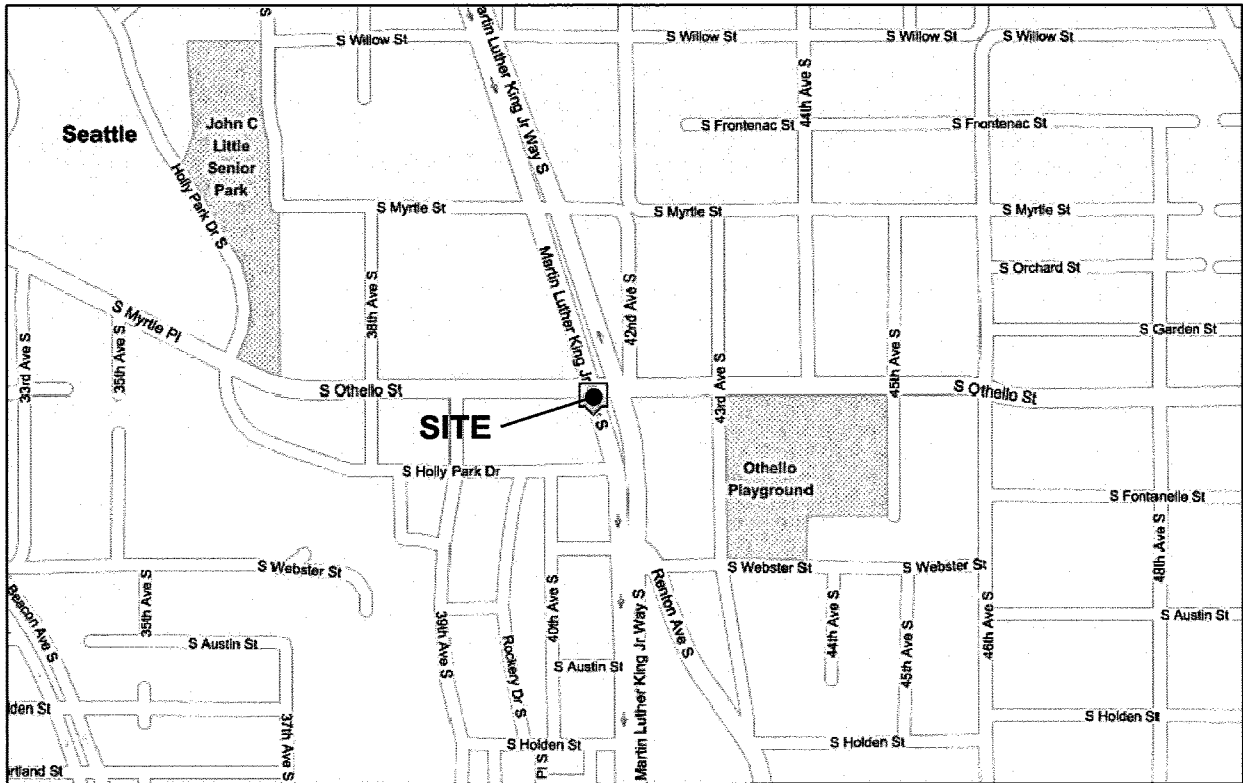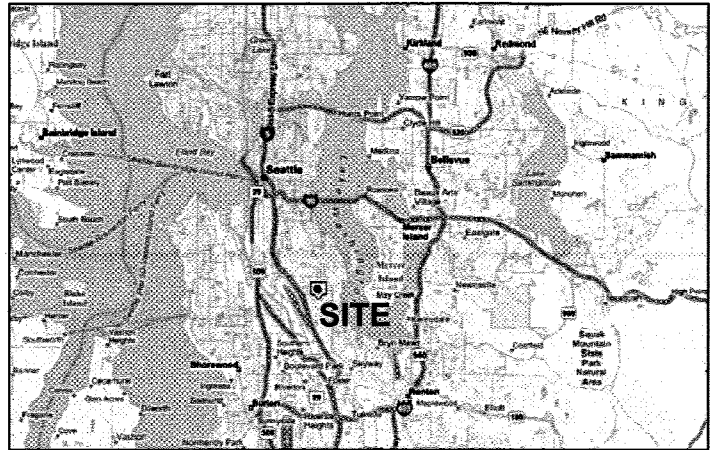

Maps Provided by Seattle.gov




Former Tidewater Service Station No. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington

FIGURE 1 Vicinity Map



FILE NAME:
303189_VM.dwg

DATE:
10/12/2011

South Othello Street



Gabriel Cisneros
2/5/13

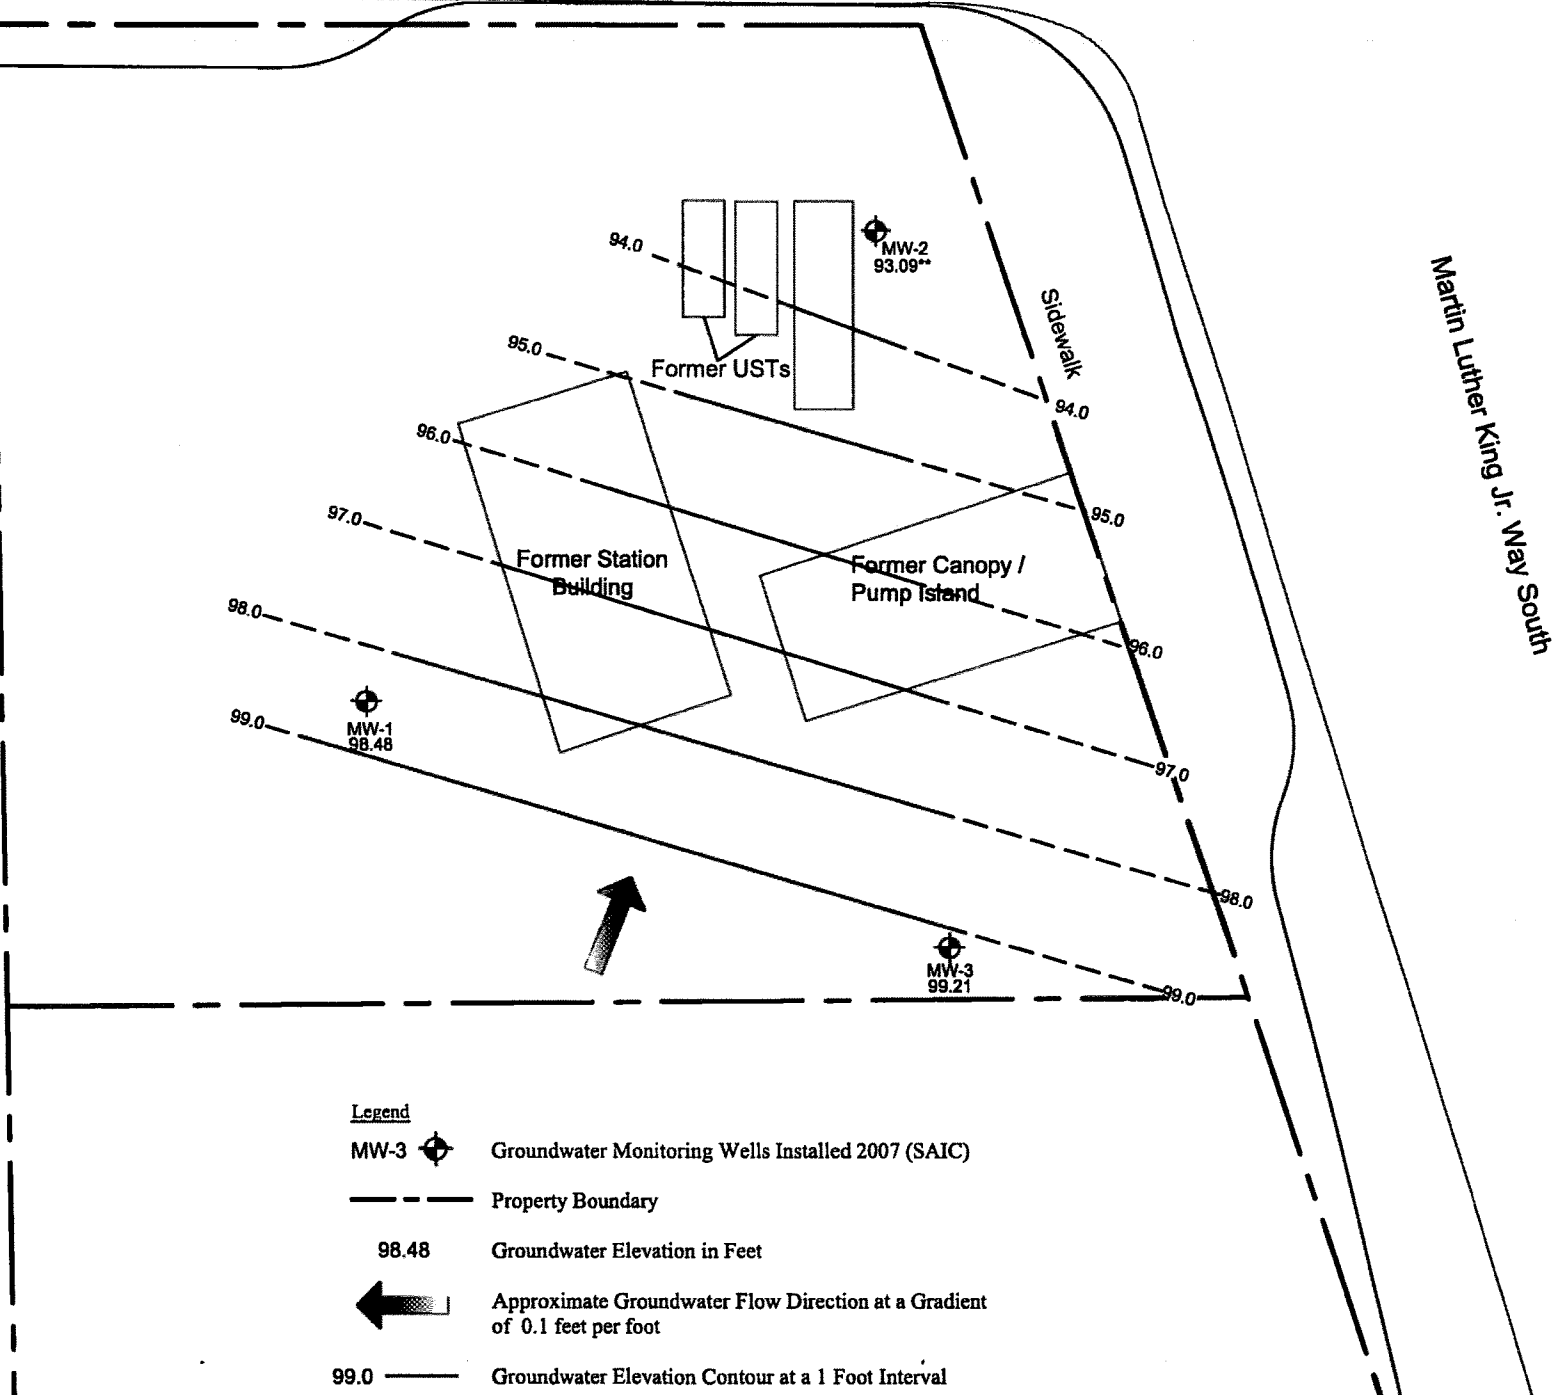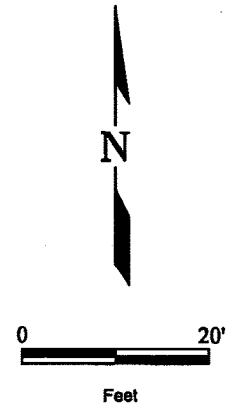

- Legend**
- MW-3 Groundwater Monitoring Wells Installed 2007 (SAIC)
 - Property Boundary
 - 98.48 Groundwater Elevation in Feet
 - Approximate Groundwater Flow Direction at a Gradient of 0.1 feet per foot
 - 99.0 ——— Groundwater Elevation Contour at a 1 Foot Interval
 - 93.09** Groundwater Elevation Corrected for the Presence of Separate Phase Hydrocarbons

Former Tidewater Service Station No. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington

FIGURE 2
Potentiometric Map
November 15, 2012

FILE NAME: 303189 Site Map.dwg DATE: 2/4/2013



TABLE 1
GROUNDWATER MONITORING DATA AND ANALYTICAL RESULTS¹
FORMER TIDEWATER SERVICE STATION NO. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington

Concentrations reported in µg/L

Well ID/ Date	Purge Method	TOC ² (ft.)	DTP (ft.)	DTW (ft.)	SPHT (ft.)	GW ³ (ft.)	TPH-DRO	TPH-HRO	TPH-GRO	Benzene	Toluene	Ethyl- benzene	Total Xylenes	MTBE	Total Lead
MW-1															
08/31/07		--	--	--	--	--	930	190	<50	<0.5	<0.5	<0.5	<1.5	--	0.052
04/24/09	LFP	99.66	--	2.36	--	97.30	650	<76	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/12/09	LFP	99.66	--	4.24	--	95.42	370	<67	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/14/09	LFP	99.66	--	1.78	--	97.88	270 ²	<68 ³	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/11/10	LFP	99.66	--	1.92	--	97.74	560	<69	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/24/10	LFP	99.66	--	2.43	--	97.23	91	<68	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/04/10	LFP	99.66	--	3.62	--	96.04	520	<75	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/12/10	LFP	99.66	--	2.00	--	97.66	440	<68	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/11	LFP	99.66	--	2.03	--	97.63	1,000	270	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/06/11	LFP	99.66	--	2.32	--	97.34	1,100	210	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/18/11	LFP	99.66	--	4.10	--	95.56	830	210	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/22/11	LFP	99.66	--	1.88	--	97.78	<30	<70	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/12	LFP	99.66	--	1.60	--	98.06	<31	<72	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/25/12	LFP	99.66	--	1.80	--	97.86	<30	<69	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/10/12	LFP	100.66	--	4.02	--	96.64	<30	<69	<50	<0.5	<0.5	<0.5	<1.5	--	--
11/15/12	LFP	100.66	--	2.18	--	98.48	120	160	<50	<0.5	<0.5	<0.5	<1.5	--	--
MW-2															
08/31/07		--	--	--	--	--	2,100	1,200	26,000	3,200	190	1,400	3,300	--	--
04/24/09	PER	99.05	--	7.34	--	91.71	-- ⁴	-- ⁴	16,000	4,100	99	1,500	2,000	<3	--
08/12/09	PER	99.05	--	8.18	--	90.87	-- ⁴	-- ⁴	27,000	4,000	100	1,300	1,900	<3	--
11/14/09	PER	99.05	--	5.75	--	93.30	-- ⁴	-- ⁴	19,000	2,800	62	950	1,300	<3	--
02/11/10	PER	99.05	--	6.98	--	92.07	-- ⁴	-- ⁴	25,000	3,400	97	1,600	2,200	<0.5	--
05/24/10	PER	99.05	--	7.42	--	91.63	-- ⁴	-- ⁴	19,000	2,900	88	1,400	2,000	<1	--
08/04/10	PER	99.05	--	7.92	--	91.13	-- ⁴	-- ⁴	16,000	3,800	110	1,700	2,700	<3	--
11/12/10	PER	99.05	--	6.16	--	92.89	-- ⁴	-- ⁴	16,000	1,900	56	660	680	<1	--
02/23/11	PER	99.05	--	6.09	--	92.96	-- ⁴	-- ⁴	12,000	2,800	60	680	780	<3	--
05/06/11	PER	99.05	--	6.98	--	92.07	-- ⁴	-- ⁴	15,000	3,100	72	1,300	1,400	<3	--
08/18/11		99.05	8.20	8.30	0.10	90.83	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	--
11/22/11		99.05	UNABLE TO MEASURE DTW OR COLLECT SAMPLE DUE TO PRESENCE OF SPH					--	--	--	--	--	--	--	--
02/23/12		99.05	1.55	1.90	0.35	97.43	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	
05/25/12		99.05	7.10	7.85	0.75	91.80	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	
08/10/12		99.05	8.14	8.34	0.20	90.87	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	
11/15/12		99.05	5.92	6.10	0.18	93.09	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	
MW-3															
08/31/07		--	--	--	--	--	120	<100	<50	<0.5	<0.5	<0.5	<1.5	--	0.055
04/24/09	LFP	100.00	--	2.13	--	97.87	58	<75	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/12/09	LFP	100.00	--	4.47	--	95.53	620	170	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/14/09	LFP	100.00	--	1.60	--	98.40	450	370	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/11/10	LFP	100.00	--	1.59	--	98.41	160	130	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/24/10	LFP	100.00	--	1.83	--	98.17	910	310	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/04/10	LFP	100.00	--	3.84	--	96.16	55	<74	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--



TABLE 1
GROUNDWATER MONITORING DATA AND ANALYTICAL RESULTS¹
FORMER TIDEWATER SERVICE STATION NO. 30-3189
7301 Martin Luther King Jr. Way South
Seattle, Washington

Concentrations reported in µg/L

Well ID/ Date	Purge Method	TOC ² (ft.)	DTP (ft.)	DTW (ft.)	SPHT (ft.)	GWE ³ (ft.)	TPH-DRO	TPH-HRO	TPH-GRO	Benzene	Toluene	Ethyl- benzene	Total Xylenes	MTBE	Total Lead
------------------	-----------------	---------------------------	--------------	--------------	---------------	---------------------------	---------	---------	---------	---------	---------	-------------------	------------------	------	---------------

Abbreviations:

BTEX = Benzene, toluene, ethylbenzene, and total xylenes

DTP = Depth to Product

DTW = Depth to Water

(ft.) = Feet

GC/MS = gas chromatography/mas spectrometry

GWE = Groundwater Elevation

LFP = Low Flow Purge

MTBE = Methyl Tertiary Butyl Ether

MTCA = Model Toxics Control Act

ND = Non-detect

PER = Peristaltic Pump

QA = Quality Assurance/Trip Blank

QC = Quality control

SAIC = SAIC Energy, Environment & Infrastructure, LLC

SPH = Separate-phase hydrocarbons

SPHT = SPH Thickness

TOC = Top of Casing

TPH = Total Petroleum Hydrocarbons

TPH-DRO = TPH as diesel-range organics

TPH-GRO = TPH as gasoline-range organics

TPH-HRO = TPH as heavy oil-range organics

USEPA = United States Environmental Protection Agency

µg/L = Micrograms per liter

< = The analyte was not detected at or above the reported value

-- = Not Measured/Not Analyzed

Analytical Methods:

After April 24, 2009 and prior to August 10, 2012 BTEX analysis by USEPA Method 8260B.

TPH-GRO by Method NWTTPH-Gx.

TPH-DRO and TPH-HRO by Method NWTTPH-Dx with silica-gel cleanup.

BTEX and MTBE by USEPA Method 8021B.

Attachment A:
Groundwater Monitoring and Sampling Data Package



GETTLER-RYAN Inc.



TRANSMITTAL

November 28, 2012
G-R #385862

TO: Ms. Ruth A. Otteman
SAIC
18912 North Creek Parkway, Suite 101
Bothell, WA 98011

FROM: Deanna L. Harding
Project Coordinator
Gettler-Ryan Inc.
6747 Sierra Court, Suite J
Dublin, California 94568

RE: **Chevron Facility**
#303189
(Former Tidewater Service Stn.)
7301 MLK Jr. Way South
Seattle, Washington

WE HAVE ENCLOSED THE FOLLOWING:

COPIES	DESCRIPTION
VIA PDF	Groundwater Monitoring and Sampling Data Package Fourth Quarter Event of November 15, 2012

COMMENTS:

Pursuant to your request, we are providing you with copies of the above referenced data for your use.

Please provide us the updated historical data prior to the next monitoring and sampling event for our field use.

Please feel free to contact me if you have any comments/questions.

trans/303189



GETTLER-RYAN INC.

CHEVRON - SITE CHECK LIST

Facility#:	Chevron #303189	Date:	11/15/12
Address:	7301 Martin Luther King Jr. Way South		
City/St.:	Seattle, WA		
Status of Site:			

DRUMS:

Please list below ALL DRUMS @ site: i.e., drum description, condition, labeling, contents, location of drum:



#	Description	Condition	Labeling	Contents	Location
	NONE				

WELLS:

Please check the condition of ALL WELLS @ site: i.e., well box condition, gaskets, bolts, well plug, well lock, etc.:

Well ID	Gaskets (M) Missing (R) Replaced	Bolts (M) Missing (R) Replaced	Well Plug Y/N	Well Lock Y/N	Well Box Manufacturer/Size/# of Bolts	Other
MW-1	Good	Good	Good	Good	MWRB / 8" / 3	
MW-2	↓	↓	↓	↓	↓	
MW-3	↓	↓	↓	↓	↓	

Additional Comments/Observations: _____

Standard Operating Procedure, Low-Flow Purging and Sampling

Gettler-Ryan Inc. field personnel adhere to the following Standard Operating Procedure (SOP) for the collection and handling of representative groundwater samples using the Low-Flow (Minimal-Drawdown) Purging technique. This SOP incorporates purging and sampling methods discussed in U.S. EPA, Ground Water Issue, Publication Number EPA/540/S-95/504, April 1996 by Puls, R.W. and M.J. Barcelona - "*Low-Flow (Minimal-Drawdown) Ground-Water Sampling Procedures.*"

A QED Well Wizard™ (or equivalent) bladder pump or Peristaltic Pump will be used to purge and sample selected wells as outlined in the scope-of-work. An in-line flow cell or other multi-parameter meter is used to collect water quality indicating parameters during purging.

Initial Pump Discharge Test Procedures

The Static Water Level (SWL) is measured in all wells at the site prior to the installation of the pump or tubing and initiation of the test procedures in any well. In addition, the presence or absence of separate-phase hydrocarbons (SPH) is determined using an interface probe. Product thickness, if present, is measured to the nearest 0.01 foot. The SWL measurement and SPH thickness, if any, will be recorded on the field data sheet.

The bladder pump or suction inlet tubing of the peristaltic pump is then positioned with its inlet located within the screened interval of the well. The in-line flow cell is then connected to the discharge tubing. After pump installation, the SWL is allowed to recover to its original level. The pump is then started at a discharge rate between 100 ml to 300 ml per minute with the in-line flow cell connected. The water level is monitored continuously for any change from the original measurement and the discharge rate is adjusted until an optimum discharge rate (ODR) is determined. The goal for the ODR is to produce a stable drawdown of less than 0.1 meter as allowed by site conditions; however the total drawdown from the initial SWL should not exceed 25% of the distance between pump inlet location and the top of the well screen. Once achieved, the ODR will be confirmed by volumetric discharge measurement and recorded on the field data sheet.

Purging and Water Quality Parameter Measurement

When the ODR has been determined and the SWL drawdown has been established within the acceptable range, and a minimum of one pump system volume (bladder volume and/or discharge tubing volume) has been purged, field measurements for temperature (T), pH, conductivity (Ec), and if required, oxygen reduction potential (ORP) and dissolved oxygen (DO) will be collected and documented on the field data sheet. Measurements should be taken every three to five minutes until parameters stabilize for three consecutive readings. The minimum parameter subset of T ($\pm 10\%$), pH (± 0.1 unit), and Ec (± 10 uS) are required to stabilize. Additional parameters that may be required are DO (± 0.2 mg/l) and ORP (± 20 mV).

Sample Collection

When water quality parameters have stabilized, and the SWL drawdown remains established within the acceptable range, groundwater sample collection may begin. If used, the in-line flow cell and its tubing are disconnected from the discharge tubing prior to sample collection. Water samples are collected from the discharge tubing into appropriate containers. Pre-preserved containers, supplied by analytical laboratories, are used when possible. When pre-preserved containers are not available, the laboratory is instructed to preserve the sample as appropriate. Duplicate samples are collected for the laboratory to use in maintaining quality assurance/quality control standards, as directed by the scope of work. The samples are labeled to include the job number, sample identification, collection date and time, analysis, preservation (if any), and the sample collector's initials. The water samples are placed in a cooler,

maintained at 4°C for transport to the laboratory. A laboratory supplied trip blank accompanies each sampling set. The trip blank is analyzed for some or all of the same compounds as the groundwater samples. Once collected in the field, all samples are maintained under chain of custody until delivered to the laboratory.

The chain of custody document includes the job number, type of preservation, if any, analysis requested, sample identification, date and time collected, and the sample collector's name. The chain of custody is signed and dated (including time of transfer) by each person who receives or surrenders the samples, beginning with the field personnel and ending with the laboratory personnel.

A laboratory supplied trip blank accompanies each sampling set. For sampling sets greater than 20 samples, 5% trip blanks are included. The trip blank is analyzed for some or all of the same compounds as the groundwater samples.



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #303189 Job Number: 385862
 Site Address: 7301 Martin Luther King Jr. Way S Event Date: 11-15-12 (inclusive)
 City: Seattle, WA Sampler: AW

Well ID: MW-1 Date Monitored: 11-15-12
 Well Diameter: .75 in.
 Total Depth: 11.65 ft.
 Depth to Water: 2.18 ft. Check if water column is less than 0.50 ft.
9.47 xVF = = x3 case volume = Estimated Purge Volume: gal.

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]:

Purge Equipment:

Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump ✓
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:

Disposable Bailer _____
 Pressure Bailer _____
 Metal Filters _____
 Peristaltic Pump ✓
 QED Bladder Pump _____
 Other: _____

Time Started:	_____ (2400 hrs)
Time Completed:	_____ (2400 hrs)
Depth to Product:	_____ ft
Depth to Water:	_____ ft
Hydrocarbon Thickness:	_____ ft
Visual Confirmation/Description:	_____
Skimmer / Absorbant Sock (circle one)	_____
Amt Removed from Skimmer:	_____ gal
Amt Removed from Well:	_____ gal
Water Removed:	_____ gal
Product Transferred to:	_____ gal

Start Time (purge): 0745 Weather Conditions: Cloudy
 Sample Time/Date: 0830 / 11-15-12 Water Color: Cloudy Odor: Y (N)
 Approx. Flow Rate: 200 mlpm Sediment Description: Cloudy
 Did well de-water? N If yes, Time: Volume: gal. DTW @ Sampling: 2.25

Time (2400 hr.)	Volume (Liters)	pH	Conductivity (µmhos/cm - MS)	Temperature (C F)	D.O. (mg/L)	ORP (mV)	Gauge DTW as parameters are recorded
<u>0803</u>	<u>3.6</u>	<u>6.68</u>	<u>0.942</u>	<u>12.2</u>	<u>1.24</u>	<u>-3</u>	<u>2.20</u>
<u>0806</u>	<u>4.2</u>	<u>6.69</u>	<u>0.945</u>	<u>12.2</u>	<u>1.27</u>	<u>-4</u>	<u>2.22</u>
<u>0809</u>	<u>4.8</u>	<u>6.70</u>	<u>0.949</u>	<u>12.3</u>	<u>1.29</u>	<u>-5</u>	<u>2.25</u>

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-1	3 x voa vial	YES	HCL	LANCASTER	NWTPH-Gx/BTEX(8021)
	2 x 1 liter ambers	YES	HCL	LANCASTER	NWTPH-Dx w/sgc

COMMENTS: Depth Pump Set At: ~ 8.0 ft.

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #303189
 Site Address: 7301 Martin Luther King Jr. Way S
 City: Seattle, WA

Job Number: 385862
 Event Date: 11-15-12 (inclusive)
 Sampler: AW

Well ID: MW-2
 Well Diameter: .75 in.
 Total Depth: 9.65 ft.
 Depth to Water: 6.10 ft.
3.55 xVF = _____ = _____ x3 case volume = Estimated Purge Volume: _____ gal.

Date Monitored: 11-15-12

Volume Factor (VF)	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Check if water column is less than 0.50 ft.

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: _____

Time Started:	_____ (2400 hrs)
Time Completed:	_____ (2400 hrs)
Depth to Product:	<u>05.92</u> ft
Depth to Water:	<u>6.10</u> ft
Hydrocarbon Thickness:	<u>0.18</u> ft
Visual Confirmation/Description:	<u>Thick Heavy SPH.</u>
Skimmer / Absorbant Sock (circle one)	_____
Amt Removed from Skimmer:	_____ gal
Amt Removed from Well:	_____ gal
Water Removed:	_____ gal
Product Transferred to:	_____ gal

Purge Equipment:
 Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:
 Disposable Bailer _____
 Pressure Bailer _____
 Metal Filters _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Start Time (purge): _____
 Sample Time/Date: _____ / _____
 Approx. Flow Rate: _____ mlpm
 Did well de-water? _____ If yes, Time: _____

Weather Conditions: _____
 Water Color: _____ Odor: Y / N _____
 Sediment Description: _____
 Volume: _____ gal. DTW @ Sampling: _____

Time (2400 hr.)	Volume (Liters)	pH	Conductivity (µmhos/cm - µS)	Temperature (C / F)	D.O. (mg/L)	ORP (mV)	Gauge DTW as parameters are recorded

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-	x voa vial	YES	HCL	LANCASTER	NWTPH-Gx/BTEX(8021)
	x 1 liter ambers	YES	HCL	LANCASTER	NWTPH-Dx w/sgc

COMMENTS: Depth Pump Set At: SPH - No Sample taken.

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER - RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #303189 Job Number: 385862
 Site Address: 7301 Martin Luther King Jr. Way S Event Date: 11-15-12 (inclusive)
 City: Seattle, WA Sampler: AW

Well ID: MW-3 Date Monitored: 11-15-12
 Well Diameter: .75 in.
 Total Depth: 9.60 ft.
 Depth to Water: 1.79 ft. Check if water column is less than 0.50 ft.
7.81 xVF = _____ x3 case volume = Estimated Purge Volume: _____ gal.

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: _____

Purge Equipment:

Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:

Disposable Bailer _____
 Pressure Bailer _____
 Metal Filters _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Time Started:	_____ (2400 hrs)
Time Completed:	_____ (2400 hrs)
Depth to Product:	_____ ft
Depth to Water:	_____ ft
Hydrocarbon Thickness:	_____ ft
Visual Confirmation/Description:	_____
Skimmer / Absorbant Sock (circle one)	_____
Amt Removed from Skimmer:	_____ gal
Amt Removed from Well:	_____ gal
Water Removed:	_____
Product Transferred to:	_____

Start Time (purge): 0845 Weather Conditions: Cloudy
 Sample Time/Date: 0930 / 11-15-12 Water Color: Cloudy Odor: Y @
 Approx. Flow Rate: 2.00 mlpm Sediment Description: Cloudy
 Did well de-water? N If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: 1.84

Time (2400 hr.)	Volume (Liters)	pH	Conductivity (µmhos/cm -MS)	Temperature (C / F)	D.O. (mg/L)	ORP (mV)	Gauge DTW as parameters are recorded
<u>0903</u>	<u>3.6</u>	<u>6.72</u>	<u>0.599</u>	<u>13.0</u>	<u>1.17</u>	<u>15</u>	<u>1.82</u>
<u>0906</u>	<u>4.2</u>	<u>6.75</u>	<u>0.606</u>	<u>13.2</u>	<u>1.20</u>	<u>18</u>	<u>1.84</u>
<u>0909</u>	<u>4.8</u>	<u>6.78</u>	<u>0.610</u>	<u>13.5</u>	<u>1.22</u>	<u>19</u>	<u>1.84</u>

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-3</u>	<u>3</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>NWTPH-Gx/BTEX(8021)</u>
	<u>2</u> x 1 liter ambers	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>NWTPH-Dx w/sgc</u>

COMMENTS: Depth Pump Set At: ~6.0ft.

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____

Chevron Northwest Region Analysis Request/Chain of Custody



For Lancaster Laboratories use only

Acct. # _____ Group # _____ Sample # _____

Facility #: 95-303189 OHL - G-R#305062
 Site Address: 7301 Martin Luther King Jr. Way South, SEATTLE, WA
 Chevron PM: MFO Lead Consultant: SAICRO Otterman
 Consultant/Office: G-R, Inc., 6747 Sierra Court, Suite J, Dublin, CA 94568
 Consultant Prj. Mgr.: Deanna L. Harding (deanna@grinc.com)
 Consultant Phone #: 925-551-7555 Fax #: 925-551-7899
 Sampler: Alex Wang

Sample Identification			Date Collected			Time Collected			Matrix			Analyses Requested										SCR #
												Preservation Codes										
Grab	Composite	Soil	Water	Oil	Air	Total Number of Containers	BTEX	8260 full scan	Oxygenates	NWTPH-GX	NWTPH-GX + Silica Gel Cleanup	Lead	Total	Dis	Method	WAVPH	WAEPH	NWTPH-HCID	quantification			

- Results in Dry Weight
- J value reporting needed
- Must meet lowest detection limits possible for 8260 compounds
- 8021 MTBE Confirmation
- Confirm MTBE + Naphthalene
- Confirm highest hit by 8260
- Confirm all hits by 8260
- Run ___ oxy's on highest hit
- Run ___ oxy's on all hits

Sample Identification			Date Collected	Time Collected	Grab	Composite	Soil	Water	Oil	Air	Total Number of Containers	BTEX	8260 full scan	Oxygenates	NWTPH-GX	NWTPH-GX + Silica Gel Cleanup	Lead	Total	Dis	Method	WAVPH	WAEPH	NWTPH-HCID	quantification
(2A)			11/15/02	1:30	X			X			X	X			X	X								
11/15/02			↓	1:30	X			X			X	X			X	X								
11/15/02			↓	1:30	X			X			X	X			X	X								

Comments /Remarks

Please forward the lab results directly to the Lead Consultant and cc: G-R.

Turnaround Time Requested (TAT) (please circle) STD: TAT 24 hour 72 hour 48 hour 4 day 5 day	Relinquished by: _____	Date	Time	Received by: _____	Date	Time
	EDF/EDD	Relinquished by: _____	Date	Time	Received by: _____	Date
Data Package Options (please circle if required) QC Summary Type I - Full Type VI (Raw Data)	Relinquished by: _____	Date	Time	Received by: _____	Date	Time
	Relinquished by Commercial Carrier: UPS FedEx Other _____				Received by: _____	Date
Temperature Upon Receipt _____ C°				Custody Seals Intact? Yes No		

Attachment B:
Laboratory Analysis Report

ANALYTICAL RESULTS

Prepared by:

Lancaster Laboratories
2425 New Holland Pike
Lancaster, PA 17605-2425

Prepared for:

Chevron
6001 Bollinger Canyon Road
L4310
San Ramon CA 94583

November 30, 2012

Project: 303189

Submittal Date: 11/16/2012

Group Number: 1349822

PO Number: 0015103600

Release Number: HORNE

State of Sample Origin: WA

Client Sample DescriptionQA Water Sample
MW-1 Grab Water Sample
MW-3 Grab Water SampleLancaster Labs (LLI) #6863245
6863246
6863247

The specific methodologies used in obtaining the enclosed analytical results are indicated on the Laboratory Sample Analysis Record.


ELECTRONIC COPY TO SAIC c/o Gettler-Ryan
ELECTRONIC COPY TO SAIC
ELECTRONIC COPY TO SAIC

Attn: Rachelle Munoz

Attn: Jamalyn Green

Attn: Ruth Otteman

Respectfully Submitted,

Jill M. Parker
Senior Specialist

(717) 556-7262



Lancaster
Laboratories

Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com



Sample Description: QA Water Sample
 Facility# 303189 Job# 385862
 7301 Martin Luther King Jr Way South - Seattle, WA

LLI Sample # WW 6863245
 LLI Group # 1349822
 Account # 11260

Project Name: 303189

Collected: 11/15/2012

Submitted: 11/16/2012 09:20

Reported: 11/30/2012 11:05

Chevron
 6001 Bollinger Canyon Road
 L4310
 San Ramon CA 94583

MLSQA

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Dilution Factor
GC Volatiles					
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx n.a.	ug/l N.D.	ug/l 50	1
GC Volatiles					
02102	Benzene	SW-846 8021B 71-43-2	ug/l N.D.	ug/l 0.5	1
02102	Ethylbenzene	100-41-4	N.D.	0.5	1
02102	Toluene	108-88-3	N.D.	0.5	1
02102	Total Xylenes	1330-20-7	N.D.	1.5	1

General Sample Comments

State of Washington Lab Certification No. C259

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx	1	12324A53A	11/20/2012 14:00	Marie D John	1
02102	Method 8021 Water Master	SW-846 8021B	1	12324A53A	11/20/2012 14:00	Marie D John	1
01146	GC VOA Water Prep	SW-846 5030B	1	12324A53A	11/20/2012 14:00	Marie D John	1



Lancaster
Laboratories

Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Sample Description: MW-1 Grab Water Sample
Facility# 303189 Job# 385862
7301 Martin Luther King Jr Way South - Seattle, WA

LLI Sample # WW 6863246
LLI Group # 1349822
Account # 11260

Project Name: 303189

Collected: 11/15/2012 08:30 by AW

Chevron

6001 Bollinger Canyon Road

Submitted: 11/16/2012 09:20

L4310

Reported: 11/30/2012 11:05

San Ramon CA 94583

MLS01

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Dilution Factor
GC Volatiles					
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx n.a.	ug/l N.D.	ug/l 50	1
GC Volatiles					
02102	Benzene	SW-846 8021B 71-43-2	ug/l N.D.	ug/l 0.5	1
02102	Ethylbenzene	100-41-4	N.D.	0.5	1
02102	Toluene	108-88-3	N.D.	0.5	1
02102	Total Xylenes	1330-20-7	N.D.	1.5	1
GC Petroleum					
Hydrocarbons w/Si					
12005	DRO C12-C24 w/Si Gel	ECY 97-602 NWTPH-Dx modified	ug/l 120	ug/l 30	1
12005	HRO C24-C40 w/Si Gel	n.a.	160	70	1
The reverse surrogate, capric acid, is present at <1%.					

General Sample Comments

State of Washington Lab Certification No. C259

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx	1	12324A53A	11/20/2012 17:33	Marie D John	1
02102	Method 8021 Water Master	SW-846 8021B	1	12324A53A	11/20/2012 17:33	Marie D John	1
01146	GC VOA Water Prep	SW-846 5030B	1	12324A53A	11/20/2012 17:33	Marie D John	1
12005	NWTPH-Dx water w/ 10g Si Gel	ECY 97-602 NWTPH-Dx modified	1	123260016A	11/27/2012 21:42	Christine E Dolman	1
12007	NW Dx water w/ 10g column	ECY 97-602 NWTPH-Dx 06/97	1	123260016A	11/22/2012 05:30	Roman Kuropatkin	1



Sample Description: MW-3 Grab Water Sample
 Facility# 303189 Job# 385862
 7301 Martin Luther King Jr Way South - Seattle, WA

LLI Sample # WW 6863247
 LLI Group # 1349822
 Account # 11260

Project Name: 303189

Collected: 11/15/2012 09:30 by AW Chevron
 6001 Bollinger Canyon Road
 L4310
 San Ramon CA 94583

Submitted: 11/16/2012 09:20
 Reported: 11/30/2012 11:05

MLS03

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Dilution Factor
GC Volatiles	ECY 97-602 NWTPH-Gx		ug/l	ug/l	
08274	NWTPH-Gx water C7-C12	n.a.	N.D.	50	1
GC Volatiles	SW-846 8021B		ug/l	ug/l	
02102	Benzene	71-43-2	N.D.	0.5	1
02102	Ethylbenzene	100-41-4	N.D.	0.5	1
02102	Toluene	108-88-3	N.D.	0.5	1
02102	Total Xylenes	1330-20-7	N.D.	1.5	1
GC Petroleum Hydrocarbons w/Si	ECY 97-602 NWTPH-Dx modified		ug/l	ug/l	
12005	DRO C12-C24 w/Si Gel	n.a.	75	30	1
12005	HRO C24-C40 w/Si Gel	n.a.	93	70	1
The reverse surrogate, capric acid, is present at <1%.					

General Sample Comments

State of Washington Lab Certification No. C259

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx	1	12324A53A	11/20/2012 18:53	Marie D John	1
02102	Method 8021 Water Master	SW-846 8021B	1	12324A53A	11/20/2012 18:53	Marie D John	1
01146	GC VOA Water Prep	SW-846 5030B	1	12324A53A	11/20/2012 18:53	Marie D John	1
12005	NWTPH-Dx water w/ 10g Si Gel	ECY 97-602 NWTPH-Dx modified	1	123260016A	11/27/2012 22:10	Christine E Dolman	1
12007	NW Dx water w/ 10g column	ECY 97-602 NWTPH-Dx 06/97	1	123260016A	11/22/2012 05:30	Roman Kuropatkin	1

Quality Control Summary

 Client Name: Chevron
 Reported: 11/30/12 at 11:05 AM

Group Number: 1349822

Matrix QC may not be reported if insufficient sample or site-specific QC samples were not submitted. In these situations, to demonstrate precision and accuracy at a batch level, a LCS/LCSD was performed, unless otherwise specified in the method.

All Inorganic Initial Calibration and Continuing Calibration Blanks met acceptable method criteria unless otherwise noted on the Analysis Report.

Laboratory Compliance Quality Control

<u>Analysis Name</u>	<u>Blank Result</u>	<u>Blank MDL</u>	<u>Report Units</u>	<u>LCS %REC</u>	<u>LCSD %REC</u>	<u>LCS/LCSD Limits</u>	<u>RPD</u>	<u>RPD Max</u>
Batch number: 12324A53A	Sample number(s): 6863245-6863247							
Benzene	N.D.	0.5	ug/l	110	110	80-120	1	30
Ethylbenzene	N.D.	0.5	ug/l	109	109	80-120	0	30
NWTPH-Gx water C7-C12	N.D.	50.	ug/l	94	90	75-135	5	30
Toluene	N.D.	0.5	ug/l	110	110	80-120	0	30
Total Xylenes	N.D.	1.5	ug/l	110	109	80-120	1	30
Batch number: 123260016A	Sample number(s): 6863246-6863247							
DRO C12-C24 w/Si Gel	N.D.	30.	ug/l	73	74	50-120	1	20
HRO C24-C40 w/Si Gel	N.D.	70.	ug/l					

Surrogate Quality Control

Surrogate recoveries which are outside of the QC window are confirmed unless attributed to dilution or otherwise noted on the Analysis Report.

Analysis Name: Method 8021 Water Master

Batch number: 12324A53A

	Trifluorotoluene-P	Trifluorotoluene-F
6863245	85	81
6863246	86	80
6863247	84	81
Blank	85	79
LCS	87	97
LCSD	86	94

Limits: 51-120 63-135

Analysis Name: NWTPH-Dx water w/ 10g Si Gel

Batch number: 123260016A

	Orthoterphenyl
6863246	79
6863247	81
Blank	81
LCS	84
LCSD	84

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The unspiked result was more than four times the spike added.

Quality Control SummaryClient Name: Chevron
Reported: 11/30/12 at 11:05 AM

Group Number: 1349822

Surrogate Quality Control

Limits: 50-150

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The unspiked result was more than four times the spike added.

Chevron Northwest Region Analysis Request/Chain of Custody



For Lancaster Laboratories use only
 Acct. #: 11260 Group # 1349822 Sample # 6863245-47

Facility #: <u>SS#303189-UML G-R#385862</u> Site Address: <u>7301 Martin Luther King Jr. Way South, SEATTLE, WA</u> Chevron PM: <u>MHO</u> Lead Consultant: <u>SAICRO Otteman</u> Consultant/Office: <u>G-R, Inc., 6747 Sierra Court, Suite J, Dublin, CA 94568</u> Consultant Prj. Mgr.: <u>Deanna L. Harding (deanna@grinc.com)</u> Consultant Phone #: <u>925-551-7555</u> Fax #: <u>925-551-7899</u> Sampler: <u>Alex Wong</u>				Matrix <input type="checkbox"/> Potable <input type="checkbox"/> NPDES <input type="checkbox"/> Soil <input type="checkbox"/> Water <input type="checkbox"/> Oil <input type="checkbox"/> Air		Analyses Requested Preservation Codes <input type="checkbox"/> BTEX <input type="checkbox"/> 8260 full scan <input type="checkbox"/> 8260 Naphthn <input type="checkbox"/> Oxygenates <input checked="" type="checkbox"/> NWTPH GX <u>8024</u> <input type="checkbox"/> NWTPH DX Silica Gel Cleanup <input type="checkbox"/> Lead Total <input type="checkbox"/> Diss. Method <input type="checkbox"/> WAWPH <input type="checkbox"/> WAEPPH <input type="checkbox"/> NWTPH H CID <input type="checkbox"/> quantification						SCR #: _____ <input type="checkbox"/> Results in Dry Weight <input type="checkbox"/> J value reporting needed <input type="checkbox"/> Must meet lowest detection limits possible for 8260 compounds <input type="checkbox"/> 8021 MTBE Confirmation <input type="checkbox"/> Confirm MTBE + Naphthalene <input type="checkbox"/> Confirm highest hit by 8260 <input type="checkbox"/> Confirm all hits by 8260 <input type="checkbox"/> Run ___ oxy's on highest hit <input type="checkbox"/> Run ___ oxy's on all hits									
Sample Identification	Date Collected	Time Collected	Grab	Composite	Soil	Water	Oil	Air	Total Number of Containers	BTEX	8260 full scan	Oxygenates	NWTPH GX	NWTPH DX Silica Gel Cleanup	Lead Total	Diss. Method	WAWPH	WAEPPH	NWTPH H CID	quantification	Comments /Remarks
<u>QA</u>	<u>11-15-12</u>	<u>0830</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>2</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Please forward the lab results directly to the Lead Consultant and cc: G-R.
<u>mw-1</u>	<u>↓</u>	<u>0830</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>5</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<u>mw-3</u>	<u>↓</u>	<u>0930</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>5</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Turnaround Time Requested (TAT) (please circle) <input checked="" type="checkbox"/> 24 hour <input type="checkbox"/> 72 hour <input type="checkbox"/> 48 hour <input type="checkbox"/> 4 day <input type="checkbox"/> 5 day				Relinquished by: _____ Date: <u>11-15-12</u> Time: _____ Received by: _____ Date: _____ Time: _____				Relinquished by: _____ Date: _____ Time: _____ Received by: _____ Date: _____ Time: _____				Relinquished by Commercial Carrier: UPS <input type="checkbox"/> <u>FedEx</u> <input type="checkbox"/> Other _____ Temperature Upon Receipt: <u>11</u> °C				Received by: <u>Bur...</u> Date: <u>11-16-12</u> Time: <u>920</u> Custody Seals Intact? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No					
Data Package Options (please circle if required) QC Summary Type I - Full Type VI (Raw Data)				SDF/EDD																	

Explanation of Symbols and Abbreviations

The following defines common symbols and abbreviations used in reporting technical data:

RL	Reporting Limit	BMQL	Below Minimum Quantitation Level
N.D.	none detected	MPN	Most Probable Number
TNTC	Too Numerous To Count	CP Units	cobalt-chloroplatinate units
IU	International Units	NTU	nephelometric turbidity units
umhos/cm	micromhos/cm	ng	nanogram(s)
C	degrees Celsius	F	degrees Fahrenheit
meq	milliequivalents	lb.	pound(s)
g	gram(s)	kg	kilogram(s)
µg	microgram(s)	mg	milligram(s)
mL	milliliter(s)	L	liter(s)
m³	cubic meter(s)	µL	microliter(s)
		pg/L	picogram/liter
<	less than - The number following the sign is the <u>limit of quantitation</u> , the smallest amount of analyte which can be reliably determined using this specific test.		
>	greater than		
J	estimated value – The result is ≥ the Method Detection Limit (MDL) and < the Limit of Quantitation (LOQ).		
ppm	parts per million - One ppm is equivalent to one milligram per kilogram (mg/kg), or one gram per million grams. For aqueous liquids, ppm is usually taken to be equivalent to milligrams per liter (mg/l), because one liter of water has a weight very close to a kilogram. For gases or vapors, one ppm is equivalent to one microliter of gas per liter of gas.		
ppb	parts per billion		
Dry weight basis	Results printed under this heading have been adjusted for moisture content. This increases the analyte weight concentration to approximate the value present in a similar sample without moisture. All other results are reported on an as-received basis.		

U.S. EPA CLP Data Qualifiers:

Organic Qualifiers		Inorganic Qualifiers	
A	TIC is a possible aldol-condensation product	B	Value is <CRDL, but ≥IDL
B	Analyte was also detected in the blank	E	Estimated due to interference
C	Pesticide result confirmed by GC/MS	M	Duplicate injection precision not met
D	Compound quantitated on a diluted sample	N	Spike sample not within control limits
E	Concentration exceeds the calibration range of the instrument	S	Method of standard additions (MSA) used for calculation
N	Presumptive evidence of a compound (TICs only)	U	Compound was not detected
P	Concentration difference between primary and confirmation columns >25%	W	Post digestion spike out of control limits
U	Compound was not detected	*	Duplicate analysis not within control limits
X,Y,Z	Defined in case narrative	+	Correlation coefficient for MSA <0.995

Analytical test results meet all requirements of NELAC unless otherwise noted under the individual analysis.

Measurement uncertainty values, as applicable, are available upon request.

Tests results relate only to the sample tested. Clients should be aware that a critical step in a chemical or microbiological analysis is the collection of the sample. Unless the sample analyzed is truly representative of the bulk of material involved, the test results will be meaningless. If you have questions regarding the proper techniques of collecting samples, please contact us. We cannot be held responsible for sample integrity, however, unless sampling has been performed by a member of our staff. This report shall not be reproduced except in full, without the written approval of the laboratory.

Times are local to the area of activity. Parameters listed in the 40 CFR part 136 Table II as "analyze immediately" are not performed within 15 minutes.

WARRANTY AND LIMITS OF LIABILITY - In accepting analytical work, we warrant the accuracy of test results for the sample as submitted. THE FOREGOING EXPRESS WARRANTY IS EXCLUSIVE AND IS GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. WE DISCLAIM ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING A WARRANTY OF FITNESS FOR PARTICULAR PURPOSE AND WARRANTY OF MERCHANTABILITY. IN NO EVENT SHALL LANCASTER LABORATORIES BE LIABLE FOR INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFIT OR GOODWILL REGARDLESS OF (A) THE NEGLIGENCE (EITHER SOLE OR CONCURRENT) OF LANCASTER LABORATORIES AND (B) WHETHER LANCASTER LABORATORIES HAS BEEN INFORMED OF THE POSSIBILITY OF SUCH DAMAGES. We accept no legal responsibility for the purposes for which the client uses the test results. No purchase order or other order for work shall be accepted by Lancaster Laboratories which includes any conditions that vary from the Standard Terms and Conditions, and Lancaster hereby objects to any conflicting terms contained in any acceptance or order submitted by client.