

HOLLY PARK

SEATTLE

LU51 - FS 8747316

February 24, 2014



RECEIVED  
MAR 21 2014  
DEPT OF ECOLOGY  
TCP - NWKO

Mr. Mark Horne  
Chevron Environmental Management Company  
6101 Bollinger Canyon Road  
San Ramon, California 94583

**Subject: Fourth Quarter 2013 Groundwater Monitoring and Sampling Report  
Former Tidewater Service Station No. 303189  
7301 Martin Luther King Jr. Way South  
Seattle, Washington**

NEW 3/31/14

Dear Mr. Horne:

Leidos Engineering, LLC (Leidos; formerly SAIC Energy, Environment & Infrastructure, LLC), on behalf of Chevron Environmental Management Company (CEMC), prepared this letter summarizing the fourth quarter 2013 groundwater monitoring and sampling event at the former Tidewater Service Station No. 303189 (the site) in Seattle, Washington (Figure 1).

**FIELD ACTIVITIES**

Gettler-Ryan, Inc. (Gettler-Ryan) conducted the groundwater monitoring and sampling field event on November 22, 2013. They collected depth-to-groundwater measurements and checked for the presence of separate-phase hydrocarbons (SPH) in three monitoring wells on site. SPH were observed in monitoring well MW-2. A site map is provided as Figure 2.

Groundwater samples were collected from two of the three monitoring wells. Samples were submitted to Eurofins Lancaster Laboratories, Inc. in Lancaster, Pennsylvania for the following analyses:

- Total petroleum hydrocarbons (TPH) as gasoline-range organics by Northwest Method NWTPH-Gx;
- TPH as diesel-range organics and TPH as heavy oil-range organics by Northwest Method NWTPH-Dx extended with silica-gel cleanup; and
- Benzene, toluene, ethylbenzene, and total xylenes by United States Environmental Protection Agency Method 8021B.

Field data sheets are provided in the Gettler-Ryan groundwater monitoring and sampling data package (Attachment A).

## **REPORT LIMITATIONS**



This technical document was prepared on behalf of CEMC and is intended for its sole use and for use by the local, state or federal regulatory agency that the technical document was sent to by Leidos. Any other person or entity obtaining, using, or relying on this technical document hereby acknowledges that they do so at their own risk, and that Leidos shall have no responsibility or liability for the consequences thereof.

Site history and background information provided in this technical document are based on sources that may include interviews with environmental regulatory agencies and property management personnel and a review of acquired environmental regulatory agency documents and property information obtained from CEMC and others. Leidos has not made, nor has it been asked to make, any independent investigation concerning the accuracy, reliability, or completeness of such information beyond that described in this technical document.

Recognizing reasonable limits of time and cost, this technical document cannot wholly eliminate uncertainty regarding the vertical and lateral extent of impacted environmental media.

Opinions and recommendations presented in this technical document apply only to site conditions and features as they existed at the time of Leidos site visits or site work and cannot be applied to conditions and features of which Leidos is unaware and has not had the opportunity to evaluate.

All sources of information on which SAIC has relied in making its conclusions (including direct field observations) are identified by reference in this technical document or in appendices attached to this technical document. Any information not listed by reference or in appendices has not been evaluated or relied upon by SAIC in the context of this technical document. The conclusions, therefore, represent our professional opinion based on the identified sources of information.

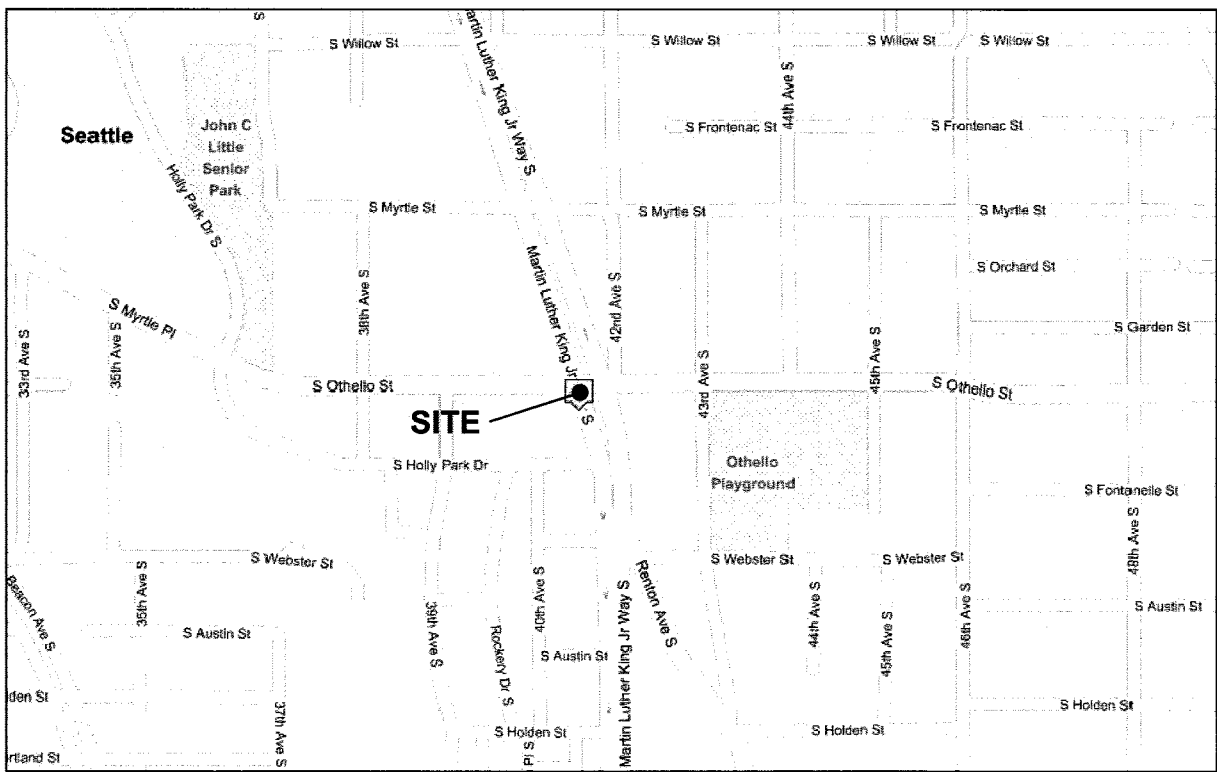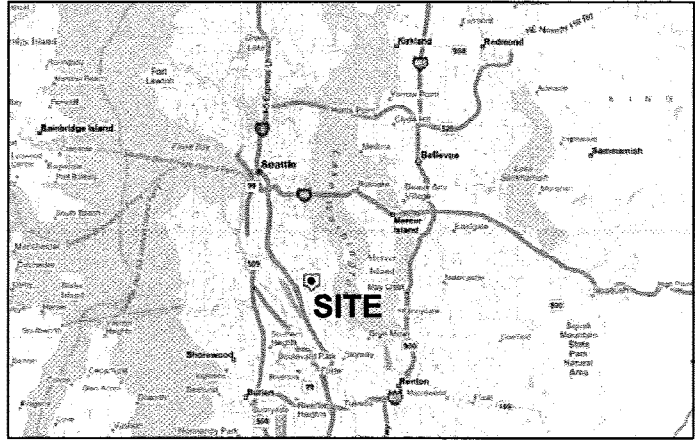



Maps Provided by Seattle.gov





Former Tidewater Service Station No. 30-3189  
 7301 Martin Luther King Jr. Way South  
 Seattle, Washington

<b>FIGURE 1</b> Vicinity Map	
FILE NAME: 303189_VM.dwg	DATE: 8/29/2012

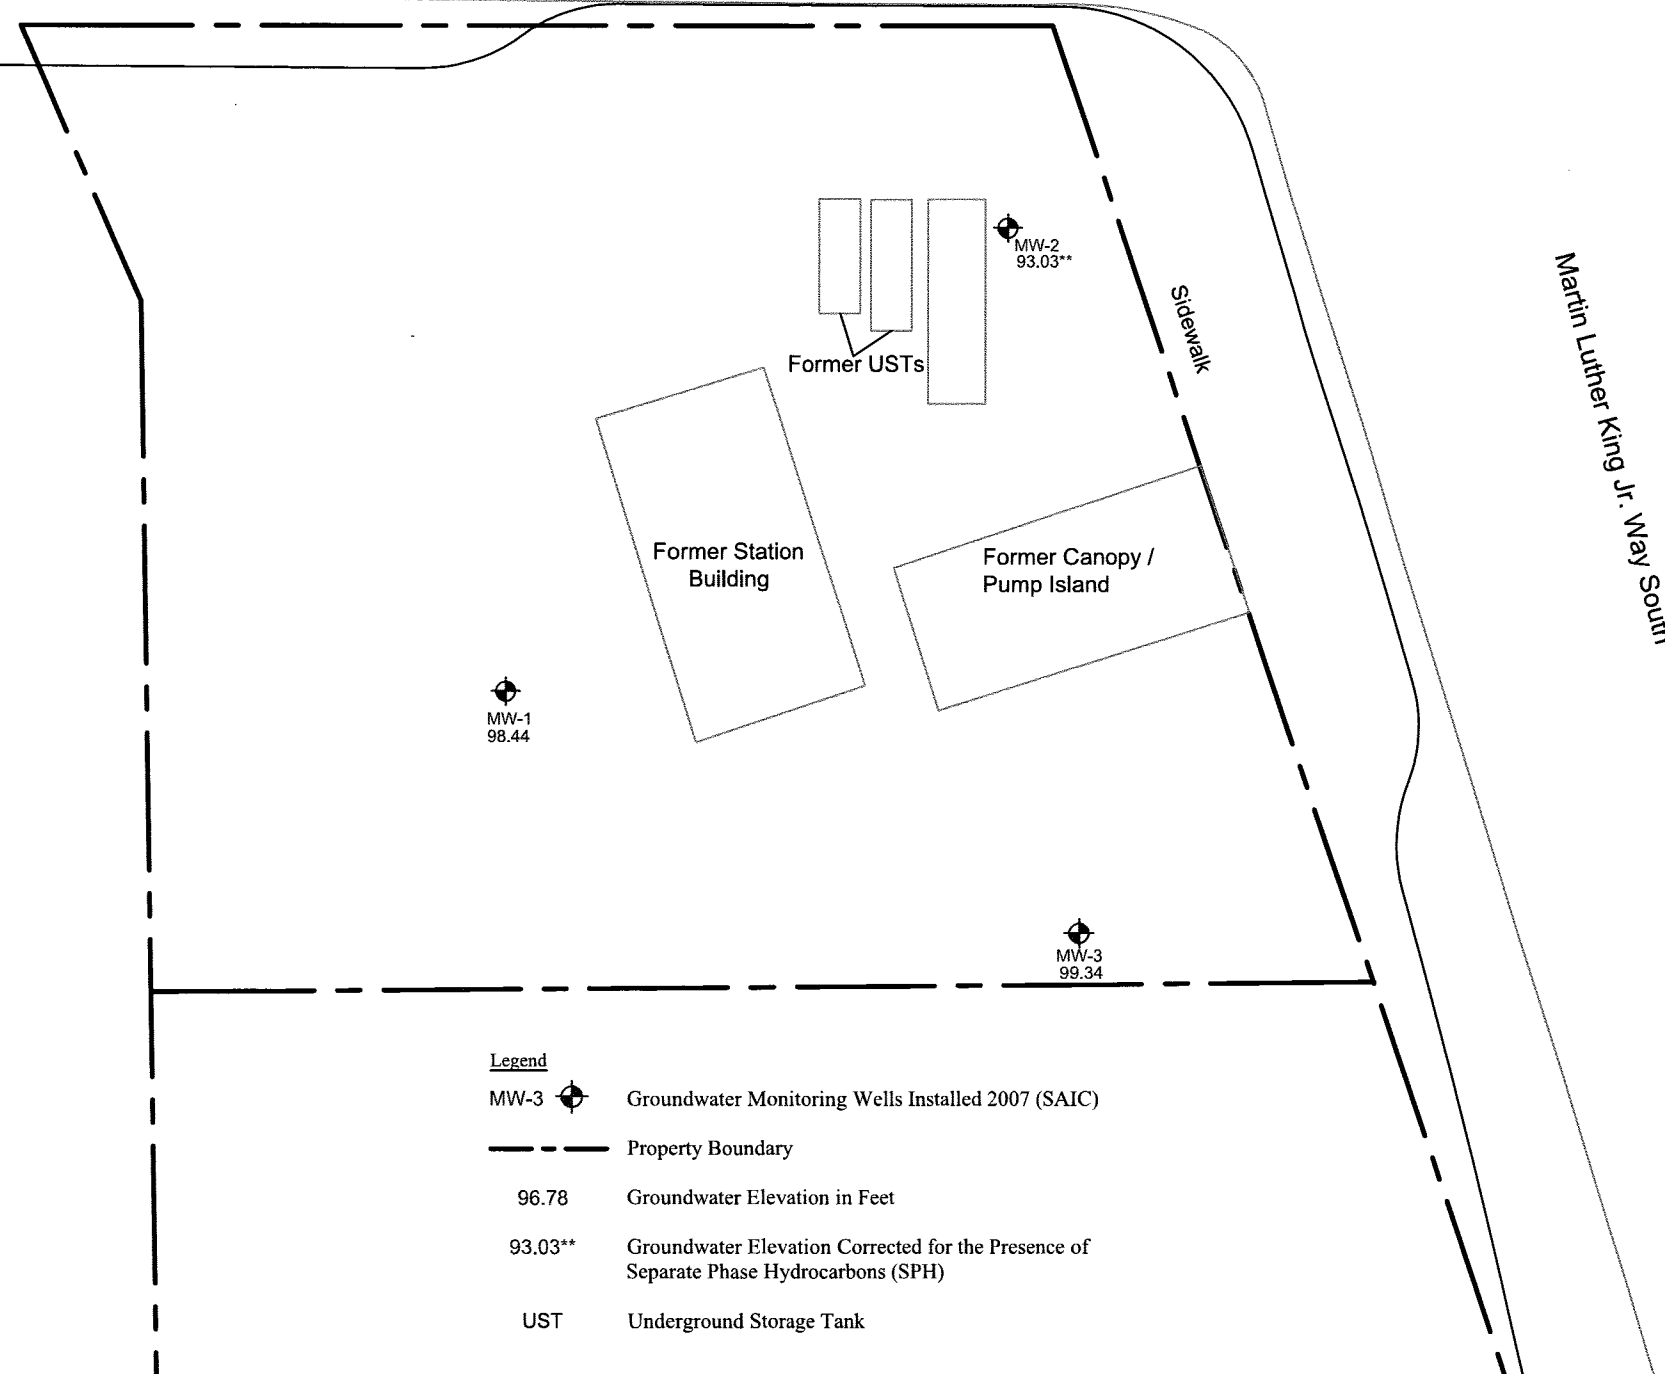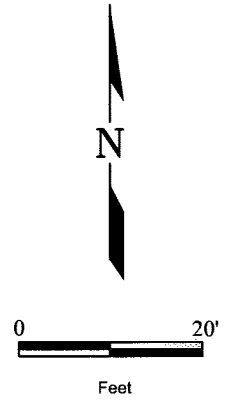South Othello Street



Legend

- MW-3  Groundwater Monitoring Wells Installed 2007 (SAIC)
-  Property Boundary
- 96.78 Groundwater Elevation in Feet
- 93.03\*\* Groundwater Elevation Corrected for the Presence of Separate Phase Hydrocarbons (SPH)
- UST Underground Storage Tank



Former Tidewater Service Station No. 303189  
7301 Martin Luther King Jr. Way South  
Seattle, Washington

**FIGURE 2**  
Groundwater Elevation Map  
November 22, 2013

FILE NAME: 303189 Site Map.dwg	DATE: 12/10/2013
-----------------------------------	---------------------

**TABLE 1  
GROUNDWATER MONITORING DATA AND ANALYTICAL RESULTS<sup>1</sup>  
FORMER TIDEWATER SERVICE STATION NO. 303189  
7301 Martin Luther King Jr. Way South  
Seattle, Washington  
Concentrations reported in µg/L**

Well ID/ Date	Purge Method	TOC <sup>2</sup> (ft.)	DTP (ft.)	DTW (ft.)	SPHT (ft.)	GWE <sup>3</sup> (ft.)	TPH-DRO	TPH-HRO	TPH-GRO	Benzene	Toluene	Ethyl- benzene	Total Xylenes	MTBE	Total Lead
<b>MW-1</b>															
08/31/07		--	--	--	--	--	930	190	<50	<0.5	<0.5	<0.5	<1.5	--	0.052
04/24/09	LFP	99.66	--	2.36	--	97.30	650	<76	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/12/09	LFP	99.66	--	4.24	--	95.42	370	<67	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/14/09	LFP	99.66	--	1.78	--	97.88	270 <sup>2</sup>	<68 <sup>3</sup>	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/11/10	LFP	99.66	--	1.92	--	97.74	560	<69	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/24/10	LFP	99.66	--	2.43	--	97.23	91	<68	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/04/10	LFP	99.66	--	3.62	--	96.04	520	<75	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/12/10	LFP	99.66	--	2.00	--	97.66	440	<68	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/11	LFP	99.66	--	2.03	--	97.63	1,000	270	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/06/11	LFP	99.66	--	2.32	--	97.34	1,100	210	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/18/11	LFP	99.66	--	4.10	--	95.56	830	210	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/22/11	LFP	99.66	--	1.88	--	97.78	<30	<70	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/12	LFP	99.66	--	1.60	--	98.06	<31	<72	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/25/12	LFP	99.66	--	1.80	--	97.86	<30	<69	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/10/12	LFP	100.66	--	4.02	--	96.64	<30	<69	<50	<0.5	<0.5	<0.5	<1.5	--	--
11/15/12	LFP	100.66	--	2.18	--	98.48	120	160	<50	<0.5	<0.5	<0.5	<1.5	--	--
02/14/13	LFP	100.66	--	1.84	--	98.82	<29	<68	<50	<0.5	<0.5	<0.5	<1.5	--	--
06/01/13	LFP	100.66	--	1.86	--	98.80	<29	<67	<50	<0.5	<0.5	<0.5	<1.5	--	--
08/22/13	LFP	100.66	--	3.98	--	96.68	<29	<67	<50	<0.5	<0.5	<0.5	<1.5	--	--
11/22/13	LFP	100.66	--	2.22	--	98.44	<29	<67	<50	<0.5	<0.5	<0.5	<1.5	--	--
<b>MW-2</b>															
08/31/07		--	--	--	--	--	2,100	1,200	26,000	3,200	190	1,400	3,300	--	--
04/24/09	PER	99.05	--	7.34	--	91.71	-- <sup>4</sup>	-- <sup>4</sup>	16,000	4,100	99	1,500	2,000	<3	--
08/12/09	PER	99.05	--	8.18	--	90.87	-- <sup>4</sup>	-- <sup>4</sup>	27,000	4,000	100	1,300	1,900	<3	--
11/14/09	PER	99.05	--	5.75	--	93.30	-- <sup>4</sup>	-- <sup>4</sup>	19,000	2,800	62	950	1,300	<3	--
02/11/10	PER	99.05	--	6.98	--	92.07	-- <sup>4</sup>	-- <sup>4</sup>	25,000	3,400	97	1,600	2,200	<0.5	--
05/24/10	PER	99.05	--	7.42	--	91.63	-- <sup>4</sup>	-- <sup>4</sup>	19,000	2,900	88	1,400	2,000	<1	--
08/04/10	PER	99.05	--	7.92	--	91.13	-- <sup>4</sup>	-- <sup>4</sup>	16,000	3,800	110	1,700	2,700	<3	--
11/12/10	PER	99.05	--	6.16	--	92.89	-- <sup>4</sup>	-- <sup>4</sup>	16,000	1,900	56	660	680	<1	--
02/23/11	PER	99.05	--	6.09	--	92.96	-- <sup>4</sup>	-- <sup>4</sup>	12,000	2,800	60	680	780	<3	--
05/06/11	PER	99.05	--	6.98	--	92.07	-- <sup>4</sup>	-- <sup>4</sup>	15,000	3,100	72	1,300	1,400	<3	--
08/18/11		99.05	8.20	8.30	0.10	90.83	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	--
11/22/11		99.05	UNABLE TO MEASURE DTW OR COLLECT SAMPLE DUE TO PRESENCE OF SPH				--	--	--	--	--	--	--	--	--
02/23/12		99.05	1.55	1.90	0.35	97.43	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	
05/25/12		99.05	7.10	7.85	0.75	91.80	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	
08/10/12		99.05	8.14	8.34	0.20	90.87	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	
11/15/12		99.05	5.92	6.10	0.18	93.09	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	
02/14/13		99.05	7.12	UNABLE TO MEASURE DTW OR COLLECT SAMPLE DUE TO PRESENCE OF SPH				--	--	--	--	--	--	--	
06/01/13		99.05	7.06	UNABLE TO MEASURE DTW OR COLLECT SAMPLE DUE TO PRESENCE OF SPH				--	--	--	--	--	--	--	
08/22/13		99.05	UNABLE TO MEASURE DTP, DTW OR COLLECT SAMPLE DUE TO PRESENCE OF SPH				--	--	--	--	--	--	--	--	
11/22/13		99.05	6.02	6.04	0.02	93.03	UNABLE TO SAMPLE DUE TO PRESENCE OF SPH					--	--	--	
<b>MW-3</b>															
08/31/07		--	--	--	--	--	120	<100	<50	<0.5	<0.5	<0.5	<1.5	--	0.055
04/24/09	LFP	100.00	--	2.13	--	97.87	58	<75	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--

**TABLE 1**  
**GROUNDWATER MONITORING DATA AND ANALYTICAL RESULTS<sup>1</sup>**  
**FORMER TIDEWATER SERVICE STATION NO. 303189**  
**7301 Martin Luther King Jr. Way South**  
**Seattle, Washington**  
**Concentrations reported in µg/L**

Well ID/ Date	Purge Method	TOC <sup>2</sup> (ft.)	DTP (ft.)	DTW (ft.)	SPHT (ft.)	GWE <sup>3</sup> (ft.)	TPH-DRO	TPH-HRO	TPH-GRO	Benzene	Toluene	Ethyl- benzene	Total Xylenes	MTBE	Total Lead
<b>MW-3 (cont)</b>															
08/12/09	LFP	100.00	--	4.47	--	95.53	620	170	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/14/09	LFP	100.00	--	1.60	--	98.40	450	370	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/11/10	LFP	100.00	--	1.59	--	98.41	160	130	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/24/10	LFP	100.00	--	1.83	--	98.17	910	310	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/04/10	LFP	100.00	--	3.84	--	96.16	55	<74	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/12/10	LFP	100.00	--	1.62	--	98.38	67	<71	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/11	LFP	100.00	--	1.73	--	98.27	140	<73	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/06/11	LFP	100.00	--	1.85	--	98.15	160	82	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/18/11	LFP	100.00	--	4.38	--	95.62	56	<74	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/22/11	LFP	100.00	--	1.58	--	98.42	<30	<70	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/12	LFP	100.00	--	1.65	--	98.35	<33	<77	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/25/12	LFP	100.00	--	1.30	--	98.70	<29	<67	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/10/12	LFP	101.00	--	4.23	--	96.77	<30	<69	<50	<0.5	<0.5	<0.5	<1.5	--	--
11/15/12	LFP	101.00	--	1.79	--	99.21	75	93	<50	<0.5	<0.5	<0.5	<1.5	--	--
02/14/13	LFP	101.00	--	2.17	--	98.83	<29	<67	<50	<0.5	<0.5	<0.5	<1.5	--	--
06/01/13	LFP	101.00	--	1.66	--	99.34	<28	<66	<50	<0.5	<0.5	<0.5	<1.5	--	--
08/22/13	LFP	101.00	--	4.22	--	96.78	<29	<67	<50	<0.5	<0.5	<0.5	<1.5	--	--
11/22/13	LFP	101.00	--	1.66	--	99.34	<30	<70	<50	<0.5	<0.5	<0.5	<1.5	--	--
<b>B-9<sup>7</sup></b>															
05/01/02		--	--	--	--	--	0.660	0.310	32	530	<100	1,600	4,300	--	--
<b>B-10<sup>7</sup></b>															
05/01/02		--	--	--	--	--	5.10	<0.063	26	240	110	240	330	--	--
<b>QA/TRIP BLANK</b>															
04/24/09		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/12/09		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/14/09		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/11/10		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/24/10		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/04/10		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
11/12/10		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/11		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/06/11		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/18/11 <sup>6</sup>		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
02/23/12		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
05/25/12		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--
08/10/12		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--
11/15/12		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--
02/14/13		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--
06/01/13		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--
08/22/13		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--
11/22/13		--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--
Standard Laboratory Reporting Limits:							--	--	50	0.5	0.5	0.5	0.5	0.5	--
MTCA Method A Cleanup Levels:							500	500	800/1,000	5	1,000	700	1,000	0.5	15
Current Method <sup>8</sup> :							NWTPH-Dx + Extended			NWTPH-Gx and USEPA 8021B/8260B				USEPA 7421	

**TABLE 1**  
**GROUNDWATER MONITORING DATA AND ANALYTICAL RESULTS<sup>1</sup>**  
**FORMER TIDEWATER SERVICE STATION NO. 30-3189**  
**7301 Martin Luther King Jr. Way South**  
**Seattle, Washington**  
**Concentrations reported in µg/L**

**Abbreviations:**

BTEX = Benzene, toluene, ethylbenzene, and total xylenes  
DTP = Depth to Product  
DTW = Depth to Water  
(ft.) = Feet  
GC/MS = gas chromatography/mass spectrometry  
GWE = Groundwater Elevation  
LFP = Low Flow Purge  
MTBE = Methyl Tertiary Butyl Ether  
MTCA = Model Toxics Control Act

ND = Non-detect  
PER = Peristaltic Pump  
QA = Quality Assurance/Trip Blank  
QC = Quality control  
SAIC = SAIC Energy, Environment & Infrastructure, LLC  
SPH = Separate-phase hydrocarbons  
SPHT = SPH Thickness  
TOC = Top of Casing

TPH = Total Petroleum Hydrocarbons  
TPH-DRO = TPH as diesel-range organics  
TPH-GRO = TPH as gasoline-range organics  
TPH-HRO = TPH as heavy oil-range organics  
USEPA = United States Environmental Protection Agency  
µg/L = Micrograms per liter  
< = The analyte was not detected at or above the reported value  
-- = Not Measured/Not Analyzed

**Analytical Methods:**

After April 24, 2009 and prior to August 10, 2012 BTEX analysis by USEPA Method 8260B.  
TPH-GRO by Method NWTPH-Gx.  
TPH-DRO and TPH-HRO by Method NWTPH-Dx with silica-gel cleanup.  
BTEX and MTBE by USEPA Method 8021B.

**Notes:**

- 1 Analytical results in bold font indicate concentrations exceed MTCA Method A cleanup levels.
- 2 TOC elevations are expressed in feet relative to an arbitrary datum.
- 3 When SPH is present, GWE has been corrected using the following formula:  $GWE = [(TOC - DTW) + (SPHT \times 0.80)]$ .
- 4 Not sampled due to insufficient water.
- 5 Laboratory report indicates the surrogate data is outside the QC limits. Results from the reextraction are within the limits. The hold time had expired prior to the reextraction therefore, all results are reported from the original extract. The TPH-DRO result for the re-extraction is 610 µg/L; the TPH-HRO result for the re-extraction is ND.
- 6 The initial analysis for GCMS volatiles could not be reported due to analytical difficulties. Since only one sample vial was submitted, the analysis was repeated using the remaining sample volume which contained headspace.
- 7 Results for wells B-9 and B-10 were provided by GeoEngineers.
- 8 Laboratory analytical methods for historical data may not be consistent with list of current analytical methods. When necessary, consult original laboratory reports to verify methods used.

**Attachment A:**  
**Groundwater Monitoring and Sampling Data Package**

---





# GETTLER-RYAN INC.

## TRANSMITTAL

December 10, 2013  
G-R #385862

TO: Ms. Ruth A. Otteman  
Leidos, Inc.  
18912 North Creek Parkway, Suite 101  
Bothell, WA 98011

FROM: Deanna L. Harding  
Project Coordinator  
Gettler-Ryan Inc.  
6805 Sierra Court, Suite G  
Dublin, California 94568

RE: **Chevron Facility**  
**#303189**  
**(Former Tidewater Service Stn.)**  
**7301 MLK Jr. Way South**  
**Seattle, Washington**

WE HAVE ENCLOSED THE FOLLOWING:

COPIES	DESCRIPTION
VIA PDF	Groundwater Monitoring and Sampling Data Package Fourth Quarter Event of November 22, 2013

COMMENTS:

Pursuant to your request, we are providing you with copies of the above referenced data for your use.

Please provide us the updated historical data prior to the next monitoring and sampling event for our field use.

Please feel free to contact me if you have any comments/questions.

trans/303189



## **Standard Operating Procedure, Low-Flow Purging and Sampling**

Gettler-Ryan Inc. field personnel adhere to the following Standard Operating Procedure (SOP) for the collection and handling of representative groundwater samples using the Low-Flow (Minimal-Drawdown) Purging technique. This SOP incorporates purging and sampling methods discussed in U.S. EPA, Ground Water Issue, Publication Number EPA/540/S-95/504, April 1996 by Puls, R.W. and M.J. Barcelona - "*Low-Flow (Minimal-Drawdown) Ground-Water Sampling Procedures.*"

A QED Well Wizard™ (or equivalent) bladder pump or Peristaltic Pump will be used to purge and sample selected wells as outlined in the scope-of-work. An in-line flow cell or other multi-parameter meter is used to collect water quality indicating parameters during purging.

### ***Initial Pump Discharge Test Procedures***

The Static Water Level (SWL) is measured in all wells at the site prior to the installation of the pump or tubing and initiation of the test procedures in any well. In addition, the presence or absence of separate-phase hydrocarbons (SPH) is determined using an interface probe. Product thickness, if present, is measured to the nearest 0.01 foot. The SWL measurement and SPH thickness, if any, will be recorded on the field data sheet.

The bladder pump or suction inlet tubing of the peristaltic pump is then positioned with its inlet located within the screened interval of the well. The in-line flow cell is then connected to the discharge tubing. After pump installation, the SWL is allowed to recover to its original level. The pump is then started at a discharge rate between 100 ml to 300 ml per minute with the in-line flow cell connected. The water level is monitored continuously for any change from the original measurement and the discharge rate is adjusted until an optimum discharge rate (ODR) is determined. The goal for the ODR is to produce a stable drawdown of less than 0.1 meter as allowed by site conditions; however the total drawdown from the initial SWL should not exceed 25% of the distance between pump inlet location and the top of the well screen. Once achieved, the ODR will be confirmed by volumetric discharge measurement and recorded on the field data sheet.

### ***Purging and Water Quality Parameter Measurement***

When the ODR has been determined and the SWL drawdown has been established within the acceptable range, and a minimum of one pump system volume (bladder volume and/or discharge tubing volume) has been purged, field measurements for temperature (T), pH, conductivity (Ec), and if required, oxygen reduction potential (ORP) and dissolved oxygen (DO) will be collected and documented on the field data sheet. Measurements should be taken every three to five minutes until parameters stabilize for three consecutive readings. The minimum parameter subset of T ( $\pm 10\%$ ), pH ( $\pm 0.1$  unit), and Ec ( $\pm 10$  uS) are required to stabilize. Additional parameters that may be required are DO ( $\pm 0.2$  mg/l) and ORP ( $\pm 20$  mV).

### ***Sample Collection***

When water quality parameters have stabilized, and the SWL drawdown remains established within the acceptable range, groundwater sample collection may begin. If used, the in-line flow cell and its tubing are disconnected from the discharge tubing prior to sample collection. Water samples are collected from the discharge tubing into appropriate containers. Pre-preserved containers, supplied by analytical laboratories, are used when possible. When pre-preserved containers are not available, the laboratory is instructed to preserve the sample as appropriate. Duplicate samples are collected for the laboratory to use in maintaining quality assurance/quality control standards, as directed by the scope of work. The samples are labeled to include the job number, sample identification, collection date and time, analysis, preservation (if any), and the sample collector's initials. The water samples are placed in a cooler,

maintained at 4°C for transport to the laboratory. A laboratory supplied trip blank accompanies each sampling set. The trip blank is analyzed for some or all of the same compounds as the groundwater samples. Once collected in the field, all samples are maintained under chain of custody until delivered to the laboratory.

The chain of custody document includes the job number, type of preservation, if any, analysis requested, sample identification, date and time collected, and the sample collector's name. The chain of custody is signed and dated (including time of transfer) by each person who receives or surrenders the samples, beginning with the field personnel and ending with the laboratory personnel.

A laboratory supplied trip blank accompanies each sampling set. For sampling sets greater than 20 samples, 5% trip blanks are included. The trip blank is analyzed for some or all of the same compounds as the groundwater samples.



# GETTLER-RYAN INC.

## WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #303189 Job Number: 385862  
 Site Address: 7301 Martin Luther King Jr. Way S Event Date: 11.22.13 (inclusive)  
 City: Seattle, WA Sampler: J.P.

Well ID: MW-1 Date Monitored: 11.22.13  
 Well Diameter: .75 in.  
 Total Depth: 11.62 ft.  
 Depth to Water: 1.22 ft.  Check if water column is less than 0.50 ft.  
9.30 xVF = --- = --- x3 case volume = Estimated Purge Volume: --- gal.  
 Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 1.00

Volume Factor (VF)	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

**Purge Equipment:**  
 Disposable Bailer \_\_\_\_\_  
 Stainless Steel Bailer \_\_\_\_\_  
 Stack Pump \_\_\_\_\_  
 Suction Pump \_\_\_\_\_  
 Grundfos \_\_\_\_\_  
 Peristaltic Pump  \_\_\_\_\_  
 QED Bladder Pump \_\_\_\_\_  
 Other: \_\_\_\_\_

**Sampling Equipment:**  
 Disposable Bailer \_\_\_\_\_  
 Pressure Bailer \_\_\_\_\_  
 Metal Filters \_\_\_\_\_  
 Peristaltic Pump  \_\_\_\_\_  
 QED Bladder Pump \_\_\_\_\_  
 Other: \_\_\_\_\_

Time Started: \_\_\_\_\_ (2400 hrs)  
 Time Completed: \_\_\_\_\_ (2400 hrs)  
 Depth to Product: \_\_\_\_\_ ft  
 Depth to Water: \_\_\_\_\_ ft  
 Hydrocarbon Thickness: \_\_\_\_\_ ft  
 Visual Confirmation/Description: \_\_\_\_\_  
 Skimmer / Absorbant Sock (circle one)  
 Amt Removed from Skimmer: \_\_\_\_\_ gal  
 Amt Removed from Well: \_\_\_\_\_ gal  
 Water Removed: \_\_\_\_\_  
 Product Transferred to: \_\_\_\_\_

Start Time (purge): 15:03 Weather Conditions: RAIN  
 Sample Time/Date: 15:02 / 11.22.13 Water Color: clear Odor: Y / N  
 Approx. Flow Rate: 100 mlpm Sediment Description: None  
 Did well de-water? NO If yes, Time: \_\_\_\_\_ Volume: \_\_\_\_\_ gal. DTW @ Sampling: 3.11

Time (2400 hr.)	Volume (Liters)	pH	Conductivity (µmhos/cm - µS)	Temperature (C / F)	D.O. (mg/L)	ORP (mV)	Gauge DTW as parameters are recorded
<u>15:21</u>	<u>1.7</u>	<u>7.02</u>	<u>589</u>	<u>13.22</u>	<u>.66</u>	<u>48.3</u>	<u>2.56</u>
<u>15:24</u>	<u>3.1</u>	<u>6.99</u>	<u>590</u>	<u>13.16</u>	<u>.62</u>	<u>42.6</u>	<u>2.00</u>
<u>15:27</u>	<u>3.5</u>	<u>6.96</u>	<u>590</u>	<u>13.10</u>	<u>.61</u>	<u>42.6</u>	<u>3.01</u>
<u>15:30</u>	<u>3.9</u>	<u>6.96</u>	<u>591</u>	<u>13.01</u>	<u>.58</u>	<u>42.6</u>	<u>3.11</u>

### LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-1	3 x voa vial	YES	HCL	LANCASTER	NWTPH-Gx/BTEX(8021)
	2 x 1 liter ambers	YES	HCL	LANCASTER	NWTPH-Dx w/sgc

COMMENTS: Depth Pump Set At: 0-9'

Add/Replaced Lock: \_\_\_\_\_ Add/Replaced Plug: \_\_\_\_\_ Add/Replaced Bolt: \_\_\_\_\_



# GETTLER-RYAN Inc.

## WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #303189 Job Number: 385862  
 Site Address: 7301 Martin Luther King Jr. Way S Event Date: 11.22.13 (inclusive)  
 City: Seattle, WA Sampler: J.P.

Well ID: MW-1 Date Monitored: 11.22.13

Well Diameter: .75 in.

Total Depth: 9.65 ft.

Depth to Water: 6.01 ft.

Volume Factor (VF)	<u>3/4" = 0.02</u>	1" = 0.04	2" = 0.17	3" = 0.38
	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Check if water column is less than 0.50 ft.

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: \_\_\_\_\_  
 xVF \_\_\_\_\_ = \_\_\_\_\_ x3 case volume = Estimated Purge Volume: \_\_\_\_\_ gal.

### Purge Equipment:

Disposable Bailer \_\_\_\_\_  
 Stainless Steel Bailer \_\_\_\_\_  
 Stack Pump \_\_\_\_\_  
 Suction Pump \_\_\_\_\_  
 Grundfos \_\_\_\_\_  
 Peristaltic Pump \_\_\_\_\_  
 QED Bladder Pump \_\_\_\_\_  
 Other: \_\_\_\_\_

### Sampling Equipment:

Disposable Bailer \_\_\_\_\_  
 Pressure Bailer \_\_\_\_\_  
 Metal Filters \_\_\_\_\_  
 Peristaltic Pump \_\_\_\_\_  
 QED Bladder Pump \_\_\_\_\_  
 Other: \_\_\_\_\_

Time Started: \_\_\_\_\_ (2400 hrs)  
 Time Completed: \_\_\_\_\_ (2400 hrs)  
 Depth to Product: 6.01 ft  
 Depth to Water: 6.01 ft  
 Hydrocarbon Thickness: .01 ft  
 Visual Confirmation/Description: THICK BLACK  
 Skimmer / Absorbent Sock (circle one)  
 Amt Removed from Skimmer: 0 gal  
 Amt Removed from Well: 0 gal  
 Water Removed: 0 gal  
 Product Transferred to: 0

Start Time (purge): \_\_\_\_\_ Weather Conditions: \_\_\_\_\_  
 Sample Time/Date: / Water Color: \_\_\_\_\_ Odor: Y / N  
 Approx. Flow Rate: \_\_\_\_\_ mlpm Sediment Description: \_\_\_\_\_  
 Did well de-water? \_\_\_\_\_ If yes, Time: \_\_\_\_\_ Volume: \_\_\_\_\_ gal. DTW @ Sampling: \_\_\_\_\_

Time (2400 hr.)	Volume (Liters)	pH	Conductivity (umhos/cm - <del>µS</del> )	Temperature (C / F)	D.O. (mg/L)	ORP (mV)	Gauge DTW as parameters are recorded

### LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-	x voa vial	YES	HCL	LANCASTER	NWTPH-Gx/BTEX(8021)
	x 1 liter ambers	YES	HCL	LANCASTER	NWTPH-Dx w/sgc

COMMENTS: Depth Pump Set At: 6.01, THICK BLACK SLUDGE, PHOTO

Add/Replaced Lock: \_\_\_\_\_ Add/Replaced Plug: \_\_\_\_\_ Add/Replaced Bolt: \_\_\_\_\_



# GETTLER-RYAN INC.

## WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #303189 Job Number: 385862  
 Site Address: 7301 Martin Luther King Jr. Way S Event Date: 11-22-13 (inclusive)  
 City: Seattle, WA Sampler: J.V.

Well ID: MW-3 Date Monitored: 11-22-13

Well Diameter: .75 in.  
 Total Depth: 9.49 ft.  
 Depth to Water: 1.66 ft.

Volume Factor (VF)	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 3.22  
 Check if water column is less than 0.50 ft.  
 xVF = - = - x3 case volume = Estimated Purge Volume: - gal.

**Purge Equipment:**  
 Disposable Bailer \_\_\_\_\_  
 Stainless Steel Bailer \_\_\_\_\_  
 Stack Pump \_\_\_\_\_  
 Suction Pump \_\_\_\_\_  
 Grundfos \_\_\_\_\_  
 Peristaltic Pump X  
 QED Bladder Pump \_\_\_\_\_  
 Other: \_\_\_\_\_

**Sampling Equipment:**  
 Disposable Bailer \_\_\_\_\_  
 Pressure Bailer \_\_\_\_\_  
 Metal Filters \_\_\_\_\_  
 Peristaltic Pump X  
 QED Bladder Pump \_\_\_\_\_  
 Other: \_\_\_\_\_

Time Started: \_\_\_\_\_ (2400 hrs)  
 Time Completed: \_\_\_\_\_ (2400 hrs)  
 Depth to Product: \_\_\_\_\_ ft  
 Depth to Water: \_\_\_\_\_ ft  
 Hydrocarbon Thickness: \_\_\_\_\_ ft  
 Visual Confirmation/Description: \_\_\_\_\_  
 Skimmer / Absorbant Sock (circle one)  
 Amt Removed from Skimmer: \_\_\_\_\_ gal  
 Amt Removed from Well: \_\_\_\_\_ gal  
 Water Removed: \_\_\_\_\_  
 Product Transferred to: \_\_\_\_\_

Start Time (purge): 16:59 Weather Conditions: Rain  
 Sample Time/Date: 16:20 / 11-22-13 Water Color: clear Odor: Y (N)  
 Approx. Flow Rate: 1.50 mpm Sediment Description: None  
 Did well de-water? No If yes, Time: \_\_\_\_\_ Volume: \_\_\_\_\_ gal. DTW @ Sampling: 2.32

Time (2400 hr.)	Volume (Liters)	pH	Conductivity (µmhos/cm - pS)	Temperature (C / F)	D.O. (mg/L)	ORP (mV)	Gauge DTW as parameters are recorded
<u>16:17</u>	<u>2.7</u>	<u>6.80</u>	<u>326</u>	<u>13.19</u>	<u>1.02</u>	<u>63.0</u>	<u>1.89</u>
<u>16:20</u>	<u>3.1</u>	<u>6.86</u>	<u>324</u>	<u>13.00</u>	<u>.96</u>	<u>62.0</u>	<u>2.03</u>
<u>16:23</u>	<u>3.5</u>	<u>6.86</u>	<u>324</u>	<u>12.92</u>	<u>.92</u>	<u>61.5</u>	<u>2.14</u>
<u>16:26</u>	<u>4.0</u>	<u>6.85</u>	<u>323</u>	<u>12.86</u>	<u>.88</u>	<u>60.6</u>	<u>2.22</u>

### LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-3</u>	<u>2</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>NWTPH-Gx/BTEX(8021)</u>
	<u>2</u> x 1 liter ambers	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>NWTPH-Dx w/sgc</u>

COMMENTS: Depth Pump Set At: 7-00'

Add/Replaced Lock: \_\_\_\_\_ Add/Replaced Plug: \_\_\_\_\_ Add/Replaced Bolt: \_\_\_\_\_

# Chevron Northwest Region Analysis Request/Chain of Custody



**Lancaster Laboratories**

Acct. # \_\_\_\_\_ Group # \_\_\_\_\_ Sample # \_\_\_\_\_  
For Eurofins Lancaster Laboratories use only  
 Instructions on reverse side correspond with circled numbers.

1 Client Information				4 Matrix				5 Analyses Requested										6 Remarks					
Facility # <b>SS#303189-OML G-R#385862</b> WBS Site Address <b>301 Martin Luther King Jr. Way South, SEATTLE, WA</b> Chevron P# <b>WHO</b> LEIDOSRO Lead Consultant <b>Ruth Otteman</b> Consultant Office <b>Getler-Ryan, Inc., 6747 Sierra Court, Suite J, Dublin, CA 94568</b> Consultant Project Mgr. <b>Deanna L. Harding, (deanna@grnc.com), (925) 551-7444 x180</b> Consultant Phone # <b>(425) 482-3328 x</b> Sampler _____				<input type="checkbox"/> Sediment <input checked="" type="checkbox"/> Ground <input type="checkbox"/> Surface <input type="checkbox"/> Potable <input type="checkbox"/> NPDES <input type="checkbox"/> Air <input type="checkbox"/> Oil <input type="checkbox"/> Composite				<input type="checkbox"/> BTEX + MTBE 8021 <input checked="" type="checkbox"/> 8260 <input checked="" type="checkbox"/> Naphth <input type="checkbox"/> 8260 full scan <input type="checkbox"/> Oxygenates <input type="checkbox"/> NWTPH-Gx <input checked="" type="checkbox"/> NWTPH-Dx with Silica Gel Cleanup <input type="checkbox"/> NWTPH-Dx without Silica Gel Cleanup <input type="checkbox"/> WA VPH <input type="checkbox"/> WA EPH <input type="checkbox"/> Total <input type="checkbox"/> Diss. <input type="checkbox"/> Method										SCR #: _____ <input type="checkbox"/> Results in Dry Weight <input type="checkbox"/> J value reporting needed <input type="checkbox"/> Must meet lowest detection limits possible for 8260 compounds <input type="checkbox"/> 8021 MTBE Confirmation <input type="checkbox"/> Confirm MTBE + Naphthalene <input type="checkbox"/> Confirm highest hit by 8260 <input type="checkbox"/> Confirm all hits by 8260 <input type="checkbox"/> Run _____ oxy's on highest hit <input type="checkbox"/> Run _____ oxy's on all hits					
2 Sample Identification		3 Collected		Grab	Composite	Soil	Water	Oil	Total Number of Containers	BTEX + MTBE 8021	8260 full scan	Oxygenates	NWTPH-Gx	NWTPH-Dx with Silica Gel Cleanup	NWTPH-Dx without Silica Gel Cleanup	WA VPH	WA EPH	Total	Diss.	Method	6 Remarks		
Date	Time	Date	Time																				
																					Please forward the lab results directly to the Lead Consultant and cc: G-R.		
<b>7 Turnaround Time Requested (TAT) (please circle)</b> <input checked="" type="radio"/> Standard 5 day 4 day <input type="radio"/> 72 hour 48 hour 24 hour				Relinquished by _____ Date <b>11-22-13</b> Time <b>1300</b> Relinquished by _____ Date _____ Time _____				Received by _____ Date _____ Time _____ Received by _____ Date _____ Time _____				<b>9</b>											
<b>8 Data Package (circle if required)</b> Type I - Full Type VI (Raw Data)				EDD (circle if required) CVX-RTBU-FL_05 (default) Other: _____				Relinquished by Commercial Carrier: UPS <input checked="" type="checkbox"/> FedEx _____ Other _____ Temperature Upon Receipt _____ °C				Received by _____ Date _____ Time _____ Custody Seals Intact? Yes No											



**Attachment B:**  
**Laboratory Analysis Report**

---

ANALYTICAL RESULTS

Prepared by:

Eurofins Lancaster Laboratories Environmental  
2425 New Holland Pike  
Lancaster, PA 17601

Prepared for:

Chevron  
6001 Bollinger Canyon Road  
L4310  
San Ramon CA 94583

December 06, 2013

Project: 303189

Submittal Date: 11/26/2013

Group Number: 1436829

PO Number: 0015119898

Release Number: SHRILL HOPKINS

State of Sample Origin: WA

Client Sample Description

QA Water  
MW-1 Grab Groundwater  
MW-3 Grab Groundwater

Lancaster Labs (LL) #

7293163  
7293164  
7293165

The specific methodologies used in obtaining the enclosed analytical results are indicated on the Laboratory Sample Analysis Record.

ELECTRONIC COPY TO  
ELECTRONIC COPY TO  
ELECTRONIC COPY TO  
ELECTRONIC COPY TO

Gettler-Ryan Inc.  
SAIC  
SAIC

Attn: Gettler Ryan  
Attn: Jamalyn Green  
Attn: Ruth Otteman

Respectfully Submitted,

Amek Carter  
Specialist

(717) 556-7252



Lancaster Laboratories  
Environmental

# ***Analysis Report***

---

2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300 • Fax: 717-656-2681 • [www.LancasterLabs.com](http://www.LancasterLabs.com)



Sample Description: QA Water  
Facility# 303189 Job# 385862  
7301 Martin Luther King Jr Way S - Seattle, WA

LL Sample # WW 7293163  
LL Group # 1436829  
Account # 11260

Project Name: 303189

Collected: 11/22/2013

Chevron

6001 Bollinger Canyon Road  
L4310

Submitted: 11/26/2013 09:15

San Ramon CA 94583

Reported: 12/06/2013 17:36

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Dilution Factor
<b>GC Volatiles</b>					
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx n.a.	ug/l N.D.	ug/l 50	1
<b>GC Volatiles</b>					
02102	Benzene	SW-846 8021B 71-43-2	ug/l N.D.	ug/l 0.5	1
02102	Ethylbenzene	100-41-4	N.D.	0.5	1
02102	Toluene	108-88-3	N.D.	0.5	1
02102	Total Xylenes	1330-20-7	N.D.	1.5	1

### General Sample Comments

State of Washington Lab Certification No. C457

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

### Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx	1	13337A53A	12/04/2013 13:49	Marie D Beamenderfer	1
02102	Method 8021 Water Master	SW-846 8021B	1	13337A53A	12/04/2013 13:49	Marie D Beamenderfer	1
01146	GC VOA Water Prep	SW-846 5030B	1	13337A53A	12/04/2013 13:49	Marie D Beamenderfer	1



Lancaster Laboratories  
Environmental

# Analysis Report

2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300 • Fax: 717-656-2681 • www.LancasterLabs.com

Sample Description: MW-1 Grab Groundwater  
Facility# 303189 Job# 385862  
7301 Martin Luther King Jr Way S - Seattle, WA

LL Sample # WW 7293164  
LL Group # 1436829  
Account # 11260

Project Name: 303189

Collected: 11/22/2013 15:32 by JP

Chevron

6001 Bollinger Canyon Road

Submitted: 11/26/2013 09:15

L4310

Reported: 12/06/2013 17:36

San Ramon CA 94583

MLKS1

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Dilution Factor
<b>GC Volatiles</b>					
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx n.a.	ug/l N.D.	ug/l 50	1
<b>GC Volatiles</b>					
02102	Benzene	SW-846 8021B 71-43-2	ug/l N.D.	ug/l 0.5	1
02102	Ethylbenzene	100-41-4	N.D.	0.5	1
02102	Toluene	108-88-3	N.D.	0.5	1
02102	Total Xylenes	1330-20-7	N.D.	1.5	1
<b>GC Petroleum</b>					
<b>Hydrocarbons w/Si</b>					
12005	DRO C12-C24 w/Si Gel	ECY 97-602 NWTPH-Dx modified n.a.	ug/l N.D.	ug/l 29	1
12005	HRO C24-C40 w/Si Gel	n.a.	N.D.	67	1
The reverse surrogate, capric acid, is present at <1%.					

### General Sample Comments

State of Washington Lab Certification No. C457

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

### Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx	1	13337A53A	12/04/2013 22:19	Marie D Beamenderfer	1
02102	Method 8021 Water Master	SW-846 8021B	1	13337A53A	12/04/2013 22:19	Marie D Beamenderfer	1
01146	GC VOA Water Prep	SW-846 5030B	1	13337A53A	12/04/2013 22:19	Marie D Beamenderfer	1
12005	NWTPH-Dx water w/ 10g Si Gel	ECY 97-602 NWTPH-Dx modified	1	133310018A	12/02/2013 18:56	Michele D Hamilton	1
12007	NW Dx water w/ 10g column	ECY 97-602 NWTPH-Dx 06/97	1	133310018A	11/28/2013 18:00	Elaine F Stoltzfus	1

Sample Description: MW-3 Grab Groundwater  
Facility# 303189 Job# 385862  
7301 Martin Luther King Jr Way S - Seattle, WA

LL Sample # WW 7293165  
LL Group # 1436829  
Account # 11260

Project Name: 303189

Collected: 11/22/2013 16:30 by JP

Chevron  
6001 Bollinger Canyon Road  
L4310  
San Ramon CA 94583

Submitted: 11/26/2013 09:15  
Reported: 12/06/2013 17:36

MLKS3

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Dilution Factor
<b>GC Volatiles</b>					
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx n.a.	ug/l N.D.	ug/l 50	1
<b>GC Volatiles</b>					
02102	Benzene	SW-846 8021B 71-43-2	ug/l N.D.	ug/l 0.5	1
02102	Ethylbenzene	100-41-4	N.D.	0.5	1
02102	Toluene	108-88-3	N.D.	0.5	1
02102	Total Xylenes	1330-20-7	N.D.	1.5	1
<b>GC Petroleum Hydrocarbons w/Si</b>					
12005	DRO C12-C24 w/Si Gel	ECY 97-602 NWTPH-Dx modified n.a.	ug/l N.D.	ug/l 30	1
12005	HRO C24-C40 w/Si Gel	n.a.	N.D.	70	1
The reverse surrogate, capric acid, is present at <1%.					

### General Sample Comments

State of Washington Lab Certification No. C457

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

### Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
08274	NWTPH-Gx water C7-C12	ECY 97-602 NWTPH-Gx	1	13337A53A	12/04/2013 22:45	Marie D Beamenderfer	1
02102	Method 8021 Water Master	SW-846 8021B	1	13337A53A	12/04/2013 22:45	Marie D Beamenderfer	1
01146	GC VOA Water Prep	SW-846 5030B	1	13337A53A	12/04/2013 22:45	Marie D Beamenderfer	1
12005	NWTPH-Dx water w/ 10g Si Gel	ECY 97-602 NWTPH-Dx modified	1	133310018A	12/02/2013 19:18	Michele D Hamilton	1
12007	NW Dx water w/ 10g column	ECY 97-602 NWTPH-Dx 06/97	1	133310018A	11/28/2013 18:00	Elaine F Stoltzfus	1



**Quality Control Summary**Client Name: Chevron  
Reported: 12/06/13 at 05:36 PM

Group Number: 1436829

**Surrogate Quality Control**Limits: 50-150

---

\*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The unspiked result was more than four times the spike added.



# Explanation of Symbols and Abbreviations

The following defines common symbols and abbreviations used in reporting technical data:

<b>RL</b>	Reporting Limit	<b>BMQL</b>	Below Minimum Quantitation Level
<b>N.D.</b>	none detected	<b>MPN</b>	Most Probable Number
<b>TNTC</b>	Too Numerous To Count	<b>CP Units</b>	cobalt-chloroplatinate units
<b>IU</b>	International Units	<b>NTU</b>	nephelometric turbidity units
<b>umhos/cm</b>	micromhos/cm	<b>ng</b>	nanogram(s)
<b>C</b>	degrees Celsius	<b>F</b>	degrees Fahrenheit
<b>meq</b>	milliequivalents	<b>lb.</b>	pound(s)
<b>g</b>	gram(s)	<b>kg</b>	kilogram(s)
<b>µg</b>	microgram(s)	<b>mg</b>	milligram(s)
<b>mL</b>	milliliter(s)	<b>L</b>	liter(s)
<b>m<sup>3</sup></b>	cubic meter(s)	<b>µL</b>	microliter(s)
		<b>pg/L</b>	picogram/liter

**<** less than - The number following the sign is the limit of quantitation, the smallest amount of analyte which can be reliably determined using this specific test.

**>** greater than

**ppm** parts per million - One ppm is equivalent to one milligram per kilogram (mg/kg), or one gram per million grams. For aqueous liquids, ppm is usually taken to be equivalent to milligrams per liter (mg/l), because one liter of water has a weight very close to a kilogram. For gases or vapors, one ppm is equivalent to one microliter per liter of gas.

**ppb** parts per billion

**Dry weight basis** Results printed under this heading have been adjusted for moisture content. This increases the analyte weight concentration to approximate the value present in a similar sample without moisture. All other results are reported on an as-received basis.

**Data Qualifiers:**

**C** – result confirmed by reanalysis.

**J** - estimated value – The result is ≥ the Method Detection Limit (MDL) and < the Limit of Quantitation (LOQ).

**U.S. EPA CLP Data Qualifiers:**

Organic Qualifiers		Inorganic Qualifiers	
<b>A</b>	TIC is a possible aldol-condensation product	<b>B</b>	Value is <CRDL, but ≥IDL
<b>B</b>	Analyte was also detected in the blank	<b>E</b>	Estimated due to interference
<b>C</b>	Pesticide result confirmed by GC/MS	<b>M</b>	Duplicate injection precision not met
<b>D</b>	Compound quantitated on a diluted sample	<b>N</b>	Spike sample not within control limits
<b>E</b>	Concentration exceeds the calibration range of the instrument	<b>S</b>	Method of standard additions (MSA) used for calculation
<b>N</b>	Presumptive evidence of a compound (TICs only)	<b>U</b>	Compound was not detected
<b>P</b>	Concentration difference between primary and confirmation columns >25%	<b>W</b>	Post digestion spike out of control limits
<b>U</b>	Compound was not detected	<b>*</b>	Duplicate analysis not within control limits
<b>X,Y,Z</b>	Defined in case narrative	<b>+</b>	Correlation coefficient for MSA <0.995

**Analytical test results meet all requirements of NELAC unless otherwise noted under the individual analysis.**

Measurement uncertainty values, as applicable, are available upon request.

Tests results relate only to the sample tested. Clients should be aware that a critical step in a chemical or microbiological analysis is the collection of the sample. Unless the sample analyzed is truly representative of the bulk of material involved, the test results will be meaningless. If you have questions regarding the proper techniques of collecting samples, please contact us. We cannot be held responsible for sample integrity, however, unless sampling has been performed by a member of our staff. This report shall not be reproduced except in full, without the written approval of the laboratory.

Times are local to the area of activity. Parameters listed in the 40 CFR part 136 Table II as “analyze immediately” are not performed within 15 minutes.

**WARRANTY AND LIMITS OF LIABILITY** - In accepting analytical work, we warrant the accuracy of test results for the sample as submitted. THE FOREGOING EXPRESS WARRANTY IS EXCLUSIVE AND IS GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. WE DISCLAIM ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING A WARRANTY OF FITNESS FOR PARTICULAR PURPOSE AND WARRANTY OF MERCHANTABILITY. IN NO EVENT SHALL EUROFINS LANCASTER LABORATORIES ENVIRONMENTAL, LLC BE LIABLE FOR INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFIT OR GOODWILL REGARDLESS OF (A) THE NEGLIGENCE (EITHER SOLE OR CONCURRENT) OF EUROFINS LANCASTER LABORATORIES ENVIRONMENTAL AND (B) WHETHER EUROFINS LANCASTER LABORATORIES ENVIRONMENTAL HAS BEEN INFORMED OF THE POSSIBILITY OF SUCH DAMAGES. We accept no legal responsibility for the purposes for which the client uses the test results. No purchase order or other order for work shall be accepted by Eurofins Lancaster Laboratories Environmental which includes any conditions that vary from the Standard Terms and Conditions, and Eurofins Lancaster Laboratories Environmental hereby objects to any conflicting terms contained in any acceptance or order submitted by client.