

**STATE OF WASHINGTON
DEPARTMENT OF ECOLOGY**

In the Matter of Remedial Action by:

ExxonMobil Oil Corporation and
American Distributing Company

AGREED ORDER for

**Focused Feasibility Study and Draft
Cleanup Action Plan – ExxonMobil ADC
Site**

No. DE **6184**

TO: ExxonMobil Oil Corporation
1001 Wampanoag Trail
Riverside, RI 02915

and

American Distributing Company
13618 45th Avenue NE
Marysville, WA 98271

TABLE OF CONTENTS

| | | |
|-------|--|----|
| I. | INTRODUCTION..... | 3 |
| II. | JURISDICTION..... | 3 |
| III. | PARTIES BOUND..... | 3 |
| IV. | DEFINITIONS..... | 4 |
| V. | FINDINGS OF FACT..... | 5 |
| VI. | ECOLOGY DETERMINATIONS..... | 9 |
| VII. | WORK TO BE PERFORMED..... | 9 |
| VIII. | TERMS AND CONDITIONS OF ORDER..... | 10 |
| | A. Public Notice..... | 10 |
| | B. Remedial Action Costs..... | 10 |
| | C. Implementation of Remedial Action..... | 11 |
| | D. Designated Project Coordinators..... | 11 |
| | E. Performance..... | 12 |
| | F. Access..... | 13 |
| | G. Sampling, Data Submittal, and Availability..... | 14 |
| | H. Public Participation..... | 14 |
| | I. Retention of Records..... | 15 |
| | J. Resolution of Disputes..... | 16 |
| | K. Extension of Schedule..... | 17 |
| | L. Amendment of Order..... | 18 |
| | M. Endangerment..... | 19 |
| | N. Reservation of Rights..... | 20 |
| | O. Transfer of Interest in Property..... | 20 |
| | P. Compliance with Applicable Laws..... | 20 |
| | Q. Indemnification..... | 22 |
| IX. | SATISFACTION OF ORDER..... | 22 |
| X. | ENFORCEMENT..... | 22 |

EXHIBITS

- EXHIBIT A: SITE LOCATION AND PROPERTY LOCATION INFORMATION
- EXHIBIT B: FOCUSED FEASIBILITY STUDY WORK PLAN
- EXHIBIT C: ECOLOGY POLICY 840 – DATA SUBMITTAL REQUIREMENTS
- EXHIBIT D: PUBLIC PARTICIPATION PLAN

I. INTRODUCTION

The mutual objective of the State of Washington, Department of Ecology (Ecology), the ExxonMobil Oil Corporation (ExxonMobil), and the American Distributing Company (ADC) under this Agreed Order (Order) is to provide for remedial action at a facility where there has been a release or threatened release of hazardous substances. This Order requires ExxonMobil and ADC to conduct a supplemental Remedial Investigation and Feasibility Study (RI/FS) per WAC 173-340-350, and develop a draft Cleanup Action Plan per WAC 173-340-350 through 173-340-380 to address upland (soil and groundwater) contamination for the Site (see definition of Site in IV.A below). The supplemental RI/FS will be referred to as a Focused Feasibility Study (FFS) in this Order to indicate that additional data will be gathered to determine the nature and extent of site soil and groundwater contamination, and the FS will evaluate a focused set of remedial alternatives. This Order supersedes and incorporates all remaining obligations under the 1998 Agreed Order (DE98TCP-N223) made between Ecology, ExxonMobil, Mr. A.P. Miller (Miller), and ADC as described in Section V.M and included under Section VII.A.1 of this Order. Ecology believes the actions required by this Order are in the public interest.

II. JURISDICTION

This Agreed Order is issued pursuant to the Model Toxics Control Act (MTCA), RCW 70.105D.050(1).

III. PARTIES BOUND

This Agreed Order shall apply to and be binding upon the Parties to this Order, their successors and assigns. The undersigned representative of each party hereby certifies that he or she is fully authorized to enter into this Order and to execute and legally bind such party to comply with this Order. ExxonMobil and ADC agree to undertake all actions required by the terms and conditions of this Order. No change in ownership or corporate status shall alter ExxonMobil's and ADC's responsibility under this Order. ExxonMobil and ADC shall provide a copy of this Order to all agents, contractors, and subcontractors retained to perform work required by this Order, and shall ensure that all work undertaken by such agents, contractors, and subcontractors complies with this Order.

IV. DEFINITIONS

Unless otherwise specified herein, the definitions set forth in Chapter 70.105D RCW and Chapter 173-340 WAC shall control the meanings of the terms in this Order.

A. Site: The Site is referred to as the ExxonMobil ADC Site and is generally located at 2717 and 2731 Federal Avenue, Everett, Snohomish County, Washington. The Site consists of both the ExxonMobil and the Miller (on which ADC operated) properties which, when combined, are approximately 0.86 acre in size (according to tax records). The Site is defined by the extent of contamination caused by the release of hazardous substances at the Site and is not limited by property boundaries. The Site includes areas where hazardous substances have been deposited, stored, disposed of, placed, or otherwise come to be located (extending both vertically and laterally). The final limits of the Site will be determined in the FFS. The Site is more particularly described in **Exhibit A** to this Order, which includes general site maps (**Exhibit A**, Figures 1 to 6), a site location description, and information from the Snohomish County Assessor's Office. The Site constitutes a Facility under RCW 70.105D.020(5).

B. Parties: Refers to the State of Washington, Department of Ecology, ExxonMobil, and ADC.

C. Potentially Liable Persons (PLPs): Refers to ExxonMobil and ADC.

D. Agreed Order or Order: Refers to this Order and each of the exhibits to the Order. All exhibits are integral and enforceable parts of this Order. The terms "Agreed Order" or "Order" shall include all exhibits to this Order.

E. 1996 Order: Refers to Agreed Order No. DE 95TC-N402, entered into in 1996 by Ecology, Mobil Oil Corporation, ADC, and Miller.

F. 1998 Order: Refers to Agreed Order No. DE 98TCP-N223, entered into in 1998 by Ecology, Mobil Oil Corporation, ADC, and Miller.

G. Miller Property: The term "Miller Property" means lots 1 through 9 and part of lot 10 of Block 619, Plat of Everett, Division C, Everett, Washington, also known as 2717 Federal Avenue in Everett, Snohomish County, Washington. See Figure 3 in **Exhibit A**.

H. ExxonMobil Property: The term "ExxonMobil Property" means lots 11 through 14 and part of lot 10 of Block 619, Plat of Everett, Division C, Everett, Washington, also known as 2731 Federal Avenue in Everett, Snohomish County, Washington. See Figure 3 in **Exhibit A**.

V. FINDINGS OF FACT

Ecology makes the following findings of fact, without any express or implied admissions of such facts by the PLPs:

A. ExxonMobil Corporation was formed in 1999 by the merger of two major oil companies, Exxon and the Mobil Oil Corporation. The Mobil Oil Corporation ("Mobil") is the successor to Socony-Mobil Oil Company, Inc., a New York corporation, which merged in or about 1959 with General Petroleum of Delaware, the successor to General Petroleum of California. General Petroleum of California leased the ExxonMobil and Miller properties from the Great Northern Railway of Minnesota from 1922 until 1927.

B. Mobil and its predecessors owned and operated a bulk petroleum plant previously located on lots 1 through 14 of Block 619, Plat of Everett, Division C, Everett, Washington, from 1927 to 1974. The operations of Mobil and its predecessors included storing and distributing petroleum products at the Site from 1927 to 1974.

C. In 1974, Mobil sold to Miller lots 1 through 9 and part of lot 10 of Block 619, Plat of Everett, Division C, Everett, Washington, for use by ADC.

D. ADC operated those sections of the petroleum bulk plant previously located on lots 1 through 9 and part of lot 10 of Block 619, Plat of Everett, Division C, Everett, Washington, from 1974 until 1990. The operations of ADC included receiving, storing and distributing bulk petroleum heating fuels at the Miller Property. The ADC plant ceased bulk petroleum operations in 1990.

E. After selling lots 1 through 9 and part of lot 10 to Miller in 1974, Mobil continued to own and operate a bulk petroleum distribution plant (from 1974 until 1987) at the ExxonMobil Property. Mobil's operations included receiving, storing and distributing petroleum products at the ExxonMobil Property. The Mobil plant ceased petroleum bulk operations in 1987.

F. ExxonMobil currently owns or formerly operated lots 11 through 14 and part of lot 10 of Block 619, Plat of Everett, Division C, Everett, Washington. See Exhibit A.

G. ADC currently owns or formerly operated lots 1 through 9 and part of lot 10 of Block 619, Plat of Everett, Division C, Everett, Washington. See Exhibit A.

H. Multiple environmental investigations and remedial actions have been conducted at the Site beginning in 1985. To date, over 100 individual soil borings, 8 test pits, and over 40 monitoring wells have been completed at the Site and surrounding areas. The most recent investigation, which involved the installation of two groundwater wells and the collection of groundwater and soil samples, was conducted in 2007 to document subsurface soil conditions and groundwater quality on the western side of Federal Avenue. Investigation results have found the following contaminants above MTCA cleanup levels in both soil and groundwater at the Site: diesel-, oil-, and gasoline-range total petroleum hydrocarbons (TPH), carcinogenic polycyclic aromatic hydrocarbons (cPAHs), lead, benzene, and xylenes. In addition, ethylbenzene has been found to be present above MTCA cleanup levels in soil. Additional information pertaining to the aforementioned environmental investigations at the Site is contained in the FFS Work Plan.

I. Liquid phase petroleum hydrocarbons (LPH) have been identified in both soil and groundwater at the Site. LPH typing analysis has indicated that the LPH characteristics are similar to several petroleum products. The LPH identified at the Site is more specifically characterized as Light Non-Aqueous Phase Liquid (LNAPL) petroleum hydrocarbons. Interim remedial actions began at the Property in 1988 with the installation of an LNAPL recovery gallery. Subsequent interim remedial actions and testing included groundwater extraction and treatment, test pit and recovery trench installation, soil vapor extraction, manual LNAPL recovery, LNAPL vacuum recovery, and excavation dewatering. LNAPL gauging and recovery, which commenced in 2002, continues to the present time (using passive recovery methods) and consists of the following activities conducted on a monthly basis: water level gauging of Site monitoring wells, LNAPL removal from select monitoring wells, and replacement of oleophilic socks in wells with LNAPL accumulations. Additional information pertaining to remedial activities at the Site is contained in the FFS Work Plan.

J. Periodic groundwater monitoring (i.e., collection of groundwater samples for analysis) began at the Site in the early 1990s. Regular quarterly groundwater monitoring commenced in 2002. In 2007, the groundwater monitoring frequency for the Site was reduced from quarterly to semi-annually. Wells sampled during groundwater monitoring events are analyzed for the following constituents: diesel-, oil-, and gasoline-range TPH, benzene, ethylbenzene, toluene, and total xylenes. Information from the latest round of groundwater monitoring activities (from August 2008) is contained in the FFS Work Plan.

K. In April 1996, Ecology entered into the 1996 Order with Mobil Oil Corporation, ADC, and Miller requiring the cleanup and elimination and/or containment of petroleum releases at and near the City of Everett's combined sewer overflow (CSO) discharge line into Port Gardner Bay. The CSO line is depicted in **Exhibit A**, Figures 2, 4, 5, and 6. The releases were related to a severely corroded and collapsed section of the CSO line approximately 400 feet from Port Gardner Bay. Mobil Oil, ADC, and Miller agreed to perform corrective action work, including replacing the collapsed CSO section, sliplining another CSO section (to prevent leakage of petroleum through the CSO), and cleanup of rip rap, sheetpile seawall, and pilings and docks near the discharge to Port Gardner Bay. The 1996 Order also required pilot testing of LPH recovery technologies and characterization of the areal and vertical distribution and concentration of the free-phase waste petroleum liquid and groundwater contamination. Between June 1996 and January 1997, approximately 23,000 gallons of LPH were recovered. As result of the work performed under the 1996 Order, direct discharge of petroleum into Port Gardner bay via the CSO was eliminated. Ecology acknowledged that the interim containment measures and CSO repair and cleanup were satisfactorily completed with no evidence of on-going releases of heavy oil. Ecology and the PLPs agreed that additional characterization was needed to fully describe the nature and extent of the contamination in the vicinity of the Site.

L. In October 1998, Ecology, Mobil Oil Corporation, ADC, and Miller entered into the 1998 Order which required the preparation of a Remedial Investigation/Focused Feasibility Study Report ("RI/FFS Report"), an Interim Action Work Plan, and the subsequent implementation and performance of the work described in the Interim Action Work Plan. As part

of the RI/FFS, environmental conditions at the Site were reviewed (analytical data from 1988 to 1996 were compiled and evaluated) and remedial options were evaluated. Based on the results of the RI/FFS, the PLPs prepared and implemented an Interim Action Work Plan. The following interim remedial actions were performed:

- 1. Demolition of site structures.** Structures that were demolished on the Site included buildings, piping, loading racks, the firewall and the northeast corner of the firewall's foundation, and the above ground storage tank pad.
- 2. Monitoring well abandonment.** A total of 22 groundwater monitoring wells were abandoned in 1998. In addition, three wells were abandoned and then reinstalled in 1999.
- 3. Construction of interceptor trench.** An interceptor trench was constructed along the western and northern Site boundaries.
- 4. Construction of site cover.** The site cover was designed to minimize the potential for infiltration of surface water into subsurface soil. In addition to an asphalt cap, a storm water collection system was included in the design for the cover.
- 5. Water management.** The water management and treatment system was constructed in December 1998. Between December 1998 and September 1999, the system treated approximately 2.5 million gallons of water from the Site.

The above remediation activities commenced in November 1998 and ended in January 2000. As a result of the RI/FFS and subsequent interim remedial actions conducted at the Site, the ExxonMobil and Miller properties were converted into a parking lot for Kimberly-Clark employees. This redevelopment option was selected to allow for possible future remediation activities at the Site. Additional information pertaining to the RI/FFS and interim remedial actions performed at the Site as part of the 1998 Order are contained in the FFS Work Plan.

M. Ecology stated in a March 23, 2000 letter to ExxonMobil and ADC that the construction portion of the interim remedial action at this site has been satisfactorily completed per the 1998 Order. Ecology also stated that as a continued requirement under the 1998 Order, groundwater monitoring and LPH recovery activities must continue at the Site as specified in Appendix G of the February 2000 Closure Report. ExxonMobil and ADC submitted quarterly and annual reports to Ecology.

VI. ECOLOGY DETERMINATIONS

Ecology makes the following determinations, without any express or implied admissions of such determinations by the PLPs.

A. ExxonMobil is an “owner or operator” as defined in RCW 70.105D.020(17) of a “facility” as defined in RCW 70.105D.020(5).

B. ADC is an “owner or operator” as defined in RCW 70.105D.020(17) of a “facility” as defined in RCW 70.105D.020(5).

C. Based upon all factors known to Ecology, a “release” or “threatened release” of “hazardous substance(s)” as defined in RCW 70.105D.020(25) and RCW 70.105D.020(10), respectively, has occurred at the Site.

D. Based upon credible evidence, Ecology issued PLP status letters to ADC, Mobil Oil Corporation, and Miller pursuant to RCW 70.105D.040, RCW 70.105D.020(21), and WAC 173-340-500. PLP status letters were sent to ADC and Mobil Oil Corporation on November 30, 1995. A PLP status letter was sent to Miller on December 1, 1995. After providing for notice and opportunity for comment, reviewing any comments submitted, and concluding that credible evidence supported a finding of potential liability, Ecology issued determinations that ADC, Mobil Oil Corporation, and Miller are PLPs under RCW 70.105D.040, and notified them of this determination by letter dated January 2, 1996.

E. Pursuant to RCW 70.105D.030(1) and RCW 70.105D.050(1), Ecology may require PLPs to investigate or conduct other remedial actions with respect to any release or threatened release of hazardous substances, whenever it believes such action to be in the public interest. Based on the foregoing facts, Ecology believes the remedial actions required by this Order are in the public interest.

VII. WORK TO BE PERFORMED

Based on the Findings of Fact and Ecology Determinations, it is hereby ordered that the PLPs take the following remedial actions at the Site, as more fully described in the FFS Work

Plan attached to this Order as **Exhibit B**, and that these actions are conducted in accordance with WAC 173-340 unless otherwise specifically provided for herein:

A. The PLPs shall conduct the remedial actions fully described in **Exhibit B** to this Order. Generally, the PLPs shall perform the following:

1. Continue on-going groundwater monitoring and LPH recovery activities at the Site.
2. Implement the Work Plan for performing a Focused Feasibility Study (FFS) at the Site (FFS Work Plan) (**Exhibit B**).
3. Perform an FFS.
4. Prepare an FFS report.
5. Develop a draft cleanup action plan (CAP) for the Site.

B. The PLPs shall perform the remedial actions required by this Order according to the work schedule set forth in **Exhibit B**.

C. If at any time after the first exchange of comments on drafts, Ecology determines that insufficient progress is being made in the preparation of any of the deliverables required under the FFS Work Plan (**Exhibit B**), Ecology may complete and issue the final deliverable.

D. The PLPs shall submit to Ecology a progress report as required in the FFS Work Plan.

VIII. TERMS AND CONDITIONS OF ORDER

A. Public Notice

RCW 70.105D.030(2)(a) requires that, at a minimum, this Order be subject to concurrent public notice. Ecology shall be responsible for providing such public notice and reserves the right to modify or withdraw any provisions of this Order should public comment disclose facts or considerations which indicate to Ecology that this Order is inadequate or improper in any respect.

B. Remedial Action Costs

The PLPs shall pay to Ecology costs incurred by Ecology pursuant to this Order and consistent with WAC 173-340-550(2). These costs shall include work performed by Ecology or

its contractors for, or on, the Site under Chapter 70.105D RCW, including remedial actions and Order preparation, negotiation, oversight, and administration. These costs shall include work performed both prior to and subsequent to the issuance of this Order. Ecology's costs shall include costs of direct activities and support costs of direct activities as defined in WAC 173-340-550(2). The PLPs shall pay the required amount within ninety (90) days of receiving from Ecology an itemized statement of costs that includes a summary of costs incurred, an identification of involved staff, and the amount of time spent by involved staff members on the project. A general statement of work performed will be provided upon request. Itemized statements shall be prepared quarterly. Pursuant to WAC 173-340-550(4), failure to pay Ecology's costs within ninety (90) days of receipt of the itemized statement of costs will result in interest charges at the rate of twelve percent (12%) per annum, compounded monthly.

Pursuant to RCW 70.105D.055, Ecology has authority to recover unreimbursed remedial action costs by filing a lien against real property subject to the remedial actions.

C. Implementation of Remedial Action

If Ecology determines that the PLPs have failed without good cause to implement the remedial action, in whole or in part, Ecology may, after notice to the PLPs, perform any or all portions of the remedial action that remain incomplete. If Ecology performs all or portions of the remedial action because of the PLPs' failure to comply with its obligations under this Order, the PLPs shall reimburse Ecology for the costs of doing such work in accordance with Section VIII.B (Remedial Action Costs), provided that the PLPs are not obligated under this Section to reimburse Ecology for costs incurred for work inconsistent with or beyond the scope of this Order.

Except where necessary to abate an emergency situation, the PLPs shall not perform any remedial actions at the Site outside those remedial actions required by this Order, unless Ecology concurs, in writing, with such additional remedial actions.

D. Designated Project Coordinators

The project coordinator for Ecology is:
Andy Kallus

Toxics Cleanup Program
PO Box 47600, Olympia, Washington 98504
Phone: 360-407-7259
E-Mail: akal461@ecy.wa.gov

The project coordinators for the PLP Group are:

Joseph Abel
ExxonMobil
1001 Wampanoag Trail
Riverside, Rhode Island 02915
Phone: 401-434-7356
E-Mail: joseph.a.abel@exxonmobil.com

Gary Dupuy
AMEC Geomatrix
600 University, Suite 1020
Seattle, WA 98101
Phone: 206-342-1777
Email: gary.dupuy@amec.com

Each project coordinator shall be responsible for overseeing the implementation of this Order. Ecology's project coordinator will be Ecology's designated representative for the Site. To the maximum extent possible, communications between Ecology and the PLPs, and all documents, including reports, approvals, and other correspondence concerning the activities performed pursuant to the terms and conditions of this Order shall be directed through the project coordinators. The project coordinators may designate, in writing, working level staff contacts for all or portions of the implementation of the work to be performed required by this Decree.

Any party may change its respective project coordinator. Written notification shall be given to the other party at least ten (10) calendar days prior to the change.

E. Performance

All geologic and hydrogeologic work performed pursuant to this Order shall be under the supervision and direction of a geologist licensed in the State of Washington or under the direct supervision of an engineer registered in the State of Washington, except as otherwise provided for by Chapters 18.220 and 18.43 RCW.

All engineering work performed pursuant to this Order shall be under the direct supervision of a professional engineer registered in the State of Washington, except as otherwise provided for by RCW 18.43.130.

All construction work performed pursuant to this Order shall be under the direct supervision of a professional engineer or a qualified technician under the direct supervision of a professional engineer. The professional engineer must be registered in the State of Washington, except as otherwise provided for by RCW 18.43.130.

Any documents submitted containing geologic, hydrologic or engineering work shall be under the seal of an appropriately licensed professional as required by Chapter 18.220 RCW or RCW 18.43.130.

The PLPs shall notify Ecology in writing of the identity of any engineer(s) and geologist(s), contractor(s) and subcontractor(s), and others to be used in carrying out the terms of this Order, in advance of their involvement at the Site.

F. Access

Ecology or any Ecology authorized representative shall have the full authority to enter and freely move about all property at the Site that the PLPs either owns, controls, or has access rights to at all reasonable times for the purposes of, *inter alia*: inspecting records, operation logs, and contracts related to the work being performed pursuant to this Order; reviewing the PLPs' progress in carrying out the terms of this Order; conducting such tests or collecting such samples as Ecology may deem necessary; using a camera, sound recording, or other documentary type equipment to record work done pursuant to this Order; and verifying the data submitted to Ecology by the PLPs. The PLPs shall make all reasonable efforts to secure access rights for those properties within the Site not owned or controlled by the PLPs where remedial activities or investigations will be performed pursuant to this Order. Ecology or any Ecology authorized representative shall give reasonable notice before entering any Site property owned or controlled by the PLPs unless an emergency prevents such notice. All persons who access the Site pursuant to this Section shall comply with any applicable Health and Safety Plan(s). Ecology employees and their representatives shall not be required to sign any liability release or waiver as a condition of Site property access.

G. Sampling, Data Submittal, and Availability

With respect to the implementation of this Order, the PLPs shall make the results of all sampling, laboratory reports, and/or test results generated by it or on its behalf available to Ecology. Pursuant to WAC 173-340-840(5), all sampling data shall be submitted to Ecology in both printed and electronic formats in accordance with Section VII (Work to be Performed), Ecology's Toxics Cleanup Program Policy 840 (Data Submittal Requirements), and/or any subsequent procedures specified by Ecology for data submittal. **Exhibit C** contains Ecology Policy 840 (Data Submittal Requirements).

If requested by Ecology, the PLPs shall allow Ecology and/or its authorized representative to take split or duplicate samples of any samples collected by the PLPs pursuant to implementation of this Order. The PLPs shall notify Ecology seven (7) days in advance of any sample collection or work activity at the Site. Ecology shall, upon request, allow the PLPs and/or its authorized representative to take split or duplicate samples of any samples collected by Ecology pursuant to the implementation of this Order, provided that doing so does not interfere with Ecology's sampling. Without limitation on Ecology's rights under Section VIII.F (Access), Ecology shall notify the PLPs prior to any sample collection activity unless an emergency prevents such notice.

In accordance with WAC 173-340-830(2)(a), all hazardous substance analyses shall be conducted by a laboratory accredited under Chapter 173-50 WAC for the specific analyses to be conducted, unless otherwise approved by Ecology.

H. Public Participation

A Public Participation Plan (see WAC 173-340-600) that is required for this Site, has been developed and is included as **Exhibit D**. Ecology shall maintain the responsibility for public participation at the Site. However, the PLPs shall cooperate with Ecology, and shall:

1. If agreed to by Ecology, develop appropriate mailing list, prepare drafts of public notices and fact sheets at important stages of the remedial action, such as the submission of work plans, remedial investigation/feasibility study reports, cleanup action plans, and engineering

design reports. As appropriate, Ecology will edit, finalize, and distribute such fact sheets and prepare and distribute public notices of Ecology's presentations and meetings.

2. Notify Ecology's project coordinator prior to the preparation of all press releases and fact sheets, and before major meetings with the interested public and local governments. Likewise, Ecology shall notify the PLPs prior to the issuance of all press releases and fact sheets, and before major meetings with the interested public and local governments. For all press releases, fact sheets, meetings, and other outreach efforts by the PLPs that do not receive prior Ecology approval, the PLPs shall clearly indicate to its audience that the press release, fact sheet, meeting, or other outreach effort was not sponsored or endorsed by Ecology.

3. When requested by Ecology, participate in public presentations on the progress of the remedial action at the Site. Participation may be through attendance at public meetings to assist in answering questions or as a presenter.

4. When requested by Ecology, arrange and/or continue information repositories to be located at the following locations:

- a. Everett Public Library
2702 Hoyt Ave
Everett, WA 98201
- b. Department of Ecology
Toxics Cleanup Program
Headquarters Office
300 Desmond Drive SE
Olympia, Washington 98503

At a minimum, copies of all public notices, fact sheets, and press releases; all quality assured monitoring data; remedial action plans and reports, supplemental remedial planning documents, and all other similar documents relating to performance of the remedial action required by this Order shall be promptly placed in these repositories.

I. Retention of Records

During the pendency of this Order, and for ten (10) years from the date of completion of work performed pursuant to this Order, the PLPs shall preserve all records, reports, documents, and underlying data in its possession relevant to the implementation of this Order and shall insert

a similar record retention requirement into all contracts with project contractors and subcontractors. Upon request of Ecology, the PLPs shall make all records available to Ecology and allow access for review within a reasonable time. PLPs do not waive any right they may have under applicable law to limit disclosure of documents protected by the attorney work-product privilege and/or the attorney-client privilege. If PLPs withhold any requested records based on an assertion of privilege, they shall provide Ecology with a privilege log specifying the records withheld and the applicable privilege. No actual data collected on Site pursuant to this Order shall be considered privileged.

J. Resolution of Disputes

1. In the event a dispute arises as to an approval, disapproval, proposed change, or other decision or action by Ecology's project coordinator, or an itemized billing statement under Section VIII.B (Remedial Action Costs), the Parties shall utilize the dispute resolution procedure set forth below.

a. Upon receipt of Ecology's project coordinator's written decision or the itemized billing statement, the PLPs has fourteen (14) days within which to notify Ecology's project coordinator in writing of its objection to the decision or itemized statement and seven (7) days thereafter to provide Ecology specific reasons for its objection.

b. The Parties' project coordinators shall then confer in an effort to resolve the dispute. If the project coordinators cannot resolve the dispute within twenty-one (21) days, Ecology's project coordinator shall issue a written decision responding to the PLPs' objection.

c. The PLPs may then request regional management review of the decision. This request shall be submitted in writing to the Headquarters Land and Aquatic Lands Cleanup Section Manager within fourteen (14) days of receipt of Ecology's project coordinator's written decision.

d. The Section Manager shall conduct a review of the dispute and shall endeavor to issue a written decision regarding the dispute within thirty (30) days of a

PLP's request for review. The Section Manager's decision shall be Ecology's final decision on the disputed matter.

2. The Parties agree to only utilize the dispute resolution process in good faith and agree to expedite, to the extent possible, the dispute resolution process whenever it is used.

3. Implementation of these dispute resolution procedures shall not provide a basis for delay of any activities required in this Order, unless Ecology agrees in writing to a schedule extension.

K. Extension of Schedule

1. An extension of schedule shall be granted only when a request for an extension is submitted in a timely fashion, generally at least thirty (30) days prior to expiration of the deadline for which the extension is requested, and good cause exists for granting the extension.

All extensions shall be requested in writing. The request shall specify:

- a. The deadline that is sought to be extended;
- b. The length of the extension sought;
- c. The reason(s) for the extension; and
- d. Any related deadline or schedule that would be affected if the extension were granted.

2. The burden shall be on the PLP to demonstrate to the satisfaction of Ecology that the request for such extension has been submitted in a timely fashion and that good cause exists for granting the extension. Good cause may include, but may not be limited to:

- a. Circumstances beyond the reasonable control and despite the due diligence of a PLP including delays caused by unrelated third parties or Ecology, such as (but not limited to) delays by Ecology in reviewing, approving, or modifying documents submitted by the PLP;
- b. Acts of God, including fire, flood, blizzard, extreme temperatures, storm, or other unavoidable casualty; or
- c. Endangerment as described in Section VIII.M (Endangerment).

However, neither increased costs of performance of the terms of this Order nor changed economic circumstances shall be considered circumstances beyond the reasonable control of the PLPs.

3. Ecology shall act upon any written request for extension in a timely fashion. Ecology shall give the PLPs written notification of any extensions granted pursuant to this Order. A requested extension shall not be effective until approved by Ecology. Unless the extension is a substantial change, it shall not be necessary to amend this Order pursuant to Section VIII.L (Amendment of Order) when a schedule extension is granted.

4. An extension shall only be granted for such period of time as Ecology determines is reasonable under the circumstances. Ecology may grant schedule extensions exceeding ninety (90) days only as a result of:

- a. Delays in the issuance of a necessary permit which was applied for in a timely manner;
- b. Other circumstances deemed exceptional or extraordinary by Ecology; or
- c. Endangerment as described in Section VIII.M (Endangerment).

5. Ecology may extend the period for reviewing and commenting on a document (as specified in **Exhibit B**) by providing oral or written notification to the PLPs, prior to expiration of the comment period. Ecology will provide an estimate of the time required for completion of its review. Ecology will provide an extension of schedule for the PLPs' submission of deliverables that corresponds to the extended period for its review of a document.

L. Amendment of Order

The project coordinators may verbally agree to minor changes to the work to be performed without formally amending this Order. Minor changes will be documented in writing by Ecology within seven (7) days of verbal agreement.

Except as provided in Section VIII.N (Reservation of Rights), substantial changes to the work to be performed shall require formal amendment of this Order. This Order may only be formally amended by the written consent of both Ecology and the PLPs. The PLPs shall submit a written request for amendment to Ecology for approval. Ecology shall indicate its approval or

disapproval in writing and in a timely manner after the written request for amendment is received. If the amendment to this Order represents a substantial change, Ecology will provide public notice and opportunity to comment. Reasons for the disapproval of a proposed amendment to this Order shall be stated in writing. If Ecology does not agree to a proposed amendment, the disagreement may be addressed through the dispute resolution procedures described in Section VIII.J (Resolution of Disputes).

M. Endangerment

In the event Ecology determines that any activity being performed at the Site is creating or has the potential to create a danger to human health or the environment on or surrounding the Site, Ecology may direct the PLPs to cease such activities for such period of time as it deems necessary to abate the danger. The PLPs shall immediately comply with such direction.

In the event a PLP determines that any activity being performed at the Site is creating or has the potential to create a danger to human health or the environment, the PLP may cease such activities. The PLPs shall notify Ecology's project coordinator as soon as possible, but no later than twenty-four (24) hours after making such determination or ceasing such activities. Upon Ecology's direction the PLPs shall provide Ecology with documentation of the basis for the determination or cessation of such activities. If Ecology disagrees with the PLP's cessation of activities, it may direct the PLPs to resume such activities.

If Ecology concurs with or orders a work stoppage pursuant to Section VIII.M (Endangerment), the PLPs' obligations with respect to the ceased activities shall be suspended until Ecology determines the danger is abated, and the time for performance of such activities, as well as the time for any other work dependent upon such activities, shall be extended in accordance with Section VIII.K (Extension of Schedule) for such period of time as Ecology determines is reasonable under the circumstances.

Nothing in this Order shall limit the authority of Ecology, its employees, agents, or contractors to take or require appropriate action in the event of an emergency.

N. Reservation of Rights

This Order is not a settlement under Chapter 70.105D RCW. Ecology's signature on this Order in no way constitutes a covenant not to sue or a compromise of any of Ecology's rights or authority. Ecology will not, however, bring an action against the PLPs to recover remedial action costs paid to and received by Ecology under this Order. In addition, Ecology will not take additional enforcement actions against the PLPs regarding remedial actions required by this Order, provided the PLPs comply with this Order.

Ecology nevertheless reserves its rights under Chapter 70.105D RCW, including the right to require additional or different remedial actions at the Site should it deem such actions necessary to protect human health and the environment, and to issue orders requiring such remedial actions. Ecology also reserves all rights regarding the injury to, destruction of, or loss of natural resources resulting from the release or threatened release of hazardous substances at the Site.

O. Transfer of Interest in Property

No voluntary conveyance or relinquishment of title, easement, leasehold, or other interest in any portion of the Site shall be consummated by the PLPs without provision for continued implementation of all requirements of this Order and implementation of any remedial actions found to be necessary as a result of this Order.

Prior to either PLP's transfer of any interest in all or any portion of the Site, and during the effective period of this Order, the PLP shall provide a copy of this Order to any prospective purchaser, lessee, transferee, assignee, or other successor in said interest; and, at least thirty (30) days prior to any transfer, the PLP shall notify Ecology of said transfer. Upon transfer of any interest, the PLPs shall restrict uses and activities to those consistent with this Order and notify all transferees of the restrictions on the use of the property.

P. Compliance with Applicable Laws

1. All actions carried out by PLPs pursuant to this Order shall be done in accordance with all applicable federal, state, and local requirements (see WAC 173-340-710(2)), including requirements to obtain necessary permits, except as provided in RCW 70.105D.090. The permits

or specific federal, state or local requirements that Ecology has determined are applicable and that are known at the time of entry of this Order have been identified in **Exhibit B**.

2. Pursuant to RCW 70.105D.090(1), PLPs are exempt from the procedural requirements of Chapters 70.94, 70.95, 70.105, 77.55, 90.48, and 90.58 RCW and of any laws requiring or authorizing local government permits or approvals. However, PLPs shall comply with the substantive requirements of such permits or approvals. At this time, no state or local permits or approvals have been identified as being applicable but procedurally exempt under this Section.

Each PLP has a continuing obligation to determine whether additional permits or approvals addressed in RCW 70.105D.090(1) would otherwise be required for the remedial action under this Order. In the event either Ecology or a PLP determines that additional permits or approvals addressed in RCW 70.105D.090(1) would otherwise be required for the remedial action under this Order, it shall promptly notify the other party of its determination. Ecology shall determine whether Ecology or one or both of the PLPs shall be responsible to contact the appropriate state and/or local agencies. If Ecology so requires, PLPs shall promptly consult with the appropriate state and/or local agencies and provide Ecology with written documentation from those agencies of the substantive requirements those agencies believe are applicable to the remedial action. Ecology shall make the final determination on the additional substantive requirements that must be met by PLPs and on how PLPs must meet those requirements. Ecology shall inform PLPs in writing of these requirements. Once established by Ecology, the additional requirements shall be enforceable requirements of this Order. PLP s shall not begin or continue the remedial action potentially subject to the additional requirements until Ecology makes its final determination.

3. Pursuant to RCW 70.105D.090(2), in the event Ecology determines that the exemption from complying with the procedural requirements of the laws referenced in RCW 70.105D.090(1) would result in the loss of approval from a federal agency that is necessary for the State to administer any federal law, the exemption shall not apply and PLPs

shall comply with both the procedural and substantive requirements of the laws referenced in RCW 70.105D.090(1), including any requirements to obtain permits.

Q. Indemnification

Each individual PLP agrees to indemnify and save and hold the State of Washington, its employees, and agents harmless from any and all claims or causes of action for death or injuries to persons or for loss or damage to property to the extent arising from or on account of acts or omissions of such individual PLP, its officers, employees, agents, or contractors in entering into and implementing this Order. However, the PLPs shall not indemnify the State of Washington nor save nor hold its employees and agents harmless from any claims or causes of action to the extent arising out of the negligent acts or omissions of the State of Washington, or the employees or agents of the State, in entering into or implementing this Order.

IX. SATISFACTION OF ORDER

The provisions of this Order shall be deemed satisfied upon the PLPs' receipt of written notification from Ecology that the PLPs have completed the remedial activity required by this Order, as amended by any modifications, and that PLPs have complied with all other provisions of this Agreed Order.

X. ENFORCEMENT

Pursuant to RCW 70.105D.050, this Order may be enforced as follows:

1. The Attorney General may bring an action to enforce this Order in a state or federal court.
2. The Attorney General may seek, by filing an action, if necessary, to recover amounts spent by Ecology for investigative and remedial actions and orders related to the Site.
3. In the event a PLP refuses, without sufficient cause, to comply with any term of this Order, that PLP will be liable for:
 - a. Up to three (3) times the amount of any costs incurred by the State of Washington as a result of its refusal to comply; and
 - b. Civil penalties of up to twenty-five thousand dollars (\$25,000) per day for each day it refuses to comply.

4. This Order is not appealable to the Washington Pollution Control Hearings Board.
This Order may be reviewed only as provided under RCW 70.105D.060.

Effective date of this Order: March 16, 2010

EXXONMOBIL OIL CORPORATION

**STATE OF WASHINGTON,
DEPARTMENT OF ECOLOGY**



~~Kurt W. Fischer~~ *MICHAEL W. SCHWEHR*
Global Area Manager - Major Projects
ExxonMobil Oil Corporation
3225 Gallows Road
Fairfax, VA 22037
(703) 846-5956

Agent and Attorney-in-Fact



Tim L. Nord
Section Manager
Toxics Cleanup Program
Land & Aquatic Lands Cleanup Section
Headquarters Office
300 Desmond Drive Southeast
Lacey, Washington 98503
(360) 407-7226

AMERICAN DISTRIBUTING COMPANY

Stephen P. Miller
President of ADC
13618 45th Avenue NE
Marysville, WA 98271
(360) 658-3751

4. This Order is not appealable to the Washington Pollution Control Hearings Board.
This Order may be reviewed only as provided under RCW 70.105D.060.

Effective date of this Order: March 16, 2010

EXXONMOBIL OIL CORPORATION

**STATE OF WASHINGTON,
DEPARTMENT OF ECOLOGY**

Kurt W. Fischer
Global Area Manager - Major Projects
ExxonMobil Oil Corporation
3225 Gallows Road
Fairfax, VA 22037
(703) 846-5956



Tim L. Nord
Section Manager
Toxics Cleanup Program
Land & Aquatic Lands Cleanup Section
Headquarters Office
300 Desmond Drive Southeast
Lacey, Washington 98503
(360) 407-7226


AMERICAN DISTRIBUTING COMPANY



Stephen P. Miller 03.08.2010
President of ADC
13618 45th Avenue NE
Marysville, WA 98271
(360) 658-3751

EXHIBIT A

**SITE LOCATION AND PROPERTY LOCATION
INFORMATION**

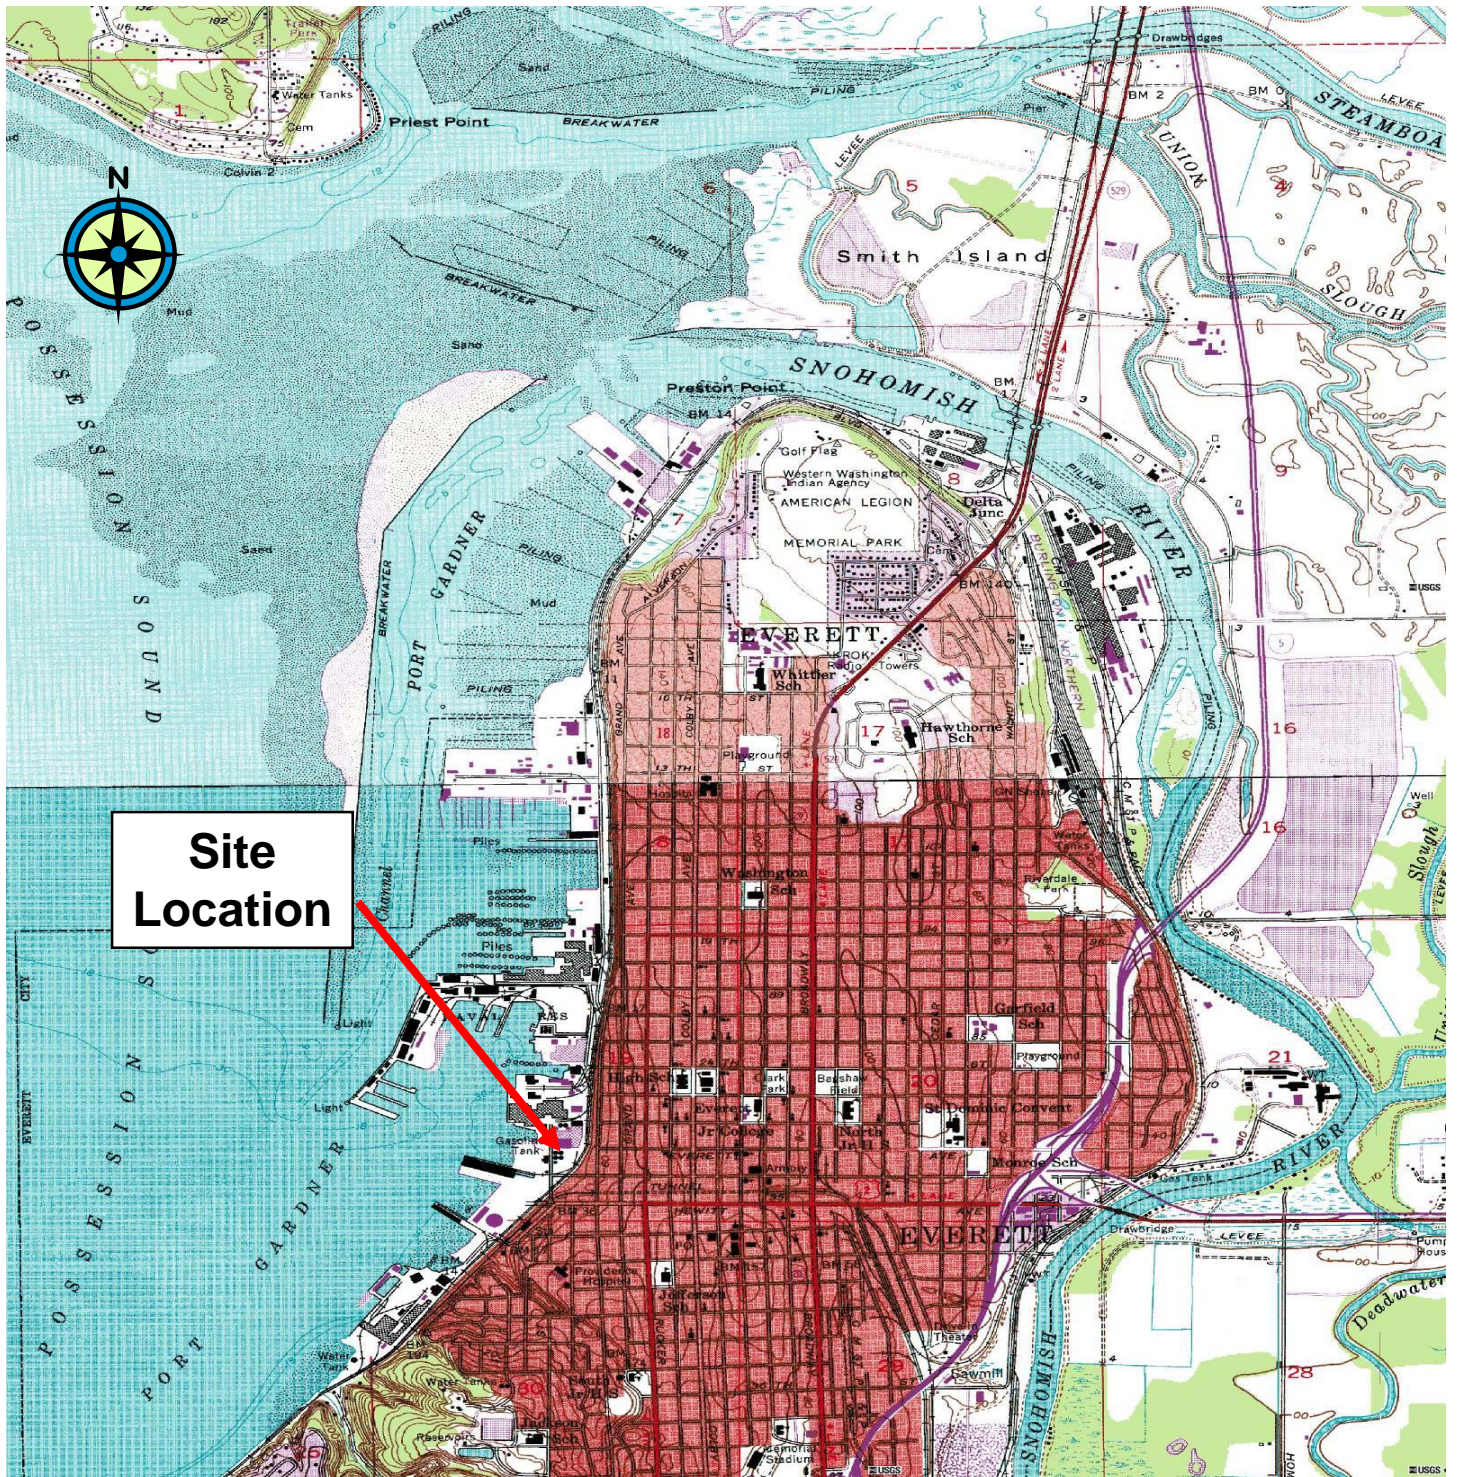

**Site
Location**

**Exhibit A – Figure 1
Site Location Map**
(Source: USGS 7.5 Minute Quadrangle Maps; Everett and Marysville
Quadrangle Maps; Photo Revised – 1968 and 1973)




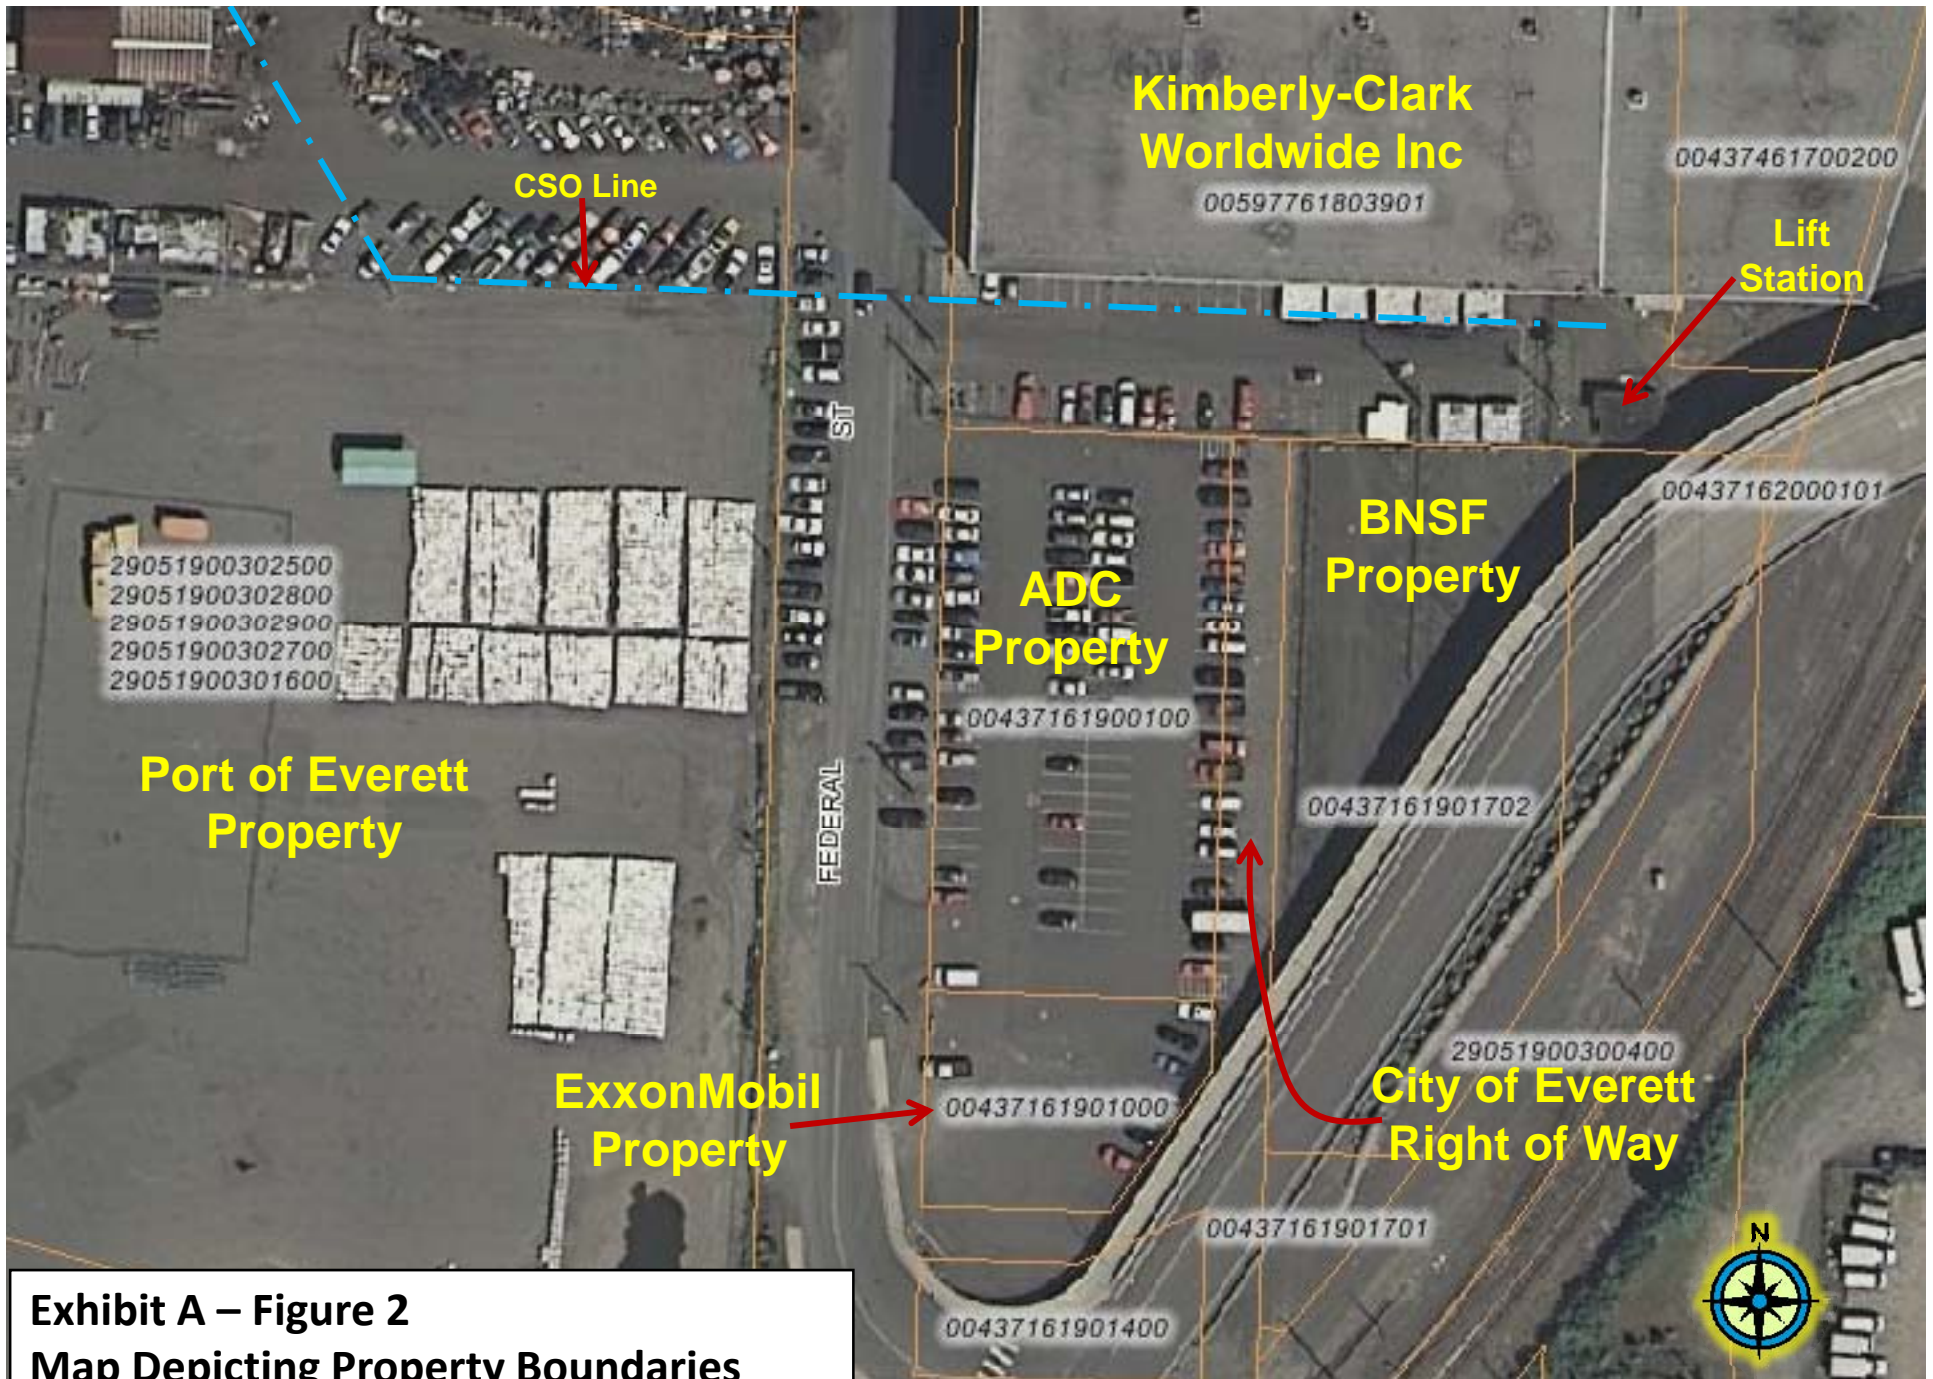


Exhibit A – Figure 2


Map Depicting Property Boundaries

(Source: October 2008 Snohomish County Online Property Information)




A product of the Snohomish County Assessor's Office
 Map produced on April 02, 2008

THIS IS NOT A SURVEY. IT IS A TAX PARCEL MAP USED FOR THE LOCATION OF PROPERTY ONLY. SNOHOMISH COUNTY DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS OF THIS MAP FOR ANY PARTICULAR PURPOSE, EITHER EXPRESS OR IMPLIED. NO REPRESENTATION OR WARRANTY IS MADE CONCERNING THE ACCURACY, CURRENCY, COMPLETENESS OR QUALITY OF DATA DEPICTED ON THIS MAP. ANY USER OF THIS MAP ASSUMES ALL RESPONSIBILITY FOR USE THEREOF, AND FURTHER AGREES TO HOLD SNOHOMISH COUNTY HARMLESS FROM AND AGAINST ANY DAMAGE, LOSS OR LIABILITY ARISING FROM ANY USE OF THIS MAP. PERSONS SEEKING THE MOST CURRENT TAX PARCEL DATA SHOULD CONSULT THE OFFICIAL DATABASE ON FILE WITH THE SNOHOMISH COUNTY ASSESSOR.

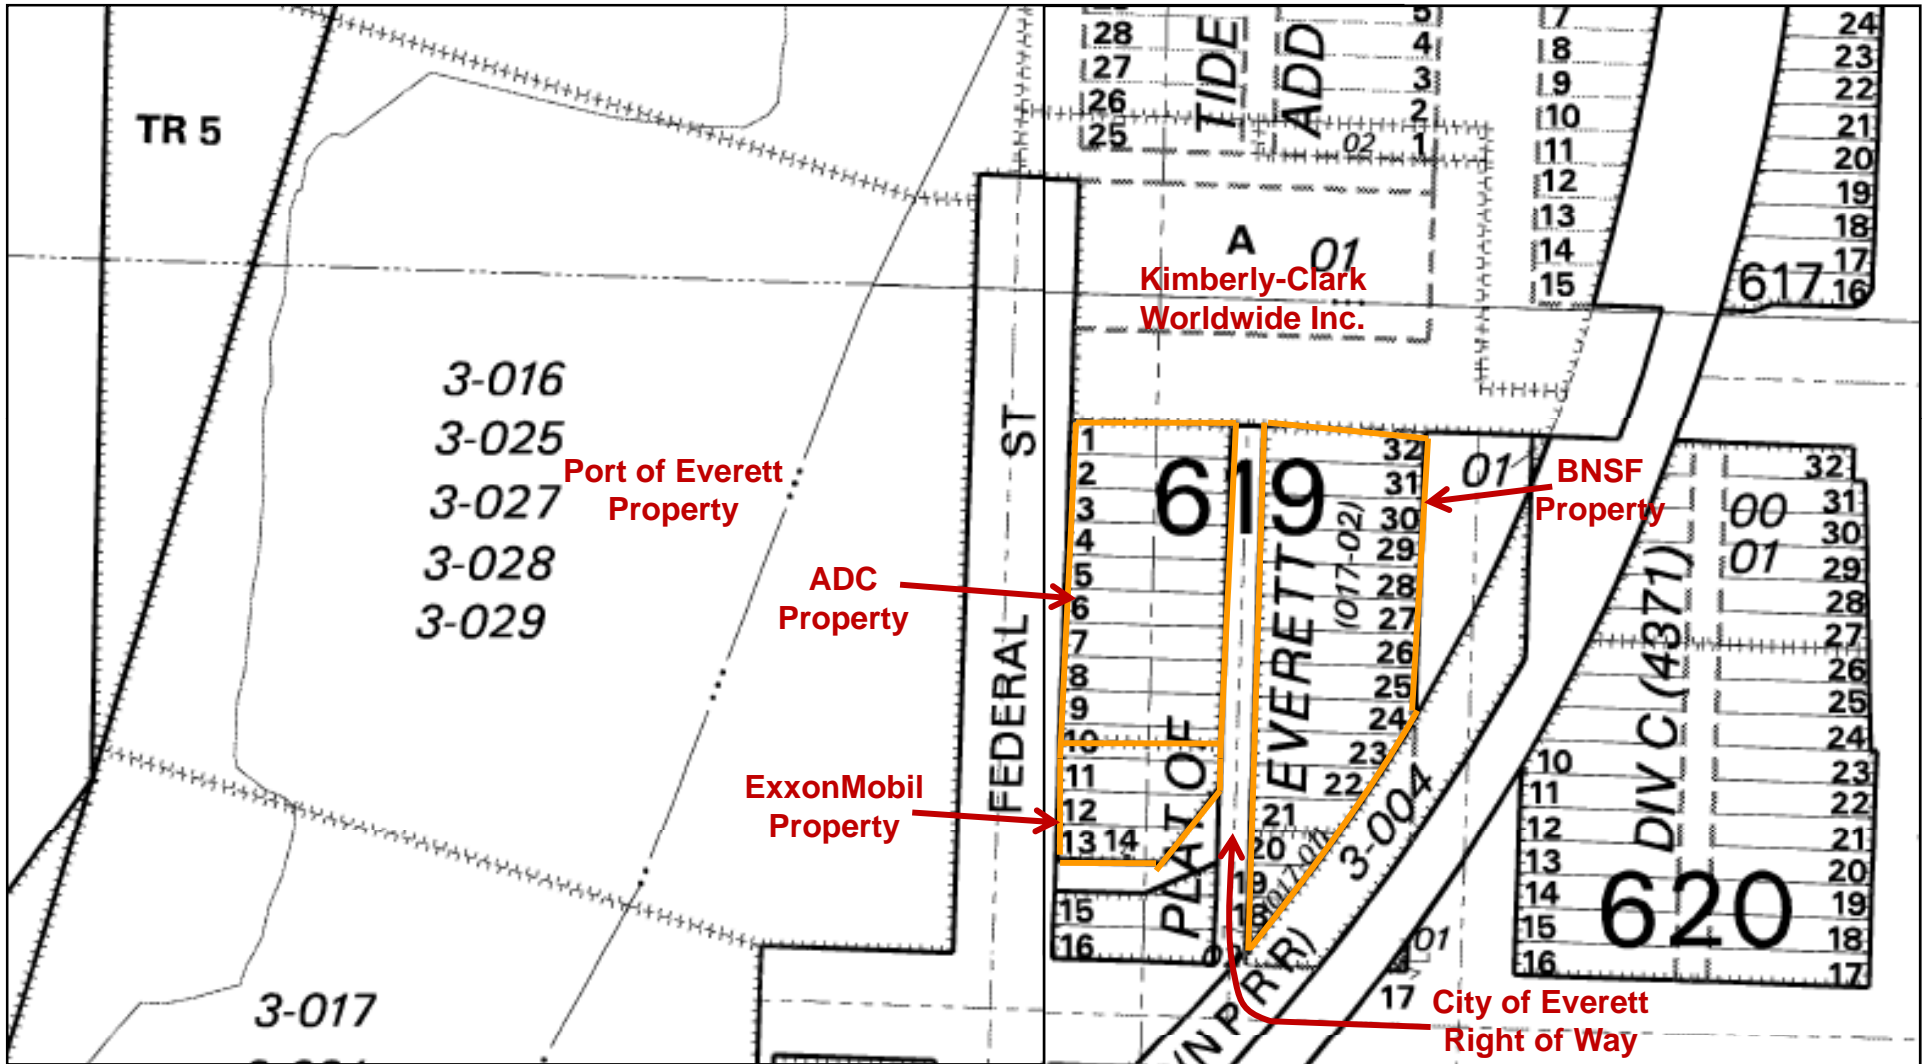

**Exhibit A – Figure 3
 Snohomish County Assessor's Office Tax Parcel Map**

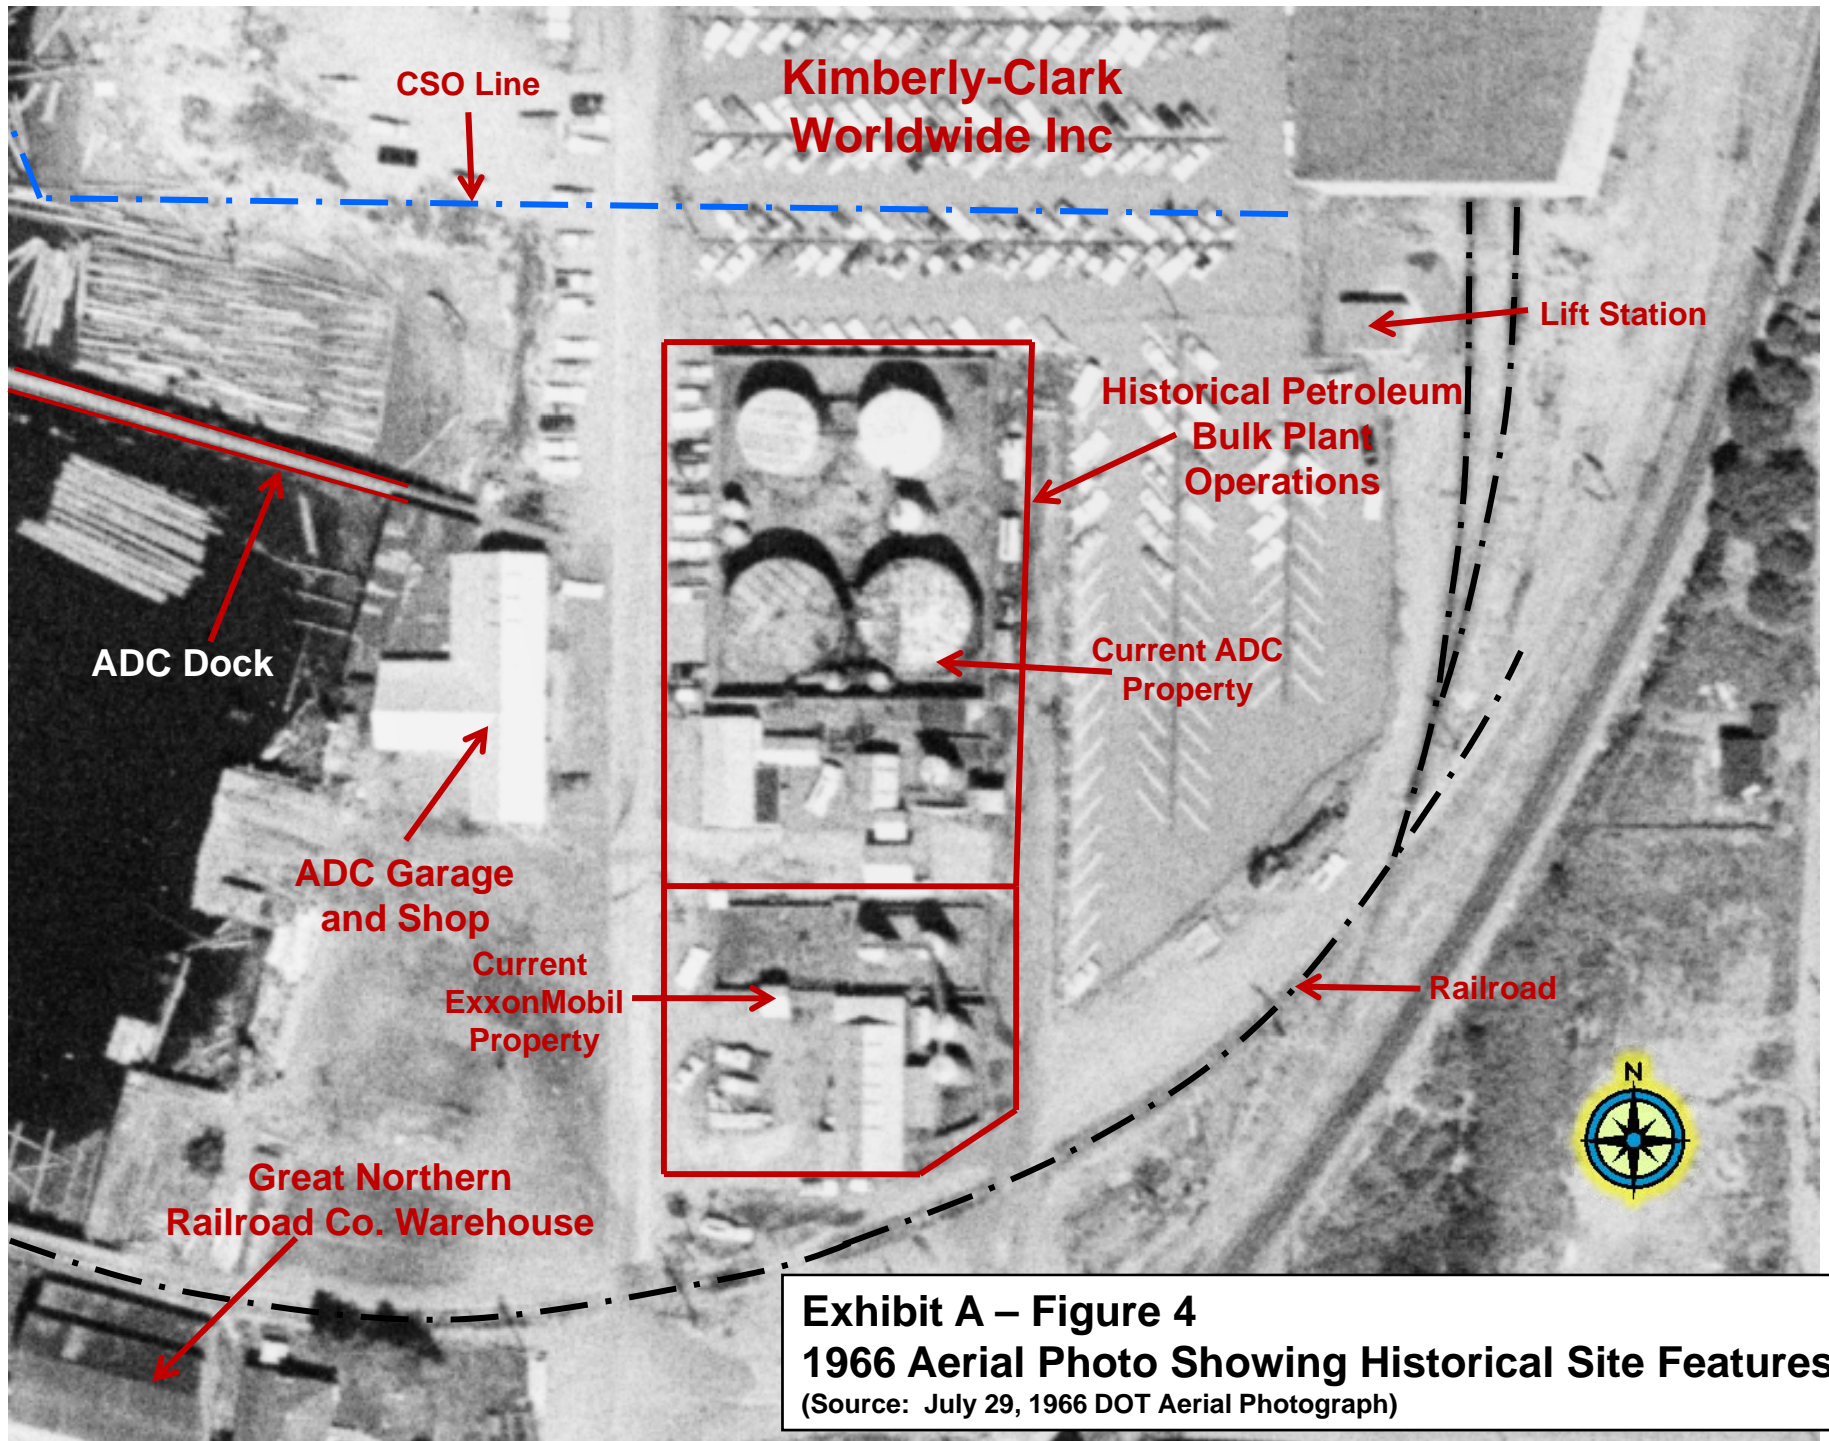


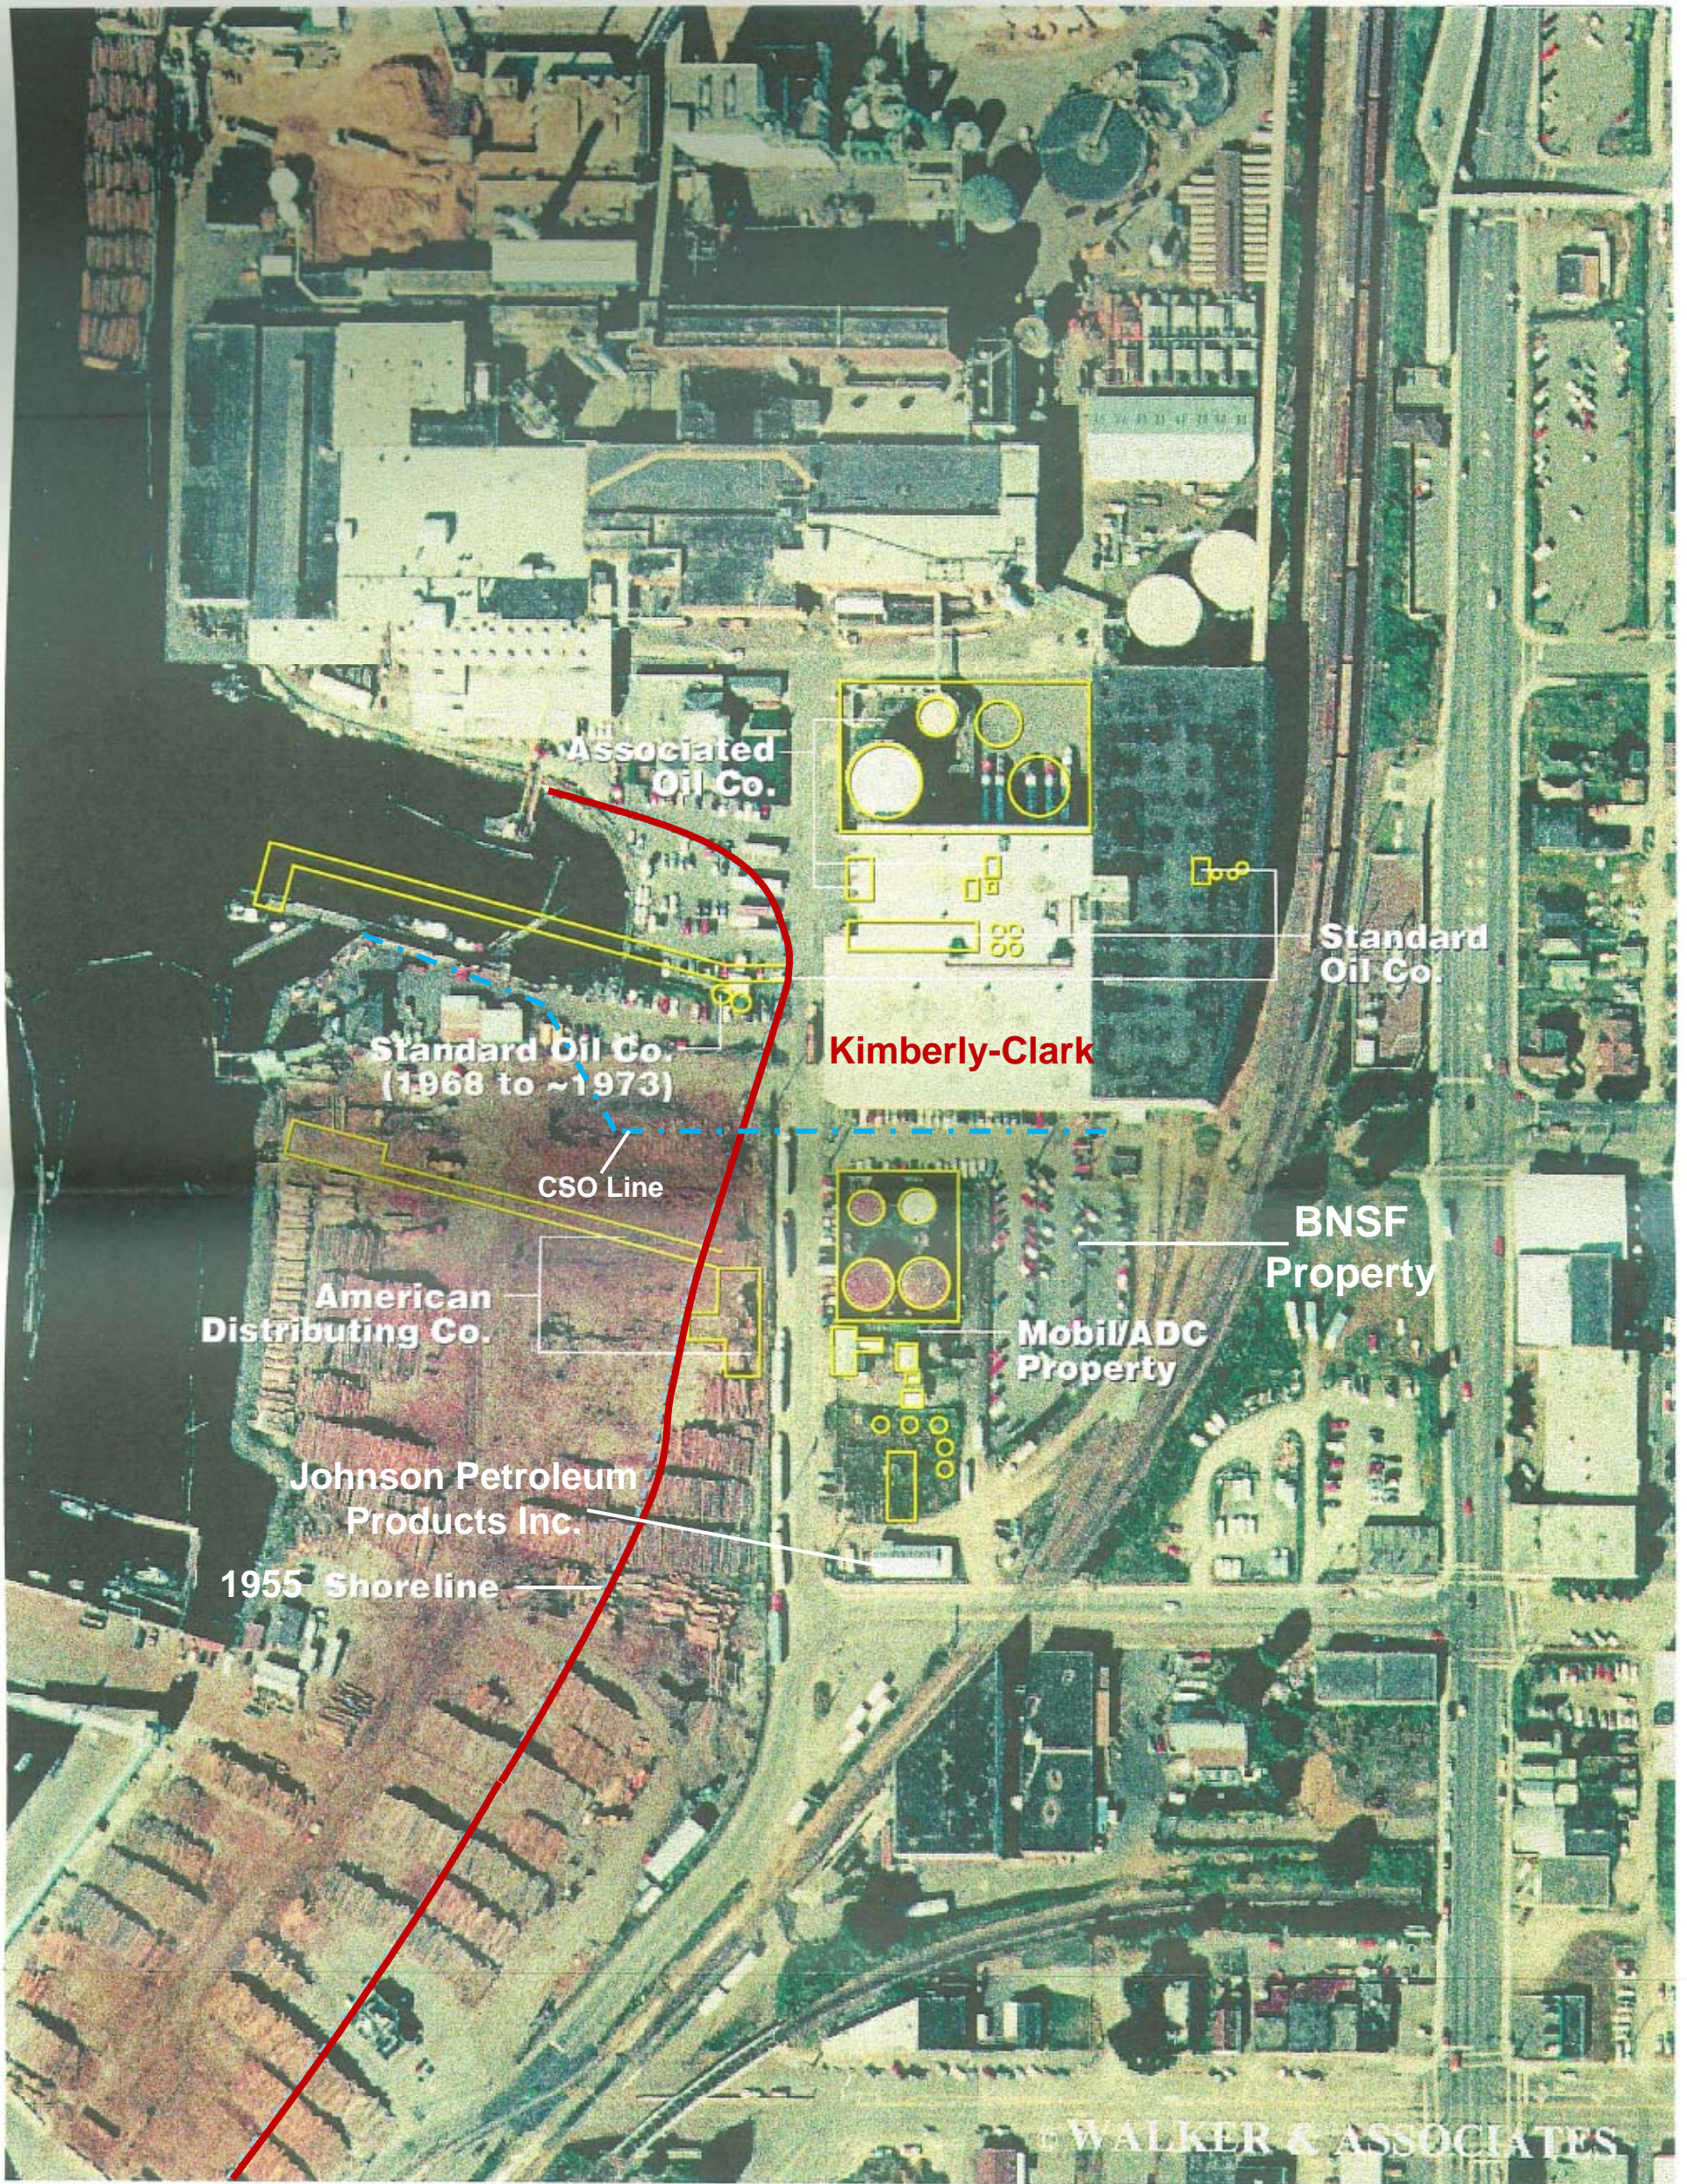


Exhibit A – Figure 5
1993 Aerial Photo Showing Historical Features
 (Source: Exponent July 23, 1998 RI/FS Report)

Figure 2-3. 1955 facility locations superimposed on 1993 aerial photograph of Federal Avenue site.



Source: AGRA Earth & Environmental (1996)

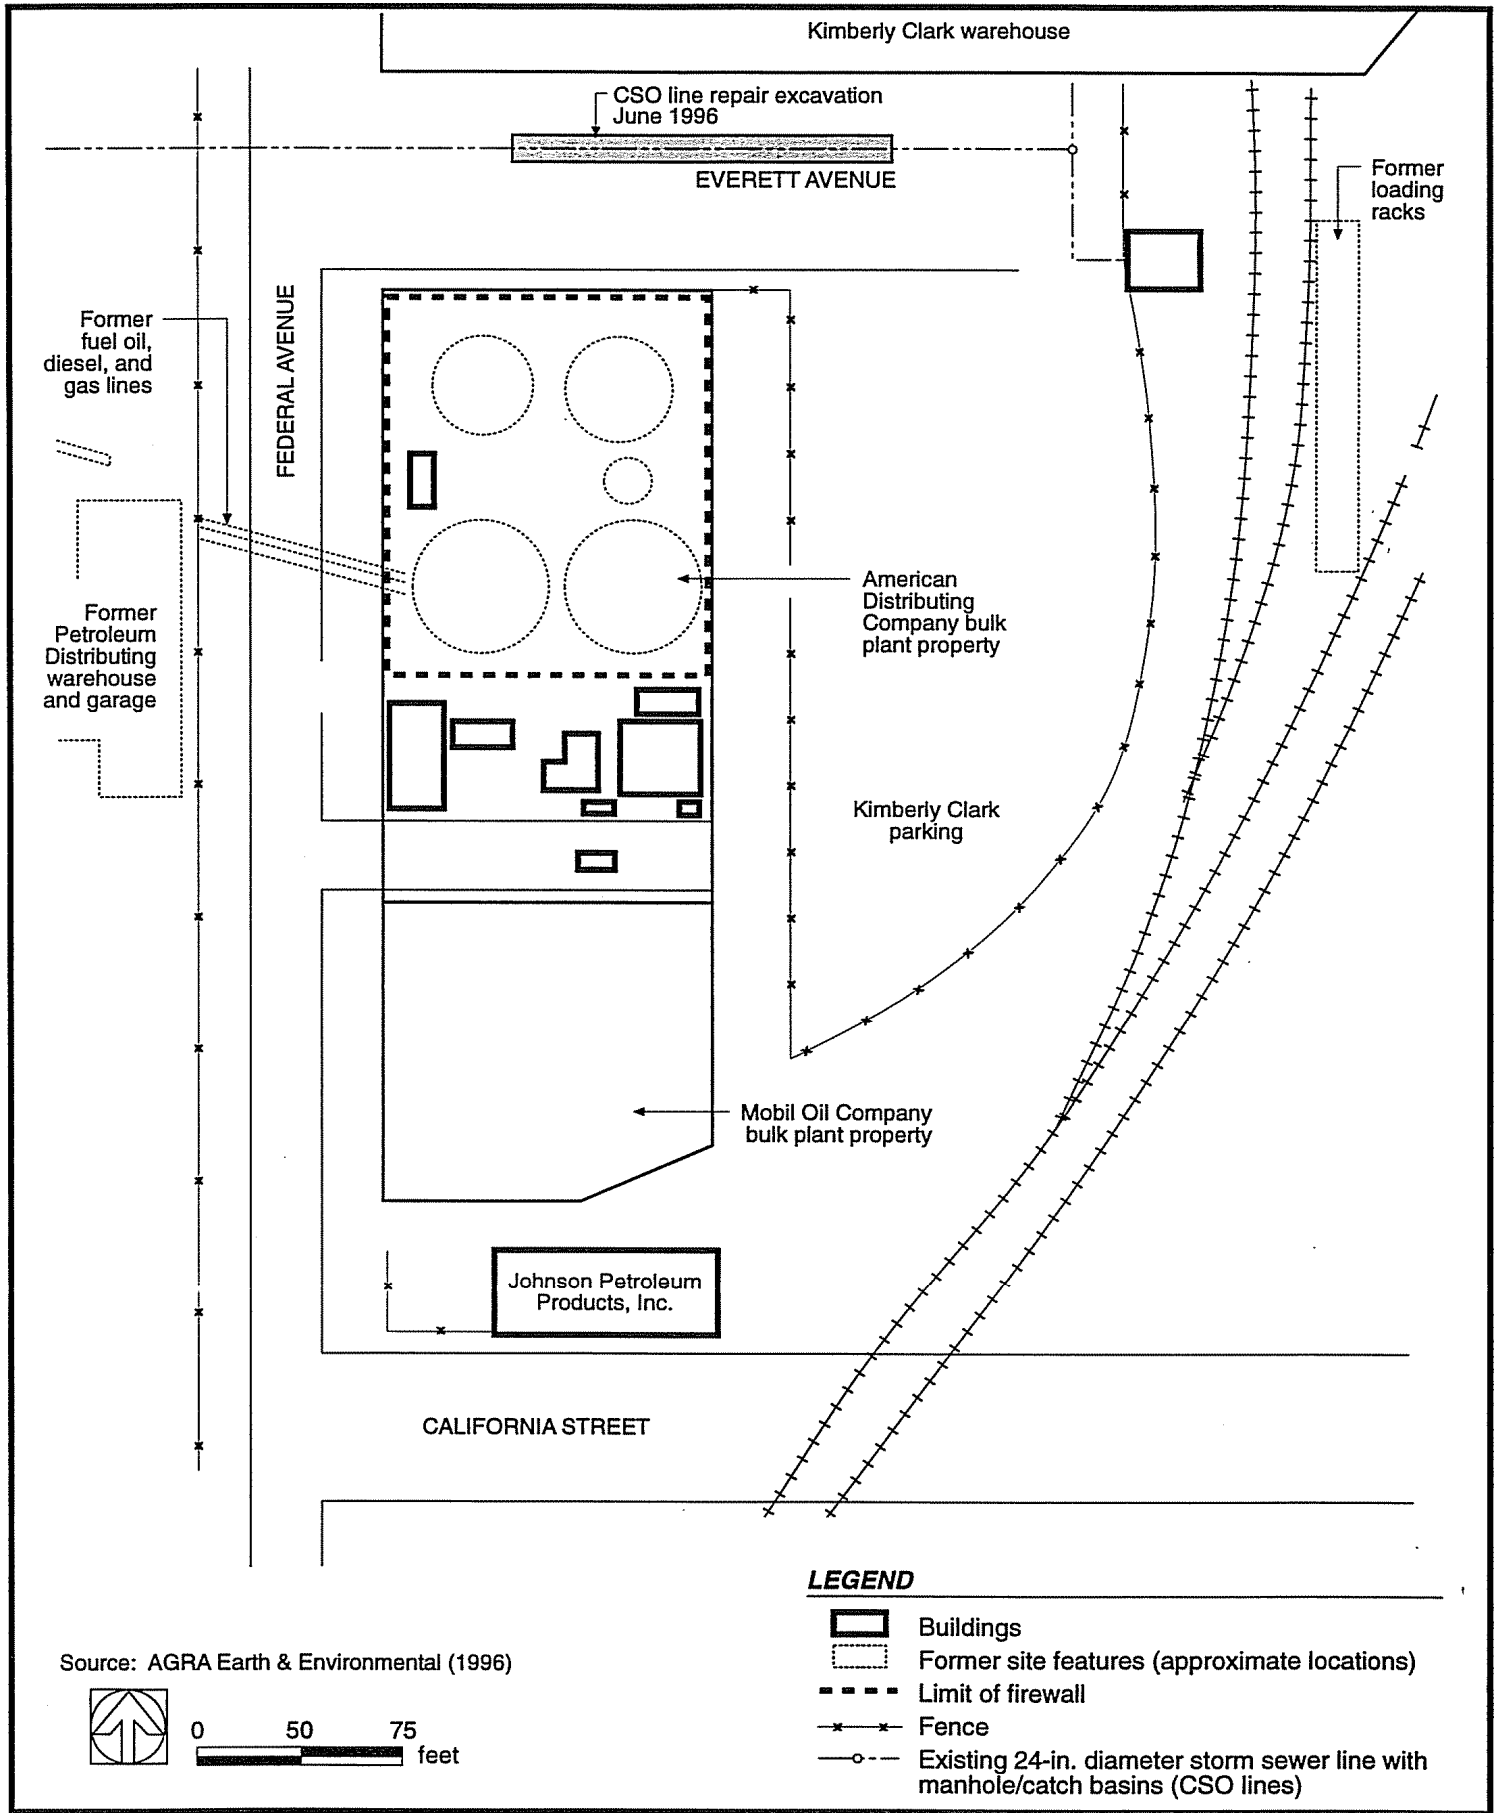

0 50 75 feet

LEGEND






-  Buildings
-  Former site features (approximate locations)
-  Limit of firewall
-  Fence
-  Existing 24-in. diameter storm sewer line with manhole/catch basins (CSO lines)

Figure 2-2. Mobil/ADC Property.

Exhibit A – Figure 6

Site Plan

(Source: Exponent July 23, 1998 RI/FS Report)


EXXONMOBIL ADC SITE

SITE/PROPERTY LOCATION INFORMATION

The ExxonMobil ADC Site is generally located at 2717 and 2731 Federal Avenue, Everett, Snohomish County, Washington. Site coordinates, a legal description, and county assessor's parcel numbers are provided below.

Coordinates: Latitude: 47°58'53.98" North; Longitude: 122°13'0.05" West.

Latitude/Longitude Reference Point: Location of the former American Distributing Company Above Ground Storage Tanks (see red circle on the figure below).

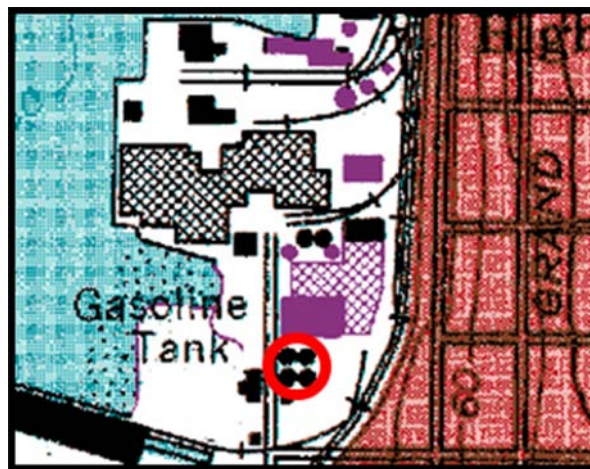

Legal Description: Section 19, Township 29 North, Range 5 East.

County Assessor's Parcel Numbers (Port of Everett Property): Parcel numbers corresponding to the ExxonMobil and ADC properties include 00437161900100 (A. P. Miller Property) and 00437161901000 (ExxonMobil Property).

Information from the County Assessor's office is attached to this site description.



* R E A L * Property Information

[County Home](#) [Assessor Home](#) [Treasurer Home](#) Information on which [Department](#) to contact

Please view [Disclaimer](#)

If you have questions, comments or suggestions, please [Contact Us](#).

Date/Time: 10/13/2008 4:49:15 PM Answers to [Frequently Asked Questions](#) about Parcel Data (opens as new window)

Return to [Property Information Entry page](#)

Parcel Number **00437161900100** Prev Parcel Reference **43716190010009**

[View Map of this parcel](#) (opens as new window)

General Information

Taxpayer Name || Address (contact the Treasurer if you have questions)

MILLER AVEN P JR || 926 GRAND - - - EVERETT, WA 98201

If the above mailing address is incorrect and you want to make a change, see the information on [Name and Address Changes](#)

Owner Name || Address (contact the Assessor if you have questions)

MILLER AVEN P JR || 926 GRAND - - - EVERETT, WA 98201

If the above name and address is incorrect due to a recent sale, please see the information on [Name and Address Changes After a Sale](#)

Sale

Street (Situs) Address (contact the Assessor if you have questions)

2717 FEDERAL AVE - - - EVERETT, WA 98201-3410

Parcel Legal Description

EVERETT DIV C PLAT OF BLK 619 D-00 - TH PTN LOTS 1-2-3-4-5-6-7-8-9 & 10 DAF BAAP ON W LN SD LOT 10 AT INT WLY EXTENSION OF N FACE OF AN 8 INCH CONCRETE FIREWALL SD PT BEING 114.9FT NLY FR SW COR LOT 14 IN SD BLK TH N ALG W LN SD BLK DIST OF 235.1FT TO NW COR SD BLK TH E ALG N LN SD BLK DIST OF 120FT TO NE COR THOF TH S ALG E LN SD BLK DIST OF 234.8FT TO ELY EXTENSION OF THE N FACE AFORMENTIONED 8 INCH CONCRETE FIREWALL TH W ALG SD EXTENSIONS & FACE OF WALL 120FT TO POB

[Go to top of page](#)

Treasurer's Tax Information

Taxes For answers to questions about Taxes, please contact the [Treasurer's office](#) (opens as new window)

2008 Taxes for this parcel \$1,365.43

Payments: Receipt No. **4608861** | **5/5/2008** | **\$682.71**

(Taxes may include Surface Water Management and/or State Forest Fire Patrol fees and any fees related to late payments. LID charges, if any, are not included.)

To obtain a duplicate tax statement, either download our [Tax Statement Request](#) form or call 425-388-3366 to request it by phone.

[Go to top of page](#)

Assessor's Property Data Characteristics and Value Data below are for 2008 tax year.

Please contact the [Treasurer's office](#) for answers to questions about Taxes (opens as new window)

For questions ONLY about property characteristics or property values (NOT taxes), please contact the [Assessor's Office](#)

Property Values

Values do not reflect adjustments made due to an exemption, such as a senior or disabled persons exemption. Reductions for exemptions are made on the property tax bill.

| | | | | | | | |
|----------|-------------|-------------|------------------|--------------------|------------|--------------|------------------|
| Tax Year | 2008 | Market Land | \$143,000 | Market Improvement | \$0 | Market Total | \$143,000 |
| Tax Year | 2009 | Market Land | \$143,000 | Market Improvement | \$0 | Market Total | \$143,000 |

[Go to top of page](#)

Valuation, Payment, and Property Tax History

View [History](#) (opens as new window)

[Go to top of page](#)

Property Characteristics

Tax Code Area (TCA) **00010** View [Taxing Districts](#) for this Parcel (opens as new window)

Use Code **637 Warehousing & Storage Services**

Size Basis **ACRE** Size **0.65** (Size may include undivided interest in common tracts and road parcels)

[Go to top of page](#)

Property Structures

No structures found for this parcel

[Go to top of page](#)

Property Sales since 7/31/1999

Explanation of [Sales Information](#) (opens as new window)

Sales data is based solely upon excise affidavits processed by the Assessor.

No sales for this parcel have been recorded since 7/31/1999

[Go to top of page](#)

Property Maps Township/Range/Section/Quarter, links to maps

Neighborhood **5306000** Explanation of [Neighborhood Code](#) (opens as new window)

Township **29** Range **05** Section **19** Quarter **SW** [Find parcel maps for this Township/Range/Section](#)

View [Map of this parcel](#) (opens as new window)



* R E A L * Property Information

[County Home](#) [Assessor Home](#) [Treasurer Home](#) Information on which [Department](#) to contact

Please view [Disclaimer](#)

If you have questions, comments or suggestions, please [Contact Us](#).

Date/Time: 10/13/2008 4:51:40 PM Answers to [Frequently Asked Questions](#) about Parcel Data (opens as new window)

Return to [Property Information Entry page](#)

Parcel Number **00437161901000** Prev Parcel Reference **43716190100008**

[View Map of this parcel](#) (opens as new window)

General Information

Taxpayer Name || Address (contact the Treasurer if you have questions)

MOBIL OIL CORPORATION || PO BOX 4973 - - - HOUSTON, TX 77210

If the above mailing address is incorrect and you want to make a change, see the information on [Name and Address Changes](#)

Owner Name || Address (contact the Assessor if you have questions)

MOBIL OIL CORPORATION || PO BOX 53 - - - HOUSTON, TX 77001-0053

If the above name and address is incorrect due to a recent sale, please see the information on [Name and Address Changes After a Sale](#)

Sale

Street (Situs) Address (contact the Assessor if you have questions)

2731 FEDERAL AVE - - - EVERETT, WA 98201-3410

Parcel Legal Description

Section 19 Township 29 Range 5 Quarter SE - THAT PTN LOT 10 LY S OF LN DAF BAAP ON W LN LOT 10 235.1FT S OF NW COR SD BLK BEG SD DESC LN TH ELY TAP ON E LN LOT 10 234.8FT S OF NE COR SD BLK TERM SD DESC LN TGW LOTS 11-13 INC & TGW BAAP ON E LN LOT 14 2.6FT S OF NE COR TH N 2.6FT TH TH W 120FT TH S 25FT TH E TO A POINT 52.9FT W OF SE COR LOT 14 TH NELY TO POB EXC THAT PTN LOTS 11 THRU 14 LY S & SELY OF FDL: BAAP ON W LN SD LOT 13 PT BEAR N01*58 49E 75.00FT FR SW COR LOT 16 SD PLAT MEAS ALG W BDY SD LOTS 13-16 TH S87*58 21E 79.84FT TH N33*01 24E 78.25FT M/L TO E BDY SD LOT 11 AND TERM SD DESC LN EXC THAT PTN SD LOT 14 DAF: BAAP ON E LN SD LOT 14 DIST 2.6FT S OF NE COR THOF TH S ALG SD E LN TO SE COR THOF TH W ALG S LN SD LOT 14 DIST 52.9FT TH NELY ALG STRT LN TO POB PER SCC #01-2-03480-2

[Go to top of page](#)

Treasurer's Tax Information

Taxes For answers to questions about Taxes, please contact the [Treasurer's office](#) (opens as new window)

2008 Taxes for this parcel \$441.13

| | | | |
|-----------------------|----------------|------------------|-----------------|
| Payments: Receipt No. | 4494514 | 4/25/2008 | \$441.13 |
|-----------------------|----------------|------------------|-----------------|

(Taxes may include Surface Water Management and/or State Forest Fire Patrol fees and any fees related to late payments. LID charges, if any, are not included.)

To obtain a duplicate tax statement, either download our [Tax Statement Request](#) form or call 425-388-3366 to request it by phone.

[Go to top of page](#)

Assessor's Property Data Characteristics and Value Data below are for 2008 tax year.

Please contact the [Treasurer's office](#) for answers to questions about Taxes (opens as new window)

For questions ONLY about property characteristics or property values (NOT taxes), please contact the [Assessor's Office](#)

Property Values

Values do not reflect adjustments made due to an exemption, such as a senior or disabled persons exemption. Reductions for exemptions are made on the property tax bill.

Snohomish County, WA Assessor Parcel Data

| | | | | | | | |
|----------|-------------|-------------|-----------------|--------------------|------------|--------------|-----------------|
| Tax Year | 2008 | Market Land | \$46,200 | Market Improvement | \$0 | Market Total | \$46,200 |
| Tax Year | 2009 | Market Land | \$46,200 | Market Improvement | \$0 | Market Total | \$46,200 |

[Go to top of page](#)

Valuation, Payment, and Property Tax History

View [History](#) (opens as new window)

[Go to top of page](#)

Property Characteristics

Tax Code Area (TCA) **00010** View [Taxing Districts](#) for this Parcel (opens as new window)

Use Code **637 Warehousing & Storage Services**

Size Basis **ACRE** Size **0.21** (Size may include undivided interest in common tracts and road parcels)

[Go to top of page](#)

Property Structures

No structures found for this parcel

[Go to top of page](#)

Property Sales since 7/31/1999

Explanation of [Sales Information](#) (opens as new window)

Sales data is based solely upon excise affidavits processed by the Assessor.

No sales for this parcel have been recorded since 7/31/1999

[Go to top of page](#)

Property Maps Township/Range/Section/Quarter, links to maps

Neighborhood **5306000** Explanation of [Neighborhood Code](#) (opens as new window)

Township **29** Range **05** Section **19** Quarter **SW** [Find parcel maps for this Township/Range/Section](#)

View [Map of this parcel](#) (opens as new window)



**FOCUSED FEASIBILITY STUDY WORK PLAN
ExxonMobil / ADC Property, Ecology Site ID 2728
2717/2731 Federal Avenue
Everett, Washington**

Submitted to:

ExxonMobil Environmental Services
East Providence Terminal
1001 Wampanoag Trail
Riverside, Rhode Island 02915

And

American Distributing Company
13618 45th Avenue NE
Marysville, Washington 98271

Submitted by:

AMEC Earth & Environmental, Inc.
11810 North Creek Parkway North
Bothell, Washington 98011

February 26, 2010

AMEC Project No. 9-915-15716-C



February 26, 2010
Project No. 9-915-15716-C

ExxonMobil Environmental Services
East Providence Terminal
1001 Wampanoag Trail
Riverside, Rhode Island 02915

Attention: Mr. Joseph Abel

American Distributing Company
13618 45th Avenue NE
Marysville, Washington 98271

Attention: Mr. Miller

Subject: Focused Feasibility Study Work Plan
ExxonMobil / ADC Property, Ecology Site ID 2728
2717/2731 Federal Avenue, Everett, Washington

AMEC Earth & Environmental, Inc. (AMEC) is pleased to submit this Focused Feasibility Study Work Plan that incorporates a Data Gap Investigation sampling and analysis plan for the above-referenced property located in Everett, Washington.

We appreciate the opportunity to have served you on this project. If you have any questions or desire further information, please feel free to contact us at (425) 368-1000.

Sincerely,

AMEC Earth & Environmental, Inc.

Anastasia Speransky, LHg
Project Hydrogeologist



Gary Dupuy, LHg
Principal

AMEC Earth & Environmental, Inc.
11810 North Creek Parkway North
Bothell, Washington 98011
(425) 368-1000 Phone
(425) 368-1001 Facsimile
www.amec.com

TABLE OF CONTENTS

| | <u>Page</u> |
|--|-------------|
| ACRONYMS AND ABBREVIATIONS..... | vi |
| 1.0 INTRODUCTION..... | 1 |
| 1.1 Purpose of the Work Plan | 1 |
| 1.2 Organization of the Report | 1 |
| 2.0 SITE SETTING AND BACKGROUND | 3 |
| 2.1 Property and Vicinity Description | 3 |
| 2.2 Site Ownership and Operational History | 3 |
| 2.2.1 ExxonMobil/ADC Property | 4 |
| 2.2.2 History of Surrounding Properties..... | 5 |
| 2.3 Site Regulatory History | 7 |
| 2.4 Environmental Setting | 8 |
| 2.4.1 Topography..... | 9 |
| 2.4.2 Geology and Hydrogeology | 9 |
| 2.4.3 Surface Water Hydrology..... | 9 |
| 2.4.4 Meteorology | 10 |
| 2.4.5 Ecological Setting | 10 |
| 2.4.6 Tidal Influence | 11 |
| 2.4.7 Historic and Cultural Resources | 11 |
| 3.0 PREVIOUS SITE INVESTIGATIONS AND INTERIM REMEDIAL ACTIONS..... | 13 |
| 3.1 Previous Environmental Investigations Conducted at the Site for Soil and Groundwater..... | 13 |
| 3.2 Interim Remedial Actions | 17 |
| 3.2.1 Infiltration Gallery in Vicinity of MW-14 | 18 |
| 3.2.2 Groundwater Extraction and Treatment..... | 18 |
| 3.2.3 Recovery Trench In the Vicinity of Side Sewer..... | 18 |
| 3.2.4 Combined Sewer Overflow Line Repair..... | 19 |
| 3.2.5 LPH Vacuum Recovery Pilot Test | 20 |
| 3.2.6 Water Management and Treatment System and Asphalt Cap Construction..... | 20 |
| 3.2.7 LPH Bailing and Groundwater Monitoring | 22 |
| 3.2.8 Puget Sound Outfall 5 Overflow Structure Project..... | 22 |
| 4.0 ONGOING GROUNDWATER MONITORING/PETROLEUM RECOVERY | 23 |
| 4.1 Petroleum Recovery | 23 |
| 4.2 Monitoring of Groundwater Quality..... | 23 |
| 5.0 PRELIMINARY SCREENING LEVELS | 25 |
| 5.1 Preliminary Soil Screening Levels | 25 |
| 5.2 Preliminary Groundwater Screening Levels | 25 |
| 6.0 SUMMARY OF CURRENT ENVIRONMENTAL SITE CONDITIONS..... | 26 |
| 6.1 Soil | 26 |

| | | |
|-------|---|----|
| 6.1.1 | TPH-D, TPH-O, and TPH (undifferentiated) | 27 |
| 6.1.2 | TPH-G | 28 |
| 6.1.3 | Benzene, Toluene, Ethylbenzene, and Total Xylenes | 28 |
| 6.1.4 | Lead | 28 |
| 6.1.5 | PAHs | 29 |
| 6.2 | Liquid-Phase Hydrocarbons | 29 |
| 6.3 | Groundwater | 30 |
| 6.3.1 | TPH-D or TPH (undifferentiated) | 30 |
| 6.3.2 | TPH-G | 30 |
| 6.3.3 | Benzene, Toluene, Ethylbenzene, and Total Xylenes | 31 |
| 6.3.4 | Total and Dissolved Lead | 31 |
| 6.3.5 | PAHs | 32 |
| 7.0 | CONCEPTUAL SITE MODEL AND PATHWAYS | 33 |
| 7.1 | Current and Future Land/Water Uses | 33 |
| 7.2 | Sources and Types of Contamination | 34 |
| 7.3 | Contaminant Migration Pathways/Media of Potential Concern | 36 |
| 7.3.1 | Soil | 36 |
| 7.3.2 | Groundwater | 36 |
| 7.3.3 | Vapor | 36 |
| 7.3.4 | Stormwater | 37 |
| 7.3.5 | Surface Water | 37 |
| 7.3.6 | Sediment | 37 |
| 7.4 | Indicator Hazardous Substances | 37 |
| 7.4.1 | Soil | 38 |
| 7.4.2 | Groundwater | 39 |
| 7.5 | Potential Receptors and Exposure Pathways | 41 |
| 7.5.1 | Potential Receptors | 41 |
| 7.5.2 | Potential Exposure Pathways | 41 |
| 7.6 | Overview of Site Conditions | 42 |
| 8.0 | FOCUSED FEASIBILITY STUDY | 44 |
| 8.1 | Data Gaps and Supplemental Field Investigations | 44 |
| 8.1.1 | Extent of TPH-D, TPH-O, and TPH-G Impacts in Groundwater | 44 |
| 8.1.2 | Nature of Aquitard Below Property | 45 |
| 8.1.3 | Extent of Soil Impacts Surrounding ADC Parcel | 45 |
| 8.1.4 | Tidal Influences | 45 |
| 8.1.5 | Extent of Ongoing Natural Attenuation | 46 |
| 8.1.6 | Aquifer Properties | 46 |
| 8.1.7 | Analytical Testing | 46 |
| 8.2 | General Approach to Focused Feasibility Study | 47 |
| 8.2.1 | Review of Potential Remedial Alternatives | 48 |
| 8.2.2 | Contents of FFS | 50 |
| 9.0 | REFERENCES | 53 |

LIST OF TABLES

| | |
|---------|--|
| Table 1 | Chronology of Historical On-Site Environmental Investigations and Remedial Actions |
| Table 2 | Analytical Results for Total Petroleum Hydrocarbons in Soil |
| Table 3 | Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Soil |
| Table 4 | Analytical Results for Polycyclic Aromatic Hydrocarbons in Soil |
| Table 5 | Analytical Results for Total Petroleum Hydrocarbons in Groundwater |
| Table 6 | Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater |
| Table 7 | Analytical Results for Polycyclic Aromatic Hydrocarbons in Groundwater |
| Table 8 | Statistical Summary of Soil Analytical Results |
| Table 9 | Statistical Summary of Groundwater Analytical Results |

LIST OF FIGURES

| | |
|-----------|---|
| Figure 1 | Site Location Map |
| Figure 2 | Plan of the Property and Vicinity |
| Figure 3 | 1930 Great Northern Railway Everett Map |
| Figure 4 | Features Seen in 1930 Great Northern Railway Everett Map over 2003 Aerial |
| Figure 5 | Aerial 1947 |
| Figure 6 | Features Seen in 1947 Aerial over 2003 Aerial |
| Figure 7 | Aerial 1955 |
| Figure 8 | Features Seen in 1955 Aerial over 2003 Aerial |
| Figure 9 | Aerial 1967 |
| Figure 10 | Features Seen in 1967 Aerial over 2003 Aerial |
| Figure 11 | Aerial 1976 |
| Figure 12 | Features Seen in 1976 Aerial over 2003 Aerial |
| Figure 13 | Aerial 1993 |
| Figure 14 | Features Seen in 1993 Aerial over 2003 Aerial |
| Figure 15 | Historical Explorations and Locations of Geologic Cross Sections A–A', B–B', and C–C' |
| Figure 16 | Geologic Cross-Section A–A' |
| Figure 17 | Geologic Cross-Section B–B' |
| Figure 18 | Geologic Cross-Section C–C' |
| Figure 19 | February 2009 Groundwater Elevation and Flow Direction |
| Figure 20 | Average LPH Thickness from September 2008 to February 2009 |
| Figure 21 | Groundwater Sample Analytical Results – August 2008 and February 2009 |
| Figure 22 | Horizontal Distribution of TPH-Diesel, TPH-Oil, and Undifferentiated TPH in Soil |
| Figure 23 | Vertical Distribution of TPH-D or TPH (Undifferentiated) in Soil: Cross Section A–A' |

| | |
|-----------|---|
| Figure 24 | Vertical Distribution of TPH-D or TPH (Undifferentiated) in Soil: Cross Section B–B' |
| Figure 25 | Vertical Distribution of TPH-D or TPH (Undifferentiated) in Soil: Cross Section C–C' |
| Figure 26 | Horizontal Distribution of TPH-Gasoline in Soil |
| Figure 27 | Vertical Distribution of TPH-G in Soil: Cross Section A–A' |
| Figure 28 | Vertical Distribution of TPH-G in Soil: Cross Section B–B' |
| Figure 29 | Vertical Distribution of TPH-G in Soil: Cross Section C–C' |
| Figure 30 | Horizontal Distribution of Benzene in Soil |
| Figure 31 | Vertical Distribution of Benzene in Soil: Cross Section A–A' |
| Figure 32 | Vertical Distribution of Benzene in Soil: Cross Section B–B' |
| Figure 33 | Vertical Distribution of Benzene in Soil: Cross Section C–C' |
| Figure 34 | Horizontal Distribution of Toluene in Soil |
| Figure 35 | Horizontal Distribution of Ethylbenzene in Soil |
| Figure 36 | Horizontal Distribution of Total Xylenes in Soil |
| Figure 37 | Horizontal Distribution of Lead in Soil |
| Figure 38 | Vertical Distribution of Lead in Soil: Cross Section A–A' |
| Figure 39 | Vertical Distribution of Lead in Soil: Cross Section B–B' |
| Figure 40 | Vertical Distribution of Lead in Soil: Cross Section C–C' |
| Figure 41 | Horizontal Distribution of Adjusted Total cPAHs Concentration in Soil |
| Figure 42 | Vertical Distribution of Toxicity-Adjusted Total cPAHs Concentrations in Soil: Cross Section A–A' |
| Figure 43 | Liquid-Phase Petroleum Hydrocarbon Maximum Thickness Since 2002 |
| Figure 44 | Historical Distribution of TPH-D, TPH-O, and TPH in Groundwater, Maximum Detected Value |
| Figure 45 | Historical Distribution of TPH-G in Groundwater, Maximum Detected Value |
| Figure 46 | Historical Distribution of Benzene in Groundwater, Maximum Detected Value |
| Figure 47 | Historical Distribution of Toluene in Groundwater, Maximum Detected Value |
| Figure 48 | Historical Distribution of Ethylbenzene in Groundwater, Maximum Detected Value |
| Figure 49 | Historical Distribution of Total Xylene in Groundwater, Maximum Detected Value |
| Figure 50 | Historical Distribution of Total Lead in Groundwater, Maximum Detected Value |
| Figure 51 | Historical Distribution of Dissolved Lead in Groundwater, Maximum Detected Value |
| Figure 52 | Historical Distribution of Toxicity Equivalency Adjusted Total cPAHs in Groundwater, Maximum Detected Value |
| Figure 53 | Historical Excavation Locations |
| Figure 54 | Area of Impact and Secondary Source Areas |
| Figure 55 | Proposed Data Gap Investigations Exploration Plan |

LIST OF APPENDICES

| | |
|------------|---|
| Appendix A | Sampling and Analysis Plan |
| Appendix B | Historical Maps and Documentation |
| Appendix C | Boring Logs, Monitoring Well Logs, and Test Pit Logs |
| Appendix D | PEG Report (Kimberly-Clark Investigations) |
| Appendix E | Addendum Sampling and Analysis Plan |
| Appendix F | Simplified Terrestrial Ecological Evaluation |
| Appendix G | Schedule |
| Appendix H | List of applicable or relevant and appropriate requirements |

ACRONYMS AND ABBREVIATIONS

| | |
|-------------------|--|
| ADC | American Distributing Company |
| ADC Parcel | northern parcel |
| AGRA | AGRA Earth & Environmental, Inc. |
| AMEC | AMEC Earth & Environmental, Inc. |
| ASTs | aboveground storage tanks |
| bgs | below ground surface |
| BNSF | Burlington Northern Santa Fe Railway |
| BTEX | benzene, toluene, ethylbenzene, and xylenes |
| CAP | cleanup action plan |
| Chevron | Chevron Corporation |
| cPAHs | carcinogenic PAHs |
| CSM | conceptual site model |
| CSO | combined sewer overflow |
| CSTO | California Street Overcrossing |
| DAHP | Washington State Department of Archaeology and Historic Preservation |
| DO | dissolved oxygen |
| Ecology | Washington State Department of Ecology |
| EPA | U.S. Environmental Protection Agency |
| EPH | extractable petroleum hydrocarbons |
| ERI | Environmental Resolutions, Inc. |
| ESA | Endangered Species Act |
| ESE | Environmental Science and Engineering, Inc. |
| ExxonMobil | ExxonMobil Oil Corporation |
| ExxonMobil Parcel | southern parcel |
| °F | degrees Fahrenheit |
| FFS | Focused Feasibility Study |
| General Petroleum | General Petroleum of California |
| gpm | gallons per minute |
| GPR | ground penetrating radar |
| HSA | hollow stem auger |
| IHSs | indicator hazardous substances |
| KC | Kimberly-Clark |
| Kleinfelder | Kleinfelder, Inc. |
| LPH | liquid-phase petroleum hydrocarbons |
| µg/L | micrograms per liter |
| mg/kg | milligram per kilograms |
| MNA | monitored natural attenuation |
| Mobil | Mobil Oil Corporation |
| MSL | mean sea level |
| MTBE | methyl tertiary-butyl ether |
| MTCA | Model Toxics Control Act |
| NWTPH-Dx | Northwest Total Petroleum Hydrocarbons–Diesel extended |
| NWTPH-Gx | Northwest Total Petroleum Hydrocarbons–Gasoline extended |

| | |
|----------|---------------------------------------|
| Order | Agreed Order |
| PAHs | polycyclic aromatic hydrocarbons |
| PCS | petroleum-contaminated soil |
| PEG | Pacific Environmental Group, Inc. |
| PSO | Puget Sound Outfall |
| P&T | groundwater pump-and-treat |
| PTI | PTI Environmental Services |
| PVC | polyvinyl chloride |
| Premier | Premier Environmental Services, LLC |
| Property | ExxonMobil/ADC Property |
| QA | quality assurance |
| RAOs | remedial action objectives |
| RZA | Rittenhouse-Zeman & Associates, Inc. |
| SAP | Sampling and Analysis Plan |
| Scott | Scott Paper Company |
| Standard | Standard Oil Company of California |
| SVE | soil vapor extraction |
| SVOCs | semivolatile organic compounds |
| TEQs | toxicity equivalent quotients |
| Texaco | Texaco Refining and Marketing, Inc. |
| TPH | total petroleum hydrocarbons |
| TPH-D | total petroleum hydrocarbons–diesel |
| TPH-O | total petroleum hydrocarbons–oil |
| TPH-G | total petroleum hydrocarbons–gasoline |
| USCG | U.S. Coast Guard |
| VPH | volatile petroleum hydrocarbons |
| WAC | Washington Administrative Code |
| WP | Work Plan |
| WRCC | Western Regional Climate Center |

1.0 INTRODUCTION

AMEC Earth & Environmental, Inc. (AMEC), has prepared this Focused Feasibility Study (FFS) Work Plan (WP) on behalf of ExxonMobil Oil Corporation (ExxonMobil) and the American Distributing Company (ADC) for the ExxonMobil/ADC Property (the Property) located at 2717 and 2731 Federal Avenue in Everett, Washington. AMEC prepared this document to provide background for preparing the FFS and to describe the rationale for additional soil and groundwater investigations at the Property and its vicinity. A Sampling and Analysis Plan (SAP), included as Appendix A to this Work Plan, addresses the specific field sampling activities, chemical analyses, and quality assurance (QA) procedures that will be conducted during additional investigations at the Property. This work plan is based on the Washington State Department of Ecology (Ecology) Model Toxics Control Act (MTCA) Cleanup Regulations, Washington Administrative Code (WAC) 173-340.

1.1 Purpose of the Work Plan

The purposes of this Work Plan are to:

- Present the history of past ownership and operations of the Property and its surroundings (Site);
- Summarize past investigation and interim remedial activities;
- Present the Conceptual Site Model (CSM); and
- Identify any remaining data gaps to complete the FFS.

1.2 Organization of the Report

This FFS WP is organized as follows.

- Section 1** Purpose and Organization of the FFS WP.
- Section 2** Regulatory background and physical setting.
- Section 3** Summary of previous investigations and interim remedial actions.
- Section 4** Description of ongoing groundwater monitoring program.
- Section 5** Discussion of preliminary screening levels.
- Section 6** Summary of environmental conditions at the Site.

- Section 7** Conceptual Site Model and evaluation of potential receptors and exposure pathways.
- Section 8** Approach to conducting the focused feasibility study, including proposed supplemental investigations for addressing data gaps and a preliminary review of potential remedial technologies.
- Section 9** List of references cited in the text.

2.0 SITE SETTING AND BACKGROUND

This section summarizes the ownership and history of the Property and surrounding area, regulatory and compliance history, and environmental setting.

2.1 Property and Vicinity Description

The Property is located east of Federal Avenue and between California Street and Everett Avenue in the northwest portion of Everett, in Snohomish County, Washington (Figure 1). The Property consists of two parcels that occupy 0.86 acres of land (Figure 2). According to the Snohomish County Tax Assessor records, the southern parcel (the ExxonMobil Parcel) is located at 2731 Federal Avenue, is owned by the Mobil Oil Corporation of Houston, Texas, and occupies approximately one-third of the Property. The northern parcel (the ADC Parcel) is located at 2717 Federal Avenue. The ADC Parcel is owned by the Estate of Mr. Miller of Everett, Washington, and occupies approximately two-thirds of the Property. Currently, no structures or aboveground or underground storage tanks are present on either parcel. The Property is asphalt-paved and currently leased for parking by the adjacent Kimberly-Clark Corporation (KC) facility. A garage that was leased by ADC from approximately the 1930s and later by ADC and General Petroleum Corporation until early 1970s was formerly located to the west of the Property, across Federal Avenue. The layout of the Property and immediate vicinity are shown on Figure 2.

The KC property is located immediately north of the ADC Parcel, at 2600 Federal Avenue. The KC property includes a manufacturing plant for paper products and a warehouse. Presently, Terminal Avenue overcrosses the Burlington Northern Santa Fe Railway (BNSF) line, which is located to the east and south of the Property. Glacier Cold Storage is located beyond Terminal Avenue and the BNSF railway corridor. The properties to the east are currently occupied by BNSF. The properties to the west, beyond Federal Avenue, are occupied by the Port of Everett and Dunlap Towing. The shoreline of Port Gardner Bay is situated approximately 300 feet to the west.

In this document “the Property” will refer to the two contiguous parcels owned by ExxonMobil and by ADC. The Property and portions of neighboring parcels where releases of hydrocarbon contamination on the Property may have migrated comprise the ExxonMobil/ADC Site (Ecology Facility ID 2728), as defined by MTCA (hereafter referred to as “the Site”). The precise boundaries of the Site (i.e., the extent of soil and groundwater contamination resulting from the historic operations on the Property) have not yet been determined. Locations within the Property boundary may be referenced as the Property or on-Property, and locations outside the Property boundaries may be referenced as off-Property.

2.2 Site Ownership and Operational History

Historical maps and documentation for the Property and surrounding parcels are compiled in Appendix B. Figures 3 through 14 shows the history of the Property and its surroundings by

superimposing features visible on historical maps and aerial and historical aerial photographs over a contemporary aerial photograph from 2003.

ExxonMobil was formed in 1999 by the merger of Exxon and Mobil Oil Corporation. The Mobil Oil Corporation (Mobil) was the successor to Socony-Mobil Oil Company, Inc., a New York corporation, which merged in or about 1959 with General Petroleum of California (General Petroleum).

From at least the 1920s, the Property was used for petroleum bulk storage, transfer, and distribution operations; marine offloading; truck loading; and rail loading and/or unloading operations of petroleum products that included fuel oils, stove oil, Bunker C, diesel, gasoline, and a blend of synthetic and petroleum base fluids specially designed for compressor applications PS300. (AGRA 1996a). However, only small quantities (55-gallon drum or smaller) of PS300 likely were used/stored at the Property.

2.2.1 ExxonMobil/ADC Property

According to the 1902 Sanborn Fire Insurance map, the Property was occupied at that time by wooden residential dwellings that lined the historic shoreline of Port Gardner Bay. The Property is labeled “marsh” on the 1902 Sanborn map. By 1914, the entire Property became vacant as shown on the 1914 Sanborn map. In 1915, the City of Everett passed Ordinance No. 1674 granting the Standard Oil Company of California (Standard; now known as Chevron) permission to construct a tank farm consisting of three aboveground storage tanks (ASTs) on Lot 1 of Block 619 (the northern portion of the ADC Parcel [Appendix B]), with piping leading to Standard’s dock on the waterfront. However, it is not certain that the tank farm was actually built. According to the Everett Plant Yard and Tank Elevations Plot Plan, dated April 8, 1946, a portion of the Property was covered by a garbage dump in 1917 (Appendix B). A search for records regarding the dump was conducted at the Washington State Department of Archaeology and Historic Preservation (DAHP) in Olympia and at the Everett Public Library’s Northwest History Room. No information was found about the dump existing at the Property and vicinity. Additionally, no evidence was found of previously recorded archaeological sites and/or historic buildings located on this parcel. To date, no Traditional Cultural Properties have been identified (i.e., on record with DAHP) within the project area. Based on historical research, it appears the Property was never used as a formal dump/sanitary landfill that accepted refuse from a city agency or wider geography.

In 1922, Gilmore Oil Co. Ltd. (predecessor to General Petroleum) first leased the Property from the Great Northern Railway of Minnesota (a predecessor to BNSF) for petroleum bulk storage, transfer, and distribution operations; marine offloading; truck loading; and rail loading and/or unloading operations (Appendix B). In 1927, Gilmore Oil Co. Ltd. became an owner of the Property (Appendix B) and General Petroleum and successors to the property, which included Mobil and ADC, continued bulk plant operations. In 1974, Mobil sold the northern two-thirds of the Property (the current ADC Parcel) to Mr. A. P. Miller for use by ADC and continued to operate a small bulk plant on the southern one-third of the Property (the ExxonMobil Parcel) until 1987. ADC continued to operate a terminal until 1990.

In 1985, the recorded on-Property structures on the ExxonMobil Parcel included two warehouse buildings, a pumphouse, and two diked fuel storage areas, each of which included two 25,000-gallon ASTs. Each pair of tanks was completely enclosed by a concrete dike ranging in height from approximately 4 to 12 feet. According to Rittenhouse-Zeman & Associates, Inc. (RZA) (RZA 1985), evidence of surface spillage on the ExxonMobil Parcel was apparent at several areas, including the unloading racks, pumphouse, and near the outdoor drum storage area. RZA (1985) reported that a number of unintentional releases of petroleum products had occurred in the past due to tank leakage, tank overfills, and surface spills associated with the four ASTs. In addition, fuel storage tanks were present prior to the RZA study in the northwest corner of the ExxonMobil Parcel. The structures on the ExxonMobil Parcel were demolished in approximately 1987.

By 1990, four large ASTs with capacities ranging from 5,037 to 9,345 barrels and five small ASTs with capacities ranging from 135 to 714 barrels, surrounded by a 13-foot-high concrete firewall, occupied the northern half of the ADC Parcel. An office building, a warehouse, a boiler room, an oil pump house, loading racks, and overhang canopies were located within the southern portion of the ADC Parcel. In addition, a 1,000-gallon AST, aboveground piping, and a concrete wall were located within the southern portion of the ADC Parcel. All structures on the ADC Parcel were demolished in 1998.

In 1999 the Property, to meet the requirements of the 1998 Agreed Order (DE-98TCP-N223), was asphalt-capped for intermittent use as a parking lot by neighboring businesses.

2.2.2 History of Surrounding Properties

Several other facilities located to the north and northeast of the Property historically operated as petroleum bulk facilities and included fuel pipelines, pumping facilities, storage facilities, railroad spurs, and railroad and maritime loading facilities. AGRA Earth and Environmental, Inc. (AGRA), identified various corporations that had operations that could have resulted in releases of contaminants in the vicinity of the Property. These corporations included BNSF Company, Chevron Corporation (Chevron), KC, Scott Paper Company (Scott), and Texaco Refining and Marketing, Inc. (Texaco).

Historical features and operations of properties that surround the Property to the north, south, east, and west are shown on Figures 3 through 14. A brief summary of operations and activities at the properties is presented below.

North, Northeast, and Northwest

In 1930, the area to the north and northeast of the Property (currently occupied by KC) was occupied by Associated Oil Company (predecessor to Texaco) and Standard, based on the 1930 Great Northern Railway real estate map and Sanborn maps. Two railroad spurs labeled "Associated Oil Co." and "General Petroleum Corp" are located to the east of the Property and extend north. Three small oil ASTs were located at that time at the eastern boundary of the Standard property adjacent to a railroad spur labeled "Standard Oil Co." (Figures 3 and 4).

In 1947, four small and two large ASTs were located on the Associated Oil Company property to the north of the ADC Parcel, and three small Standard Oil ASTs remained next to the railroad spur (Figures 5 and 6).

According to a 1955 aerial photograph (Figure 7), four small ASTs were installed half-way between the Associated Oil Company tank farm and the General Petroleum tank farm (Figure 8). Standard issued a quit claim for the Standard parcel to Scott Paper Company in 1958. In 1963, Standard Oil sold its remaining property to Scott.

According to a 1967 aerial photograph (Figure 9), the number of ASTs present on the Associated Oil property expanded from six to eight (as compared to the 1955 aerial photograph) with the addition of two large fuel oil ASTs. The four small fuel oil ASTs located just south of Associated Oil's fuel farm were also present on the 1967 aerial photograph. By that time, KC's T-shaped warehouse was built over three different former Standard ASTs (Figure 10).

The five ASTs located on the Associated Oil Company fuel farm were still visible in the 1976 aerial photograph (Figures 11 and 12). In addition, two large ASTs located northeast of Associated's fuel farm and north of the KC warehouse appear on the 1976 aerial photograph. The ownership of these two ASTs is not clear, however, according to the Polk City directories Scott Paper Co. was listed as occupying at the area to the north from 1958 to 1995. KC was listed as the owner of this property from 1995 until present.

Two of the Associated Oil Company ASTs remain visible in the 1993 aerial photograph (Figures 13 and 14). The two ASTs north of the KC warehouse are also visible in the 1993 photograph. In 1995, KC purchased the Scott property. A reconnaissance of the Property and vicinity conducted by AGRA in 1996 (AGRA, 1996a) indicated that one of the larger ASTs in the former Standard fuel farm was labeled as containing #3 Fuel Oil, and one of the smaller ASTs was labeled "caustic". The contents of the ASTs north of the KC warehouse are unknown (AGRA, 1996a).

South

In the late 1980s to early 1990s, Mr. Jack Johnston (part-owner of Johnston Petroleum) purchased the adjacent property south of the ExxonMobil Parcel from BNSF. The Johnston property has been used for parking vehicles, storing packaged goods and oils, and receiving containers (e.g. drums) to be shipped to a recycling facility. In 2001, the California Street Overcrossing ramp was constructed covering the Johnston Estate Parcel and the southeast corner of the ExxonMobil Parcel. The former Johnston property is depicted on Figure 14.

West

According to the 1930 Great Northern Railway real estate map, Sanborn maps and a lease document, ADC leased from Great Northern Railway the building located to the west of Federal Avenue and between 26th Street and California Street (Figures 3 to 10). The lease commenced in 1937 and extended till 1971. General Petroleum (predecessor of ExxonMobil) sub-leased the building from ADC between 1951 and 1971. General Petroleum and ADC stored oil and grease and trucks in the warehouse and oil in steel drums adjacent to the warehouse. A wash rack and

boiler room was located in the southern end of the building in 1957 (1957 Sanborn map). According to aerial photographs, the warehouse was removed sometime prior to 1976. In addition, a fuel pier that was adjacent to the warehouse and extended westward into Port Gardner Bay was leased by ADC and sub-leased to General Petroleum. In 1973 the western shoreline was infilled to its current configuration by the Port of Everett. The Port of Everett currently owns the properties to the west of the Property. The Port of Everett uses these properties as a storage yard.

East

According to the 1930 Great Northern Railway real estate map and Sanborn maps, the property to the east has belonged to Burlington Northern (later known as BNSF) since 1930.

Photographs and building plans showed a spur to the east of the Property that with a petroleum-loading rack used to pump oil into railroad tank cars. In a 1947 photograph, the area appears to be unpaved with low-lying vegetation. The area appears to be predominantly used as an open parking lot during 1955, 1967, 1985, 1993, and 2003 (photograph). According to the City of Everett Tax Assessor records, the property to the east belongs to BNSF and is used as an open parking lot for KC workers. The City of Everett right-of-way alley separates the Property from the BNSF parcel.

2.3 Site Regulatory History

Petroleum contamination has been found in soil and groundwater beneath the Property and beneath properties to the west (Port of Everett), north (Everett Avenue right-of-way and adjacent to the KC warehouse), and east (BNSF property and in the vicinity of the former loading racks).

In October 1995, free-phase petroleum liquid characterized as biodegraded heavy fuel oil fractions was observed to have seeped through the City of Everett's combined sewer overflow (CSO) line in Port Gardner Bay. The United States Coast Guard (USCG) performed multiple phases of petroleum hydrocarbon fingerprinting/typing analysis of the liquid-phase petroleum hydrocarbons (LPH) discharging into Port Gardner Bay from samples collected at the CSO and surrounding wells (Appendix B). Typing analysis of the LPH indicated that the petroleum hydrocarbons in Port Gardner Bay had characteristics similar to several petroleum products, including No. 2 fuel, heavy fuel oil (Bunker C), and weathered crude oil. The results of the fingerprinting indicated that there were likely multiple sources that contributed to the spill observed emerging from the CSO (*i.e.*, some samples from the Bay were similar to petroleum hydrocarbons from the Property but many were not). Fingerprinting of petroleum hydrocarbon from the Property in 1995 and 2006 identified a range of products including degraded diesel mixed with degraded gasoline and heating oil. Samples from the eastern part of the Property collected in 1995 had characteristics of heavy oil similar to Bunker C or crude oil.

There is no history of crude oil storage on the Property as the facility was used for finished product distribution.

In 1995, Mobil and ADC entered into an Agreed Order (Order) (DE-95TC-N402) with Ecology to take necessary steps to clean up, eliminate, and/or contain petroleum releases at and near the City of Everett CSO discharge line and/or diffuser into Port Gardner Bay. The 1995 Order also required pilot testing of petroleum recovery technologies; characterization of the nature of contamination in the vicinity of the CSO line; and repair of the CSO line. Interim remedial actions were undertaken and studies performed at the Site demonstrated that the pathway to the Bay had been removed. Approximately 23,000 gallons of petroleum were recovered within the vicinity of the CSO line by various interim remedial measures. In December 1996, Ecology issued notice of potential liability letters to Kimberly-Clark, Texaco, BNSF, Scott Paper, and Chevron which stated that there was credible evidence of releases of hazardous substances from the properties owned or operated by each of these companies.

In 1998, Mobil and ADC entered into a new Agreed Order (DE-98TCP-N223) with Ecology to complete a remedial investigation/FFS. Remedial action objectives (RAOs) were developed and approved by Ecology using existing analytical data, agreed-upon exposure pathway analyses, and a screening-level risk assessment. The cleanup approach selected to achieve RAOs included an LPH interceptor trench along the western and northern boundaries of the Property and a low-permeability cap over the Property. The interceptor trench and cap were installed in 1999.

Periodic groundwater monitoring began at the Site in the early 1990s. Regular quarterly groundwater monitoring and monthly LPH gauging and removal commenced in 2002, as a continued requirement under the 1998 Agreed order and in accordance with a monitoring program specified by Premier Environmental Services, LLC (Premier) (Premier 2002) and submitted to Ecology.

In 2007, the groundwater monitoring frequency for the Site was reduced from quarterly to semiannually. This change in monitoring frequency was verbally accepted by Ecology in February 2007 and followed up with a letter on May 8, 2007. The acceptance was again confirmed in a meeting with Ecology on August 8, 2007.

In 2009, a third Agreed Order between Ecology, ExxonMobil, and ADC was negotiated for the Site. The draft Agreed Order to be issued for public comment specifies that an FFS and Draft Cleanup Action Plan (CAP) be prepared to identify the nature and extent of site soil and groundwater contamination and a preferred final cleanup action to address contamination in soil and groundwater at the ExxonMobil/ADC Site in compliance with requirements under MTCA.

2.4 Environmental Setting

This section presents a summary of general environmental conditions at the Property and immediate vicinity. The Property is located in the southwest quarter of Section 19, Township 29 North, Range 5 East, Willamette Meridian. The nearest surface water is Port Gardner Bay of Possession Sound, located approximately 300 feet west of the Property.

2.4.1 Topography

The topography of the Property and immediate vicinity is relatively flat with an elevation of approximately 11 feet above mean sea level (MSL). The area slopes gently to the west toward Port Gardner Bay. Higher elevations, up to 150 feet above MSL, exist to the east of the Property. The surrounding area consists of roadways, industrial buildings surrounded by parking lots, and a storage area.

2.4.2 Geology and Hydrogeology

Soil boring, monitoring well, and test pit logs are compiled in Appendix C. The stratigraphy underlying the Site is displayed on geologic cross-sections A-A', B-B', and C-C', which are presented on Figures 16 through 18, respectively. The locations of the cross-sections are shown on Figure 15.

The area surrounding the Property is underlain by Vashon advance outwash deposits (Qva) and Transitional beds (Qtb). The outwash deposits are primarily granular, and the Transitional beds are composed of interbedded clayey, silty fine to medium sand. Based on subsurface investigations conducted at the Property and surrounding vicinity, the area is underlain by a heterogeneous mixture of fill materials consisting of very loose to medium dense brown, brownish gray, and gray silty sand and sand with areas of wood and brick debris extending to depths of approximately 5 to 10 feet below ground surface (bgs).

Previously, the materials encountered beneath the shallow fill were interpreted as additional fill materials extending to approximate depths of 20 to 27 feet bgs. The deeper materials were reported to be consistent in color (gray) and were characterized as silty sand and silt and dark-brown to black peat mixed with wood debris. However, based on review of previous investigations conducted during preparation of this FFS WP, the grey silty sand/silt unit with peat mixed with wood debris can be interpreted as native marsh deposits. Materials that occur beneath the Property at depths greater than 20 to 27 feet bgs consist of dense, moist, brown, medium sand with various amounts of silt and discontinuous stiff, brown, organic-rich, clayey silt with some fine sand. The deeper materials were interpreted to be Quaternary-aged transitional beds, deposited between Fraser and pre-Fraser glaciations.

Due to the proximity of the Site to Port Gardner Bay, shallow unconfined groundwater occurs at the Site and surroundings at depths of 1 to 5 feet bgs. Previous groundwater elevation data indicate fluctuations between high and low seasonal water tables of up to 3 feet. Based on the historical groundwater elevation data, groundwater beneath the Property flows generally to the west and to the northwest (Figure 19).

2.4.3 Surface Water Hydrology

Surface water at the Property flows to the west and northwest, following the surface slope, toward seven catch basins on the Property. The catch basins are located in two linear groups, which are oriented north-south (Figure 2). Catch basins CB05, CB03, CB04, and CB06 (listed south to north) are approximately 70 feet east of the western boundary of the Property. Catch basins CB07, CB01, and CB02 (listed south to north) are approximately 15 feet east of the

western boundary of the Property. The area is served by a combined (storm and sanitary) sewer. Sewage is pumped to and treated at the City of Everett sewage treatment plant. The storm sewer system at the Property is shown on Figure 2.

2.4.4 Meteorology

Everett has a moderate climate usually classified as Marine west coast, typified by wet, cool winters and relative dry, warm summers. Temperature extremes are moderated by the proximity to the adjacent Puget Sound and the greater Pacific Ocean. The region lies in a partial rain shadow, partially protected from Pacific storms by the Olympic Mountains, and from Arctic air by the Cascade Range.

The Western Regional Climate Center (WRCC) provides a summary of Climatological statistics for Everett Junior College (located approximately 2 miles from the Property) (WRCC 2009). The average annual temperature measured at Everett Junior College is 50.6 degrees Fahrenheit (°F). Average monthly temperature varies from about 39°F in January to about 63°F in July and August. Winters are cool and wet with average lows around 35°F on winter nights. Colder weather can occur, but seldom lasts more than a few days. Summers are dry and warm, with average daytime highs around 73°F. Hotter weather usually occurs only during a few summer days. The hottest official recorded temperature was 98°F on June 6, 1955; the coldest recorded temperature was 0°F on November 11, 1993 (WRCC 2009).

Total annual precipitation is about 35.5 inches, with about two-thirds of the rainfall occurring during the wet season from October through March. Monthly average rainfall varies from a maximum of 5.02 inches in December to 1.03 inch in July. Most of the precipitation falls as drizzle or light rain, with only occasional downpours (WRCC 2009). The 10-year and 100-year recurrence interval, 24-hour precipitation events are approximately 2.25 inches and 3.25 inches, respectively (Miller et al. 1973).

2.4.5 Ecological Setting

The Property is located near the marine shoreline in the Snohomish River basin (Water Resource Inventory Area 7), in an area zoned for heavy industrial development. The Everett Naval Station is located to the north and northeast of the Site. No wetlands, streams, shorelines, floodplains, or functional wildlife habitat occur on the Property. Nearby environmentally sensitive areas include Port Gardner and the Snohomish River.

Port Gardner is located 300 feet west of the Property and contains the nearest wildlife area. The portion of Port Gardner shoreline located near the ExxonMobil/ADC Site is classified as Dungeness crab (*Cancer magister*) habitat, according to the City of Everett Fish and Wildlife Habitat Conservation Areas Critical Areas Map (City of Everett, 2006).

Species listed under the Endangered Species Act (ESA) and Washington State Priority Species may be present in Port Gardner. ESA-listed species present in Port Gardner may include Chinook salmon (*Oncorhynchus tshawytscha*), bull trout (*Salvelinus confluentus*), coho salmon (*O. kisutch*), and steelhead (*O. mykiss*). Adult salmonid use of the area is limited to migration

and possibly physiological transition. Juvenile use of the area is similar, but may also include feeding/rearing and refuge from predation (City of Everett 2002).

Common invertebrates present in Port Gardner include snails (*Littorina spp.*), mussels (*Mytilus cf. edulis*), clams (*Macoma balthica*, *Macoma spp.*, *Cryptomya spp.*), cockles (*Clinocardium sp.*), jingle shells (*Pododesmus macroschisma*), polychaetes (*Nereis spp.*, *Notomastus spp.*, *Nephtys spp.*, *Glycera spp.*), barnacles (*Balanus glandula*), shore crabs (*Hemigrapsus spp.*), isopods (*Gnorimosphaeroma oregonesis*), ghost shrimp (*Callinassa sp.*), blue mud shrimp (*Upogebia pugettensis*), Dungeness crab (*Cancer magister*), red crab (*C. productus*), and anemones (*Mertridium senile*) (City of Everett 2002).

Water quality in Port Gardner meets Washington State requirements for all parameters and is not listed on the Ecology's 303d list.

The Snohomish River is situated east and north of the ExxonMobil/ADC Property, approximately 1.5 miles away at the closest point. The River is separated from the Property by areas of industrial and other development, including the City of Everett's Central Business District, residential and commercial development, and areas of industrial and maritime services along the Snohomish River shoreline.

As mentioned previously, no wetlands, streams, shorelines, floodplains, or functional wildlife habitat occur on the Property or within the immediate vicinity (NWI 2009; City of Everett 2006, 2009). Vegetation in the vicinity of the Property is sparse and generally limited to maintained landscaping, including ornamental shrubs and trees. The nearest stream habitat is Pigeon Creek #1 and its associated wetlands, located approximately 1 mile southwest of the Property.

2.4.6 Tidal Influence

Tidal studies were conducted at the Property by RZA AGRA in 1991 and AMEC in 2008. As reported by Exponent (1998a), AGRA monitored water levels in selected monitoring wells for a 48-hour period to measure the recovery after the 24-hour aquifer test and to assess potential tidal influences in shallow groundwater. During the 48-hour period, no clear evidence of tidal fluctuations was noted. Based on the results of the recovery monitoring, the observed hydraulic gradient at the Property, and the distance from Port Gardner Bay, it was concluded that tidal influences on shallow groundwater at the Property would be expected to be negligible (Exponent, 1998a).

No determinations were made based on AMEC's (2008b) tidal study results, and further tidal influence studies will be conducted (see Section 8.1.4).

2.4.7 Historic and Cultural Resources

Records were researched at the DAHP in Olympia and at the Everett Public Library's Northwest History Room. No information regarding historic and cultural resources was found for the Property. Additionally, there are no previously recorded archaeological sites and/or historic buildings located on the Property. Although no specific Traditional Cultural Properties have been identified within the project area, the Everett waterfront in general has a long history of tribal

use. A brief summary of tribal use associated with the Everett waterfront along with tribal engagement activities that have taken place for the project was provided by Ecology and is set forth below.

Ecology is working with landowners/stakeholders including local Indian tribes to cleanup contaminated sites and sediments in the vicinity of Port Gardner Bay area and the Snohomish River Estuary. Port Gardner Bay is identified as a high-priority, "early-action" cleanup area under the Puget Sound Initiative (PSI). The ExxonMobil/ADC Site has been identified as a cleanup site under the PSI. Local tribes that have been actively engaged by Ecology under the PSI at Port Gardner include the Tulalip, Suquamish, Swinomish, and Lummi. Ecology has worked with a tribal liaison to assist in developing contacts and early engagement with cultural and natural resource sections within each of the aforementioned tribes. Engagement with the tribes has consisted of meetings to discuss PSI cleanup sites and cultural resources, providing the tribes with draft work products for early input, and providing them with a monthly update containing the current status of each PSI site, near term work products for tribal review, project schedules, and a summary of tribal engagement for the Port Gardner Puget Sound Initiative Sites.

Based on Ecology's discussion with the tribes and information provided in a 1973 *Historical Survey of Everett* (Dilgard and Riddle, 1973), people have inhabited the Port Gardner Bay area for thousands of years. For centuries, the northwest point of the peninsula (i.e., Preston Point) was the site of Hebolb, the principal village of the Snohomish tribe. Its location near the mouth off the Snohomish River and next to Port Gardner Bay provided both abundant food and transportation. Native tribes used the Everett shoreline in part for subsistence activities such as shellfish collection, hunting, plant gathering, and fishing. According to local tribes, native long houses were located up and down the Everett waterfront. Local tribes have communicated to Ecology that the Everett waterfront is a culturally sensitive area. With that in mind, the SAP outlines procedures to be used in the event cultural resources are encountered during site activities.

Historic maps and aerial photographs of the project area were also consulted. Sanborn Fire Insurance Maps from the early part of the 20th century depict an emerging industrial area with a few wooden and temporary dwellings lining the historic shoreline of Port Gardner Bay. No information was found to suggest the Property was used as a formal dump/sanitary landfill that was accepting municipal refuse or trash from a wider geography.

3.0 PREVIOUS SITE INVESTIGATIONS AND INTERIM REMEDIAL ACTIONS

This section summarizes previous investigations and interim remedial activities undertaken at the Property and vicinity since 1985. From 1985 to 2009, extensive and focused investigations were undertaken by various consultants at the Property and off the Property. These investigations included drilling soil borings, installation of monitoring wells, test pit excavations, and collection and analytical testing of soil and groundwater samples. In addition, several interim remedial activities, including installation of LPH recovery trenches, manual LPH recovery, and capping the Property, have been conducted at the Property since 1988. Table 1 provides a chronology of previous investigations and interim remedial activities conducted at the Property and vicinity. Figure 15 shows the locations of historical explorations conducted on- and off-Property. Analytical data from previous investigations have been compiled by Ecology into a project database.

3.1 Previous Environmental Investigations Conducted at the Site for Soil and Groundwater

A chronology of subsurface investigation activities conducted at the Property and surrounding area is presented below and in Table 1. Soil boring, test pit, and monitoring well logs are provided in Appendix C. A summary of current environmental conditions for soil and groundwater is presented in Sections 6.1 and 6.2, respectively.

In May 1985, RZA advanced five soil borings, B-1 through B-5, at the ExxonMobil Parcel. The borings were advanced using a hollow-stem auger (HSA) drill rig to depths ranging from 8.4 to 19 feet bgs. The borings were completed as 2-inch-diameter monitoring wells. No soil or groundwater samples were collected during this investigation. The monitoring wells B-1 through B-5 were named MW-1 through MW-5 in several later reports. RZA reported that petroleum odor was noticed in most of the borings, and evidence of contamination was also apparent below the water table. Specifically, petroleum odor or sheen on groundwater was observed in monitoring wells B-1, B-2, B-4, and B-5 (RZA, 1985).

In March 1988, RZA advanced 13 borings throughout the ExxonMobil Parcel to a depth of 11.5 feet bgs. The borings were completed as monitoring wells MW-6 through MW-18. RZA collected soil samples from the borings and groundwater samples from the monitoring wells. After monitoring well installation, 1.29 feet of LPH was measured in MW-14.

In January 1990, Environmental Science and Engineering, Inc. (ESE) advanced 19 hand-auger borings, AD-01 through AD-19, throughout the ADC Parcel to depths ranging from 1 to 4.5 feet bgs and collected soil samples from the borings.

In February 1990, ESE advanced seven HSA borings, W-1 through W-7, on and surrounding the ADC Parcel. Soil borings W-1 through W-6 were each advanced to a depth of 23 feet bgs and completed as 2-inch-diameter monitoring wells. Soil boring W-7 was advanced to the depth of 16 feet bgs and backfilled with bentonite upon completion. In June 1990, ESE advanced 10 hand-auger borings, including W-8 through W-17, to depths ranging from 6 to 10 feet. AMEC

was unable to identify soil analytical data for W-8 through W-17. However, gauging data indicate that free product was observed in 10 of the 17 monitoring wells located at and around the ADC Parcel. ESE suggested that a possible source for some LPH could be a railroad loading rack formerly located east of the ADC Parcel.

In October 1990, RZA collected grid soil samples B-1 through B-25 from the ExxonMobil Parcel using a hand auger. Soil samples were collected from depths ranging from 0.5 to 3 feet bgs. Two samples were studied for the purpose of conducting a slurry bio-feasibility study. Rapid biodegradation of total petroleum hydrocarbons (TPH) in the gasoline range (TPH-G) was observed. Biodegradation of TPH (undifferentiated) was not achieved.

Sometime prior to November 1990, monitoring wells B-3 (MW-3), B-4 (MW-4), and MW-7 were destroyed. AMEC was unable to locate records regarding well decommissioning.

In March 1991, RZA advanced six percussion soil borings to depths ranging from 5 to 5.5 feet bgs and installed 2-inch-diameter shallow monitoring wells MW-19 through MW-24. Wells MW-19, MW-20, and MW-21 were installed to the west of the ExxonMobil Parcel, and wells MW-22, MW-23, and MW-24 were installed at the possible source of free product at the railroad loading rack, to the east of the ADC Parcel. In June 1991, RZA installed two shallow 2-inch-diameter monitoring wells MW-25 and MW-26 on the west side of Federal Avenue. Because monitoring wells MW-25 and MW-26 were found to be either inaccessible or dry and no groundwater samples were collected, the wells were renamed as soil borings B-25 and B-26. On June 20, 1991, RZA installed four 4-inch-diameter monitoring wells MW-27, MW-28, MW-29, and MW-30, each to a depth of 13.5 feet bgs. These monitoring wells were installed to the east of the ADC Parcel. In addition, in June 1991, RZA advanced soil boring B-21-91 to a depth of 29 feet bgs along the eastern boundary of the ADC Parcel. This boring was backfilled with bentonite.

In November 1991, RZA AGRA installed an 8-inch-diameter recovery well, RW-2, and advanced soil boring B-1A to a depth of 31 feet bgs and soil borings B-8A and B-15A to depths of 29 feet bgs. Soil borings B-1A, B-8A, and B-15A were advanced in the vicinity of the existing monitoring wells B-1, MW-8, and MW-15. No soil analytical data for this drilling event were found.

In December 1993, RZA AGRA advanced seven off-Property borings MW-31 through MW-37 and completed six of the borings as 2-inch-diameter monitoring wells screened from 5 to 15 feet bgs. Soil boring MW-33 was advanced to 29 feet bgs and then backfilled up to 15 feet bgs. Soil boring B-34 was drilled and sampled but no well was installed at that location. Monitoring wells MW-31, MW-32, and MW-33 were installed to the west of the ExxonMobil Parcel, across Federal Avenue. A groundwater monitoring event followed monitoring well installation activities. Well B-1, MW-27, and MW-29 contained LPH and were not sampled. In addition, a ground-penetrating radar (GPR) survey was conducted to assess whether underground product lines had been removed. The GPR survey did not identify any linear subsurface features.

In December 1993, RZA AGRA excavated five test pits (TP-1 through TP-5) to depths ranging from 3 to 3.5 feet bgs. The test pits were associated with installation of a recovery trench along the western border of the ExxonMobil Parcel. Monitoring well MW-21 was decommissioned

during the recovery trench installation activities. However, the project database contains analytical results from 2002 for samples identified as originating from MW-21. These database entries may have been incorrectly identified.

In July 1995, RZA AGRA gauged monitoring wells located on the ADC Parcel. Wells W-9, W-12, and W-13 contained LPH.

RZA AGRA conducted a groundwater monitoring event in December 1995. Recovery well RW-2 and monitoring wells B-2, MW-8, MW-9, MW-18, MW-15 through MW-18, MW-27, and MW-28 were gauged. Wells RW-2, MW-9, MW-18, and MW-28 contained LPH and were not sampled.

In March 1996, AGRA advanced 13 push-probe soil borings, GP-1 through GP-13, to depths ranging from 9.5 to 12 feet bgs. These explorations were located generally to the north of the ADC Parcel and were associated with the CSO line repair (see Table 1). Soil samples were collected from the borings. No groundwater samples were collected from temporary screens installed in borings. Soil samples indicated that soil surrounding the damaged portion of the CSO line was impacted with petroleum hydrocarbons. LPH was also observed to accumulate in the temporary wells.

In May 1996, AGRA advanced 14 bobcat borings, BB-1 through BB-14, to depths ranging from 3 to 4 feet bgs at the ADC Parcel and collected soil samples. In addition, seven test pits (TP-1-96 through TP-7-96) were excavated throughout the ADC/Miller Parcel to depths ranging from 1.5 to 6 feet.

On June 5, 1996, AGRA advanced borings VRW-1 and MW-38 to depths of 15 feet bgs and 12.5 feet bgs, respectively, on the northeast corner of the Property. The borings were completed as 4-inch-diameter recovery well VRW-1 and 2-inch-diameter monitoring well MW-38. AGRA gauged wells in August 1996. LPH was found in B-1, VRW-1, MW-27, MW-29, MW-30, MW-38, W-1, W-9, and W-15.

Between November 1997 and January 1998, on behalf of Chevron, Texaco, KC, and BNSF, Pacific Environmental Group, Inc. (PEG), conducted an environmental investigation in the vicinity of several former petroleum bulk plants adjacent to the north and northwest of the Property. PEG advanced 15 soil borings using a hand-auger (Probe-1) and direct-push technology (Probe-2 through Probe-15) to depths ranging from 4 to 13 feet bgs. Borings Probe-7 to Probe-12 were advanced in the vicinity of the CSO line. PEG also advanced two soil borings inside the KC warehouse to depths of 16.5 feet bgs using a HSA drill rig and completed the borings as 2-inch-diameter monitoring wells, KC-1 and KC-2. Monitoring wells KC-1 and KC-2 were screened from 2 to 10 feet bgs and from 1.5 to 11.5 bgs, respectively. PEG submitted three soil samples to the analytical laboratory collected from borings Probe-7, Probe-11, and KC-1 at depths ranging from 3 to 8.5 feet bgs. Groundwater samples were collected from temporary screens installed in each probe (with the exception of Probe-1) and from the two monitoring wells KC-1 and KC-2. During drilling, PEG did not identify LPH in soil borings or monitoring wells. Detected concentrations of TPH-G, TPH in the diesel (TPH-D) and oil (TPH-O) ranges, and toluene in soil samples did not exceed MTCA Method A cleanup levels. Concentrations of TPH-D and TPH-O were detected above MTCA Method A cleanup levels in

groundwater samples collected from Probe-7 and Probe-11 (nearest to CSO line). Concentrations of TPH-O were also detected above MTCA Method A cleanup levels in groundwater samples collected from Probes 13 and -14. Concentrations of TPH-G, benzene, toluene, ethylbenzene, and xylenes (BTEX) were either below the laboratory detection limits or below the MTCA Method A cleanup levels in all groundwater samples. No soil samples were collected in the vicinity of the four ASTs formerly located at the Associated Oil Company property, which was located approximately 400 feet north of the ADC Parcel. One groundwater sample that was collected in the vicinity of the former Associated Fuel Tank Farm (Probe 4) had concentrations of TPH-D, TPH-G, and BTEX below the MTCA Method A cleanup levels. The PEG report (PEG, 1998) is included in Appendix D.

Between November and December 1998, the following groundwater monitoring wells were abandoned: MW-6, MW-8, MW-9, MW-12, MW-13, MW-15, MW-16, MW-17, MW-38, WP-1, B-1, B-2, W-4, W-8, W-11, W-12, W-14, AD-11, AD-12, AD-13, AD-15, AD-19, W-10, W-15, and MW-40. The well abandonment activities were associated with an interim remedial action conducted at the Property in January 1999, which included construction of an interceptor trench along the western and northern boundaries of the Property and a low-permeability cap over the entire Property (Table 1). In addition, nine 4-inch-diameter LPH recovery wells (LPH-1 through LPH-9) were installed in the interceptor trench in January 1999. A storm collection system that connects to the City of Everett sewer system was installed at the Property as part of the cap.

Three monitoring wells (W-10R, W-15R, and MW-40R) were installed on October 1, 1999, to replace abandoned wells W-10, W-15, and MW-40. The monitoring wells were screened from 4 to 14 feet bgs.

In December 1999, Dames and Moore performed geotechnical investigations associated with the California Street Overcrossing (CSTO) Project located at the intersection of California Street and Federal Avenue. Soil samples were collected for petroleum hydrocarbon analyses from borings DM-6, DM-7, and DM-8 located south and southeast of the Property. In September 2000, URS performed a Phase II investigation for the CSTO Project. Push-probe borings UG-1 to UG-12 (originally labeled GP-1 through GP-12) were advanced to the east and south of the Property to collect soil samples. Groundwater samples were collected from temporary screens installed in UG-2 and UG-8 (URS, 2000a).

Petroleum-affected soils along the overcrossing alignment extended from the west side of California Street to the middle of the KC parking lot. The contamination was found to be present generally from 4 to 5 feet bgs. The petroleum-affected soils extended over an area of approximately 25,600 square feet and on average were approximately 8 feet thick. Thus, approximately 7,600 cubic yards of petroleum-contaminated soil (PCS) was calculated to be present along the overcrossing alignment (URS, 2000a).

In July 2001, URS conducted a Phase II investigation on the Johnston Petroleum property adjacent to the south boundary of the ExxonMobil Parcel. URS advanced seven push-probe borings (JP-1 through JP-7) at the Johnston Petroleum parcel and collected soil samples. In addition, groundwater samples were collected from temporary screens installed in JP-1, JP-4, and JP-7. No TPH fractions or BTEX were detected above MTCA Method A cleanup levels in

the soil samples. The grab groundwater sample collected from JP-1 contained TPH-D and TPH-O above MTCA Method A cleanup levels. No TPH-G or BTEX was detected in groundwater samples collected within the Johnston Petroleum parcel (URS, 2001).

In February 2002, Environmental Resolutions, Inc. (ERI) abandoned monitoring wells MW-22, MW-23, MW-24, MW-35, and MW-37 and piezometer DM-6 due to the proximity of the CSTO construction project. Abandoned monitoring wells MW-22 through MW-24 were reported to be 5 feet deep, monitoring wells MW-35 and MW-37 were 15 feet deep, and piezometer DM-6 was 53 feet deep. ERI re-installed monitoring well W-2. Reportedly, well W-2 was screened from 3 to 23 feet bgs. No soil samples were collected during well installation activities. In addition, in July 2002 ERI abandoned shallow monitoring wells MW-20, MW-21, and an unidentified well located south of MW-21. The reported abandonment of MW-21 in 2002 contradicts the reported decommissioning of MW-21 due to installation of the recovery trench to the west of the Property in December 1995.

Since 2002, monthly water level gauging of monitoring wells at the Site; manual LPH removal from monitoring wells where more than 0.02-foot of LPH was detected; oleophilic sock installation and replacement in wells with LPH accumulations; and quarterly groundwater monitoring have been conducted at the Site by Kleinfelder, ERI, and most recently AMEC. The ongoing groundwater monitoring activities are being conducted pursuant to the groundwater monitoring program included in the 1998 Agreed Order (DE98TCP-N-223). The ongoing groundwater monitoring program is described in detail in Section 4.0.

In February 2007, AMEC contracted Bravo Environmental of Kenmore, Washington, to conduct a video survey of the storm drain system that connects to the City of Everett sewer system installed at the Property by Kleinfelder, Inc. (Kleinfelder), in 1999 as part of interim remedial measure (Section 3.2.6). The purpose of the video survey was to verify that groundwater from the Property is not infiltrating into the stormwater system through possible cracks and fissures in the piping and seven catch basins. No significant cracks or fissures within the storm water system were observed during the 2007 video survey.

In 2007, the frequency of groundwater monitoring was reduced to semiannual. In 2008, AMEC installed two additional off-Property wells (MW-A1 and MW-A2) along the west side of Federal Avenue (AMEC, 2008a) and performed a tidal study (AMEC, 2008b). On June 3, 2008, recovery wells LPH-1 through LPH-9 and monitoring wells W-1, W-2, W-3, W-6, W-10R, MW-10, MW-11, W-15R, W-17, RW-2, MW-19, MW-27, MW-28, MW-29, MW-30, MW-40R, and MW-A1 and MW-A2 were surveyed by a professional surveyor.

An investigation along a proposed City of Everett utility alignment adjacent to the perimeter of the Property was undertaken in February 2010. A copy of the SAP Addendum that addresses the activities associated with the investigation is provided in Appendix E.

3.2 Interim Remedial Actions

Interim remedial actions and testing at the Property have included groundwater extraction and treatment, recovery trench installation, soil vapor extraction (SVE), excavation, manual LPH

recovery, LPH vacuum recovery, excavation dewatering, interceptor trench installation along the western and northern Property boundaries, and installation of a low-permeability cap over the entire Property. This section provides a brief description of each of the interim remedial actions.

3.2.1 Infiltration Gallery in Vicinity of MW-14

LPH at a depth of 1.29 feet was observed in monitoring well MW-14 in April 1988. At that time, RZA evaluated the feasibility of extracting LPH beneath the ExxonMobil Parcel by installing a recovery trench, vapor extraction system, and groundwater treatment system consisting of an oil/water separator coupled with an air stripper. In May 1988, an infiltration gallery was installed in the vicinity of MW-14. The infiltration gallery was "T"-shaped and approximately 45 feet long. Construction activities consisted of trench excavation and installation of two modified 55-gallon drums as sumps. The trench was subsequently filled with 1.5-inch-diameter washed gravel with 8 to 12 inches of surrounding ground surface (removed in 1999). On May 12, 1988, a vacuum truck pumped subsurface fluids from the sumps; 1,400 gallons of liquid was removed from the sumps, approximately 50 gallons of which was LPH. As a result of this interim remedial action, the LPH thickness in MW-14 decreased to 0.40 feet in August 1988.

3.2.2 Groundwater Extraction and Treatment

In March 1989, an automated groundwater extraction and treatment system was installed by RZA in the location of the May 1988 infiltration gallery. The system consisted of a fluid extraction sump situated in RW-1 (formerly MW-14), an oil-water separator, an air stripper, and a re-infiltration gallery. The re-infiltration gallery, which was approximately 100 feet long, was constructed parallel to the north side of the ExxonMobil Parcel. It consisted of a perforated, 4-inch-diameter polyvinyl chloride (PVC) pipe surrounded by pea gravel within the excavated trench. The groundwater extraction and treatment system operated at a pumping rate of approximately 2 to 3 gallons per minute (gpm). However, no measurable quantities of LPH were removed, and no LPH was observed in recovery well RW-1. In August 1989, 0.68 and 0.73 feet of LPH was measured in MW-8 and MW-18, respectively. Approximately 7 gallons of free product and oily water were hand bailed from both wells and disposed of in the oil-water separator of the groundwater treatment system at the Property. The groundwater extraction and treatment system was shut down in March 1990 because of flooding of the re-infiltration gallery and has not been restarted.

3.2.3 Recovery Trench In the Vicinity of Side Sewer

In December 1993, an LPH recovery trench was installed on the southwest corner of the ExxonMobil Parcel. The trench was installed in a north-south orientation, to a depth of approximately 4 feet bgs. Two recovery wells that consisted of 8-inch-diameter, schedule 40 PVC screens were placed to a depth of approximately 7 feet in the trench. The trench was backfilled with 7/8-inch-diameter round rock to a depth of approximately 3 feet. The rock was overlain by a filter fabric and covered with compacted pit run, followed by placement of approximately 6 inches of crushed rock over the pit run to bring the excavation to grade. Concrete vaults were then placed over the recovery wells. Underground PVC piping was extended from the vaults to the remediation equipment compound located on the ExxonMobil

Parcel for future access to LPH recovery equipment. Soil excavated during construction was stockpiled on the Property, covered with visqueen, and later disposed of at an external facility.

No LPH accumulated in the recovery trench, and no LPH was recovered from the trench. The trench was re-examined in August 1996; no LPH accumulation was evident.

3.2.4 Combined Sewer Overflow Line Repair

In October 1995, discharge of petroleum product into Everett Harbor from a CSO line prompted an investigation by the U.S. Coast Guard (USCG) Puget Sound Marine Safety Office and the City of Everett to assess the source of the hydrocarbons. The outfall is located on the west side of the 2700 block of Federal Avenue, approximately 175 yards northwest of the ADC Parcel. Camera surveys of the sewer lines that flow to the outfall revealed LPH seepage in the section of the CSO line that runs approximately 40 feet north of the northern boundary of the ADC Parcel. The section of pipe in which the infiltration was observed during the camera survey was discovered to be made of clay tiles that had settled and cracked. On April 16, 1996, a meeting was held at the City of Everett to discuss options for repairing the broken section of the CSO line. The repair option selected at the meeting consisted of replacement of the settled portion of the line and slip lining of the remaining portion of the line.

In June 1996, AGRA began repair activities on the CSO line. The settled portion of the pipe, approximately 25 feet long, was excavated and replaced. Another section of pipe, which was approximately 20 feet long and made of metal, was found to be corroded and out of round. This section of pipe was also excavated and replaced. The excavation to repair the CSO line in this area was approximately 125 feet long. The remaining portions of the CSO line were slip-lined to eliminate the potential for leakage of LPH through the joints of the intact sections of the existing pipe. During the excavation activities, LPH was observed entering the excavation from the wood waste layer where this layer intercepted both the north and south sidewalls. Three 36-inch-diameter, 22-foot-deep dewatering wells (DW-1 through DW-3) were installed prior to excavation of the CSO line. Dewatering was performed throughout the excavation to allow for repair of the CSO line. Throughout construction, pumps operated alternately, both within the CSO line excavation and within the three dewatering wells. The recovered liquid was transferred to an 18,000-gallon baffled tank, then to two 21,000-gallon settling tanks, and finally to an 18,000-gallon baffled tank. Reportedly 1,450,800 gallons of groundwater and 23,050 gallons of LPH were removed during CSO line excavation dewatering activities. During repair of the CSO line, daily LPH recovery volumes varied from 0 gallons to 7,550 gallons. Approximately 80 percent of the total LPH recovered was removed in the first 6 days of CSO line excavation dewatering.

Oleophilic sorbent booms were installed to absorb and contain LPH discharging into Port Gardner Bay. During CSO excavation and repair activities, sorbent pads, oil sweeps, and/or soil snares, sorbent booms, and a mechanical skimmer were used to contain and recover the floating petroleum to the extent practicable.

3.2.5 LPH Vacuum Recovery Pilot Test

In May and June 1996, AGRA conducted an LPH recovery pilot test at the Property. The recovery system consisted of SVE and groundwater/LPH pumping systems installed on the newly installed 4-inch vacuum recovery well (VRW-1) located in the northeast corner of the ADC Parcel. The SVE system discharged directly to the atmosphere, while the groundwater/LPH pumping system transferred the extracted liquid to a 500-gallon LPH settling tank, then to a 6,900-gallon groundwater storage tank. The test was performed for 14 days. During that time, approximately 125 gallons of LPH and 28,228 gallons of groundwater were removed from VRW-1. AGRA concluded that overall efficiency of LPH recovery during the test was 0.43 percent. Daily LPH removal rates could not be measured during the test because of emulsification of LPH with groundwater. LPH thickness in VRW-1 decreased from 9.41 feet to no measurable thickness in 14 days. LPH in MW-38 (observation well) decreased slightly, however, LPH thickness and water levels varied significantly throughout the 14 days of testing. AGRA concluded that the variability of groundwater levels in MW-38 may indicate that this area of the Property is tidally influenced. The thickness of LPH was measured in VRW-1 and MW-38 a month after the recovery pilot testing. Wells VRW-1 and MW-38 contained 1.35 and 0.29 feet of LPH, respectively.

In addition, LPH was removed with a vacuum truck from a test pit (TP-6-96) in May 1996. LPH did not recharge into test pit TP-6-96 during a 2-week period, and no additional LPH was removed. Ecology has since agreed that active removal of LPH is not a viable technology.

3.2.6 Water Management and Treatment System and Asphalt Cap Construction

In February 1997, PTI prepared a memorandum summarizing environmental investigations, LPH recovery activities, and geology of the Site and vicinity (PTI, 1997a). The memorandum stated that long-term, passive (LPH only) recovery was effective in removing LPH. The memorandum also stated that active LPH and groundwater recovery that had been performed up to that time had been effective for short durations, but recovery structures did not continue to recover LPH for extended periods of time when active recovery was employed.

In July 1998, on behalf of Mobil Oil Corporation, ADC, and Mr. A. P. Miller, Exponent prepared a Remedial Investigation and Focused Feasibility Study for the Property (Exponent 1998a). In this study, Exponent summarized the history of the Property and evaluated feasible remedial options for the Site. To achieve the remedial objective, Exponent recommended the installation of LPH recovery trenches and a low-permeability cap over the Property.

In November 1998, Kleinfelder completed an initial survey evaluation of the Property. Kleinfelder also performed an asbestos survey prior to demolition of structures on the Property. Asbestos was found to be present in buildings on the Property, and asbestos abatement was conducted by Performance Abatement Services between November 12 and 17, 1998. Demolition activities at the Property were completed in January 1999. Structures that were demolished on the ADC Parcel included four buildings (an office building, oil pump house building, a warehouse, and boiler room), aboveground piping, loading racks, the firewall (including 40 feet of foundation of the wall in the northeast corner of the Property), and the AST pad. In addition, a trench that was

installed in 1988 in the vicinity of MW-14/RW-1 was demolished. Two modified 55-gallon drums that had been used as sumps were filled with concrete.

Kleinfelder conducted interim remedial actions at the Property from the end of 1998 throughout 1999. These actions consisted of monitoring well abandonment, clearing and grubbing of the ExxonMobil Parcel, demolition of structures on the ADC Parcel, demolition of the firewall on the ADC Parcel, construction of an interceptor trench, abandonment of underground utilities, installation of a downgradient liner and LPH collection piping, installation of a low-permeability cap, and installation of a storm drain system. Demolition activities at the Property were completed in January 1999.

Approximately 162 tons of contaminated shallow soil and vegetation were removed from within the ADC firewall area that was situated on the northern portion of the ADC Parcel surrounding the former ASTs. The soil was disposed of at TPS Technologies in Lakewood, Washington. Approximately 3.5 tons of Class 3 PCS was taken to CRS Associated located in Everett, Washington. Marine Services, Inc., removed 110 gallons of purge water for recycling at an external facility.

Between December 1998 and September 1999, the water management and treatment system constructed at the Property in 1998 treated approximately 2.5 million gallons of water from the Property. The water was treated using an oil-water separator, a settling tank, and a carbon polishing unit. The water then discharged via the storm sewer system to the Everett Water Pollution Control Facility, in accordance with project-specific City of Everett Industrial Waste Discharge Permit No. 154. Approximately 19,900 gallons of oily water and 450 gallons of sludge were collected at the Property between December 1998 and September 1999. Sources of oily water included recovered product from underground pipes prior to removal; water from tank washing prior to removal; water skimmed from excavated areas during interceptor trench construction; and water skimmed from the water treatment system product overflow and flow equalization tanks.

From August to September 1999, cap construction activities were performed and included complete grading of the Property, installation of two layers of geotextile fabric along the entire trench, installation of asphalt-treated base material and paving fabric, and installation of the asphalt cap.

In January 1999, an interceptor trench was constructed along the western and northern Property boundaries. The trench utilized the existing concrete footing structure that is 7 feet deep with an impermeable liner placed over the downgradient side of the trench contiguous with the footing. The trench was backfilled with uniform washed gravel and was constructed to the current grade. Lateral piping and vaults were installed during construction of the Property cover in September 1999. Nine 4-inch-diameter LPH recovery wells (LPH-1 through LPH-9) were installed in the trench.

3.2.7 LPH Bailing and Groundwater Monitoring

Manual bailing of LPH from wells that contain a measurable amount of LPH has been performed on a daily, weekly, and later on a monthly basis since December 1991. LPH recovery activities currently conducted at the Property are based on the groundwater monitoring program included in Ecology's 1998 Agreed Order (DE98TCP-N-223).

The current monthly LPH monitoring consists of water level gauging of nine recovery wells (LPH-1 through LPH-9) and 16 monitoring wells (W-1, W-2, W-3, W-6, MW-10, W-10R, MW-11, W-15R, W-17, MW-18, MW-19, MW-27, MW-28, MW-29, MW-30, MW-40R), LPH removal from select monitoring wells, and replacement of oleophilic socks in wells with measurable accumulations of LPH. More details on the ongoing LPH recovery program are provided in Section 4.0.

3.2.8 Puget Sound Outfall 5 Overflow Structure Project

In July 2008, on behalf of the City of Everett Utilities Department, Floyd | Snider collected soil and water samples from an excavation at the CSO Puget Sound Outfall 5 (PSO 5) Overflow Structure (Figure 15). The overflow structure was built to control overflows from the CSO into Puget Sound. The project was located to the north-northeast of the Property. Water samples were analyzed during excavation dewatering to verify that water discharged to the City sewer system met the requirements of the City's industrial pretreatment requirements. Soil samples were collected to characterize soils for disposal. Soil samples were screened in the field. Soil samples that exhibited signs of contamination were not sampled, but instead disposed of under a Class III soil profile. Apparently clean soil samples were sampled per disposal specifications and disposed of as Class II soils. Appendix B contains the City of Everett's letter to Ecology and analytical data. The locations and depths of contaminated soil were not identified by Floyd | Snider or the City of Everett.

4.0 ONGOING GROUNDWATER MONITORING/PETROLEUM RECOVERY

Periodic groundwater monitoring has been conducted at the Site since the early 1990s and became regular in 2002, pursuant to the groundwater monitoring program included in Ecology's 1998 Agreed Order (DE98TCP-N-223). The monitoring program includes (1) petroleum recovery and (2) collection and analytical testing of groundwater samples. The groundwater samples were collected on the quarterly basis and the LPH recovery was conducted monthly. In 2007, the groundwater monitoring frequency was reduced to semiannual.

4.1 Petroleum Recovery

Manual bailing of LPH from wells that contain measurable accumulations of LPH has been performed on a daily, weekly, or monthly basis since December 1991. The current LPH monitoring program is performed monthly and consists of:

- Water level gauging of nine recovery wells (LPH-1 through LPH-9) and 16 monitoring wells (W-1, W-2, W-3, W-6, MW-10, W-10R, MW-11, W-15R, W-17, MW-18, MW-19, MW-27, MW-28, MW-29, MW-30, MW-40R),
- LPH removal from monitoring wells where more than 0.02 foot of LPH is detected, and
- Replacement of oleophilic socks in wells with measurable accumulations of LPH.

LPH gauging during the most recent semiannual groundwater monitoring event conducted in February 2009 produced the following results.

- The thickness of LPH in LPH-9 fluctuates from no detectable LPH to 0.16 feet.
- The thickness of LPH in W-1 fluctuates from 0.06 to 0.93 feet.
- The thickness of LPH in W-2 fluctuates from no detectable LPH to 0.75 feet.
- The thickness of LPH in MW-29 remains greater than 1 foot.

The average thickness of LPH measured from September 2008 to February 2009 during monthly monitoring events is shown on Figure 20.

4.2 Monitoring of Groundwater Quality

From 2002 to 2007, groundwater samples were collected quarterly from five monitoring wells: MW-11, MW-19, MW-40R, W-3, and W-6. In 2007, the frequency of groundwater monitoring was reduced from quarterly to semiannually. This change in the frequency of groundwater monitoring was verbally accepted by Ecology in February 2007 and verified in a letter dated May 8, 2007. The accepted revised groundwater monitoring schedule was confirmed in a meeting with Ecology on August 8, 2007. Two off-Property monitoring wells (MW-A1 and MW-A2) installed in 2008 are also included in the groundwater gauging and monitoring network.

Groundwater samples are collected using a peristaltic pump and dedicated disposable tubing. The purge water is monitored for field water quality parameters (temperature, pH, specific

conductivity, turbidity, dissolved oxygen, and oxidation-reduction potential) recorded at 5-minute intervals using a Horiba U-22 water quality meter.

Groundwater samples are submitted to Test America Laboratories in Bothell, Washington, for the following analyses:

- TPH-G using Ecology Method Northwest Total Petroleum Hydrocarbons-Gasoline extended (NWTPH-Gx);
- TPH-D and TPH-O using Ecology Method Northwest Total Petroleum Hydrocarbons-Diesel extended (NWTPH-Dx); and
- BTEX using U.S. Environmental Protection Agency (EPA) Method 8020.

The February 2009 groundwater monitoring results produced the following findings.

- The direction of the hydraulic gradient is toward the west to northwest.
- Groundwater samples from monitoring wells MW-11, MW-19, MW-A1, MW-A2, W-3, and W-6, contained concentrations of BTEX below the analytical detection limits. MW-40R contained BTEX concentrations at detectable levels but below MTCA Method A cleanup levels. Concentrations of TPH-G were detected in MW-19, MW-40R, MW-A1, MW-A2, W-3, and W-6. Groundwater from MW-40R contained a TPH-G concentration that exceeded MTCA Method A cleanup levels.
- TPH-D and TPH-O were detected in groundwater samples from monitoring wells MW-19, MW-40R, MW-A1, MW-A2, W-3, and W-6. TPH-D concentrations in all the above wells were above MTCA Method A cleanup levels except monitoring well W-6. TPH-O was detected in the same well set and concentrations only exceeded MTCA Method A cleanup levels in monitoring well MW-40R.
- Groundwater samples from monitoring well MW-11 did not contain analytes at concentrations above the laboratory detection limits.

Analytical results for the August 2008 and February 2009 monitoring events are presented on Figure 21. Analytical results from groundwater monitoring are discussed in detail in Section 6.3

5.0 PRELIMINARY SCREENING LEVELS

This section was prepared consistent with Ecology MTCA cleanup rules (WAC 173-340) and establishes preliminary screening levels for soil and groundwater. Based on the data collected during the Data Gap Investigations and remedy selection criteria under MTCA, the site-specific cleanup levels and, if necessary, remediation levels will be established.

5.1 Preliminary Soil Screening Levels

The applicable MTCA Method A and/or MTCA Method B soil cleanup levels (WAC 173-340-700) are presented along with analytical results for indicator hazardous substances (IHSs) in soil in Tables 2 through 4. Petroleum constituents have been identified in soil samples located off-Property, and therefore MTCA Method A cleanup levels for residential/unrestricted land use will serve as preliminary screening levels for total petroleum hydrocarbons BTEX and carcinogenic polycyclic aromatic hydrocarbons (cPAHs). MTCA Method A cleanup levels for industrial land use will be used as preliminary screening levels for lead since the Property will remain in industrial use for the foreseeable future and existing concentrations of lead in groundwater are below its screening level. Noncarcinogenic polycyclic aromatic hydrocarbons (PAHs) were compared to MTCA Method B residential/unrestricted cleanup levels.

The MTCA Method A unrestricted and industrial (applicable to lead only) land use were selected as preliminary screening levels based on the following considerations: (1) levels protective of human health and the environment for direct contact, inhalation, and ingestion; and (2) levels protective of groundwater. In addition, soil concentrations considered protective of terrestrial receptors (plants and animals) were assessed using a simplified terrestrial ecological evaluation (WAC 173-340-7492). A copy of the evaluation is presented in Appendix F.

5.2 Preliminary Groundwater Screening Levels

The applicable MTCA Method A and/or MTCA Method B groundwater screening levels (WAC 173-340-720) are presented along with analytical results for IHSs in groundwater in Tables 5 through 7. Although the groundwater on the Site is not currently used for potable purposes, preliminary screening criteria for the Site will be established for use of groundwater as potable water. However, based on the historical and current industrial use of properties surrounding the Property, it is not likely that groundwater at the Site could potentially be a future source of drinking water (WAC 173-340-720(2)(c) and (d)). The groundwater to surface water pathway will be evaluated as part of the FFS after the data gaps investigation. In the event that IHS's are in contact with surface water, screening criteria will be re-evaluated for groundwater. If it is determined that surface water is not impacted then groundwater will be evaluated in the context of partition since groundwater is considered non-potable. This screening criterion will be based on a MTCATPH calculated value for TPH and Method B or C for other components.

6.0 SUMMARY OF CURRENT ENVIRONMENTAL SITE CONDITIONS

This section summarizes environmental conditions for soil and groundwater at the Property and vicinity, based on results of historical and recent investigations. Soil samples for chemical analyses have been collected from soil borings, test pits, and trench and test pit excavations on the Property and in the vicinity of the Property. Groundwater samples for chemical analyses have been collected from temporary wells and groundwater monitoring and recovery wells. Analytical results of the soil and groundwater samples indicate that heavy-range petroleum hydrocarbons are distributed in soil and groundwater across the Property and vicinity. LPH has been observed in the soil and floating on the water table. TPH-G, BTEX, PAHs, and lead have also been reported to be present in soil and groundwater samples.

Soil and groundwater data collected at the Site since 1988 were imported into a Microsoft Access database and will ultimately be put into the Ecology EIM system. Analytical results for soil samples are presented in Tables 2 through 4. Analytical results for groundwater samples are presented in Tables 5 through 7.

The concentrations of detected chemicals in groundwater are compared against the MTCA Method A cleanup levels for groundwater (drinking water-based). The concentrations of selected PAH compounds with no established MTCA Method A cleanup level are screened against MTCA Method B cleanup levels (Table 7).

6.1 Soil

The general geology, based on the previous subsurface investigations conducted at the Property and its surroundings, is described in Section 2.4.2. Soil boring, monitoring well, and test pit logs are compiled in Appendix C. The stratigraphy underlying the Site is displayed on geologic cross-sections A-A', B-B', and C-C', which are presented on Figures 16 through 18, respectively. The locations of the cross sections are shown on Figure 15.

The thickness and continuation of the silt/clay layer was not completely assessed during previous subsurface investigations. Below is the list of deeper borings drilled in the area that encountered Quaternary-aged transitional beds in the borings. Boring locations are shown on Figure 15.

- B-21 was drilled to 29 feet bgs by RZA in 1991. No silt/clay was encountered to the total depth of the boring. Native sand was encountered at 27 feet bgs.
- MW-33 was drilled to 29 feet bgs. The silt/clay layer was encountered at 25 feet bgs and continued to the total depth of the boring.
- W-2, W-3, and W-6 were drilled to 23 feet bgs. Organic silt (silt/clay) was recorded in each boring at 20 feet bgs and extended to the total depths of the borings.
- B-1A and B-15A were drilled to 30 and 29 feet bgs, respectively. No silt/clay layer was encountered in either boring.

- MW-A1 and MW-A2 were drilled to 26.5 feet bgs. An organic silt/clay layer was encountered from 23 to 25 feet bgs in MW-1A and from 17.5 to 21 feet bgs in MW-2A. In both borings, the layer of silt/clay is underlain by native sand.

Analytical results for soil samples are presented in Tables 2 through 4. The concentrations of detected chemicals in soil reported in Table 2 through 4 are compared with MTCA Method A soil cleanup levels (see Section 5.1). The concentrations of selected PAH compounds presented in Table 4 with no established MTCA Method A soil cleanup level were compared instead with MTCA Method B cleanup levels.

Soil samples have been collected at the Site at various depths and analyzed for the following:

- Petroleum hydrocarbons by EPA Method 8015 Modified and/or 418.1 and Ecology Methods NWTPH-D, NWTPH-Dx, and NWTPH-Gx;
- Oil and grease by EPA Method 413;
- BTEX by EPA Method 8020;
- Semivolatile organic compounds (SVOCs) by EPA Method 8310; and
- Lead by EPA Method 7421.

The majority of the analyzed soil samples were collected from above the water table and/or at the capillary fringe at approximate depths ranging from 0 to 5 feet bgs. Approximately one-third of the analyzed samples were collected at depths ranging from 5 to 14 feet bgs. However, the extent of petroleum contamination (odor and/or discoloration) in soil was evident in several borings to depths of up to approximately 16 feet bgs.

The following subsections summarize the current environmental conditions at the Site for each IHS identified in Section 7.4.

6.1.1 TPH-D, TPH-O, and TPH (undifferentiated)

Soil analytical data for TPH-D, TPH-O, and TPH (undifferentiated) are displayed on Table 2. In this discussion, analytical results for undifferentiated TPH are assumed to be representative of TPH-D, since predominantly diesel-range hydrocarbons have been detected at the Site. The horizontal and vertical distributions of TPH-D and TPH (undifferentiated) in soil are shown on Figures 22 through 25. TPH-D has been found in soil samples collected throughout the Property and adjoining parcels, but not in samples collected on the Johnston Petroleum property adjacent to the southern boundary of the Property (Figure 22). Concentrations of TPH-D and undifferentiated TPH have been detected above the MTCA Method A cleanup level of 2,000 milligrams per kilogram (mg/kg) in samples collected on both Parcels (Figure 22). TPH-D has also been detected in soil samples collected to the north, west, and east of the Property. The vertical extent of TPH-D ranges from near the surface to near the water table (0.5 to 5 feet bgs). Several samples collected below the groundwater table exhibited TPH-D, TPH-O, or TPH (undifferentiated) contamination (Figures 23 through 25). Soil samples with concentrations of TPH-D and/or TPH-O above the MTCA Method A cleanup levels were collected from borings

B-34 and UG-9 (located to the east of the ExxonMobil Parcel) at approximate depths ranging from 10 to 14 feet bgs, GP-9 (located to the north of the Property) at an approximate depth of 8 feet bgs, and MW-A1 and MW-A2 (located to the west of the ADC Parcel) at approximate depths ranging from 7.5 to 9 feet bgs.

The extent of TPH-D impact in soil hydrogeologically downgradient (west and northeast of the Property) cannot be inferred based on existing data. This is considered to be a data gap that will be addressed in the data gaps investigation.

6.1.2 TPH-G

Soil analytical data for TPH-G (with BTEX and lead) are shown on Table 3. The horizontal and vertical distribution of TPH-G detected in soil samples is shown on Figures 26 through 29. Historical analytical data are not available for TPH-G in soil samples collected within the Property. TPH-G was not detected above 30 mg/kg (MTCA Method A cleanup level if benzene is present) in soil samples collected to the south and southwest of the Property. TPH-G greater than 30 mg/kg and less than 100 mg/kg was noted in the southwest of the Site, and concentrations greater than 100 mg/kg were noted to the northwest, north and east of the Site (Figure 26). The western (downgradient) extent of TPH-G impact in soil cannot be inferred based on existing data and this is considered to be a data gap that will be addressed in the investigation.

6.1.3 Benzene, Toluene, Ethylbenzene, and Total Xylenes

Soil analytical data for BTEX are shown on Table 3. The horizontal and vertical distribution of benzene detected in soil samples is shown on Figure 30. The horizontal distribution of toluene, ethylbenzene, and total xylenes is shown on Figures 34 through 36, respectively. Soil samples containing concentrations of benzene greater than the MTCA Method A cleanup level of 0.03 mg/kg have been collected from three general areas: the center of the ExxonMobil Parcel; off-Property to the east; and one location off-Property to the northwest (Figure 30). In the case of the first two of these areas, surrounding samples did not have reportable concentrations of benzene. However, the majority of the soil samples were analyzed for BTEX using EPA Method 8020. This analytical method has benzene detection limits greater than the MTCA Method A cleanup level of 0.03 mg/kg. The extent of benzene impact in soil within the center of the ExxonMobil Parcel and off-Property to the east cannot be inferred based on existing data and is considered a data gap that will be addressed in the data gaps investigation.

6.1.4 Lead

Soil analytical data for lead are shown on Table 3. The horizontal and vertical distribution of lead in soil is shown on Figures 37 through 40. Historical analytical data for lead are not available for soil samples collected within the ExxonMobil Parcel. No soil samples collected at the Property or neighboring properties contained lead at concentrations above the MTCA Method A cleanup level for industrial land use of 1,000 mg/kg. No lead impact in soil was identified because soil samples did not have lead concentrations above the MTCA Method A cleanup level for industrial land use.

6.1.5 PAHs

Soil analytical data for PAHs are shown on Table 4. Soil samples collected within the Property boundaries have not been analyzed for PAHs. Soil samples for PAH analyses have been collected from 15 locations on neighboring parcels. Noncarcinogenic PAHs were detected in soil samples, but none was found at concentrations that exceeded MTCA Method B cleanup levels. Samples collected west of the Property have not contained detectable concentrations of PAHs. Because no noncarcinogenic PAHs were detected above MTCA Method cleanup levels A (or MTCA Method B if no value for Method A was available), analytical results for noncarcinogenic PAHs are not mapped. cPAH concentrations were evaluated in the context of toxicity equivalencies (WAC 173-340-708(8)(e)). The toxicity equivalent quotients (TEQs) were calculated by assigning one-half of the method reporting limit for nondetected compounds multiplying by their assigned TEQ value and summed. Four soil samples collected at locations north and south from the Property (GP-7, GP-8, GP-9, and MW-32), contained benzo(a)pyrene and/or TEQ-adjusted concentrations of total cPAHs above the MTCA Method A cleanup level for residential land use of 0.1 mg/kg. The horizontal and vertical distribution of TEQ-adjusted concentrations of total cPAHs in soil is shown on Figures 41 and 42, respectively.

6.2 Liquid-Phase Hydrocarbons

Historically, LPH has been observed at greater than trace thicknesses primarily in the northern portion of the Property and on nearby adjacent parcels (Figure 43). Trace amounts of LPH have also been observed on the southern portion of the ExxonMobil Parcel. The observed presence of LPH has largely been associated with wood debris in explorations. It is possible that peat layers are acting as confining layers for the migration of LPH. LPH has not been observed in off-Property wells to the northwest. LPH typing analysis has indicated that LPH recovered from the Property had characteristics of a range of products including degraded diesel mixed with degraded gasoline and heating oil.

The current monthly LPH monitoring regime is described in Section 4.0. The table below lists the maximum thickness of LPH measured in wells with more than trace amounts of LPH at the Property and neighboring parcels since 2002.

Maximum Measured Thickness of LPH

| Well Type | Well Name | Maximum LPH Thickness in Feet | Month and Year Measured |
|------------|-----------|-------------------------------|-------------------------|
| Recovery | LPH-5 | 4.21 | January 2003 |
| Recovery | LPH-7 | 0.01 | November 2007 |
| Recovery | LPH-8 | 0.01 | February 2006 |
| Recovery | LPH-9 | 0.16 | October 2008 |
| Monitoring | W-1 | 4.42 | October 2005 |
| Monitoring | W-2 | 7.43 | June 2002 |
| Monitoring | W-10R | 1.00 | July 2003 |
| Monitoring | W-17 | 0.1 | March 2002 |
| Monitoring | MW-27 | 2.60 | March 2005 |
| Monitoring | MW-29 | 7.18 | October 2002 |

The maximum thickness of LPH measured in wells at the Property and neighboring parcels since 2002 is displayed on Figure 43.

6.3 Groundwater

Shallow unconfined groundwater occurs at the Site at depths of 1 to 5 feet bgs. Previous groundwater elevation data indicate fluctuations between high and low seasonal water tables of up to 3 feet. Based on the historical groundwater elevation data, groundwater beneath the Property flows generally to the west and to the northwest (Figure 19). The groundwater gradient across the Property averages 0.0455 feet/foot as calculated between wells W-6 and MW-A1.

A 24-hour aquifer test was conducted by RZA AGRA Earth & Environmental, Inc. (RZA AGRA) in December 1991. The aquifer test consisted of pumping groundwater from monitoring well MW-10 at a rate of approximately 1 to 2 gallons per minute and measuring the response in monitoring well MW-18 and recovery wells RW-1 and RW-2. The radius of influence included most of the northeastern quarter of the ExxonMobil Parcel. The aquifer test results indicated that the hydraulic conductivity at the Property ranges from 4.0 to 9.5 feet/day.

According to deep boring logs, no deeper groundwater was encountered. The soils (both silt/clay and sand) become moist at approximately 23 feet bgs in all borings except at MW-1A and MW-2A, where the sand beneath the silt/clay was reported to be saturated.

Groundwater samples collected at the Property and neighboring parcels have been analyzed for one or more of the following analytes: petroleum hydrocarbons by EPA Method 8015 Modified and Ecology Methods NWTPH-D, NWTPH-Dx and NWTPH-Gx; BTEX by EPA Method 8020; VOCs by EPA Method 602 (analytical data not found for VOCs except for BTEX); SVOCs by EPA Method 8310; and total and dissolved lead by EPA Method 7421.

6.3.1 TPH-D or TPH (undifferentiated)

Groundwater analytical data for TPH-D, TPH-O, and TPH (undifferentiated) are shown on Table 5. The historical distribution of TPH-D, TPH-O, and TPH (undifferentiated) in groundwater is shown on Figure 44. TPH-D has been detected at concentrations above the MTCA Method A cleanup level of 500 micrograms per liter ($\mu\text{g/L}$) throughout the ExxonMobil Parcel and to the west, south, and east of the Property. Historical analytical results for TPH-D and TPH (undifferentiated) in groundwater are limited for the ADC Parcel. However, groundwater samples collected from monitoring wells MW-A1 and MW-A2, both located west of the ADC Parcel, have contained TPH-D and TPH-O at concentrations above the MTCA Method A cleanup level. The extent of downgradient TPH-D impact cannot be inferred based on available data, because no data to the west of monitoring wells MW-A1 and MW-A2 exist. This is considered to be a data gap that will be addressed in the data gaps investigation.

6.3.2 TPH-G

Groundwater analytical data for TPH-G are shown on Table 6. The historical distribution of TPH-G in groundwater is shown on Figure 45. TPH-G has been detected at concentrations above the MTCA Method A cleanup level of 1,000 $\mu\text{g/L}$ if benzene is not present and 800 $\mu\text{g/L}$ if

benzene is present primarily on the ExxonMobil Parcel and along the eastern boundary of the ADC Parcel. Historical groundwater TPH-G data are limited for the ADC Parcel. TPH-G has also been detected at concentrations greater than 1,000 or 800 µg/L in samples collected off-Property to the east and northeast. A groundwater sample collected from MW-22 in December 1991 contained TPH-G with a concentration exceeding the MTCA Method A cleanup level. Concentration of TPH-G in groundwater sample collected from W-6 in February 2009 was reported below MTCA Method A cleanup levels. Monitoring well W-6 is located at the eastern portion of the Property. In addition, eastern monitoring wells W-17 and MW-27 through MW-30 contain various amount of LPH (Figure 43). TPH-G impact to the east of the Property will be further investigated in the data gaps investigation.

6.3.3 Benzene, Toluene, Ethylbenzene, and Total Xylenes

Groundwater analytical data for BTEX are shown on Table 6. The historical distribution of benzene, toluene, ethylbenzene, and total xylenes in groundwater is shown on Figures 46 through 49, respectively. Historical analytical data for benzene in groundwater are limited for the ADC Parcel. Benzene has been detected at concentrations above the MTCA Method A cleanup level of 5 µg/L primarily on the ExxonMobil Parcel and to the east of the Property. Benzene has not been detected in groundwater samples collected south or west of the Property. Benzene concentration were reported in groundwater samples collected from monitoring wells MW-40R, MW-11, MW-19, MW-40R, MW-1A, MW-2A, W-3, and W-6) in February 2009 had either below the laboratory detection limits or below the MTCA Method cleanup levels. No ethylbenzene and/or toluene was detected at concentrations above the respective MTCA Method A cleanup level. One sample collected from MW-18 in 1988 had a concentration of total xylenes exceeding the MTCA Method A cleanup level. The extent of benzene impact downgradient of the Property can be inferred to be within the Federal Avenue right-of-way based on the fact that benzene was not detected in samples collected from MW-A1 and MW-A2, which are west of Federal Avenue. The extent of benzene impact upgradient from the Property can be partially inferred based on the fact that benzene was not detected in samples collected from monitoring wells MW-27 and MW-28. The extent of upgradient benzene impact can be inferred to be east of these monitoring wells and will be confirmed in the data gaps investigation. The extent of upgradient benzene impact to the east of the Property and south of MW-28 cannot be inferred based on available data, and is considered to be a data gap that will be addressed in the data gaps investigation.

6.3.4 Total and Dissolved Lead

Groundwater analytical data for total and dissolved lead are shown on Table 6. The historical distribution of total and dissolved lead in groundwater is shown on Figures 50 and 51, respectively. Total lead has been detected at concentrations above the MTCA Method A cleanup level of 15 µg/L in groundwater samples collected at the ExxonMobil Parcel. Historical analytical data for total and/or dissolved lead are not available for the ADC Parcel or from the area to the northwest of the Property. The upgradient and downgradient extent of total lead impact cannot be inferred based on available data.

Dissolved lead has not been detected at concentrations above the MTCA Method A cleanup level of 15 µg/L in samples collected at the Property or on neighboring parcels. Dissolved lead has not been detected to the east of the Property. One groundwater sample collected in 1993 from well MW-33 had a reportable concentration of dissolved lead. However, this concentration was below the MTCA Method A cleanup level. No further work is required.

6.3.5 PAHs

Groundwater analytical data for PAHs are shown on Table 7. Concentrations of cPAHs were evaluated in the context of toxicity equivalencies (WAC 173-340-708(8)(e)). The TEQs were determined assuming one-half of the method reporting limit for nondetected compounds. The historical distribution of cPAHs in groundwater is shown on Figure 52. TEQ-adjusted total cPAH concentrations exceeded the MTCA Method A cleanup level of 0.1 µg/L for water in samples collected primarily in the southern portion of the Property and to the northeast of the Property, in a line roughly corresponding to cross-section A-A'. cPAHs have not been detected in the extreme southern portion of the ExxonMobil Parcel. Historical analytical data for PAHs in groundwater are limited for the ADC Parcel and for the area west and northwest of the Property. Therefore, this is considered to be a data gap that will be addressed in the data gaps investigation.

7.0 CONCEPTUAL SITE MODEL AND PATHWAYS

This section presents the Conceptual Site Model (CSM) with applicable pathways and transport mechanisms based on physical characteristics of the Site. During preparation of the CSM, the following factors were taken into consideration:

- Presence of Indicator Hazardous Substances;
- Concentration of IHSs in relation to screening and other applicable criteria;
- Extent and distribution of IHSs in impacted media;
- Transport mechanisms between media;
- Potential migration to receptors;
- Properties of IHSs;
- Properties of media; and
- Potential for natural attenuation.

As discussed in Section 2,1, “Property” refers to the two contiguous parcels owned by ExxonMobil and by ADC (the ExxonMobil Parcel and the ADC Parcel, respectively). The Property and portions of neighboring parcels to the west (former ADC/General Petroleum Co. warehouse), north (Everett Avenue right-of-way up to the CSO line), and east (BNSF property and in the vicinity of the former loading racks) that are affected by hydrocarbon contamination comprise the ExxonMobil ADC Site (Ecology Facility ID 2728), as defined by MTCA (“Site”). The precise boundaries of the Site have not yet been determined. Locations within the Property boundary may be referenced as the Property or on-Property, and locations outside the Property boundaries may be referenced as off-Property.

7.1 Current and Future Land/Water Uses

Based on the City of Everett Comprehensive Plan, the Property and the land to the north, south, and west are zoned for Heavy Manufacturing (M-2). Zoning to the east is the Central Business District (B-3).

In 1999 as an interim action completed under the 1998 Agreed Order, ExxonMobil/ADC capped the Property with asphalt pavement. The asphalt-capped Property is currently leased to KC for employee parking. The property downgradient from the Property is currently used by the Port of Everett for storage. There is no known proposed future development of the Property; however, it is likely that the Property will remain industrial in the future. In addition the groundwater below the site will never be considered for beneficial use due to the industrial nature of the area, the closeness to salt-water intruded groundwater, the availability of a public potable water supply, and the existence of County and City regulations against use of drinking water wells.

7.2 Sources and Types of Contamination

Petroleum hydrocarbon impacts to soil and groundwater at the Property have resulted from past releases from former operations at the ExxonMobil and ADC Parcels. Beginning in the 1920s or earlier, the Property was used for petroleum bulk storage, transfer, and distribution operations; marine offloading; truck loading; and rail loading and/or unloading operations of petroleum products. The only identified known source of subsurface contamination is a reported spill in the southern portion of the ADC Parcel. There is also a possibility that impacts to soil and groundwater beneath the Property have resulted from off-Property sources, such as facilities located to the north and northeast of the Property (Section 2.2.2). These facilities operated as historic petroleum bulk facilities and included bulk fuel pipelines, pumping facilities, storage facilities, railroad spurs, and railroad and maritime loading facilities. The sources described above are considered primary sources of contamination. Liquid-phase hydrocarbons described in Section 6.2 are considered a secondary source of contamination.

In association with remedial actions undertaken on the Property in 1999, excavations have occurred that removed some of the identified IHS's. These activities include excavation associated with capping the Property, removal of building slabs, excavation of the firewall foundation in the northeast of the ADC Parcel and excavation of the interceptor trench located along the northern and western boundaries of the Property. A comparison of pre-cap Property site contours and finished contours (minus 2.5 feet for the capping material) was used to determine the excavated areas and depths (original and post cap contour maps can be found in Appendix B – historical maps and documentation).

In May 1988, a 45-long infiltration gallery was installed in the vicinity of MW-14. In March 1989, an automated groundwater extraction and treatment system was installed in the location of the May 1988 infiltration gallery. The system consisted of a fluid extraction sump situated in RW-1 (formerly MW-14), an oil-water separator, an air stripper, and infiltration gallery. The infiltration gallery, which was approximately 100 feet long, was constructed parallel to the north side of the ExxonMobil Parcel. In December 1993, an LPH recovery trench was installed to the west of the ExxonMobil Parcel. The trench was installed in a north-south orientation, to a depth of approximately 4 feet bgs. Soil excavated during constructions was stockpiled on the Property, covered with visqueen, and later disposed of at a permitted facility.

Petroleum-affected soils along the overcrossing alignment extended from the west side of California Street to the center portion of the KC parking lot. The contamination was found to be present generally from 4 to 5 feet bgs. The petroleum-affected soils extended over an area of approximately 25,600 square feet and on average were approximately 8 feet thick. Thus, approximately 7,600 cubic yards of petroleum-contaminated soil was calculated to be present along the overcrossing alignment (URS, 2000a). In 2002, these soils were excavated and disposed of during CSTO construction project. According to weight tickets attached to e-mail from Shawn Severn (Premier) to Bill Joyce in 2002, 207.72 tons of contaminated soil associated with CSTO construction was excavated and disposed off at Rinker facility in Everett in 2002. Soil excavation areas are shown on Figure 53.

Presently, five discreet secondary source locations are identified based on the occurrence of free product. The secondary source areas are identified on Figure 54. These areas are vertically delineated based on the deepest occurrence of contaminated soil using the boring logs to determine wood waste containing hydrocarbons or other lithologies with strong odor and/or elevated analysis result.

- Source 1 is situated in the vicinity of well W-1. Well W-1 contains free product with a maximum thickness of 4.42 feet measured in October 2005. In addition, a soil sample that was collected from W-1 at the depth of 3 feet bgs, had 13,000 mg/kg of undifferentiated TPH concentration. Soil contamination to the west of W-1 is delineated by the interceptor trench with no measurable free product noted in the closest recovery wells LPH3 and LPH4. To the east and north high concentrations of TPH were detected in AD-13, AD-14 and AD-10 (boring locations are shown on Figure 22) prior to the placement of the site cap in 1999. These high concentrations would have been removed during the work in 1999, when building slab removal (an office building, oil pump house building, a warehouse, and boiler room, aboveground piping, loading racks) and general excavation occurred. Soil contamination will be verified during the data gap investigations by continuous sampling from 0 to 5 feet of a deep boring to be advanced in the vicinity of AD-10 and AD-11. The lateral extent of Source 1 to the west, south, east, and north is limited to the vicinity of W-1.
- Source 2 is situated in the vicinity of well W-2 and extents laterally towards the northeast. Well W-2 has had frequent trace occurrence of free product. In addition, a soil sample that was collected from W-2 at the depth of 3 feet bgs, had 17,000 mg/kg of undifferentiated TPH concentration.
- Source 3 is limited to the vicinity of well W-10R. Well W-10R inclusive of LPH6 has had frequent occurrence of free product. The lateral extent of Source 3 to the east is defined by TPH concentration below MTCA Method A cleanup level reported in shallow soil sample collected from AD-4. The lateral extent of Source 3 to the west and north is bound by the LPH recovery trench and the firewall foundation. Source 3 lateral extent to the south will be assessed during the data gap investigations with continuous sampling from 0 to 5 feet of a deep boring to be advanced in the vicinity of LPH5.
- Source 4 is situated in the vicinity of former boring B-21-91 where an undifferentiated TPH concentration of 12,000 mg/kg was reported in a soil sample collected from boring B-21-91 at 5 feet bgs. Source 4 extends north towards wells W-17 and LPH9. Both wells have had frequent trace to measurable thickness occurrence of free product. Source 4 does not extend beyond the northern property boundary because no TPH-D and TPH-O above MTCA A cleanup levels were reported in soil samples collected from GP-4 and GP-5. In 1999, the northeast portion of the firewall that was surrounding the former tank farm at the ADC parcel was demolished prior constructing to the cap. The foundation of the firewall in the northeast corner was excavated to the depth of 7 feet bgs (Exponent 2000). This excavation is considered to be the eastern extent of Source 4 and will be verified during the data gaps investigation.

- Source 5 is situated in the vicinity of wells MW-27 and MW-29. The combined area surrounding MW-27 and MW-29 span significant occurrence of wood waste. Both wells have frequent occurrence of free product. The southern extent of Source 5 is unknown and will be assessed during the data gap investigations.

There are no secondary sources of contamination within the ExxonMobil Parcel due to extensive excavation activities on the Parcel and the surrounding properties to the west, east, and south (Figure 53).

7.3 Contaminant Migration Pathways/Media of Potential Concern

This section summarizes applicable transport mechanisms for each affected medium of concern.

7.3.1 Soil

Since the Property is capped, there are two potential transport mechanisms from soil—soil to groundwater, and soil to vapor. Leaching (including infiltration and percolation) can transport soil particles and solubilized constituents to groundwater. The primary area of concern on the site for transport of soil to groundwater is related to the secondary source areas (Figure 54).

Similarly, volatilization of chemicals from soil directly to vapor may allow contaminants to be transported from soil to air. In addition, should the cap be damaged or removed there would be a potential for direct contaminant transport from soil to storm water, surface water, and sediment. Therefore, soil at the Property is a medium of concern. Additionally, paving outside the Property boundary is beyond ExxonMobil's control, so transport mechanisms from soil for the remainder of the Site (outside the Property) should also be considered.

7.3.2 Groundwater

There are two potential mechanisms for transport of contaminants from groundwater – groundwater to vapor and groundwater to surface water. Volatilization of chemicals directly from groundwater to vapor is considered viable. Groundwater can potentially migrate off-Property to Port Gardner Bay. Groundwater migration to the CSO line was observed and mitigated in 1996. Due to extensive repairs to the CSO line made in 1996, subsequent migration of groundwater to the CSO is unlikely. Groundwater that migrates to surface water could also impact sediment via sorption directly from groundwater or from porewater as a result of groundwater flux to surface water. Therefore, groundwater is a medium of concern. At this time, migration of IHSs from groundwater to surface water has not been shown to be occurring although more data is required to confirm this.

7.3.3 Vapor

No potential transport mechanisms from vapor were determined. The vapor phase is considered a terminal endpoint of impact—not a primary source of contaminants to other media. Vapors were evaluated as emanating from other affected media, such as soil and groundwater. Therefore, vapor is not a medium of concern.

7.3.4 Stormwater

No potential transport mechanisms from stormwater were identified. The surface of the Property is capped, and stormwater sheet flows to the catch basins located at the Property and downgradient from the Property. The stormwater system at the Property was video surveyed in 2007, and no breaches or infiltration were observed in the system. Therefore, there is no pathway from soil or groundwater to stormwater, and stormwater is not a medium of concern. However, stormwater has not been shown to have impacts from the Site, so this is an incomplete pathway.

7.3.5 Surface Water

Surface water bodies (e.g. Port Gardner Bay) are considered a terminal endpoint of impact and not a primary source of contaminants to other media. Surface water is a medium of concern due to its status as a terminal endpoint. Surface water transport off the Property is not considered a pathway since the Property is capped with asphalt pavement. Stormwater from the Property discharges to the CSO, which has been reconstructed to eliminate potential contact to affected groundwater. The only pathway to surface water currently is a potential pathway of groundwater to Port Gardner Bay. At this time the completeness of this pathway is not known since the extent of groundwater impacted above screening levels is not fully delineated to the west.

7.3.6 Sediment

No potential transport mechanisms from sediment exist. Sediments are considered a potential terminal endpoint of impact and not a primary source of contaminants to other media. No direct releases from the Property to sediment have been documented, and this transport mechanism is considered not to be a primary source. However, at this time the completeness of this pathway is not known since the extent of groundwater impacted above screening levels is not fully delineated to the west.

7.4 Indicator Hazardous Substances

Under MTCA, “indicator hazardous substances” means the subset of hazardous substances present at the Site that constitute the basis for monitoring and analyses, or the basis for any phase of remedial action for the purpose of characterizing the Site or establishing cleanup requirements for the Site. Consistent with WAC 173-340-703, when defining cleanup requirements at a Site contaminated with a relatively large number of detected chemicals of concern, Ecology might eliminate from consideration those hazardous substances that contribute a small percentage of overall threat to human health and the environment. Historically, TPH-D, TPH-O, TPH-G, benzene, toluene, ethylbenzene, xylenes, PAHs, and lead were found in soil and groundwater at the Property.

The statistical summaries for soil and groundwater results are presented in Tables 8 and Table 9, respectively. The summaries present the number of samples analyzed, the frequency of detection, the minimum and maximum detection limits, the minimum and maximum results, the mean result for each chemical, the number of results that exceed MTCA Method A or MTCA

Method B cleanup levels, and whether or not the chemical is selected as an indicator hazardous substance.

7.4.1 Soil

The Property and its immediate surroundings are zoned for industrial use. The Property is covered by a low-permeability asphalt/concrete cap. Soils at the Property consist of fill overlying recent marshland and transitional beds deposited between Fraser and pre-Fraser glaciations. Heterogeneous mixtures of sands, silts, peat, and wood debris extend to depths of 20 to 27 feet bgs. A discontinuous organic silt/clay unit and a dense, moist, brown, medium sand unit were encountered at greater depths in borings that were advanced to depths greater than 20 feet bgs.

With the asphalt cap on the Property, the potential exposure routes and receptors are limited to:

- Contact (dermal, incidental ingestion, or inhalation) with hazardous substances in soil by construction workers;
- Partitioning of hazardous substances in soil to groundwater.

It is assumed at this point that the cap on the property will either remain in place as part of the final remedy or the soil will be addressed.

Constituents detected in the upper 15 feet of soil were evaluated to assess the potential risk to humans, plants, and small animals posed by contaminated soil. These exceedances appear to be mostly limited to the fill material beneath the Property. In addition, soil concentrations considered protective of terrestrial receptors (plants and animals) were assessed using a simplified terrestrial ecological evaluation (WAC 173-340-7492). A copy of the evaluation is presented in Appendix E. According to the simplified terrestrial ecological evaluation, the Site does not have a substantial potential for posing a threat of significant adverse effects to terrestrial ecological receptors. Thus, ecological receptors will be removed from further consideration during development of cleanup levels.

As shown in Table 8, the following chemicals have been detected in soil samples collected at the Site:

- TPH-D has been detected at concentrations above the MTCA Method A cleanup level of 2,000 mg/kg at the Property and to the north, west, and east (Figures 22 through 25). The majority of the samples with TPH concentrations above the MTCA Method A cleanup level were collected at shallow depths (less than 5 feet bgs). However, soil samples with exceedances of TPH were collected at depths of 7.5 feet bgs and greater in several borings. TPH-D and TPH-O were selected as indicator hazardous substances.
- TPH-G was not detected at concentrations above 30 mg/kg (MTCA Method A cleanup level if benzene is present) in soil samples collected to the south and southwest of the Property, but was detected at concentrations greater than 100 mg/kg in soil samples collected to the north, west, and east of the Site (Figures 26 to 29). Samples collected

on the Property were not analyzed for TPH-G. TPH-G was selected as an indicator hazardous substance.

- Concentrations of benzene above the MTCA Method A cleanup level of 0.03 mg/kg were reported for soil samples collected on- and off-Property (Figures 30 through 33). Samples containing concentrations of benzene greater than 0.03 mg/kg have been collected from three general areas: the center of the ExxonMobil Parcel; off-Property to the east; and one location off-Property to the west (MW-A2) (Figure 30). Benzene was selected as an indicator hazardous substance due to the potential risk to humans, plants, and small animals. Concentrations of ethylbenzene and total xylenes have also been detected above the MTCA Method A cleanup levels (Figures 35 and 36). However, these constituents are associated with benzene, which has already been identified as a hazardous indicator substance, so none of these constituents by itself was selected as an indicator hazardous substance.
- Soil samples collected on the Property and to the west, north, and east of the Property did not contain lead at concentrations above the MTCA Method A cleanup level for industrial land use (1,000 mg/kg) (Figures 37 through 40). Lead was not selected as an indicator hazardous substance.
- Samples collected on the Property have not been analyzed for PAHs. However, toxicity-equivalent concentrations of total cPAHs were reported below MTCA Method A industrial cleanup levels but above MTCA Method A cleanup levels for unrestricted use in four soil samples collected off-Property to the north and to the south (Figures 41 and 42). Three soil samples contained benzo(a)pyrene at a concentration above the MTCA Method A residential cleanup level of 0.1 mg/kg. Thus, cPAHs were selected as indicator hazardous substances.

7.4.2 Groundwater

Groundwater beneath the Site is not currently used as a drinking water source nor is it likely to be considered a drinking water (potable) source in the future as discussed earlier. However, preliminary screening criteria currently used for the Site assume the highest potential beneficial use, which is as a potential source of drinking water.

WAC 173-340-720(2)(c) and (d) provides that even if groundwater is classified as a potential future drinking water source, Ecology recognizes there are sites for which a very low probability exists that the groundwater would be used as a drinking water supply, owing to the proximity of surface water that is unsuitable for use as a domestic supply. The Site's groundwater is in direct proximity to a surface water body not suitable as a potable water supply (Port Gardner Bay). There are no known water supply wells within one-half mile of the Site, and the groundwater does not serve as a current source for drinking water. Neither the Site nor the Port Gardner Bay surface water is hydraulically connected to a future source of groundwater that may be used as a domestic drinking water supply.

The top of the saturated zone is situated within fill materials at approximate depths ranging from 1 to 5 feet bgs. Previous groundwater elevation data indicate fluctuations of up to 3 feet

between high and low seasonal water tables. Based on the historical groundwater elevation data, groundwater beneath the Property flows generally toward the west and northwest. Most likely, the groundwater table is higher currently than in the past due to infill of the coastline to the west of the Property. Groundwater levels gauged in monitoring wells constructed at the Site do not appear to be significantly affected by tidal fluctuations, however, the recent tidal study results were inconclusive to determine the exact tidal influence.

Analytical data from groundwater samples were compared to groundwater cleanup levels protective of human health. The screening levels selected are MTCA Method A unrestricted use cleanup levels, if available. MTCA Method B cleanup levels were used for IHSs for which no Method A cleanup level exists. The groundwater analytical results indicate the following constituents are present in groundwater beneath the Site.

- TPH-D and/or undifferentiated TPH has been detected at concentrations above the MTCA Method A cleanup levels throughout the Site (Figure 44). Therefore, TPH-D was selected as an indicator hazardous substance.
- TPH-G has been detected at concentrations above the MTCA Method A cleanup levels in groundwater samples collected from the monitoring wells installed at the Property as well as monitoring wells installed to the east and northeast of the Property (Figure 45). Therefore, TPH-G was selected as an indicator hazardous substance.
- Benzene has been detected in groundwater samples collected on- and off-Property at concentrations above the MTCA Method A cleanup levels (Figure 46). Therefore, benzene was selected as an indicator hazardous substance. Toluene, ethylbenzene, and total xylenes have also been detected in groundwater samples collected on- and off-Property (Figures 47, 48, and 49, respectively). No samples contained toluene and ethylbenzene at concentrations above the Method A cleanup levels (Figures 47 and 48). Only two samples collected from MW-15 and MW-18 in 1988 contained total xylenes at concentrations exceeding the MTCA Method A cleanup level (Figure 49). Since toluene, ethylbenzene, and total xylenes are not exceeding Method A unrestricted cleanup levels, with the exception of total xylene detections reported in two samples in 1988, those constituents in groundwater do not pose a risk to humans. None of these constituents was selected as an indicator hazardous substance.
- Total lead has been detected at concentrations above the MTCA Method A cleanup level in groundwater samples collected at the Site (Figure 50). Increased turbidity in groundwater samples may be attributed to soil lithology, increased organic content, screen size, and/or purging. High concentrations of total lead occurring in groundwater samples at the Site are most likely due to increased organic content in the formation being sampled. Due to the high turbidity of groundwater samples, total lead results in groundwater are not representative of groundwater quality due to the contribution of lead contained in suspended sediment. Dissolved lead has not been detected at concentrations above the MTCA Method A cleanup level in groundwater samples collected at the Site (Figure 51). Therefore, lead was not selected as an indicator hazardous substance.

- cPAHs have been detected at toxicity-equivalent adjusted concentrations above the MTCA Method A cleanup level in groundwater samples collected at the Site (Figure 52). Therefore, cPAHs were selected as indicator hazardous substances.

7.5 Potential Receptors and Exposure Pathways

In this section, potential exposure pathways are evaluated to assess whether complete pathways exist that could pose a threat to potential receptors. Soils are hydrologically linked to groundwater and surface water systems. One of the objectives of soil remediation at the Site is to manage soil-to-groundwater pathways to prevent unacceptable transfer of contaminants from the soil, which may ultimately affect groundwater and potential surface water use. This section identifies the locations and environmental media (soil and groundwater) at the Site that require cleanup action evaluation in the FFS.

7.5.1 Potential Receptors

Human receptors are the most sensitive receptors to the IHSs under current and likely future land uses. The entire range of activities associated with land use at the Site, on-Property, and off-Property, must be free of appreciable health risks. Potential human receptors are the general public, Kimberly-Clark workers, and future construction workers.

For the Property, ecological receptors are not considered to be present due to the lack of any habitat. Since there remains a potential pathway of groundwater to Port Gardner Bay, there could be potential ecological receptors such as marine life and birds; however, at this time it is not known if Site-affected groundwater has migrated to Port Gardner Bay at concentrations above screening levels. Further data will be collected to delineate the extent of groundwater impacts as part of the FFS work, and this information will determine if ecological receptors need to be further evaluated.

7.5.2 Potential Exposure Pathways

Potential exposure pathways for the public, general workers and construction workers for each medium were evaluated. A descriptive summary of this evaluation is provided below.

7.5.2.1 SOIL

The Property is covered with a low-permeability asphalt surface cap that prevents direct contact with the underlying soil. Therefore, the pathway is currently incomplete for direct exposure to contaminants in soil at the Property by the general public and general workers for the current site use.

Exposure to soil by construction workers via dermal absorption, ingestion, and/or inhalation as a result of subsurface excavation is a potential exposure pathway. This potential exposure pathway will be addressed in the FFS.

7.5.2.2 GROUNDWATER

The Property is currently covered with a low-permeability asphalt surface cap, which prevents direct contact with the underlying groundwater and minimizes infiltration of surface water. Therefore, the pathway is incomplete for direct exposure to contaminants in groundwater at the Site by the general public and general workers. In addition, groundwater beneath the Site is not currently used as a drinking water source nor is it likely to be considered a drinking water (potable) source in the future.

As noted in Section 7.3.2, there is a potential pathway of contaminants from groundwater to surface water (Port Gardner Bay). Potential exposure of receptors to surface water impacted by contaminant transport from groundwater will be addressed in the FFS.

7.5.2.3 STORM WATER

Storm water on the Property drains to storm drains that are connected to a combined sewer. Water entering these storm drains is conveyed to the City of Everett sewage treatment plant. This pathway is considered complete; however, the potential is low for direct exposure to contaminants in storm water at the Site by the general public and general workers.

7.5.2.4 SOIL AND GROUNDWATER TO VAPOR

The Property is currently covered with an asphalt cap that limits vapor migration from soil. Since the cap limits but does not eliminate vapor migration, the pathway remains complete; however, the potential is low for exposure by general workers to contaminants transported to vapor from soil or groundwater at the Property. Exposure to vapor by construction workers at the Site will be addressed in the FFS.

7.5.2.5 GROUNDWATER TO SURFACE WATER

There remains a complete pathway of groundwater to Port Gardner Bay, although data will be obtained as part of the FFS work to evaluate whether groundwater is migrating to the Bay at concentrations above ultimate cleanup levels. It is also noted that groundwater that actually migrates to surface water could also impact sediment via sorption directly from groundwater or from porewater as a result of groundwater flux to surface water. Depending on the results of the groundwater delineation, aquatic organisms and terrestrial organisms in the Bay may be potential receptors of contaminants in groundwater and may need to be evaluated in the FFS. The risk of exposure to contaminants in surface water is low for general workers and construction workers.

The risk of exposure to contaminants in surface water by potential receptors will be addressed in the FFS.

7.6 Overview of Site Conditions

An overview of the secondary source areas and the extent of groundwater impacted at concentrations above screening levels at the Site is presented in Figure 54. LPH is located primarily in the area northeast of the Property boundary in the vicinity of MW-27 and MW-29.

Sporadic occurrences of LPH have been observed in the southern portion and on the western border of the Property. During exploration, LPH has been primarily associated with wood debris. Elevated concentrations of TPH-D, TPH-G, and benzene in soil have also been noted in the vicinity of the LPH. Concentrations of PAHs, cPAHS, lead, toluene, ethylbenzene, and xylenes in soil are not elevated. There is no observed downgradient migration of gasoline or benzene in the dissolved phase. Dissolved-phase concentrations of diesel have been observed downgradient of the Property and will be delineated as part of the data gaps work and addressed in the FFS.

8.0 FOCUSED FEASIBILITY STUDY

This section summarizes the general approach to completing the FFS. Remaining data gaps will be addressed by conducting additional remedial field investigations. Prior to field investigations, appropriate start cards will be obtained from the Ecology Water Resources Program to install monitoring wells. Details of the approach to completing the FFS will be developed based on results of the data gaps investigation.

The investigation of the data gaps described in Section 8.1 is addressed in the SAP, included as Appendix A of this Work Plan. The SAP constitutes a work plan for all drilling, sampling, and other investigative activities to be conducted for the FFS. A schedule of the proposed activities and reporting timelines is provided in Appendix G.

8.1 Data Gaps and Supplemental Field Investigations

The Property and neighboring parcels have been the subject of extensive subsurface investigations to characterize the nature and extent of impacts to soil and groundwater from hydrocarbon releases at the Property. The next step to complete the FFS is to complete the characterization of the nature and extent of soil and groundwater contamination resulting from releases at the Property and select a final remedial approach to address the historic releases.

Five areas of affected soil and groundwater at the Site are illustrated on Figure 54. As detailed in Section 7.0, AMEC has identified certain data gaps to complete the FFS. These data gaps and the proposed supplemental field investigations to complete these data gaps are described below. The proposed field investigations are summarized on Figure 55.

8.1.1 Extent of TPH-D, TPH-O, and TPH-G Impacts in Groundwater

TPH-D, TPH-O, and TPH-G have been observed in the dissolved phase in groundwater beyond the perimeter of the Property boundary. The western, northwestern and northeastern limits of the dissolved-phase plume are not fully defined. In addition, the potential presence of a dissolved-phase plume associated with the ADC Garage and Shop formerly located across Federal Avenue from the Property is unknown.

To address the data gap, four groundwater monitoring wells (MW-A3 through MW-A6) will be installed to depths of less than 20 feet bgs between Port Gardner Bay and the Property, and one groundwater monitoring well (MW-A7 [deep]) will be installed upgradient of the Property (Figure 55). In addition, one grab groundwater sample will be collected from boring AP-1 located in the former ADC Garage and Shop. The wells will aid in defining the limits of petroleum-impacted groundwater. During drilling, soil samples will be collected for analyses of petroleum hydrocarbons to evaluate whether additional petroleum hydrocarbon sources are contributing to the existing plume.

8.1.2 Nature of Aquitard Below Property

Containment as an appropriate strategy will be evaluated to address the hydrocarbon source area. The silt/clay unit that underlies the Property may serve as an aquitard, but past investigations have provided inconsistent information related to the description, depth, and continuity of the layer.

To address this data gap, six deep soil borings (AB-1 through AB-6) will be advanced around the perimeter of the Property to maximum depths of 35 feet bgs to assist in evaluating the lateral extent of the aquitard. In addition, an additional deep boring will be advanced to the east of MW-29. The deep boring will be backfilled and completed as a 2-inch-diameter monitoring well (MW-A7) screened from 3 to 13 feet bgs. As part of this investigation, soil samples will be collected and tested for physical geotechnical properties as needed for design purposes.

8.1.3 Extent of Soil Impacts Surrounding ADC Parcel

To evaluate the limits of any proposed excavation the extent of impacts to soil should be thoroughly characterized. The precise vertical and horizontal extent of hydrocarbon impacts in soil in the area east of the northern portion of the ADC Parcel needs to be assessed to accurately determine the extent and volume of potentially impacted soil. According to the boring log for MW-29, contaminated soil was detected by field screening at a depth of 9 feet bgs in MW-29, but no samples were collected for chemical analyses from depths greater than 2 feet bgs in this boring or nearby locations MW-27, MW-28, and MW-30. LPH was historically present in monitoring well MW-29. Characterizing the vertical and horizontal extent of soil impacts in the vicinity of MW-29 will better quantify the extent of affected soil and support a practicability analysis for remedial alternatives pursuant to MTCA.

To address this data gap, six soil borings (AP-2 through AP-7) will be advanced in the area east of the northern portion of the ADC Parcel (near former General Petroleum Corporation's spur fuel loading rack) to a maximum depth of 15 feet bgs to define the lateral and vertical extent of soil contamination in the vicinity of MW-29. In addition, the additional deep boring advanced to the east of MW-29 to evaluate the containment option for the hydrocarbon source areas (Section 8.1.2) will provide additional information about soil impacts in this area. The deep boring will be backfilled and completed as a 2-inch-diameter monitoring well (MW-A7) screened from 3 to 13 feet bgs.

In addition, four of the six deep soil borings (AB-1, AB-2, AB-5, and AB-6) will be advanced around the perimeter of the Property to assist in evaluating the lateral extent of the secondary source areas 1, 2, and 4 (Section 7.2). Soil samples from borings AB-1 and AB-5 will be collected continuously from approximately 0.5 to 5 feet bgs. Shallow samples (above water table) with the obvious signs of petroleum-hydrocarbon contamination will be analyzed for TPH-D and TPH-O.

8.1.4 Tidal Influences

Minimal groundwater response to tidal fluctuations has been observed during previous investigations.

The potential for tidal influences on groundwater will be evaluated further by undertaking a tidal study incorporating a temporary stilling well in Puget Sound as well as newly installed and existing groundwater monitoring wells.

8.1.5 Extent of Ongoing Natural Attenuation

Natural attenuation appears to be occurring in areas affected by releases from the Property based on the presence of dissolved-phase petroleum hydrocarbons in groundwater. It is not known whether natural attenuation processes are successfully reducing concentrations of hydrocarbons to below preliminary screening levels in the downgradient plume. The rate of degradation within the plume is also unknown.

To assess the rate of natural attenuation, groundwater samples will be collected from wells within the downgradient plume and analyzed for a suite of natural attenuation parameters. The groundwater sampling will be designed so as to collect samples representative of separate wet and dry seasons. Analyses will include general chemistry water quality parameters (i.e., dissolved oxygen, total organic carbon, alkalinity, etc.). The selection of natural attenuation parameters will be consistent with requirements specified in Ecology guidance (Ecology 2005).

8.1.6 Aquifer Properties

To determine the hydraulic conductivity of off-Property aquifer materials, aquifer testing will be performed. The aquifer testing will be performed by conducting slug tests in two of the downgradient monitoring wells installed as part of this Data Gaps Supplemental Investigation.

8.1.7 Analytical Testing

Two soil samples collected from each soil boring installed as part of this Supplemental Investigation will be analyzed for TPH-G, TPH-D, and TPH-O using Ecology methods NWTPH-Gx and NWTPH-Dx; samples with detectable concentrations of TPH-D will be run with a silica gel cleanup to remove any biogenic interference (typically from decaying plant matter).

Soil samples from the downgradient borings (MW-A3 through MW-A6 and AP-1) will be analyzed for BTEX and methyl tertiary-butyl ether (MTBE) using EPA Method 8260B, and low-level PAHs by EPA method 8270D SIM. In addition, select soil samples from these downgradient borings that exhibit contamination based on field screening will be analyzed for 1,2-dichloroethane, ethylene dibromide (dibromoethane), and n-hexane by EPA Method 8260B.

Two soil samples with the highest concentration of detected petroleum hydrocarbons will be analyzed for extractable petroleum hydrocarbons (EPH) and volatile petroleum hydrocarbons (VPH) using Ecology Method WA MTCA-EPH/VPH. The soil sample results will assist in defining the horizontal and vertical extent of soil contamination with IHS. Results of EPH/VPH analyses will be used in calculating remediation levels during the FFS.

Two soil samples collected from the saturated zone of the perimeter borings (AB-1 though AB-6) will be analyzed for total organic carbon, soil bulk density, porosity, volumetric water content, and permeability (Shelby tube). Samples of drill cuttings will be retained from each

boring for use in developing design parameters for a potential slurry wall mix, if necessary. Data from this testing will be used to assist in the development of remedial alternatives.

Groundwater monitoring will be conducted at the Site after the additional wells are installed. The groundwater samples will be collected from five existing wells (MW-11, MW-19, MW40R, MW-A1 and MW-A2) that are currently monitored semiannually, four newly installed downgradient monitoring wells (MW-A3 through MW-A6), and one newly installed upgradient monitoring well (MW-A7). The quarterly groundwater samples will be analyzed for TPH-G, TPH-D, and TPH-O using Ecology Methods NWTPH-Gx and NWTPH-Dx; BTEX and MTBE by EPA Method 8260B; low-level PAHs by EPA method 8270D SIM; and dissolved lead by EPA Method 6020. In addition, selected groundwater samples will be analyzed for 1,2-dichloroethane, ethylene dibromide and n-hexane by EPA Method 8260B. As previously mentioned, groundwater samples will be collected during the dry season and wet season quarterly groundwater monitoring events for analysis of natural attenuation parameters.

8.2 General Approach to Focused Feasibility Study

After the Data Gap Supplemental Investigation has been completed and at least one groundwater monitoring event that incorporates the newly installed wells has been conducted, the FFS will be performed. The purpose of the FFS is to identify and evaluate remedial alternatives for the contaminated subsurface soil to minimize or prevent further releases of pollutants into the groundwater and reduce the off-site migration of contaminated groundwater.

In advance of the FFS report the Remedial Action Objectives have been identified. The RAOs are site-specific goals established to protect human health and the environment. The RAOs provide a framework for developing and evaluating remedial action technologies and alternatives. Three preliminarily RAOs have been identified for the FFS.

- Reduce the potential for IHSs to leach from site soil to groundwater.
- Reduce the potential for IHSs to migrate off site.
- Meet cleanup levels in soil and groundwater at the applicable point of compliance within a reasonable restoration time frame.

Groundwater and soil are the two primary media that will require remedial action. The objective will be to address the remaining exposure pathways/receptors and this can be achieved by reducing concentrations and contaminant mass in soil (source control) which therefore, will address the soil to groundwater pathway and the vapor pathway. Institutional controls will be evaluated to address the remaining direct exposure pathway.

MTCA requires that cleanup levels be met at the point of compliance or at a conditional point of compliance. MTCA (WAC 173-340-720 through 173-340-760) defines development of cleanup levels for groundwater and soil and outlines the process for determining the point of compliance or conditional point of compliance (WAC 173-340-720(8)(c) for each medium. A conditional point of compliance can be at the Property boundary or beyond for sites adjacent to surface

water assuming that all property owners beyond the Property agree to the conditional point of compliance.

MTCA acknowledges that cleanup levels may not be met at the point of compliance initially but requires that cleanup levels be met within a reasonable time frame [WAC 173-340-360 (4)]. MTCA also allows the use of “remediation levels” [WAC 173-340-360 (2)(h)] for sites where cleanup levels cannot necessarily be achieved at the point of compliance or where a more permanent solution is not practical based in part on MTCA’s disproportionate cost analysis.

Based on the historical data and the data obtained during the Data Gap Supplemental Investigation, the FFS will:

- Finalize Remedial Action Objectives;
- Establish site-specific cleanup levels, points of compliance for soil and groundwater, and, if necessary, propose remediation levels;
- Identify applicable state and federal laws;
- Evaluate Cleanup Alternatives based on MTCA criteria (WAC 173-340-360), including threshold requirements, permanency of remedial solutions, restoration time frame, public concerns, and cost, including procedures to assess relative benefits versus disproportionate cost; and
- Recommend a Remedial Action Alternative.

The FFS will also present an expected schedule of implementation and a public participation plan.

8.2.1 Review of Potential Remedial Alternatives

A reasonable number and type of cleanup action alternatives have been previously evaluated in an earlier report (Exponent, 1998a). Based on the previous work and discussion with Ecology, the FFS will not redo the screening of technologies section of the previously approved Feasibility Study (FS). Instead, the FFS will proceed directly to the evaluation of feasible remediation alternatives. Consistent with discussions and meeting with Ecology, the FFS will focus on evaluating a select number of remediation alternatives that are considered potentially feasible to address petroleum hydrocarbon impacts in soil and groundwater at the Site. These remediation alternatives include:

1. Excavation of secondary source area to the degree practicable, capping of soils, and monitored natural attenuation to address downgradient groundwater;
2. Capping of the source area to contain site soils and Monitored Natural Attenuation to address downgradient groundwater;
3. Subsurface slurry wall containment barrier and capping of the source area and monitored natural attenuation to address downgradient groundwater; and

4. Enhanced natural attenuation through the use of an oxygen enhancer for downgradient groundwater.

The combinations of two or several remediation alternatives listed above are considered potentially appropriate to address hydrocarbon impacts along with the use of Institutional Controls at the Site. These alternatives will be evaluated in the FFS as standalone cleanup options. The alternatives consist of technologies or combination of technologies to address the source area soils and LPH, combined with one or two technologies to address downgradient groundwater.

The remediation technologies employed in these alternatives are described below.

EXCAVATION OF SECONDARY SOURCE MATERIAL

Remedial excavation involves excavation, transport, and off-site disposal of affected soil. Impacted soil could be removed based on assumptions specific to each of three options: (1) "secondary source area" removal, (2) removal of known source(s), and (3) comprehensive excavation. The limits of practicable soil removal will be evaluated in the FFS in accordance with MTCA's permanence criteria.

SLURRY WALL

A subsurface slurry barrier wall is a relatively narrow (6 inches to 3 feet thick), subsurface, low-permeability barrier wall that is installed using slurry-trenching technology. The wall is designed to impede groundwater flow and eliminate the potential migration of LPH. A slurry wall would be used in conjunction with a remediation system to address impacted soil and/or groundwater. A slurry wall would likely be constructed by mixing native soils with bentonite clay and possibly other admixtures in situ in an alignment partially surrounding the source area. The slurry wall would ideally be constructed such that the bottom of the wall is keyed to an aquitard; however, a "hanging" slurry wall, in which the bottom of the wall is in the aquifer at an appropriate depth below impacted material, may be acceptable, particularly to contain LPH. If the slurry wall is considered as one of the remedial options, groundwater wells will be installed with screens below the bottom of the slurry wall on and off-property to monitor the groundwater quality.

Geotechnical data necessary to design a slurry wall include lithologic descriptions at regular intervals; depth to an aquitard; permeability of the native material at the proposed bottom of the slurry wall; and suitability of the native material as aggregate. These data will be collected during the Data Gap Supplemental Investigation.

MONITORED NATURAL ATTENUATION

Monitored natural attenuation (MNA) is a remedial technology that can lead to permanent destruction of IHSs in a noninvasive manner. The approach relies on natural processes, including biodegradation by indigenous organisms and adsorption to soil, to retard and degrade organic compounds and to retard and immobilize metals in combination with appropriate monitoring. Ecology allows the use of MNA only in conjunction with source removal or control. This technology is especially appropriate to the petroleum hydrocarbon plume at the Site. The

depositional history of the shallow subsurface in the vicinity of the Property has resulted in a substantial amount of natural organic materials in the subsurface. This organic material supports natural microorganisms that can support natural biodegradation of groundwater constituents. The high organic content of soils at the Site is expected to provide a favorable environment for effective natural biodegradation of organic constituents that may be present in affected groundwater.

A monitoring network and program are typically associated with this technology to ensure that hazardous constituent degradation is effective and that cleanup levels are attained. Guidance by Ecology (July 2005) provides technical recommendations regarding the types of monitoring parameters and analyses useful for evaluating the effectiveness of MNA and will be used during data gaps sampling to determine the viability of this approach for the FFS.

OXYGEN ENHANCED BIOREMEDIATION

MNA in some cases may not result in degradation of IHAs that meet cleanup levels or meet cleanup levels in an acceptable time frame. In these cases it may be necessary to enhance the natural biodegradation processes. Since hydrocarbon compounds degrade most quickly by aerobic processes, groundwater needs to be well oxygenated to maximize biodegradation. Where groundwater dissolved oxygen (DO) concentrations are too low, at some sites the addition of air or oxygen to the groundwater can increase the DO and thereby enhance the natural processes. A common means of increases the oxygen content of groundwater is to use a manufactured time release electron acceptor, for example a magnesium peroxide-based powder that slowly releases oxygen when hydrated. This slow release of oxygen is intended to increase the DO concentration in groundwater, facilitating conditions favorable to microbes that consume contaminants such as diesel-range hydrocarbons. Such products can be applied in three ways: (1) by injection into the aquifer in slurry form, typically through direct-push points; (2) by placing a bag (“sock”) containing the product in an existing well; and (3) by mixing the product into soil in an excavation.

Data necessary to determine applicability of a time release electron acceptor and an application regime are specified by the supplier. Typical parameters of interest in addition to contaminant concentrations include pH, total organic carbon, and temperature. These data can be collected during sampling of existing wells. The potential effectiveness of this remedial technology will be evaluated in the Focused Feasibility Study.

8.2.2 Contents of FFS

A proposed table of contents for the FFS is presented below.

- 1.0 INTRODUCTION
 - 1.1 Overview
 - 1.2 Purpose and Scope of Work
 - 1.3 Report Organization
- 2.0 BACKGROUND

- 2.1 Site Description and History
- 2.2 Nature and Extent of Contamination
 - 2.2.1 Geology
 - 2.2.2 Hydrogeology
 - 2.2.3 Nature and Extent of Contamination
- 2.3 Beneficial Water and Land Use
- 2.4 MTCA Risk-Based Evaluation (a list of potential applicable or relevant and appropriate requirements is provide in Appendix H).
- 2.5 Ecological Setting and Terrestrial Ecological Evaluation
- 3.0 FEASIBILITY STUDY SCOPING
 - 3.1 Remedial Action Objectives
 - 3.2 Regulatory Requirements
 - 3.2.1 Ecology Requirements
 - 3.2.2 Applicable or Relevant and Appropriate Requirements
 - 3.2.3 Permits
 - 3.3 Cleanup Levels
 - 3.3.1 Indicator Hazardous Substances
 - 3.3.2 Site-Specific Cleanup Levels
 - 3.3.3 Remediation Levels
 - 3.4 Points of Compliance
 - 3.5 Areas Needing Remediation
- 4.0 CLEANUP ALTERNATIVES
 - 4.1 Capping with Monitored Natural Attenuation
 - 4.2 Slurry Wall Containment and Capping with Monitored Natural Attenuation
 - 4.3 Secondary Source Excavation and Capping with Monitored Natural Attenuation
 - 4.4 Expanded Excavation in Accordance with MTCA's Permanence Criteria
 - 4.5 Enhanced Natural Attenuation Using *Enhanced Aerobic Bioremediation*.
 - 4.6 Institutional Controls
- 5.0 DETAILED EVALUATION OF CLEANUP ACTION ALTERNATIVES
 - 5.1 Evaluation Criteria
 - 5.1.1 MTCA Threshold Requirements
 - 5.1.2 MTCA Disproportionate Cost Analysis
 - 5.2 Individual Analysis of Alternatives
 - 5.3 Comparative Analysis of Alternatives
 - 5.4 Summary Analysis of Alternatives
- 6.0 Recommended Remedial Action Alternative

REFERENCES

LIMITATIONS

Appendix A Cost Estimates for FFS Remediation Alternatives

9.0 REFERENCES

- AGRA (AGRA Earth & Environmental, Inc.). 1996a. "Work Plan for Liquid Petroleum Hydrocarbon Recovery Pilot Testing", Mobil Oil Corporation and American Distributing Bulk Plants, Everett, Washington. January (revised in March).
- . 1996b. Groundwater Monitoring and Sampling Report. Mobil Oil Corporation and American Distributing Company Facilities, Everett, Washington, April 4.
- . 1996c. "Off-Site Characterization Work Plan". Mobil Oil Corporation and American Distributing Company Facilities, Everett, Washington, April.
- . 1996d. "Off-Site Contamination Source Assessment", Mobil Oil Corporation and American Distributing Bulk Plants, Everett, Washington. October.
- . 1996e. Review of LPH Pilot Test, Mobil Oil Corporation/American Distributing Company Bulk Plant Properties, Everett, Washington (letter). October 18.
- . 1996f. Weekly and Monthly Field Reports regarding the CSO line repair. April to December.
- . 1997. LPH Recovery Technical Memorandums. Mobil Oil Corporation/American Distributing Company Bulk Plant Properties, Everett, Washington. February to December.
- AMEC Earth & Environmental, Inc. (AMEC). 2007. "Forth Quarter 2006: Groundwater Sampling and Liquid-Phase Hydrocarbon Recovery Report" ExxonMobil/ADC Properties, 2717-2731 Federal Avenue, Everett, Washington. March 5.
- . 2006. "First Quarter 2007: Groundwater Sampling and Liquid-Phase Hydrocarbon Recovery Report" ExxonMobil/ADC Properties, 2717-2731 Federal Avenue, Everett, Washington. June 27.
- . 2007. Video Survey of Storm Drain System East End of Site, ExxonMobil/ADC Properties, 2717-2731 Federal Avenue, Everett, Washington (letter). March, 23.
- . 2008a. Off-Site Groundwater Monitoring Well Installation Report, 2717-2731 Federal Avenue, Everett, Washington. April 22.
- . 2008b. Tidal Study Report, Former Mobil Oil Terminal 46-108, 2717-2731 Federal Avenue, Everett, Washington (letter). June 12.
- City of Everett (Everett). 2002. Everett Shoreline Master Program, Section 1- Introduction. <http://www.everettwa.org/default.aspx?ID=869>.
- . 2006. Fish & Wildlife Habitat Conservation Areas Critical Areas Map 6. City of Everett Planning and Community Development.
- . 2009. Critical Areas Map 1. City of Everett Planning and Community Development.

- Dilgard and Riddle, 1973. "Shoreline Historical Survey Report", Shoreline Master Plan Committee for City of Everett. 1973.
- Exponent. 1998a. "Remedial Investigation and Focused Feasibility Study", Mobil and ADC/Miller Properties, Everett, Washington. July 23.
- . 1998b. "Interim Action Workplan and Engineering Design Report," Mobil and ADC/Miller Properties, Everett, Washington. July 23.
- . 2000. "Closure Report", Mobil and ADC/Miller Properties, Everett, Washington. February.
- Kleinfelder, Inc. 2001. "Annual Liquid Petroleum Hydrocarbon Recovery Report", Mobil and ADC/Miller Properties, Everett, Washington. February 15.
- . 2001. Liquid Petroleum Hydrocarbon Recovery Options, Mobil and ADC/Miller Properties, Agreed Order DE98TCP-N223 (letter). March 29.
- . 2001. Liquid Petroleum Hydrocarbon 2001 Monitoring and Recovery Schedule, Mobil and ADC/Miller Properties, Agreed Order DE98TCP-N223 (letter). March 30.
- . 2001. 2001 Groundwater Monitoring Schedule, Mobil and ADC/Miller Properties, Agreed Order DE98TCP-N223 (letter). March 30.
- Miller, J.F., Frederick, R.H., and Tracey, R.H. 1973. Precipitation Frequency Atlas of the United States, Volume IX—Washington: National Weather Service, Silver Spring, Maryland. Prepared for Soil Conservation Service, Engineering Division.
- National Wetland Inventory (NWI). 2009. Online Mapper. Retrieved May 1, 2009 from <http://www.fws.gov/wetlands/Data/mapper.html>.
- Peck, Norman D. of the Washington Department of Ecology. 1997. Re: Removal of Containment Boom at Dunlap Towing, Everett, WA (letter). January 22.
- Peck, Norman D. and Polayes, Joanne of the Washington Department of Ecology. 1997. Re: Mobil-American Distributing Site (letter). December 30
- Polayes, Joanne of the Washington Department of Ecology. 2000. Completion of Construction Portion of the Interim Action at the Mobil and ADC/Miller Properties (letter), Everett, Washington. March 23.
- Premier (Premier Environmental Services, LLC.). 2002. Annual Liquid Petroleum Hydrocarbon Recovery Report, ExxonMobil Corporation/American Distributing Company (ExxonMobil/ADC) Site, Everett, Washington, Agreed Order DE 98TCP-N223 (letter). March 1.
- PTI (PTI Environmental Services). 1997a. "LPH Recovery Technical Memorandum," Federal Avenue Site, Everett, Washington. February.

- PTI. 1997b. Proposal for Completion of the MTCA Process, Federal Avenue Site, Everett, Washington (letter). September 5.
- Rittenhouse-Zeman & Associates, Inc. (RZA). 1985. "Preliminary Soil and Ground Water Quality Study", Mobil Oil Corporation Bulk Plant, 2731 Federal Avenue, Everett, Washington, June.
- . 1989. "Remedial Action Update Report", Mobil Oil Corporation Bulk Plant, 2731 Federal Avenue, Everett, Washington, September 28.
- RZA AGRA Earth and Environmental, Inc. (RZA AGRA). 1992. "Quarterly Groundwater Sampling Report", Former Bulk Plant, Everett, Washington. March 22.
- . 1994. "Off-Site Subsurface Characterization and Recovery Trench Installation", Former Bulk Plant, Everett, Washington. April 18.
- URS Corporation. 2000a. Extended Phase I Environmental Site Assessment. Proposed California Street Overcrossing, Everett, Washington. February 9.
- URS Corporation. 2000b. Draft Report. Phase II Site Investigation Report, California Street Overcrossing, Everett, Washington. November 3.
- URS Corporation. 2001. Addendum 1. Geotechnical Investigation Report. California Street Overcrossing, Everett, Washington. April 13.
- Washington State Department of Ecology (Ecology). 2001. Model Toxics Control Act Cleanup Regulation, Chapter 173-340 WAC. Publication No. 94-06.
- Washington State Department of Ecology (Ecology). 2005. "Guidance on Remediation of petroleum-Contaminated Groundwater by Natural Attenuation", Publication No. 05-09-091 (Version 1.0), July.
- WRCC (Western Regional Climatic Center). 2009. Climatological Data Summaries: Everett Junior College, Washington. <http://www.wrcc.dri.edu/index.html>, accessed May 30, 2009.

TABLES

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|--|-------------------|------------------|--|--|--|
| May-85 | Rittenhouse-Zeman and Associates, Inc. (RZA) | ExxonMobil Parcel | | Borings, monitoring well installation | 2-inch diameter monitoring wells B-1 through B-5 (MW-1 through MW-5 in several reports) installed. | B-1, B-2, B-4, and B-5. Petroleum odor noticed in borings, evidence found of contamination below groundwater table. |
| Mar-88 | RZA | ExxonMobil Parcel | | Borings, monitoring well installation | 2-inch diameter monitoring wells MW-6 through MW-18 installed. | Soil and groundwater samples collected. LPH (1.29 feet) measured in MW-14. |
| Apr-88 | RZA | ExxonMobil Parcel | | Recovery trench installation, SVE and groundwater treatment system test (oil-water separator and air stripper) | Installation of recovery trench near MW-14, soil vapor extraction system and groundwater treatment system to evaluate feasibility of extracting LPH | Decommissioned in 1998 during construction of low-permeability cap at the Property. |
| May-88 | RZA | ExxonMobil Parcel | | Infiltration gallery, pumping subsurface fluids | Infiltration gallery installed in the vicinity of MW-14. Subsurface fluids were pumped with a vacuum truck from the sumps. | The gallery was T-shaped and 45 ft long with two 55 gal drums installed at both ends as sumps. 1,400 gal of liquid removed, 50 gal was LPH. As a result, LPH thickness in MW-14 decreased to 0.40 ft by August 1988. |
| Mar-89 | RZA | ExxonMobil Parcel | | Automated groundwater extraction and treatment system | An automated groundwater extraction and treatment system was installed in the location of the infiltration gallery. The system included fluid extraction sump stationed in RW-1 (formerly MW-14), oil-water separator, air stripper, and reinfiltration gallery. | The groundwater extraction and treatment system was shut down in March 1990 due to flooding of the re-infiltration gallery, and has not been restarted. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|---------------------|---|---------------------------------------|------------------|---|---|---|
| Jan-90 | Environmental Science and Engineering, Inc. (ESE) | ADC Parcel | | Borings | Hand auger AD-01 through AD-19 | Soil samples collected. |
| Feb-90 | ESE | ADC Parcel | | Borings, monitoring well installation | HSA borings W-1 through W-7. 2-inch diameter monitoring wells W-1 through W-6 installed. | W-7 was backfilled. |
| Jun-90 | ESE | ADC Parcel | | Hand-auger borings | Hand-auger borings W-8 through W-17 hand | No soil data found for W-8 through W-17. |
| Oct-90 | RZA | ExxonMobil Parcel | | Shallow grid soil sampling, bio-feasibility study | Hand auger B-1 through B-25. Two soil sample studies for the purpose of conducting a slurry flask bio-feasibility study. | 0-3 ft bgs. Rapid biodegradation of TPH-G fraction was observed. Biodegradation of TPH (undifferentiated) was not achieved. |
| Nov-90 | Unknown | ExxonMobil Parcel | | Monitoring wells decommissioning | B-3 (MW-3), B-4 (MW-4), and MW-7 destroyed | No documentation of well decommissioning. |
| Mar through June-91 | RZA | Parcels surrounding ExxonMobil Parcel | | Borings, monitoring well installation | 2-inch diameter monitoring wells MW-19 through MW-24 and 4-inch diameter monitoring wells MW-27 through MW-30 installed. Soil boring B-21-91 advanced. | MW-25 and MW-26 were inaccessible or dry and later renamed as B-25 and B-26. No well decommissioning records were found. |
| Jun-91 | RZA and ESE | The Property | | Quarterly groundwater monitoring | Groundwater monitoring event. New 2-inch diameter monitoring wells MW-25 and MW-26 installed. Gauged wells: RW-1, B-1, B-2, B-5, MW-6, MW-8 through MW-13, MW-15 through MW-18, AD-19, W-1 through W-6, and W-8 through W-15. | B-1, MW-8, AD-19, W-1, W-6, W-9, W-11, W-12, W-13, and W-15 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|---|---|------------------|--|---|---|
| Nov-91 | RZA AGRA | ExxonMobil Parcel | | Borings, recovery well | 8-inch diameter recovery well RW-2 installed. Deep soil borings B-1A, B-8A, and B-15A advanced. | Soil borings advanced in vicinity of existing wells B-1, B-8, and B-15. No analytical data found for this event. |
| Dec-91 | RZA AGRA Earth & Environmental, Inc. (RZA AGRA) | ExxonMobil Parcel | | Quarterly groundwater monitoring, aquifer and tidal study | Quarterly groundwater monitoring. Gauged wells: RW-1, B-1, B-2, B-5, MW-6, MW-8 through MW-13, MW-15 through MW-30, and AD-19. 24-hour pumping from MW-10 at a rate of 1 to 2 gpm and measuring response in MW-18, RW-1, and RW-2 for 48 hours. | B-1, MW-8, MW-11, MW-26, MW-27, MW-29, and AD-19 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. Hydraulic conductivity at the Site was estimated as 4 to 9.5 ft/day. Minimum tidal influence was observed. |
| 1992 | RZA AGRA | | | Discussions with Ecology | Ecology discussed enforcement with Mobil and RZA AGRA. Ecology decided to allow site to go independent. | |
| Dec-93 | RZA AGRA | West of ExxonMobil Parcel | | Off-Property borings, monitoring well installation, GPR survey | 2-inch diameter monitoring wells MW-31 through MW-33 and MW-35 through MW-37 were installed; B-34 advanced and backfilled. GPR survey was conducted to assess whether underground product lines had been removed. | Survey did not identify any subsurface linear features. |
| Dec-93 | RZA AGRA | ExxonMobil Parcel and off-site property to the west | | Quarterly groundwater monitoring | Groundwater monitoring event. Gauged wells B-1, B-2, MW-6, MW-8 through MW-13, MW-15 through MW-18, MW-27 through MW-33, MW-35 through MW-37. | B-1, MW-27, and MW-29 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|---|---------------------------|------------------|--|---|--|
| Dec-93 | RZA AGRA | West of ExxonMobil Parcel | | Test pits, recovery trench | Excavated five test pits TP-1 through TP-5. Recovery trench installation along the western border of ExxonMobil Parcel. | Monitoring well MW-21 was decommissioned during the recovery trench installation activities. However, a 2002 decommissioning record was found that stated that MW-21 was decommissioned in 2002. |
| 1995 | | | | Agreed Order DE-95TC-N402 | | Required evaluation of LPH. |
| Jul-95 | RZA AGRA | ADC Parcel | | Quarterly groundwater monitoring | Groundwater monitoring event. Gauged wells: W-3, W-5, W-9, W-10, W-12 through W-15. | W-9, W-12, and W-13 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |
| Oct-95 | U.S. Coast Guard Puget Sound Marine Safety Office & City of Everett | North of the Property | | Investigation of petroleum product discharge into Everett Harbor | Camera surveys of the sewer lines | Outfall located approximately 175 yards northwest of the ADC parcel, section of Combined Sewer Outflow (CSO) line with LPH seepage. |
| Nov-95 | RZA AGRA | Site | | Groundwater monitoring | Groundwater monitoring event. Gauged wells: RW-1, B-1, B-2, MW-6, MW-8 through MW-13, MW-15 through MW-18, and MW-27 through MW-37. | B-1, MW-18, MW-29, and MW-30 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |
| Dec-95 | RZA AGRA | Site | | Groundwater monitoring | Groundwater monitoring event. Gauged wells: RW-2, B-2, MW-8, MW-9, MW-18, MW-15 through MW-18, MW-27, and MW-28. | RW-2, MW-9, MW-18, and MW-28 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|-------------------|--------------------------------|------------------|--|---|---|
| Mar-96 | AGRA | North of the Property | | Borings | Direct-push soil borings GP-1 through GP-13. Borings associated with the CSO line repair. | The collected soil sample results indicated that soil surrounding the damaged portion of the CSO line were impacted with petroleum hydrocarbons. LPH accumulation was noticed in temporary screens installed in soil borings. No groundwater samples were collected from temporary screens. |
| Apr-96 | City of Everett | | | Meeting | Meeting held to discuss options for repairing the section of CSO line. | Replacement of the settled portion of the line and slip lining of the remaining portion of the line was decided. |
| May-96 | AGRA | ADC Parcel | | Borings | Bobcat borings BB-1 through BB-14. | Soil samples collected. |
| Jun-96 | AGRA | North of the Property | | CSO line repairs | Excavation of settled portion of pipe replaced. Slip-lining of remaining CSO line. CSO line excavation dewatering. | 1,450,800 gal of groundwater and 23,050 gal of LPH were removed during CSO line excavation and dewatering. |
| Jun-96 | AGRA | ADC Parcel | | Borings, monitoring wells, and test pits | 4-inch diameter recovery well VRW-1 and 2-inch diameter monitoring well MW-38 installed. Seven test pits TP-1-96 through TP-7-96 excavated. | Wells were installed on the northeast corner of the property. Test pits were throughout the ADC Parcel. |
| Jun-96 | AGRA | LPH Vacuum Recovery Pilot Test | | LPH vacuum recovery pilot test | 14-day test included SVE and groundwater/LPH pumping system. | 125 gal of LPH and 28,228 gal of groundwater removed from VRW-1 during test. |
| Aug-96 | AGRA | Site | | Monitoring wells | Gauged wells at the property. | LPH found in B-1, VRW-1, MW-27, MW-29, MW-30, MW-38, W-1, W-9, W-15. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|------------------|--|----------------------------|------------------|---|--|---|
| Feb-97 | PTI Environmental Services (PTI) | Site | | LPH recovery technical memorandum | Technical memorandum to summarize environmental investigations, LPH recovery activities, and geology. | PTI concluded that long-term, passive (LPH only) recovery may be the most effective method of LPH recovery. |
| Nov-97 Jan-98 | Pacific Environmental Group, Inc. (PEG) | Kimberly-Clark Property | | Boring, monitoring well | Direct push borings Probe-1 through Probe-15. 2-inch diameter HSA monitoring wells KC-1 and KC-2 inside the KC warehouse. | Groundwater samples were collected from temporary screens installed in each boring. LPH not identified in soil borings or monitoring wells. TPH-D and TPH-O were detected above MTCA Method A cleanup levels in borings advanced in the vicinity of repaired CSO line. Samples not collected in vicinity of former ASTs. |
| 1998 | | | | Agreed Order DE98TC-P-N223 | | Required remedial investigation/focused feasibility study. |
| Jul-98 | Exponent | Site | | Remedial Investigation and Focused Feasibility Study | Report | Exponent recommended the installation of LPH recovery trenches and capping the property. |
| Nov-98 | Kleinfelder, Inc. (Kleinfelder) | ADC Parcel | | Survey, geotechnical evaluation | Initial survey. Asbestos survey prior to demolition. | Demolition activities included four buildings on the ADC parcel. Demolition completed in January 1999. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|-------------------|--|------------------|---|--|---|
| Dec-98 | Kleinfelder | The Property | | Interim remedial action | Removed TPH-impacted soil, graded the property, removed purge water. | 162 tons of contaminated shallow soil and vegetation removed from within the ADC firewall area during demolition and transported to TPS Technologies facility for disposal. 3.5 tons of class 3 petroleum-contaminated soil taken to CRS Associated. Marine Services, Inc. removed 110 gal of purge water. |
| 1999 | Kleinfelder | The Property | | Interim remedial action (continued) | Monitoring well abandonment. Interceptor trench construction along the western and northern property boundaries. Low-permeability cap construction over the property. Recovery wells LPH-1 through LPH-9 installed in interceptor trench. Storm collection system that connects to the City of Everett sewer system was installed. | Monitoring wells abandoned (MW-6, MW-8, MW-9, MW-12, MW-13, MW-15, MW-16, MW-17, MW-38, WP-1, B-1, B-2, W-4, W-8, W-11, W-12, W-14, AD-11, AD-12, AD-13, AD-15, AD-19, W-10, W-15, and MW-40). Completed site grading, installation of two layers of geotextile fabric, asphalt-treated base material, and paving fabric and asphalt cap. |
| Oct-99 | Kleinfelder | The Property | | Monitoring wells installation | Monitoring wells W-10R, W-15R, and MW-40R. | Wells installed to replace wells W-10, W-15, and MW-40. |
| Dec-99 | Dames and Moore | To the south and southeast from the Property | | Geotechnical drilling and piezometer installation | DM-6, DM-7, and DM-8 were sampled for environmental samples. | Work associated with California Street Overcrossing (CSTO) Project. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|---|---|------------------|--|--|---|
| Sep-00 | URS Corporation (URS) | To the south, east, and southeast from the Property | | Borings | Phase II investigation for the CSTO Project. Push-probe borings UG-1 through UG-12. | Groundwater samples collected from temporary screens installed in UG-2 and UG-8. Estimated 7,600 cubic yards of petroleum-contaminated soil present along the overcrossing alignment. |
| Jul-01 | URS | Johnston Petroleum parcel | | Borings | Phase II investigation for Johnson Petroleum parcel. Push-probe borings JP-1 through JP-7. | Soil samples collected. Groundwater samples collected from JP-1, JP-4, and JP-7. No significant contamination found. |
| Feb-02 | Environmental Resolutions, Inc. (ERI) | Site and vicinity | | Monitoring wells decommissioning, monitoring well re-installment | Abandonment of monitoring wells (MW-22, MW-23, MW-24, MW-35, and MW-37) and piezometer DM-6 due to proximity to the CSTO Project. Re-installed well W-2. | No soil samples taken during W-2 installation. |
| 2002 | Reid Middleton | CSTO | | Memorandum to Ecology | Southeast corner of the asphalt cap over the ExxonMobil Parcel removed. Steel piles for concrete foundation were installed. | No information regarding contaminant soil excavation and removal was found. |
| 2002-2007 | Kleinfelder, ERI, AMEC Earth & Environmental, Inc. (AMEC) | Site | | Groundwater monitoring | Monthly LPH gauging and quarterly groundwater monitoring. | LPH greater than 0.02 ft thick is bailed manually and oleophilic socks are replaced. |
| Jul-02 | ERI | West of the ExxonMobil Parcel | | Well decommissioning | Monitoring wells MW-20, MW-21, and one unidentified well were decommissioned. | The record contradicts the records that indicate that MW-21 was decommissioned during the December 1993 recovery trench installation. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|--------------|-------------------|---------------------------------|------------------|--|--|--|
| 2007-present | AMEC | Site | | Groundwater monitoring | AMEC request to change to semiannual groundwater monitoring. | Request was accepted by Ecology. |
| 2008 | AMEC | West of the property | | Monitoring wells | Off-property monitoring wells MW-A1 and MW-2A installed on the west side of Federal Avenue. | Monitoring wells MW-A1 and MW-2A are incorporated into existing groundwater monitoring network. |
| Feb-08 | AMEC | Site | | Tidal study | Tidal response was measured in W-3, W-6, MW-11, MW-28, and MW-40R | Minimal response in each well, except MW-11. |
| Jun-08 | AMEC | Site | | Well Head elevations survey | True North Land Surveying of Seattle, Washington, surveyed recovery and monitoring wells located on-site | Recovery wells LPH-1 through LPH-9 and monitoring wells W-1, W-2, W-3, W-6, W-10R, MW-10, MW-11, W-15R, W-17, RW-2, MW-19, MW-27, MW-28, MW-29, MW-30, MW-40R, and MW-A1 and MW-A2. |
| Jun-08 | Floyd Snider | North-Northeast of the property | | Excavation and disposal of PCS and dewatering the excavation | Soil associated with Puget Sound Outfall 5 (PSO 5) Overflow Structure project was excavated and disposed off. In addition, dewatering also occurred during excavation. | Soil was field-screen. Soil that exhibited obvious signs of contamination was disposed off as Class II soil without sampling. Soil that appeared to be "clean", was sampled and then disposed as Class II soil. Water from the excavation was sampled for the City sewer discharge requirements. |
| 2009 | AMEC | Site | | Proposed 2009 Agreed Order | | Data Gap Investigations, followed by Focused Feasibility Study, and CAP. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

Abbreviations

ADC = American Distributing Company
AST = Above Ground Storage Tank
bgs = below ground surface
CAP = Cleanup Action Plan
CSO = Combined Sewer Outflow
CSTO = California Street Overcrossing
Ecology = Washington State Department of Ecology
ft = feet
gal = gallons
gpm = gallons per minute
GPR = Ground Penetrating Radar
HSA = Hollow Stem Auger
KC = Kimberly-Clark
LPH = Liquid Petroleum Hydrocarbons
MTCA = Model Toxics Control Act
PCS = petroleum-contaminated soil
SVE = Soil Vapor Extraction
TPH = Total Petroleum Hydrocarbons
TPH-D = Total Petroleum Hydrocarbons-Diesel Range Organics
TPH-G = Total Petroleum Hydrocarbons-Gasoline Range Organics
TPH-O = Total Petroleum Hydrocarbons-Residual Range Organics

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|---------------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| AD-1 | 0.5 to 1 | 1/15/1990 | -- | 780 | -- | -- |
| AD-1 | 3 | 1/15/1990 | -- | 3,900 | -- | -- |
| AD-1 | 3 | 1/15/1990 | -- | 2,380 ¹ | -- | -- |
| AD-2 | 0.5 to 1 | 1/15/1990 | -- | 250 | -- | -- |
| AD-2 | 2.5 to 3 | 1/15/1990 | -- | 280 | -- | -- |
| AD-3 | 0.5 to 1 | 1/15/1990 | -- | 31 | -- | -- |
| AD-3 | 1.5 to 2 | 1/15/1990 | -- | 9 | -- | -- |
| AD-4 | 0.5 to 1 | 1/15/1990 | -- | 720 | -- | -- |
| AD-5 | 0.5 to 1 | 1/15/1990 | -- | 8,800 | -- | -- |
| AD-5 | 1.5 to 2 | 1/15/1990 | -- | 1,900 | -- | -- |
| AD-5 | 2.5 to 3 | 1/15/1990 | -- | 2,300 | -- | -- |
| AD-5 | 2.5 to 3 | 1/15/1990 | -- | 2,100 ¹ | -- | -- |
| AD-6 | 0.5 to 1 | 1/15/1990 | -- | 2,700 | -- | -- |
| AD-7 | 0.5 to 1 | 1/15/1990 | -- | 5,800 | -- | -- |
| AD-8 | 0.5 to 1 | 1/15/1990 | -- | 1,600 | -- | -- |
| AD-8 | 2.5 to 3 | 1/15/1990 | -- | 2,700 | -- | -- |
| AD-8 | 2.5 to 3 | 1/15/1990 | -- | 1,530 ¹ | -- | -- |
| AD-8 | 4.5 to 5 | 1/15/1990 | -- | 6,200 | -- | -- |
| AD-8 | 4.5 to 5 | 1/15/1990 | -- | 7,080 ¹ | -- | -- |
| AD-9 | 0.5 to 1 | 1/15/1990 | -- | 630 | -- | -- |
| AD-9 | 1.5 to 2 | 1/15/1990 | -- | 4,400 | -- | -- |
| AD-10 | 0.5 to 1 | 1/15/1990 | -- | 33,000 | -- | -- |
| AD-11 | 0.5 to 1 | 1/15/1990 | -- | 8,000 | -- | -- |
| AD-11 | 1 to 1.5 | 1/15/1990 | -- | 12,000 | -- | -- |
| AD-12 | 0.5 to 1 | 1/15/1990 | -- | 230 | -- | -- |
| AD-12 | 2.5 to 3 | 1/15/1990 | -- | 14,000 | -- | -- |
| AD-12 | 2.5 to 3 | 1/15/1990 | -- | 9900 ¹ | -- | -- |
| AD-12 | 3 to 3.5 | 1/15/1990 | -- | 16,000 | -- | -- |
| AD-12 | 3 to 3.5 | 1/15/1990 | -- | 12,800 ¹ | -- | -- |
| AD-13 | 0.5 to 1 | 1/15/1990 | -- | 4,400 | -- | -- |
| AD-13 | 2 to 2.5 | 1/15/1990 | -- | 27,000 | -- | -- |
| AD-13 | 2 to 2.5 | 1/15/1990 | -- | 24,900 ¹ | -- | -- |
| AD-14 | 0.5 to 1 | 1/15/1990 | -- | 13,000 | -- | -- |
| AD-14 | 2 to 2.5 | 1/15/1990 | -- | 17,000 | -- | -- |
| AD-14 | 2 to 2.5 | 1/15/1990 | -- | 9,500 ¹ | -- | -- |
| AD-15 | 0.5 to 1 | 1/15/1990 | -- | 61 | -- | -- |
| AD-15 | 0.5 to 1 | 1/15/1990 | -- | 7 ¹ | -- | -- |
| AD-15 | 2.5 to 3 | 1/15/1990 | -- | 2,400 | -- | -- |
| AD-15 | 2.5 to 3 | 1/15/1990 | -- | 3,340 ¹ | -- | -- |
| AD-16 | 0.5 to 1 | 1/15/1990 | -- | 2,200 | -- | -- |
| AD-16 | 0.5 to 1 | 1/15/1990 | -- | 1,370 ¹ | -- | -- |
| AD-17 | 0.5 to 1 | 1/15/1990 | -- | 8,500 | -- | -- |
| AD-17 | 0.5 to 1 | 1/15/1990 | -- | 8,100 ¹ | -- | -- |
| AD-18 | 0.5 to 1 | 1/15/1990 | -- | 24 | -- | -- |
| AD-18 | 4 to 4.5 | 1/15/1990 | -- | 520 | -- | -- |
| AD-19 | 0.5 to 1 | 1/15/1990 | -- | 23,000 | -- | -- |

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|--------------------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| AD-19 | 1 to 1.5 | 1/15/1990 | -- | 100,000 | -- | -- |
| B-1_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 2,117 | -- | -- |
| B-1_Soil Grab | 1.5 to 2 | 10/9/1990 | -- | 446 | -- | -- |
| B-2_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 90.6 | -- | -- |
| B-3_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 213 | -- | -- |
| B-3_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 831 | -- | -- |
| B-4_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 65.2 | -- | -- |
| B-5_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 701 | -- | -- |
| B-6_Soil Grab | 0 to 1 | 10/9/1990 | -- | 428 | -- | -- |
| B-7_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 434 | -- | -- |
| B-8_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 126 | -- | -- |
| B-8_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 174 | -- | -- |
| B-9_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 469 | -- | -- |
| B-9_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 643 | -- | -- |
| B-10_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 206 | -- | -- |
| B-10_Soil Grab | 1.5 to 2 | 10/9/1990 | -- | 231 | -- | -- |
| B-11_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 323 | -- | -- |
| B-11_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 406 | -- | -- |
| B-12_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 191 | -- | -- |
| B-12_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 11,775 | -- | -- |
| B-13_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 277 | -- | -- |
| B-13_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 15.9 | -- | -- |
| B-14_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 212 | -- | -- |
| B-14_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 128 | -- | -- |
| B-15_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 132 | -- | -- |
| B-15_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 17 | -- | -- |
| B-16_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 1,898 | -- | -- |
| B-16_Soil Grab | 1.5 to 2.5 | 10/9/1990 | -- | 9,718 | -- | -- |
| B-17_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 1,513 | -- | -- |
| B-17_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 2,139 | -- | -- |
| B-18_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 46 | -- | -- |
| B-18_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 738 | -- | -- |
| B-19_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 626 | -- | -- |
| B-19_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 10,577 | -- | -- |
| B-20_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 117 | -- | -- |
| B-20_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 46.9 | -- | -- |
| B-21_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 2,116 | -- | -- |
| B-21_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 1,974 | -- | -- |
| B-21-91 | 5 | 6/24/1991 | -- | 12,000 | -- | -- |
| B-21-91 | 5 | 6/24/1991 | -- | 4,700¹ | -- | -- |
| B-21-91 | 6 | 6/24/1991 | -- | 27 | -- | -- |
| B-21-91 | 6 | 6/24/1991 | -- | 10 U | -- | -- |
| B-22_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 360 | -- | -- |
| B-22_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 1,800 | -- | -- |
| B-23_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 1,691 | -- | -- |
| B-23_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 6,421 | -- | -- |
| B-24_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 560 | -- | -- |

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|---------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| B-25_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 76 | -- | -- |
| B-25_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 29.8 | -- | -- |
| B-34/S-2 | 4 to 5.5 | 12/6/1993 | -- | -- | 500 | -- |
| B-34/S-5 | 12.5 to 14 | 12/6/1993 | -- | -- | 4,800 | -- |
| CSO Log yard backfill | | 6/27/1996 | -- | -- | 3,910 | 586 |
| CSO Log yard N-2 | | 7/1/1996 | -- | -- | 58.9 | 221 |
| CSO Log yard pipe | | 6/27/1996 | -- | -- | 45.2 | 25 U |
| CSO Log yard W-1 | | 7/1/1996 | -- | -- | 27 | 67.3 |
| DM-6 | | 12/6/1999 | -- | -- | 44.3 | 25 U |
| DM-7 | | 12/8/1999 | -- | -- | 482 | 225 |
| DM-8 | | 12/1/1999 | -- | -- | 44.4 | 102 |
| GP-1 | 10 | 3/20/1996 | -- | -- | 276 | -- |
| GP-2 | 11.5 | 3/20/1996 | -- | -- | 322 | -- |
| GP-3 | 6 | 3/20/1996 | -- | -- | 1,370 | -- |
| GP-4 | 6 | 3/20/1996 | -- | -- | 297 | -- |
| GP-5 | 3 | 3/20/1996 | -- | -- | 30.4 | -- |
| GP-5 | 8.5 | 3/20/1996 | -- | -- | 703.2 | -- |
| GP-7 | 5.5 | 3/20/1996 | -- | -- | 3,800 | 4,300 |
| GP-8 | 7 | 3/20/1996 | -- | -- | 77 | 160 |
| GP-8 | 8 | 3/20/1996 | -- | -- | 6.55 | -- |
| GP-9 | 8 | 3/20/1996 | -- | -- | 12,000 | 2,900 |
| GP-10 | 7 to 7 | 3/20/1996 | -- | -- | 383 | -- |
| GP-11 | 6.5 | 3/20/1996 | -- | -- | 92 | 60 |
| GP-12 | 11 | 3/20/1996 | -- | -- | 382 | -- |
| GP-12 | 12.5 | 3/20/1996 | -- | -- | 414 | -- |
| GP-13 | 7 | 3/20/1996 | -- | -- | 2 U | -- |
| GP-13 | 10 | 3/20/1996 | -- | -- | 15 | 41 |
| JP-1 | 4 to 8 | 6/21/2001 | -- | -- | 73.8 | 100 |
| JP-2 | 0 to 3 | 6/21/2001 | -- | -- | 134 | 341 |
| JP-2 | 3 to 6 | 6/21/2001 | -- | -- | 379 | 942 |
| JP-3 | 4 to 6 | 6/21/2001 | -- | -- | 10 U | 25 U |
| JP-4 | 3 to 6 | 6/21/2001 | -- | -- | 180 | 58.2 |
| JP-5 | 3 to 6 | 6/21/2001 | -- | -- | 210 | 375 |
| JP-6 | 6 to 9 | 6/21/2001 | -- | -- | 26.6 | 69.3 |
| JP-7 | 1 to 2 | 6/21/2001 | -- | -- | 264 | 923 |
| MW-6 | 2.5 | 3/9/1988 | 180 | 80 | -- | -- |
| MW-7 | 2.5 | 3/9/1988 | 605 | 605 | -- | -- |
| MW-8 | 2.5 | 3/9/1988 | 1,680 | 1,580 | -- | -- |
| MW-9 | 2.5 | 3/9/1988 | 33,500 | 33,500 | -- | -- |
| MW-10 | 2.5 | 3/9/1988 | 1,380 | 1,260 | -- | -- |
| MW-11 | 2.5 | 3/9/1988 | 10,100 | 9,480 | -- | -- |
| MW-12 | 2.5 | 3/9/1988 | 5 U | 5 U | -- | -- |
| MW-15 | 2.5 | 3/9/1988 | 3,430 | 3,030 | -- | -- |
| MW-16 | 2.5 | 3/9/1988 | 5 U | 5 U | -- | -- |
| MW-17 | 2.5 | 3/9/1988 | 174 | 124 | -- | -- |
| MW-18 | 2.5 | 3/9/1988 | 777 | 777 | -- | -- |
| MW-19 | 2 to 3.5 | 3/11/1991 | -- | 53 | -- | -- |

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|--------------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| MW-19 | 2 to 3.5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-19 | 3.5 to 5 | 3/11/1991 | -- | 14 | -- | -- |
| MW-19 | 3.5 to 5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-20 | 2 to 3.5 | 3/11/1991 | -- | 18 | -- | -- |
| MW-20 | 2 to 3.5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-20 | 3.5 to 5 | 3/11/1991 | -- | 20 | -- | -- |
| MW-20 | 3.5 to 5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-21 | 1.5 to 3 | 3/11/1991 | -- | 110 | -- | -- |
| MW-21 | 1.5 to 3 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-21 | 3.5 to 5 | 3/11/1991 | -- | 12,000 | -- | -- |
| MW-21 | 3.5 to 5 | 3/11/1991 | -- | 4,700 ¹ | -- | -- |
| MW-22 | 2.5 to 4 | 3/11/1991 | -- | 41,000 | -- | -- |
| MW-22 | 2.5 to 4 | 3/11/1991 | -- | 7,300 ¹ | -- | -- |
| MW-22 | 4 to 5.5 | 3/11/1991 | -- | 24,000 | -- | -- |
| MW-22 | 4 to 5.5 | 3/11/1991 | -- | 430 ¹ | -- | -- |
| MW-23 | 1 to 2.5 | 3/11/1991 | -- | 300 | -- | -- |
| MW-23 | 1 to 2.5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-24 | 2.5 to 4 | 3/11/1991 | -- | 260 | -- | -- |
| MW-24 | 2.5 to 4 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-24 | 4 to 5.5 | 3/11/1991 | -- | 1,300 | -- | -- |
| MW-24 | 4 to 5.5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-27 | 2 | 6/24/1991 | -- | 4,700 | -- | -- |
| MW-27 | 2 | 6/24/1991 | -- | 900 | -- | -- |
| MW-27 | 3 | 6/24/1991 | -- | 61 | -- | -- |
| MW-27 | 3 | 6/24/1991 | -- | 10 U ¹ | -- | -- |
| MW-28 | 2 | 6/24/1991 | -- | 93 | -- | -- |
| MW-28 | 2 | 6/24/1991 | -- | 10 U ¹ | -- | -- |
| MW-28 | 3 | 6/24/1991 | -- | 51 | -- | -- |
| MW-28 | 3 | 6/24/1991 | -- | 10 U ¹ | -- | -- |
| MW-29 | 1 | 6/24/1991 | -- | 590 | -- | -- |
| MW-29 | 1 | 6/24/1991 | -- | 220 ¹ | -- | -- |
| MW-29 | 2 | 6/24/1991 | -- | 730,000 | -- | -- |
| MW-29 | 2 | 6/24/1991 | -- | 160,000 | -- | -- |
| MW-30 | 2 | 6/24/1991 | -- | 4,900 | -- | -- |
| MW-30 | 2 | 6/24/1991 | -- | 820 | -- | -- |
| MW-30 | 3 | 6/24/1991 | -- | 7,700 | -- | -- |
| MW-30 | 3 | 6/24/1991 | -- | 3,000 | -- | -- |
| MW-31 | 12.5 to 14 | 12/6/1993 | -- | -- | 49 | -- |
| MW-31 | 2.5 to 4 | 12/6/1993 | -- | -- | 13 | -- |
| MW-32 | 12.5 to 14 | 12/6/1993 | -- | -- | 17 | -- |
| MW-32 | 7.5 to 9 | 12/6/1993 | -- | -- | 10 U | -- |
| MW-33 | 12.5 to 14 | 12/6/1993 | -- | -- | 11 | -- |
| MW-33 | 5 to 6.5 | 12/6/1993 | -- | -- | 1,100 | -- |
| MW-35 | 12.5 to 14 | 12/6/1993 | -- | -- | 16 | -- |
| MW-35 | 2.5 to 4 | 12/6/1993 | -- | -- | 10 U | -- |
| MW-36 | 12.5 to 14 | 12/6/1993 | -- | -- | 22 | -- |

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|---------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| MW-36 | 2.5 to 4 | 12/6/1993 | -- | -- | 700 | -- |
| MW-37 | 2.5 to 4 | 12/6/1993 | -- | -- | 3,500 | -- |
| MW-37 | 12.5 to 14 | 12/6/1993 | -- | -- | 380 | -- |
| MW-A1 | 7.5 to 8 | 2/4/2008 | -- | -- | 74.1 | 79.5 |
| MW-A1 | 8.5 to 9 | 2/4/2008 | -- | -- | 5,160 | 471 U |
| MW-A2 | 6 to 6.5 | 2/4/2008 | -- | -- | 33.3 | 290 |
| MW-A2 | 7.5 to 8 | 2/4/2008 | -- | -- | 2,370 | 279 |
| RW-1/MW-14 | 2.5 | 3/9/1988 | 1,730 | 1,730 | -- | -- |
| TP-2 | 3.5 | 12/6/1993 | -- | -- | 10 U | -- |
| TP-2 | 3.5 | 12/8/1993 | -- | -- | -- | -- |
| TP-3 | 3.5 | 12/6/1993 | -- | -- | 16 | -- |
| TP-3 | 3.5 | 12/8/1993 | -- | -- | -- | -- |
| TP-5 | 3.5 | 12/6/1993 | -- | -- | 10 U | -- |
| TP-5 | 3.5 | 12/8/1993 | -- | -- | -- | -- |
| UG-1 | 5 to 7 | 9/25/2000 | -- | -- | 27,100 | 52,300 |
| UG-2 | 10 to 12 | 9/25/2000 | -- | -- | 364 | 353 |
| UG-3 | 7.5 to 9.5 | 9/25/2000 | -- | -- | 190 | 79.5 |
| UG-4 | 5 to 7 | 9/25/2000 | -- | -- | 10 U | 25 U |
| UG-5 | 5 to 7 | 9/25/2000 | -- | -- | 10 U | 25 U |
| UG-6 | 5 to 7 | 9/26/2000 | -- | -- | 10 U | 25 U |
| UG-7 | 2.5 to 4.5 | 9/26/2000 | -- | -- | 402 | 1,860 |
| UG-8 | 5 to 7 | 9/26/2000 | -- | -- | 5,180 | 730 |
| UG-9 | 2.5 to 4.5 | 9/26/2000 | -- | -- | 8,560 | 327 |
| UG-9 | 10 to 12 | 9/26/2000 | -- | -- | 2,170 | 320 |
| UG-10 | 5 to 7 | 9/26/2000 | -- | -- | 10 U | 25 U |
| UG-11 | 5 to 7 | 9/26/2000 | -- | -- | 153 | 176 |
| UG-12 | 5 to 7 | 9/26/2000 | -- | -- | 10 U | 25 U |
| W-1 | 3 | 2/23/1990 | -- | 13,000 | -- | -- |
| W-2 | 3 | 2/23/1990 | -- | 17,000 | -- | -- |
| W-3 | 3 | 2/23/1990 | -- | 28 | -- | -- |
| W-4 | 3 | 2/23/1990 | -- | 4,600 | -- | -- |
| W-5 | 3 | 2/23/1990 | -- | 2,300 | -- | -- |
| W-6 | 3 | 2/23/1990 | -- | 1,200 | -- | -- |
| W-7 | 3 | 2/23/1990 | -- | 910 | -- | -- |

Notes:

1. Duplicate result analyzed using EPA Method 8015 Modified. The primary results were analyzed using EPA Method 418.1.

mg/kg = milligrams per kilogram

MTCA = Model Toxics Control Act

TPH = Total Petroleum Hydrocarbon

U = Analyte not detected above the reporting limit indicated

-- = Not analyzed

Bold and cell in orange = Result greater than MTCA A CUL criteria

Table 3 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Soil

| Sample ID | Depth | Date Sampled | TPH-Gas mg/kg | Benzene mg/kg | Ethylbenzene mg/kg | Toluene mg/kg | Total Xylene mg/kg | Lead mg/kg |
|--|------------|--------------|---------------------|---------------|--------------------|---------------|--------------------|------------|
| MTCA Method A Industrial Cleanup Level | | | | | | | | 1,000 |
| MTCA Method A Cleanup Level, Unrestricted/Residential | | | 100/30 ¹ | 0.03 | 6 | 7 | 9 | 250 |
| AD-1 | 3 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 22 |
| AD-5 | 2.5 to 3 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 76 |
| AD-8 | 2.5 to 3 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 10 |
| AD-8 | 4.5 to 5 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 2.8 |
| AD-12 | 2.5 to 3 | 1/15/1990 | -- | 0.4 U | 1.5 | 8 U | 2 U | -- |
| AD-12 | 3 to 3.5 | 1/15/1990 | -- | 0.4 U | 2.5 | 8 U | 2 U | 44 |
| AD-13 | 2 to 2.5 | 1/15/1990 | -- | 0.4 U | 10 | 8 U | 2 U | 180 |
| AD-14 | 2 to 2.5 | 1/15/1990 | -- | 5.1 | 15 | 8 U | 2 U | 58 |
| AD-15 | 0.5 to 1 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 97 |
| AD-15 | 2.5 to 3 | 1/15/1990 | -- | 0.4 U | 0.25 | 8 U | 0.61 | 14 |
| AD-16 | 0.5 to 1 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 7.9 |
| AD-17 | 0.5 to 1 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 69 |
| B-21-91 | 5 | 6/24/1991 | -- | 0.035 | 2 | 0.53 | 8.8 | 30 |
| B-21-91 | 6 | 6/24/1991 | -- | 0.05 U | 0.05 U | 0.05 U | 0.05 U | 3.7 |
| B-34/S-2 | 4 to 5.5 | 12/6/1993 | 670 | 0.63 | 2.6 | 0.05 U | 0.9 | 15 U |
| B-34/S-5 | 12.5 to 14 | 12/6/1993 | 2,600 | 6.6 | 14 | 0.05 U | 3.8 | 860 |
| DM-6 | | 12/6/1999 | 10.5 | -- | -- | -- | -- | -- |
| DM-7 | | 12/8/1999 | 20.1 | -- | -- | -- | -- | -- |
| DM-8 | | 12/1/1999 | 5 U | -- | -- | -- | -- | -- |
| GP-7 | 5.5 | 3/20/1996 | 150 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| GP-8 | 7 | 3/20/1996 | 3.9 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| GP-9 | 8 | 3/20/1996 | 880 | 0.05 U | 0.05 U | 0.18 | 0.6 | -- |
| GP-11 | 6.5 | 3/20/1996 | 160 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| GP-13 | 10 | 3/20/1996 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-1 | 4 to 8 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-2 | 0 to 3 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-2 | 3 to 6 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-3 | 4 to 6 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-4 | 3 to 6 | 6/21/2001 | 6.04 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-5 | 3 to 6 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-6 | 6 to 9 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-7 | 1 to 2 | 6/21/2001 | 26.5 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| MW-6 | 2.5 | 3/9/1988 | -- | 0.015 U | 1.001 | 0.01 U | 2.95 | -- |
| MW-7 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.087 U | 0.01 U | 0.064 U | -- |
| MW-8 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.01 U | 0.01 U | 0.015 U | -- |
| MW-9 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.432 | 0.01 U | 1.207 | -- |
| MW-10 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.122 | 0.02 | 1.399 | -- |
| MW-11 | 2.5 | 3/9/1988 | -- | 0.362 | 1.994 | 1.31 | 10.39 | -- |
| MW-12 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.01 U | 0.01 U | 0.015 U | -- |
| MW-15 | 2.5 | 3/9/1988 | -- | 0.158 U | 0.781 | 0.66 | 11.018 | -- |
| MW-16 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.01 U | 0.01 U | 0.015 U | -- |
| MW-17 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.01 U | 0.01 U | 0.015 U | -- |
| MW-18 | 2.5 | 3/9/1988 | -- | 0.048 | 2.685 | 0.028 | 10.215 | -- |

Table 3 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Soil

| Sample ID | Depth | Date Sampled | TPH-Gas mg/kg | Benzene mg/kg | Ethylbenzene mg/kg | Toluene mg/kg | Total Xylene mg/kg | Lead mg/kg |
|--|------------|--------------|---------------------|---------------|--------------------|---------------|--------------------|------------|
| MTCA Method A Industrial Cleanup Level | | | | | | | | 1,000 |
| MTCA Method A Cleanup Level, Unrestricted/Residential | | | 100/30 ¹ | 0.03 | 6 | 7 | 9 | 250 |
| MW-19 | 2 to 3.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-19 | 3.5 to 5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-20 | 2 to 3.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-20 | 3.5 to 5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-21 | 1.5 to 3 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-21 | 3.5 to 5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-22 | 2.5 to 4 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-22 | 4 to 5.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-23 | 1 to 2.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-24 | 2.5 to 4 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-24 | 4 to 5.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-27 | 2 to 2 | 6/24/1991 | -- | 0.05 U | 0.57 | 0.05 U | 0.64 | 310 |
| MW-27 | 3 to 3 | 6/24/1991 | -- | 0.05 U | 0.05 U | 0.05 U | 0.05 U | 10 |
| MW-28 | 2 to 2 | 6/24/1991 | -- | 0.05 U | 0.05 U | 0.05 U | 0.05 U | 15 |
| MW-28 | 3 to 3 | 6/24/1991 | -- | 0.05 U | 0.66 | 0.05 U | 1.9 | 11 |
| MW-29 | 1 to 1 | 6/24/1991 | -- | 0.05 U | 0.84 | 0.55 | 3.5 | 29 |
| MW-29 | 2 to 2 | 6/24/1991 | -- | 0.18 | 2.9 | 5.3 | 7.9 | 89 |
| MW-30 | 2 to 2 | 6/24/1991 | -- | 0.05 U | 0.74 | 0.77 | 2.6 | 37 |
| MW-30 | 3 to 3 | 6/24/1991 | -- | 0.5 | 0.24 | 0.13 | 1 | 570 |
| MW-31 | 12.5 to 14 | 12/6/1993 | 31 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-31 | 2.5 to 4 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 44 |
| MW-32 | 12.5 to 14 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 200 |
| MW-32 | 7.5 to 9 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-33 | 12.5 to 14 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-33 | 5 to 6.5 | 12/6/1993 | 49 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 54 |
| MW-35 | 12.5 to 14 | 12/6/1993 | 1.3 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-35 | 2.5 to 4 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-36 | 12.5 to 14 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-36 | 2.5 to 4 | 12/6/1993 | 30 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 26 |
| MW-37 | 12.5 to 14 | 12/6/1993 | 170 | 0.18 | 0.19 | 0.05 U | 0.26 | 15 U |
| MW-37 | 2.5 to 4 | 12/6/1993 | 180 | 0.77 | 1.4 | 0.05 U | 2.3 | 55 |
| MW-A1 | 7.5 to 8 | 2/4/2008 | 50 U | 0.0322 U | 0.0322 U | 0.0376 | 0.0965 U | -- |
| MW-A1 | 8.5 to 9 | 2/4/2008 | 168 | 0.0319 U | 0.0319 U | 0.0319 U | 0.0956 U | -- |
| MW-A2 | 6 to 6.5 | 2/4/2008 | 10.2 U | 0.102 U | 0.102 U | 0.102 U | 0.306 U | -- |
| MW-A2 | 7.5 to 8 | 2/4/2008 | 203 | 0.0355 | 0.04 | 0.0313 U | 0.6 | -- |
| RW-1/MW-14 | 2.5 | 3/9/1988 | -- | 0.575 | 2.348 | 1.301 | 12.975 | -- |
| TP-2 | 3.5 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 10 U |
| TP-3 | 3.5 | 12/6/1993 | 3.4 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 10 U |
| TP-5 | 3.5 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 10 U |
| UG-1 | 5 to 7 | 9/25/2000 | 173 | -- | -- | -- | -- | -- |
| UG-2 | 10 to 12 | 9/25/2000 | 55.3 | -- | -- | -- | -- | -- |
| UG-3 | 7.5 to 9.5 | 9/25/2000 | 108 | -- | -- | -- | -- | -- |
| UG-4 | 5 to 7 | 9/25/2000 | 5 U | -- | -- | -- | -- | -- |

Table 3 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Soil

| Sample ID | Depth | Date Sampled | TPH-Gas mg/kg | Benzene mg/kg | Ethylbenzene mg/kg | Toluene mg/kg | Total Xylene mg/kg | Lead mg/kg |
|---|------------|--------------|---------------------|---------------|--------------------|---------------|--------------------|------------|
| MTCA Method A Industrial Cleanup Level | | | | | | | | 1,000 |
| MTCA Method A Cleanup Level, Unrestricted/Residential | | | 100/30 ¹ | 0.03 | 6 | 7 | 9 | 250 |
| UG-5 | 5 to 7 | 9/25/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-6 | 5 to 7 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-7 | 2.5 to 4.5 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-8 | 5 to 7 | 9/26/2000 | 3410 | -- | -- | -- | -- | -- |
| UG-9 | 2.5 to 4.5 | 9/26/2000 | 6050 | 2.5 U | 34 U | 5.5 U | 30.5 U | -- |
| UG-9 | 10 to 12 | 9/26/2000 | 630 | -- | -- | -- | -- | -- |
| UG-10 | 5 to 7 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-11 | 5 to 7 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-12 | 5 to 7 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |

Notes:

1. Cleanup level for TPH-Gas is 100 mg/kg when benzene is absent, and 30 mg/kg in presence of benzene.

mg/kg = milligrams per kilogram

MTCA = Model Toxics Control Act

U = Analyte not detected above the reporting limit indicated

-- = Not analyzed

Bold TPH-Gas = Result greater than 30 mg/kg but presence of benzene is unknown due to high detection limit

Bold and cell in orange = Result greater than MTCA Method A Unrestricted Land Use

cell in yellow = analyte not detected, but detection limit is greater than MTCA Unrestricted Land Use

Bold and cell in green = Result greater than MTCA Unrestricted Land Use but less than MTCA Method A Industrial Cleanup Level

Table 4 Analytical Results for Polycyclic Aromatic Hydrocarbons in Soil

| Sample ID | Depth | Date Sampled | Acenaphthene (mg/kg) | Acenaphthylene (mg/kg) | Anthracene (mg/kg) | Benzo(a) anthracene* (mg/kg) | Benzo(a) pyrene* (mg/kg) | Benzo(b) fluoranthene* (mg/kg) | Benzo(g,h,i) perylene (mg/kg) | Benzo(k) fluoranthene* (mg/kg) | Chrysene* (mg/kg) | Dibenz(a,h) anthracene* (mg/kg) | Indeno(1,2,3-cd) pyrene* (mg/kg) | Naphthalene (mg/kg) | Phenanthrene (mg/kg) | Pyrene (mg/kg) | Total cPAH ¹ TEQ-Adjusted (mg/kg) | |
|-------------------------------------|------------|--------------|----------------------|------------------------|--------------------|------------------------------|--------------------------|--------------------------------|-------------------------------|--------------------------------|-------------------|---------------------------------|----------------------------------|---------------------|----------------------|----------------|--|--------|
| MTCA A Industrial CUL | | | | | | | 2 | | | | | | | | | | 2 | |
| MTCA A Unrestricted/Residential CUL | | | | | | | 0.1 | | | | | | | | | | 0.1 | |
| MTCA B Carcinogen CUL | | | | | | | 0.14 | | | | | | | | | | | |
| MTCA B Non-Carcinogen CUL | | | 4,800 | | 24,000 | | | | | | | | | 1,600 | | 2,400 | | |
| B-34/S-2 | 4 to 5.5 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 1.1 | 0.24 | 0.1 U | 0.0755 U | |
| B-34/S-5 | 12.5 to 14 | 12/6/1993 | 2 U | 2 U | 4.9 | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 4.9 | 2 U | 1.51 U | |
| GP-7 | 5.5 | 3/20/1996 | 0.15 U | 0.993 | 0.261 | 4.25 | 0.024 | 0.468 | 0.744 | 0.132 | 3.43 | 0.01 U | 1.43 | 0.15 U | 0.844 | 1.3 | 0.6868 | |
| GP-8 | 7 | 3/20/1996 | 0.32 | 0.168 | 0.147 | 0.717 | 0.166 | 0.141 | 0.0728 | 0.0435 | 25.2 | 0.01 U | 0.0967 | 0.15 U | 0.669 | 0.02 U | 0.51832 | |
| GP-9 | 8 | 3/20/1996 | 1.27 | 2.98 | 0.15 U | 0.01 U | 0.105 | 0.173 | 0.412 | 0.111 | 12.4 | 0.409 | 0.0858 | 0.15 U | 1.3 | 1.35 | 0.30738 | |
| GP-11 | 6.5 | 3/20/1996 | 0.15 U | 0.15 U | 0.15 U | 0.0859 | 0.0106 | 0.053 | 0.165 | 0.01 U | 0.192 | 0.0644 | 0.0483 | 0.15 U | 0.276 | 0.202 | 0.03818 | |
| GP-13 | 10 | 3/20/1996 | 0.15 U | 0.15 U | 0.15 U | 0.0479 | 0.0361 | 0.0173 | 0.01 U | 0.0365 | 0.0597 | 0.0312 | 0.0157 | 0.15 U | 0.15 U | 0.0482 | 0.051557 | |
| MW-31 | 2.5 to 4 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.12 | 0.14 | 0.0755 U | |
| MW-31 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-32 | 7.5 to 9 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-32 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 | 0.34 | 0.26 | 0.33 | 0.18 | 0.16 | 0.16 | 0.1 U | 0.17 | 0.1 U | 0.68 | 0.98 | 0.3666 | |
| MW-33 | 5 to 6.5 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-33 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-35 | 2.5 to 4 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-35 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-36 | 2.5 to 4 | 12/6/1993 | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 0.31 | 0.31 | 1.51 U |
| MW-36 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-37 | 2.5 to 4 | 12/6/1993 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.3775 U | |
| MW-37 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| TP-2 | 3.5 | 12/8/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| TP-3 | 3.5 | 12/8/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| TP-5 | 3.5 | 12/8/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |

Notes:

- * = Compounds is a cPAH compound included in calculations of TEQ-adjusted total cPAH concentration. Values for individual cPAH constituents are actual analytical results.
- 1. Total cPAH concentration expressed as TEQ-adjusted total cPAH concentration adjusted using Toxicity Equivalency Factors for maximum required cPAHs (Table 708-2 under WAC 173-340-708).
- cPAH = Carcinogenic Polycyclic Aromatic Hydrocarbon
- CUL = cleanup level
- mg/kg = milligrams per kilogram
- MTCA = Model Toxics Control Act
- TEQ = toxicity-equivalent quotient
- U = Sample was analyzed but not detected above the reporting limit indicated
- = Not analyzed
- Bold and cell in blue** = Benzo(a)pyrene result greater than MTCA Method A CUL Residential and MTCA Method B CUL Carcinogen but less than MTCA Method A CUL Industrial
- Bold and cell in yellow** = Analyte not detected, but detection limit is greater than MTCA Method A CUL Unrestricted and/or Industrial land use
- Bold and cell in orange** = Result for TEQ-adjusted total cPAHs greater than MTCA Method A residential/unrestricted CUL.

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|---------------|--------------|-----------------------|-------------------------------|-------------------|-----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| B-2_well | 3/27/1991 | -- | 3,800 | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 12/26/1991 | -- | -- | 500 U | -- |
| | 12/9/1993 | -- | -- | 780 | -- |
| | 11/21/1995 | -- | -- | 4,400 | 3,900 |
| B-5_well | 3/27/1991 | -- | 1,000 U | -- | -- |
| MW-10 | 3/17/1988 | 86,200 | 86.2 | -- | -- |
| | 3/27/1991 | -- | 27,000 | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 2,600 | -- |
| | 12/26/1991 | -- | -- | 9,000 | -- |
| | 12/9/1993 | -- | -- | 10,000 | -- |
| | 11/22/1995 | -- | -- | 4,200 | 6,800 |
| | 12/8/2000 | -- | -- | 19,000 | 18,000 J |
| 2/28/2002 | -- | -- | 5,700 | 2,300 J | |
| MW-11 | 3/17/1988 | 48,400 | 41.4 | -- | -- |
| | 3/27/1991 | -- | 15,000 | -- | -- |
| | 6/24/1991 | -- | 7,200 | -- | -- |
| | 9/26/1991 | -- | -- | 3,900 | -- |
| | 12/9/1993 | -- | -- | 10,000 | -- |
| | 11/22/1995 | -- | -- | 2,400 | 1,200 |
| | 12/8/2000 | -- | -- | 230 J | 400 U |
| | 3/19/2001 | -- | -- | 540 | 310 J |
| | 5/16/2001 | -- | -- | 760 | 590 |
| | 8/21/2001 | -- | -- | 670 | 820 |
| | 2/28/2002 | -- | -- | 460 | 520 |
| | 8/27/2002 | -- | -- | 3,700 | 1,300 J |
| | 11/26/2002 | -- | -- | 480 | 520 |
| | 2/6/2003 | -- | -- | 460 | 460 J |
| | 5/15/2003 | -- | -- | 470 | 440 J |
| | 8/20/2003 | -- | -- | 610 | 610 |
| | 11/14/2003 | -- | -- | 360 | 330 J |
| | 2/26/2004 | -- | -- | 430 | 410 J |
| | 5/27/2004 | -- | -- | 270 J | 310 J |
| | 11/18/2004 | -- | -- | 500 J | 480 U |
| | 2/24/2005 | -- | -- | 240 | 430 J |
| | 5/23/2005 | -- | -- | 470 | 380 J |
| | 8/30/2005 | -- | -- | 79 U | 98 U |
| | 11/29/2005 | -- | -- | 160 J | 200 J |
| | 2/23/2006 | -- | -- | 77 U | 96 U |
| | 8/24/2006 | -- | -- | 93.9 U | 93.9 U |
| | 11/27/2006 | -- | -- | 108 | 94.3 U |
| 2/12/2007 | -- | -- | 93.9 U | 141 | |
| 8/29/2007 | -- | -- | 94.3 U | 109 | |
| 2/11/2008 | -- | -- | 19,200 | 1,280 | |
| 2/12/2009 | -- | -- | 94.3 U | 94.3 U | |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|---------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| MW-12 | 3/17/1988 | 10,500 | 4 | -- | -- |
| | 3/27/1991 | -- | 5,200 | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 4,100 | -- |
| | 12/26/1991 | -- | -- | 500 U | -- |
| | 12/9/1993 | -- | -- | 550 | -- |
| | 11/22/1995 | -- | -- | 2,100 | 3,600 |
| MW-13 | 3/17/1988 | 25,000 | 16.9 | -- | -- |
| | 3/27/1991 | -- | 8,200 | -- | -- |
| | 6/24/1991 | -- | 4,300 | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/9/1993 | -- | -- | 2,600 | -- |
| | 11/22/1995 | -- | -- | 6,700 | 3,100 |
| MW-15 | 3/17/1988 | 9,500 | 9.5 | -- | -- |
| | 3/27/1991 | -- | 4,000 | -- | -- |
| | 6/24/1991 | -- | 4,000 | -- | -- |
| | 9/26/1991 | -- | -- | 860 | -- |
| | 12/26/1991 | -- | -- | 790 | -- |
| | 12/9/1993 | -- | -- | 600 | -- |
| | 11/21/1995 | -- | -- | 1,700 | 1,700 |
| MW-16 | 3/17/1988 | 2,700 | 2.7 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 910 | -- |
| | 12/9/1993 | -- | -- | 610 | -- |
| | 11/21/1995 | -- | -- | 770 | 1,200 |
| MW-17 | 3/17/1988 | 3,800 | 3.8 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 460 | -- |
| | 12/26/1991 | -- | -- | 1,000 | -- |
| | 12/9/1993 | -- | -- | 320 | -- |
| | 11/21/1995 | -- | -- | 490 | 970 |
| MW-18 | 3/17/1988 | 31,000 | 18 | -- | -- |
| | 3/27/1991 | -- | 43,000 | -- | -- |
| | 6/24/1991 | -- | 15,000 | -- | -- |
| | 9/26/1991 | -- | -- | 5,300 | -- |
| | 12/26/1991 | -- | -- | 11,000 | -- |
| | 12/9/1993 | -- | -- | 46,000 | -- |
| | 11/21/1995 | -- | -- | 16,000 | 4,400 |
| | 2/28/2002 | -- | -- | 2,500 | 950 U |
| MW-19 | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 1,800 | -- |
| | 12/7/2000 | -- | -- | 830 J | 1,000 U |
| | 3/19/2001 | -- | -- | 1,600 | 800 |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|----------------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| MW-19 (continued) | 5/16/2001 | -- | -- | 760 | 590 |
| | 8/21/2001 | -- | -- | 1,100 | 1,200 |
| | 2/28/2002 | -- | -- | 1,200 | 580 |
| | 8/27/2002 | -- | -- | 680 | 410 J |
| | 11/26/2002 | -- | -- | 860 | 570 |
| | 2/6/2003 | -- | -- | 1,900 | 1,100 J |
| | 5/15/2003 | -- | -- | 3,300 | 2,000 |
| | 8/20/2003 | -- | -- | 1,400 J | 1,400 J |
| | 11/14/2003 | -- | -- | 1,400 | 750 |
| | 2/26/2004 | -- | -- | 1,800 J | 4,700 J |
| | 5/27/2004 | -- | -- | 680 | 460 J |
| | 8/30/2004 | -- | -- | 850 | 460 J |
| | 11/18/2004 | -- | -- | 640 | 190 U |
| | 2/24/2005 | -- | -- | 860 | 500 |
| | 5/23/2005 | -- | -- | 1,000 | 550 J |
| | 8/30/2005 | -- | -- | 1,200 | 470 J |
| | 11/29/2005 | -- | -- | 200 J | 180 J |
| | 2/12/2006 | -- | -- | 1,570 | 705 |
| | 2/23/2006 | -- | -- | 200 J | 100 U |
| | 8/24/2006 | -- | -- | 1,740 | 825 |
| 11/27/2006 | -- | -- | 209 | 118 | |
| 8/29/2007 | -- | -- | 1,390 | 547 | |
| 2/11/2008 | -- | -- | 794 | 587 | |
| 8/28/2008 | -- | -- | 1,050 | 1,200 | |
| 2/12/2009 | -- | -- | 993 | 303 | |
| MW-20 | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 520 | -- |
| | 12/7/2000 | -- | -- | 410 J | 400 U |
| | 3/19/2001 | -- | -- | 610 | 480 J |
| | 5/17/2001 | -- | -- | 540 | 390 J |
| | 2/28/2002 | -- | -- | 540 | 410 J |
| MW-21 | 3/27/1991 | -- | 1,058,000 | -- | -- |
| | 6/24/1991 | -- | 63,000 | -- | -- |
| | 2/28/2002 | -- | -- | 9,800 | 5,800 |
| MW-22 | 3/27/1991 | -- | 800,000 | -- | -- |
| | 12/26/1991 | -- | -- | 26,000 | -- |
| MW-23 | 3/27/1991 | -- | 25,000 | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| MW-24 | 3/27/1991 | -- | 6,000 | -- | -- |
| MW-27 | 6/24/1991 | -- | 16,000 | -- | -- |
| | 9/26/1991 | -- | -- | 9,400 | -- |
| | 11/21/1995 | -- | -- | 4,700 | 4,400 |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|---------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| MW-28 | 6/24/1991 | -- | 600 | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 500 U | -- |
| | 12/9/1993 | -- | -- | 2,600 | -- |
| | 11/21/1995 | -- | -- | 3,400 | 3,700 |
| MW-30 | 6/24/1991 | -- | 7,200 | -- | -- |
| | 9/26/1991 | -- | -- | 1,300 | -- |
| | 12/26/1991 | -- | -- | 3,500 | -- |
| | 12/9/1993 | -- | -- | 2,200 | -- |
| MW-31 | 12/9/1993 | -- | -- | 470 | -- |
| | 11/21/1995 | -- | -- | 470 | 750 U |
| MW-32 | 12/9/1993 | -- | -- | 490 | -- |
| | 11/21/1995 | -- | -- | 400 | 750 U |
| MW-33 | 12/9/1993 | -- | -- | 5,500 | -- |
| | 11/21/1995 | -- | -- | 790 | 750 U |
| MW-35 | 12/9/1993 | -- | -- | 900 | -- |
| | 11/22/1995 | -- | -- | 330 | 1,100 |
| | 12/8/2000 | -- | -- | 160 J | 400 U |
| | 3/19/2001 | -- | -- | 190 J | 200 |
| MW-36 | 12/9/1993 | -- | -- | 790 | -- |
| | 11/21/1995 | -- | -- | 710 | 750 U |
| MW-37 | 12/9/1993 | -- | -- | 13,000 | -- |
| | 11/21/1995 | -- | -- | 1,600 | 2,400 |
| MW-40R | 12/8/2000 | -- | -- | 11,000 | 6,400 J |
| | 3/19/2001 | -- | -- | 20,000 | 14,000 |
| | 5/16/2001 | -- | -- | 18,000 | 14,000 |
| | 8/21/2001 | -- | -- | 15,000 | 8,100 |
| | 2/28/2002 | -- | -- | 13,000 | 6,500 |
| | 8/27/2002 | -- | -- | 6,600 | 2,700 |
| | 11/26/2002 | -- | -- | 5,900 | 3,600 J |
| | 2/6/2003 | -- | -- | 9,100 | 5,300 |
| | 5/15/2003 | -- | -- | 14,000 | 7,200 |
| | 8/20/2003 | -- | -- | 16,000 | 6,300 J |
| | 11/14/2003 | -- | -- | 5,300 | 2,300 J |
| | 2/26/2004 | -- | -- | 13,000 | 4,600 J |
| | 5/27/2004 | -- | -- | 11,000 | 4,800 J |
| | 8/30/2004 | -- | -- | 15,000 | 5,000 |
| | 2/24/2005 | -- | -- | 4,200 | 1,900 |
| | 5/23/2005 | -- | -- | 15,000 | 4,200 J |
| | 8/30/2005 | -- | -- | 23,000 | 6,600 |
| | 11/29/2005 | -- | -- | 2,100 | 790 J |
| | 2/23/2006 | -- | -- | 2,000 | 540 U |
| | 8/24/2006 | -- | -- | 6,550 | 2,090 |
| | 11/27/2006 | -- | -- | 3,750 | 968 |
| 2/12/2007 | -- | -- | 3,970 | 1,060 | |
| 8/29/2007 | -- | -- | 5,150 | 520 | |
| 2/11/2008 | -- | -- | 2,840 | 1,080 | |
| 8/28/2008 | -- | -- | 10,600 | 8,990 | |
| 2/12/2009 | -- | -- | 3,110 | 959 | |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|---------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| MW-6 | 3/17/1988 | 12,400 | 1.1 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 5,500 | -- |
| | 12/9/1993 | -- | -- | 670 | -- |
| | 11/21/1995 | -- | -- | 800 | 1,400 |
| MW-7 | 3/17/1988 | 4,700 | 1.6 | -- | -- |
| MW-8 | 3/17/1988 | 132,000 | 11.5 | -- | -- |
| | 6/24/1991 | -- | 1,300 | -- | -- |
| | 12/9/1993 | -- | -- | 26,000 | -- |
| | 11/21/1995 | -- | -- | 3,300 | 3,100 |
| MW-9 | 3/17/1988 | 7,600 | 1.5 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 770 | -- |
| | 12/26/1991 | -- | -- | 4,800 | -- |
| | 12/9/1993 | -- | -- | 2,600 | -- |
| | 11/21/1995 | -- | -- | 3,300 | 3,300 |
| MW-A1 | 2/11/2008 | -- | -- | 2,060 | 488 |
| | 8/28/2008 | -- | -- | 2,850 | 2,600 |
| | 2/12/2009 | -- | -- | 2,080 | 414 |
| MW-A2 | 2/11/2008 | -- | -- | 1,310 | 550 |
| | 8/28/2008 | -- | -- | 1,790 | 1100 |
| | 2/12/2009 | -- | -- | 1840 | 339 |
| RW-1/MW-14 | 8/22/1989 | -- | 19,000 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 530 | -- | -- |
| | 9/26/1991 | -- | -- | 5,100 | -- |
| | 12/26/1991 | -- | -- | 500 U | -- |
| RW-2 | 2/11/2002 | -- | -- | 2,500 | 950 U |
| UG-2 | 9/25/2000 | -- | -- | 95 | 49 |
| UG-8 | 9/25/2000 | -- | -- | 66,500 | 7,360 |
| VWPT-1 | 6/6/1995 | -- | -- | 2,600 | 1,300 |
| W-15R | 2/28/2002 | -- | -- | 300,000 | 20,000 U |
| W-17 | 12/7/2000 | -- | -- | 53,000 | 26,000 |
| | 3/19/2001 | -- | -- | 12,000 | 6,400 |
| | 5/16/2001 | -- | -- | 43,000 | 19,000 J |
| | 8/21/2001 | -- | -- | 31,000 | 9,800 |
| W-2 | 3/2/1990 | -- | 7,400 | -- | -- |
| W-3 | 3/2/1990 | -- | 530 U | -- | -- |
| | 12/7/2000 | -- | -- | 990 | 350 J |
| | 3/19/2001 | -- | -- | 900 | 370 J |
| | 5/17/2001 | -- | -- | 1,500 | 440 J |
| | 8/21/2001 | -- | -- | 700 | 360 J |
| | 3/1/2002 | -- | -- | 810 | 750 |
| | 8/27/2002 | -- | -- | 1,100 | 540 J |
| | 11/26/2002 | -- | -- | 850 | 260 J |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|--------------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| W-3 (continued) | 2/6/2003 | -- | -- | 2,600 | 1,200 |
| | 5/15/2003 | -- | -- | 1,000 | 350 J |
| | 8/20/2003 | -- | -- | 1,000 | 290 J |
| | 11/14/2003 | -- | -- | 820 | 260 J |
| | 2/26/2004 | -- | -- | 880 | 260 J |
| | 5/27/2004 | -- | -- | 1,600 | 380 J |
| | 8/30/2004 | -- | -- | 950 | 230 J |
| | 11/18/2004 | -- | -- | 1,800 J | 960 U |
| | 2/24/2005 | -- | -- | 1,400 | 250 J |
| | 5/23/2005 | -- | -- | 2,000 | 480 J |
| | 8/30/2005 | -- | -- | 470 | 98 U |
| | 11/29/2005 | -- | -- | 850 | 390 J |
| | 2/23/2006 | -- | -- | 480 | 110 U |
| | 8/24/2006 | -- | -- | 683 | 481 |
| | 11/27/2006 | -- | -- | 1,310 | 153 |
| | 2/12/2007 | -- | -- | 863 | 169 |
| | 8/29/2007 | -- | -- | 1,360 | 95.2 U |
| | 2/11/2008 | -- | -- | 1,720 | 508 |
| 8/28/2008 | -- | -- | 2,100 | 1,840 | |
| 2/12/2009 | -- | -- | 1,400 | 364 | |
| W-4 | 3/2/1990 | -- | 23,200 | -- | -- |
| W-5 | 3/2/1990 | -- | 3,800 | -- | -- |
| W-6 | 12/7/2000 | -- | -- | 32,000 | 15,000 J |
| | 3/19/2001 | -- | -- | 25,000 | 10,000 |
| | 5/16/2001 | -- | -- | 49,000 | 23,000 J |
| | 8/21/2001 | -- | -- | 20 | 6,400 J |
| | 2/28/2002 | -- | -- | 680 | 740 |
| | 8/27/2002 | -- | -- | 160,000 | 71,000 |
| | 11/26/2002 | -- | -- | 3,600 | 3,300 J |
| | 2/6/2003 | -- | -- | 8,800 | 6,300 |
| | 5/15/2003 | -- | -- | 18,000 | 11,000 |
| | 8/20/2003 | -- | -- | 59,000 | 29,000 |
| | 11/14/2003 | -- | -- | 6,100 | 3,700 J |
| | 2/26/2004 | -- | -- | 20,000 | 15,000 |
| | 5/27/2004 | -- | -- | 19,000 | 16,000 |
| | 8/30/2004 | -- | -- | 10,000 | 6,400 |
| | 11/18/2004 | -- | -- | 900 J | 530 J |
| | 2/24/2005 | -- | -- | 13,000 | 11,000 |
| | 5/23/2005 | -- | -- | 8,800 | 5,000 J |
| | 8/30/2005 | -- | -- | 170,000 | 120,000 |
| | 11/29/2005 | -- | -- | 1,500 | 2,600 |
| | 2/23/2006 | -- | -- | 270 | 610 |
| 8/24/2006 | -- | -- | 3,300 | 1,580 | |
| 11/27/2006 | -- | -- | 1,030 | 429 | |
| 2/12/2007 | -- | -- | 1,660 | 532 | |
| 8/29/2007 | -- | -- | 2,080 | 756 | |
| 2/21/2008 | -- | -- | 1,590 | 890 | |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|--------------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| W-6 (continued) | 8/26/2008 | -- | -- | 27,900 | 23,800 |
| | 2/12/2009 | -- | -- | 444 | 323 |

Notes:

J = The result is an approximation

µg/L = microgram per liter

MTCA = Model Toxics Control Act

TPH = Total Petroleum Hydrocarbon

U = Analyte not detected above the reporting limit indicated

-- = Not analyzed

Bold and cell in orange = Result greater than MTCA Method A cleanup level

cell in yellow = analyte not detected, but reporting limit is greater than MTCA Method A cleanup level

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| B-2_well | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 12/26/1991 | 50 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 1.1 | 1 U | 2.8 | 20 |
| | 11/21/1995 | 50 U | 0.78 | 0.5 U | 0.5 U | 1 U | -- | -- |
| | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| MW-10 | 3/17/1988 | -- | 27 | 12.7 | 30 | 192 | -- | -- |
| | 3/27/1991 | -- | 5 | 4 | 7 | 6 | -- | -- |
| | 6/24/1991 | -- | 1 | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 1,800 | 19 | 0.5 U | 0.5 U | 7.2 | -- | -- |
| | 12/26/1991 | 960 | 11 | 0.5 U | 0.55 | 2.5 | -- | -- |
| | 12/9/1993 | 1,100 | 0.88 | 0.5 U | 1.6 | 3.8 | 2.3 | 65 |
| | 11/22/1995 | 1,300 | 1.3 | 0.5 U | 0.5 U | 2 | -- | -- |
| | 12/8/2000 | 1,100 | 0.84 J | 4 | 1.1 | 4.1 | -- | -- |
| 2/28/2002 | 1,100 | 0.86 J | 1 U | 0.73 J | 5 | -- | -- | |
| MW-11 | 3/17/1988 | -- | 149 | 18.5 | 12 | 160 | -- | -- |
| | 3/27/1991 | -- | 205 | 68 | 25 | 86 | -- | -- |
| | 6/24/1991 | -- | 36 | 15 | 13 | 20 | -- | -- |
| | 9/26/1991 | 440 | 3.7 | 0.5 U | 0.5 U | 1.1 | -- | -- |
| | 12/9/1993 | 880 | 90 | 9.9 | 0.5 U | 25 | 5.5 | 110 |
| | 11/22/1995 | 790 | 36 | 1.8 | 0.8 | 1.6 | -- | -- |
| | 12/8/2000 | 48 U | 2.8 | 0.2 U | 0.22 J | 0.6 U | -- | -- |
| | 3/19/2001 | 48 U | 0.46 J | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/16/2001 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/21/2001 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/28/2002 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/27/2002 | 48 U | 1.3 | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/26/2002 | 48 U | 0.94 J | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/6/2003 | 48 U | 0.92 J | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/15/2003 | 70 J | 4.4 | 1.5 | 8.7 | 9.3 | -- | -- |
| | 8/20/2003 | 48 U | 0.2 U | 0.2 U | 0.3 J | 0.6 U | -- | -- |
| | 11/14/2003 | 48 U | 0.5 J | 0.6 J | 0.9 J | 3.2 | -- | -- |
| | 2/26/2004 | 48 U | 0.2 U | 0.5 J | 0.2 U | 1.7 J | -- | -- |
| | 5/27/2004 | 48 U | 0.2 U | 0.3 J | 0.5 J | 1.2 J | -- | -- |
| | 11/18/2004 | 48 U | 0.9 J | 0.6 J | 0.8 J | 2.4 J | -- | -- |
| | 2/24/2005 | 48 U | 0.2 U | 0.5 J | 0.4 J | 2.1 J | -- | -- |
| | 5/23/2005 | 140 J | 1 | 3.5 | 9.5 | 19 | -- | -- |
| | 8/30/2005 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/29/2005 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/23/2006 | 51 J | 0.9 J | 1.8 | 2.8 | 6.8 | -- | -- |
| | 8/24/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 11/27/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| 2/12/2007 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/29/2007 | 1 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/11/2008 | 2,300 | 21.1 | 4.44 | 2.65 | 13.5 | -- | -- | |
| 2/12/2009 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| MW-12 | 3/17/1988 | -- | 218 | 2 U | 7.2 | 146.5 | -- | -- |
| | 3/27/1991 | -- | 1 U | 1 U | 1 U | 3 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 160 | 2.1 | 0.42 | 0.5 U | 0.56 | -- | -- |
| | 12/26/1991 | 65 | 20 | 0.5 U | 0.43 | 2.9 | -- | -- |
| | 12/9/1993 | 50 U | 21 | 0.5 U | 0.86 | 3.2 | 4.3 | 23 |
| | 11/22/1995 | 50 U | 9.2 | 0.5 U | 0.5 U | 1 | -- | -- |
| MW-13 | 3/17/1988 | -- | 163 | 42 | 8.9 | 169.8 | -- | -- |
| | 3/27/1991 | -- | 1 U | 2 | 1 | 1 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 50 U | 2.2 | 0.5 U | 0.5 U | 1 U | 5.5 | 30 |
| | 11/22/1995 | 120 | 5.2 | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-15 | 3/17/1988 | -- | 850 | 108 | 351 | 1,453 | -- | -- |
| | 3/27/1991 | -- | 5 | 31 | 9 | 204 | -- | -- |
| | 6/24/1991 | -- | 7 | 13 | 2 | 29 | -- | -- |
| | 9/26/1991 | 220 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 890 | 15 | 34 | 1.1 | 69 | -- | -- |
| | 12/9/1993 | 140 | 1.4 | 1.8 | 0.95 | 1.8 | 3.7 | 19 |
| | 11/21/1995 | 4,800 | 540 | 26 | 9.8 | 140 | -- | -- |
| MW-16 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 50 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.7 | 1 U | 2.8 | 21 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-17 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| | 3/27/1991 | -- | 44 | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 280 | 1 | 4 | 2 | -- | -- |
| | 9/26/1991 | 2,600 | 1,100 | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 1,100 | 480 | 1.3 | 2.2 | 4 | -- | -- |
| | 12/9/1993 | 50 U | 20 | 0.5 U | 0.88 | 1.4 | 6.5 | 10 |
| | 11/21/1995 | 50 U | 66 | 0.5 U | 0.53 | 1 U | -- | -- |
| MW-18 | 3/17/1988 | -- | 800 | 115 | 194 | 1,941 | -- | -- |
| | 3/27/1991 | -- | 141 | 24 | 22 | 158 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 750 | 0.69 | 0.5 U | 0.5 U | 2.4 | -- | -- |
| | 12/26/1991 | 4,400 | 223 | 24 | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 1,700 | 140 | 8.3 | 0.5 U | 58 | 6.1 | 230 |
| | 11/21/1995 | 4,000 | 170 | 5.9 | 2 U | 3.7 | -- | -- |
| | 2/28/2002 | 1,300 | 110 | 0.98 J | 1.6 | 7.8 | -- | -- |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| MW-19 | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 150 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 130 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/7/2000 | 700 | 0.2 U | 2.2 | 0.2 U | 3 | -- | -- |
| | 3/19/2001 | 580 | 0.2 U | 5 U | 1 U | 6.7 | -- | -- |
| | 5/16/2001 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/21/2001 | 400 | 0.2 U | 0.2 U | 1.1 | 1.3 J | -- | -- |
| | 2/28/2002 | 220 J | 0.2 U | 0.2 U | 0.2 U | 2 J | -- | -- |
| | 8/27/2002 | 160 J | 0.2 U | 0.2 U | 0.2 U | 0.81 J | -- | -- |
| | 11/26/2002 | 210 J | 0.21 J | 0.2 U | 0.2 U | 0.92 J | -- | -- |
| | 2/6/2003 | 260 | 0.34 J | 0.2 U | 0.2 U | 0.66 J | -- | -- |
| | 5/15/2003 | 300 | 1.8 | 0.9 J | 5 U | 6.6 | -- | -- |
| | 8/20/2003 | 240 J | 15 | 0.7 J | 1.2 | 2.7 J | -- | -- |
| | 11/14/2003 | 220 J | 0.3 J | 0.3 J | 0.3 J | 1.4 J | -- | -- |
| | 2/26/2004 | 93 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/27/2004 | 210 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/30/2004 | 230 J | 0.2 U | 0.2 U | 1 U | 1.1 J | -- | -- |
| | 11/18/2004 | 130 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/24/2005 | 180 J | 0.2 U | 0.2 U | 0.2 U | 1.2 J | -- | -- |
| | 5/23/2005 | 4,600 | 63 | 92 | 340 | 530 | -- | -- |
| | 8/30/2005 | 160 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/29/2005 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| 2/12/2006 | 336 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/23/2006 | 350 | 0.3 J | 0.2 U | 0.2 U | 0.6 U | -- | -- | |
| 8/24/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 11/27/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/29/2007 | 208 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/11/2008 | 250 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/28/2008 | 135 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/12/2009 | 187 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| MW-20 | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 110 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 50 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/7/2000 | 84 J | 0.21 J | 0.2 U | 0.2 U | 0.99 J | -- | -- |
| | 3/19/2001 | 69 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/17/2001 | 68 J | 0.2 U | 0.2 U | 0.2 U | 0.61 J | -- | -- |
| | 2/28/2002 | 56 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| MW-21 | 3/27/1991 | -- | 3 | 2 | 2 | 25 | -- | -- |
| | 6/24/1991 | -- | 9 | 110 | 220 | 560 | -- | -- |
| | 2/28/2002 | 310 | 0.62 J | 1.5 | 1 | 2.8 J | -- | -- |
| MW-22 | 3/27/1991 | -- | 1 U | 1 U | 2 | 7 | -- | -- |
| | 12/26/1991 | 4,500 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| MW-23 | 3/27/1991 | -- | 1 U | 1 U | 2 | 8 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 2 | -- | -- |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| MW-24 | 3/27/1991 | -- | 1 U | 1 U | 2 | 1 | -- | -- |
| MW-27 | 6/24/1991 | -- | 1 U | 3 | 7 | 9 | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 11/21/1995 | 160 | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-28 | 6/24/1991 | -- | 1 U | 1 | 1 | 3 | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 59 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 94 | 0.5 U | 0.5 U | 0.5 U | 1 U | 2 U | 120 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-30 | 6/24/1991 | -- | 40 | 0.5 U | 150 | 70 | -- | -- |
| | 9/26/1991 | 280 | 1.6 | 0.5 U | 0.5 U | 0.68 | -- | -- |
| | 12/26/1991 | 680 | 1.8 | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 320 | 1.6 | 0.5 U | 0.5 | 1.3 | 2 U | 11 |
| MW-31 | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | 2 U | 24 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-32 | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | 2.2 | 92 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-33 | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 1.7 | 1 U | 4.7 | 99 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-35 | 12/9/1993 | 50 U | 2.9 | 0.5 U | 0.5 U | 1.6 | 2.8 | 77 |
| | 11/22/1995 | 50 U | 2.7 | 0.5 U | 0.5 U | 1.7 | -- | -- |
| | 12/8/2000 | 48 U | 0.62 J | 0.2 U | 0.32 J | 3 U | -- | -- |
| | 3/19/2001 | 48 | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| MW-36 | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.75 | 1 U | 2 U | 45 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-37 | 12/9/1993 | 3,900 | 630 | 26 | 0.5 U | 12 | 2 U | 140 |
| | 11/21/1995 | 50 U | 0.5 | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-40R | 12/8/2000 | 950 | 19 | 2.9 | 3.5 | 4.2 | -- | -- |
| | 3/19/2001 | 1,400 | 28 | 1.4 | 3.6 | 8.4 | -- | -- |
| | 5/16/2001 | 1,300 | 25 | 2.1 | 5.6 | 9 | -- | -- |
| | 8/21/2001 | 1,600 | 30 | 3.1 | 2.3 | 5.8 | -- | -- |
| | 2/28/2002 | 1,300 | 21 | 1.2 | 2.4 | 5.8 | -- | -- |
| | 8/27/2002 | 1,200 | 23 | 1.6 | 4.4 | 7.1 | -- | -- |
| | 11/26/2002 | 1,800 | 14 | 0.8 J | 1.6 | 4.9 | -- | -- |
| | 2/6/2003 | 1,900 | 21 | 1.1 | 2.3 | 5.1 | -- | -- |
| | 5/15/2003 | 1,700 | 21 | 1.5 | 5.4 | 7.9 | -- | -- |
| | 8/20/2003 | 1,200 | 17 | 1.6 | 4.3 | 7 | -- | -- |
| | 11/14/2003 | 1,600 | 12 | 1.7 | 3 | 9 | -- | -- |
| | 2/26/2004 | 1,400 | 13 | 1.1 | 2.8 | 6.6 | -- | -- |
| | 5/27/2004 | 980 | 10 | 0.9 J | 2.4 | 4.5 | -- | -- |
| | 8/30/2004 | 1,100 | 11 | 1.4 | 4.2 | 7.6 | -- | -- |
| | 2/24/2005 | 1,200 | 9.1 | 1.3 | 2.4 | 6.7 | -- | -- |
| | 5/23/2005 | 1,700 | 17 | 12 | 42 | 69 | -- | -- |
| | 8/30/2005 | 910 | 13 | 2.6 | 6.4 | 8.8 | -- | -- |
| | 11/29/2005 | 1,100 | 10 U | 1.4 | 2.6 | 5.6 | -- | -- |
| 2/23/2006 | 1,200 | 10 U | 1.4 | 3.1 | 5.6 | -- | -- | |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| MW-40R (continued) | 8/24/2006 | 410 | 6.38 | 1 U | 1.88 | 7.55 | -- | -- |
| | 11/27/2006 | 1,390 | 6.42 | 2.68 | 1.32 | 5.05 | -- | -- |
| | 2/12/2007 | 1,560 | 6.38 | 3.14 | 1 U | 3 U | -- | -- |
| | 8/29/2007 | 1,000 | 6.6 | 1 U | 1.5 | 3.48 | -- | -- |
| | 2/11/2008 | 1,100 | 3.18 | 1.09 | 1.24 | 7.12 | -- | -- |
| | 8/28/2008 | 1,070 | 4.91 | 1.2 | 2.29 | 5.97 | -- | -- |
| | 2/12/2009 | 855 | 3.65 | 1.25 | 3.39 | 6.4 | -- | -- |
| MW-6 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 760 | 47 | 45 | 8.3 | 19 | -- | -- |
| | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.83 | 1 U | 12 | 14 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-7 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| MW-8 | 3/17/1988 | -- | 1,050 | 359 | 37 | 237 | -- | -- |
| | 6/24/1991 | -- | 47 | 5 | 72 | 17 | -- | -- |
| | 12/9/1993 | 130 | 0.71 | 0.5 U | 0.5 | 1 U | 3.2 | 79 |
| | 11/21/1995 | 110 | 7.7 | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-9 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| | 3/27/1991 | -- | 140 | 8 | 3 | 20 | -- | -- |
| | 6/24/1991 | -- | 280 | 1 | 4 | 2 | -- | -- |
| | 9/26/1991 | 220 | 1.1 | 0.5 U | 0.5 U | 0.54 | -- | -- |
| | 12/26/1991 | 50 U | 9.3 | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 50 U | 6.7 | 0.5 U | 0.5 U | 1 U | 4.2 | 70 |
| | 11/21/1995 | 50 U | 1.3 | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-A1 | 2/11/2008 | 250 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 8/28/2008 | 134 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 2/12/2009 | 145 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| MW-A2 | 2/11/2008 | 250 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 8/28/2008 | 159 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 2/12/2009 | 188 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| RW-1/ MW-14 | 8/22/1989 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 3/27/1991 | -- | 5 | 1 U | 1 U | 8 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 | -- | -- |
| | 9/26/1991 | 2,200 | 410 | 19 | 6.4 | 10 | -- | -- |
| | 12/26/1991 | 3,200 | 590 | 170 | 11 | 56 | -- | -- |
| RW-2 | 2/11/2002 | 1,300 J | 110 | 0.98 J | 1.6 | 7.8 | -- | -- |
| UG-2 | 9/25/2000 | 5.98 | 61 | 2.5 U | 7.45 U | 31 U | -- | -- |
| UG-8 | 9/25/2000 | 5.31 | -- | -- | -- | -- | -- | -- |
| W-15R | 2/28/2002 | 5,000 | 520 | 8.1 | 7.8 | 11 | -- | -- |
| W-17 | 12/7/2000 | 2,600 | 0.67 J | 0.2 U | 6.6 | 3.2 | -- | -- |
| | 3/19/2001 | 2,000 | 0.2 U | 10 U | 1.1 | 11 | -- | -- |
| | 5/16/2001 | 500 | 0.2 U | 0.2 U | 0.51 J | 2.8 J | -- | -- |
| | 8/21/2001 | 1,900 | 1 U | 0.54 J | 0.2 U | 0.6 U | -- | -- |
| W-2 | 3/2/1990 | -- | 0.3 U | 0.3 U | 0.5 | 1 | -- | -- |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| W-3 | 3/2/1990 | -- | 0.3 U | 0.3 U | 0.3 U | 0.3 U | -- | -- |
| | 12/7/2000 | 410 | 0.2 U | 0.72 UJ | 1 U | 1.2 J | -- | -- |
| | 3/19/2001 | 280 | 0.2 U | 0.2 U | 0.2 U | 0.8 J | -- | -- |
| | 5/17/2001 | 290 | 0.2 U | 0.2 U | 0.2 U | 0.61 J | -- | -- |
| | 8/21/2001 | 230 J | 0.2 U | 0.2 U | 0.47 J | 0.6 U | -- | -- |
| | 3/1/2002 | 84 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/27/2002 | 460 | 0.2 U | 0.2 U | 0.2 J | 0.6 U | -- | -- |
| | 11/26/2002 | 460 | 1 U | 0.2 U | 0.2 U | 0.6 J | -- | -- |
| | 2/6/2003 | 390 | 1 U | 0.2 U | 0.26 J | 0.94 J | -- | -- |
| | 5/15/2003 | 400 | 1.6 | 1 J | 4.4 | 6.5 | -- | -- |
| | 8/20/2003 | 290 | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/14/2003 | 370 | 3.8 | 1.5 | 3 | 7.3 | -- | -- |
| | 2/26/2004 | 200 J | 0.2 J | 0.2 U | 0.2 U | 0.9 J | -- | -- |
| | 5/27/2004 | 200 J | 0.2 J | 0.3 J | 0.5 J | 1.2 J | -- | -- |
| | 8/30/2004 | 220 J | 0.4 J | 0.8 J | 5 U | 5 U | -- | -- |
| | 11/18/2004 | 390 | 1.3 | 0.9 J | 1.3 | 3.7 | -- | -- |
| | 2/24/2005 | 230 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/23/2005 | 550 | 2.3 | 5.3 | 17 | 30 | -- | -- |
| | 8/30/2005 | 170 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/29/2005 | 450 | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| 2/23/2006 | 270 | 2 U | 1.2 | 2.2 | 4.8 | -- | -- | |
| 8/24/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 11/27/2006 | 102 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/12/2007 | 352 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/29/2007 | 190 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/11/2008 | 271 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/28/2008 | 314 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/12/2009 | 239 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| W-4 | 3/2/1990 | -- | 7 | 17 | 7 | 15 | -- | -- |
| W-5 | 3/2/1990 | -- | 3.5 | 0.3 U | 0.3 U | 0.3 U | -- | -- |
| W-6 | 12/7/2000 | 3,400 | 0.2 U | 0.2 U | 1 U | 8 | -- | -- |
| | 3/19/2001 | 3,400 | 0.39 J | 20 U | 3.2 | 27 | -- | -- |
| | 5/16/2001 | 710 | 0.2 U | 2 U | 0.5 J | 3.5 | -- | -- |
| | 8/21/2001 | 2.2 | 1.1 | 7.3 | 0.2 U | 0.6 U | -- | -- |
| | 2/28/2002 | 120 J | 1.7 | 1.2 | 0.4 J | 3.5 | -- | -- |
| | 8/27/2002 | 850 | 1.8 | 0.2 U | 2.5 | 3 U | -- | -- |
| | 11/26/2002 | 2,300 | 1 | 1 U | 1 U | 10 U | -- | -- |
| | 2/6/2003 | 400 | 3.3 | 0.6 J | 0.89 J | 2.7 J | -- | -- |
| | 5/15/2003 | 400 | 4.7 | 1.7 | 9.4 | 11 | -- | -- |
| | 8/20/2003 | 530 | 1.4 | 1 U | 1.9 | 3 U | -- | -- |
| | 11/14/2003 | 700 | 12 | 7.9 | 14 | 39 | -- | -- |
| | 2/26/2004 | 150 J | 1 U | 2 U | 1 U | 3 J | -- | -- |
| | 5/27/2004 | 380 | 5 | 7.2 | 18 | 35 | -- | -- |
| | 8/30/2004 | 220 J | 0.9 J | 0.3 J | 1.6 | 2.2 J | -- | -- |
| 11/18/2004 | 79 J | 1.8 | 0.9 J | 1.5 | 3.9 | -- | -- | |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| W-6 (continued) | 2/24/2005 | 230 J | 0.8 J | 1 U | 0.9 J | 3 J | -- | -- |
| | 5/23/2005 | 2,900 | 22 | 53 | 170 | 300 | -- | -- |
| | 8/30/2005 | 190 J | 1.2 | 0.2 U | 0.7 J | 0.6 U | -- | -- |
| | 11/29/2005 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/23/2006 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/24/2006 | 100 U | 1 U | 1 U | 2.33 | 3 U | -- | -- |
| | 11/27/2006 | 670 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 2/12/2007 | 835 | 1.28 | 1 U | 1.32 | 3 U | -- | -- |
| | 8/29/2007 | 603 | 1.03 | 1 U | 1.08 | 3 U | -- | -- |
| | 2/21/2008 | 372 | 1.18 | 1 U | 1 U | 3 U | -- | -- |
| | 8/26/2008 | 1 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| 2/12/2009 | 280 | 1 U | 1 U | 1 U | 3 U | -- | -- | |

Notes:

J = The result is an approximation

µg/L = microgram per liter

MTCA = Model Toxics Control Act

TPH = Total Petroleum Hydrocarbon

U = Analyte was not detected above the reporting limit indicated

UJ = Analyte was not detected above the reporting limit. Indicated value is estimated reporting limit.

-- = Not analyzed

Bold and cell in orange = Result greater than MTCA Method A cleanup level

Bold and cell in yellow = Analyte not detected, but reporting limit is greater than MTCA Method A cleanup level.

Table 7 Analytical Results for Polycyclic Aromatic Hydrocarbons in Groundwater

| Well ID | Date Sampled | Acenaphthene (µg/L) | Acenaphthylene (µg/L) | Anthracene (µg/L) | Benzo(a)anthracene* (µg/L) | Benzo(a)pyrene* (µg/L) | Benzo(b)fluoranthene* (µg/L) | Benzo(g,h,i)perylene (µg/L) | Benzo(k)fluoranthene* (µg/L) | Chysene* (µg/L) | Dibenz(a,h)anthracene* (µg/L) | Fluoranthene (µg/L) | Fluorene (µg/L) | Indeno(1,2,3-cd)pyrene* (µg/L) | Naphthalene (µg/L) | Phenanthrene (µg/L) | Pyrene (µg/L) | cPAHs ¹ (µg/L) |
|--|--------------|---------------------|-----------------------|-------------------|----------------------------|------------------------|------------------------------|-----------------------------|------------------------------|-----------------|-------------------------------|---------------------|-----------------|--------------------------------|--------------------|---------------------|---------------|---------------------------|
| MTCA Method A Cleanup Level | | | | | | 0.1 | | | | | | | | | | | | 0.1 |
| MTCA Method B Cleanup Level Carcinogenic | | | | | | | | | | | | | | | | | 480 | |
| MTCA Method B Cleanup Level Non-Carcinogenic | | 960 | | 4,800 | | | | | | | | | | | 160 | | | |
| MW-40R | 12/8/2000 | 3.8 U | 27.3 J | 0.6 J | 0.45 | 0.243 J | 0.18 U | 0.48 U | 0.048 U | 1.9 | 0.14 U | 0.73 J | 4 | 0.4 J | 4.4 J | 2.9 | 6.4 | 0.3654 |
| | 3/19/2001 | 7.7 U | 29.7 J | 0.93 J | 0.9 | 0.33 J | 0.37 U | 1 U | 0.097 U | 5.4 | 0.29 U | 0.95 J | 4.8 J | 0.89 J | 7.7 U | 3.9 | 1.6 U | 0.60085 |
| | 5/16/2001 | 4 U | 21 J | 0.76 J | 0.1 U | 0.2 J | 0.2 U | 0.5 J | 0.08 J | 0.3 U | 0.1 U | 1 | 5 | 0.63 J | 4 J | 2.1 | 13 | 0.2925 |
| | 8/21/2001 | 8 U | 8 U | 0.96 J | 1.4 | 0.6 J | 0.7 | 0.9 U | 0.2 J | 7.7 | 0.3 U | 1.5 J | 6.3 J | 0.68 J | 8 U | 5.7 | 21 | 0.99 |
| | 2/28/2002 | 4 U | 4 U | 0.2 U | 0.3 J | 0.3 J | 0.3 J | 0.5 U | 0.1 U | 0.4 U | 0.2 U | 1 | 3 J | 0.4 U | 5 U | 3 | 0.9 U | 0.397 |
| W-15R | 2/28/2002 | 50 J | 40 J | 78 | 9 | 5 | 4 | 3 J | 2 | 26 | 0.5 U | 51 | 90 | 3 J | 10 U | 200 | 2 U | 7.085 |
| W-17 | 12/7/2000 | 4.6 J | 5.6 J | 2.2 | 2 | 1.45 | 0.97 | 1.1 J | 0.4 | 8 | 0.14 U | 4 | 6.5 | 1.28 J | 3.8 U | 14.4 | 27.9 | 2.002 |
| | 3/19/2001 | 7.9 U | 7.9 U | 4.3 | 3.74 | 2.05 | 1.63 | 1.4 J | 0.473 J | 21.8 | 0.3 U | 5.8 | 10.1 | 0.66 U | 7.9 U | 25.5 | 58.8 | 2.9003 |
| | 5/16/2001 | 6 J | 6 J | 5 | 2.1 | 1.7 | 1.1 | 0.5 U | 0.7 | 7.6 | 0.46 J | 8 | 12 | 2.5 | 4 U | 7 | 95 | 2.462 |
| | 8/21/2001 | 8 U | 8 U | 5 | 4.4 | 2.1 | 1.9 | 0.9 U | 0.7 | 23 | 0.3 U | 9 | 19 | 0.6 U | 6 U | 37 | 120 | 3.075 |
| W-3 | 12/7/2000 | 1.2 J | 6.79 J | 0.191 J | 0.02 U | 0.02 U | 0.038 U | 0.1 U | 0.01 U | 0.06 U | 0.03 U | 0.03 U | 0.76 J | 0.067 U | 1.29 J | 0.071 J | 0.17 U | 0.01855 U |
| | 3/19/2001 | 1.1 J | 6.97 J | 0.53 | 0.019 U | 0.019 U | 0.036 U | 0.096 U | 0.0096 U | 0.057 U | 0.029 U | 0.029 J | 1.44 | 0.064 U | 1.35 J | 0.067 U | 0.16 U | 0.017665 U |
| | 5/17/2001 | 2.4 J | 20 | 0.3 | 0.02 U | 0.02 U | 0.04 U | 0.09 U | 0.013 J | 0.06 U | 0.03 U | 0.15 | 3.2 | 0.06 U | 13 | 1 | 0.31 | 0.0191 U |
| | 8/21/2001 | 0.9 J | 0.8 U | 0.03 U | 0.02 U | 0.02 U | 0.04 U | 0.09 U | 0.009 U | 0.06 U | 0.03 U | 0.03 U | 0.9 | 0.06 U | 1.2 J | 0.06 U | 0.2 U | 0.01825 U |
| | 3/1/2002 | 0.9 U | 0.9 U | 0.04 U | 0.02 U | 0.02 U | 0.04 U | 0.1 U | 0.02 U | 0.09 U | 0.04 U | 0.04 U | 0.5 J | 0.09 U | 1 U | 0.09 U | 0.2 U | 0.02095 U |
| W-6 | 12/7/2000 | 130 J | 118 J | 96 | 58.1 | 32 | 26.9 | 10 U | 5.9 J | 341 | 3 U | 110 | 242 | 31 | 80 U | 680 | 728 | 47.75 |
| | 3/19/2001 | 7.9 U | 14 J | 2.4 | 1.41 | 0.74 J | 0.57 J | 1 U | 0.098 U | 0.59 U | 0.3 U | 2.3 | 9.5 | 0.84 J | 7.9 U | 17.5 | 1.7 U | 1.04485 |
| | 5/16/2001 | 4 U | 4 U | 0.26 J | 0.2 J | 0.3 J | 0.26 J | 0.5 U | 0.14 J | 0.6 J | 0.16 J | 0.58 J | 0.8 U | 0.82 J | 4 U | 0.49 J | 12 | 0.464 |
| | 8/21/2001 | 8 U | 8 U | 0.34 J | 1.1 | 0.6 J | 0.7 | 0.9 U | 0.26 J | 7.2 | 0.3 U | 0.58 J | 2.6 J | 0.86 J | 6 U | 1.9 J | 22 | 0.979 |
| | 2/28/2002 | 4 U | 4 U | 0.2 U | 0.2 J | 0.3 J | 0.4 J | 0.5 U | 0.1 J | 0.4 U | 0.2 U | 0.5 J | 0.9 U | 0.8 J | 5 U | 0.8 J | 0.9 U | 0.462 |

Notes:

*Compound is cPAH constituent included in TEQ-adjusted total cPAH concentrations. Values for individual cPAH constituents are actual analytical results.

1. Total cPAH concentration expressed as TEQ-adjusted concentration adjusted using Toxicity Equivalency Factors for Maximum Required cPAHs (Table 708-2 under WAC 173-340-708).

cPAH = carcinogenic polycyclic aromatic hydrocarbon

J = The result is an approximation

µg/L = microgram per liter

MTCA = Model Toxics Control Act

TEQ = toxicity-equivalent quotient

U = Analyte not detected above the reporting limit indicated

-- = Not analyzed

Bold and cell in orange = Result greater than MTCA Method A cleanup level.

Table 8 Statistical Summary of Soil Analytical Results

| Parameter | CAS Number | Analyte | MTCA A Unrestricted (mg/kg) | MTCA A Industrial (mg/kg) | MTCA B Carcinogen (mg/kg) | MTCA B Noncarcinogen (mg/kg) | Indicator Hazardous Substance (yes/no) | Number Analyzed | Frequency of Detection (percent) | Maximum Detection Limit (mg/kg) | Minimum Detection Limit (mg/kg) | Maximum Result (mg/kg) | Minimum Result (mg/kg) | Average Result (mg/kg) | Number of Results Exceeding MTCA A Industrial | Number of Results Exceeding MTCA A Unrestricted | Number of Results Exceeding MTCA B Carcinogen | Number of Results Exceeding MTCA B Noncarcinogen |
|--------------------|-------------------|------------------------|-----------------------------|---------------------------|---------------------------|------------------------------|--|-----------------|----------------------------------|---------------------------------|---------------------------------|------------------------|------------------------|------------------------|---|---|---|--|
| Metals | 7439-92-1 | Lead | 250 | 1000 | | | no | 38 | 71 | 15 | 10 | 860 | 2.8 | 108 | 0 | 3 | 0 | 0 |
| SVOCs | 120-12-7 | Anthracene | | | | 24,000 | no | 22 | 18 | 2 | 0.1 | 4.9 | 0.1 | 1.4 | 0 | 0 | 0 | 0 |
| | 129-00-0 | Pyrene | | | | 2,400 | no | 22 | 32 | 2 | 0.02 | 1.35 | 0.0482 | 0.62 | 0 | 0 | 0 | 0 |
| | 191-24-2 | Benzo(g,h,i)perylene | | | | | no | 22 | 23 | 2 | 0.01 | 0.744 | 0.0728 | 0.31 | 0 | 0 | 0 | 0 |
| | 193-39-5 | Indeno(1,2,3-cd)pyrene | | | | | no | 22 | 27 | 2 | 0.1 | 1.43 | 0.0157 | 0.31 | 0 | 0 | 0 | 0 |
| | 205-99-2 | Benzo(b)fluoranthene | | | | | no | 22 | 27 | 2 | 0.1 | 0.468 | 0.0173 | 0.20 | 0 | 0 | 0 | 0 |
| | 206-44-0 | Fluoranthene | | | | 3,200 | no | 22 | 36 | 2 | 0.1 | 1.75 | 0.019 | 0.52 | 0 | 0 | 0 | 0 |
| | 207-08-9 | Benzo(k)fluoranthene | | | | | no | 22 | 23 | 2 | 0.01 | 0.16 | 0.0365 | 0.097 | 0 | 0 | 0 | 0 |
| | 208-96-8 | Acenaphthylene | | | | | no | 22 | 14 | 2 | 0.1 | 2.98 | 0.168 | 1.4 | 0 | 0 | 0 | 0 |
| | 218-01-9 | Chysene | | | | | no | 22 | 27 | 2 | 0.1 | 25.2 | 0.0597 | 6.9 | 0 | 0 | 0 | 0 |
| | 50-32-8 | Benzo(a)pyrene | 0.1 | 2 | 0.14 | | yes | 22 | 27 | 2 | 0.1 | 0.26 | 0.0106 | 0.10 | 0 | 3 | 2 | 0 |
| | 53-70-3 | Dibenz(a,h)anthracene | | | | | no | 22 | 14 | 2 | 0.01 | 0.409 | 0.0312 | 0.17 | 0 | 0 | 0 | 0 |
| | 56-55-3 | Benzo(a)anthracene | | | | | no | 22 | 23 | 2 | 0.01 | 4.25 | 0.0479 | 1.1 | 0 | 0 | 0 | 0 |
| | 83-32-9 | Acenaphthene | | | | 4,800 | no | 22 | 9 | 2 | 0.1 | 1.27 | 0.32 | 0.80 | 0 | 0 | 0 | 0 |
| | 85-01-8 | Phenanthrene | | | | | no | 22 | 41 | 0.5 | 0.1 | 4.9 | 0.12 | 1.0 | 0 | 0 | 0 | 0 |
| | 86-73-7 | Fluorene | | | | 3,200 | no | 22 | 18 | 2 | 0.1 | 3.52 | 0.17 | 1.6 | 0 | 0 | 0 | 0 |
| 91-20-3 | Naphthalene | | | | 1,600 | no | 22 | 5 | 2 | 0.1 | 1.1 | 1.1 | 1.1 | 0 | 0 | 0 | 0 | |
| 91-20-3 | cPAH ¹ | | 0.1 | 2 | 0.14 | | yes | 22 | 27 | 1.51 | 0.0755 | 0.6868 | 0.03818 | 0.33 | 0 | 4 | 4 | 0 |
| Oil and Grease TPH | TPH_O&G | Oil and Grease | | | | | na | 12 | 83 | 5 | 5 | 33,500 | 174 | 5,356 | 0 | 0 | 0 | 0 |
| | TPH | TPH | 2,000 | 2,000 | | | yes | 152 | 91 | 10 | 5 | 730,000 | 7 | 11,470 | 58 | 58 | 0 | 0 |
| | TPH-D | TPH-Diesel | 2,000 | 2,000 | | | yes | 67 | 82 | 10 | 2 | 27,100 | 7 | 1,627 | 11 | 11 | 0 | 0 |
| | TPH-G | TPH-Gas | 30 | 30 | | | yes | 50 | 50 | 50 | 1 | 6,050 | 1 | 632 | 17 | 17 | 0 | 0 |
| | TPH-O | TPH-Oil | 2,000 | 2,000 | | | yes | 37 | 76 | 471 | 25 | 52,300 | 41 | 2,438 | 3 | 3 | 0 | 0 |
| VOC | 71-43-2 | Benzene | 0 | 0 | | | yes | 80 | 30 | 34 | 0.01 | 15 | 0.04 | 2.70 | 3 | 3 | 0 | 0 |
| | 100-41-4 | Ethylbenzene | 6 | 6 | | | no | 80 | 15 | 8 | 0.01 | 5.3 | 0.02 | 0.90 | 0 | 0 | 0 | 0 |
| | 108-88-3 | Toluene | 7 | 7 | | | no | 80 | 26 | 30.5 | 0.015 | 12.975 | 0.26 | 4.07 | 4 | 4 | 0 | 0 |
| | 1330-20-7 | Total Xylene | 9 | 9 | | | no | 80 | 15 | 2.5 | 0.015 | 6.6 | 0.035 | 1.25 | 12 | 12 | 0 | 0 |

Notes:

1. Total cPAH concentration expressed as TEQ-adjusted concentration adjusted using Toxicity Equivalency Factors for Maximum Required cPAHs (Table 708-2 under WAC 173-340-708).

CAS = Chemical Abstract Service

cPAH = carcinogenic polycyclic aromatic hydrocarbons

mg/kg = microgram per kilogram

MTCA = Model Toxics Control Act

SVOC = Semivolatile Organic Compound

TPH = Total Petroleum Hydrocarbon

VOC = Volatile Organic Compound

Table 9 Statistical Summary of Groundwater Analytical Results

| Parameter | CAS Number | Analyte | MTCA A Groundwater (µg/L) | MTCA B Carcinogen (µg/L) | MTCA B Noncarcinogen (µg/L) | Indicator Hazardous Substance (yes/no) | Number Analyzed | Frequency of Detection (percent) | Maximum Detection Limit | Minimum Detection Limit | Maximum Result (µg/L) | Minimum Result (µg/L) | Average Result (µg/L) | Number of Results Exceeding MTCA A | Number of Results Exceeding MTCA B Carcinogen | Number of Results Exceeding MTCA B Noncarcinogen |
|--------------------|-------------|------------------------|---------------------------|--------------------------|-----------------------------|--|-----------------|----------------------------------|-------------------------|-------------------------|-----------------------|-----------------------|-----------------------|------------------------------------|---|--|
| Metals | 7439-92-1 | Total Lead | 15 | -- | -- | no | 20 | 100 | -- | -- | 230 | 10 | 65 | 17 | -- | -- |
| | 7439-92-1 | Dissolved Lead | 15 | -- | -- | yes | 20 | 75 | 2 | 2 | 12 | 2 | 4 | 0 | -- | -- |
| SVOCs | 120-12-7 | Anthracene | | | 4,800 | no | 64 | 44 | 5 | 0.028 | 96 | 0.028 | 4.9 | 0 | 0 | 0 |
| | 129-00-0 | Pyrene | | | 480 | no | 64 | 38 | 2 | 0.16 | 728 | 0.16 | 18.25 | 0 | 0 | 1 |
| | 191-24-2 | Benzo(g,h,i)perylene | | | | no | 64 | 13 | 10 | 0.09 | 10 | 0.09 | 0.51 | 0 | 0 | 0 |
| | 193-39-5 | Indeno(1,2,3-cd)pyrene | | | | no | 64 | 30 | 0.66 | 0.06 | 31 | 0.06 | 0.85 | 0 | 0 | 0 |
| | 205-99-2 | Benzo(b)fluoranthene | | | | no | 64 | 28 | 0.4 | 0.036 | 26.9 | 0.036 | 0.77 | 0 | 0 | 0 |
| | 206-44-0 | Fluoranthene | | | 640 | no | 64 | 56 | 0.1 | 0.028 | 110 | 0.028 | 3.84 | 0 | 0 | 0 |
| | 207-08-9 | Benzo(k)fluoranthene | | | | no | 64 | 31 | 0.1 | 0.009 | 5.9 | 0.009 | 0.248 | 0 | 0 | 0 |
| | 208-96-8 | Acenaphthylene | | | | no | 64 | 33 | 8 | 0.76 | 118 | 0.76 | 7.7 | 0 | 0 | 0 |
| | 218-01-9 | Chysene | | | | no | 64 | 41 | 0.59 | 0.057 | 341 | 0.057 | 8.9 | 0 | 0 | 0 |
| | 50-32-8 | Benzo(a)pyrene | 0.1 | | | yes | 64 | 41 | 0.1 | 0.019 | 32 | 0.019 | 0.89 | 20 | 0 | 0 |
| | 53-70-3 | Dibenz(a,h)anthracene | | | | no | 64 | 13 | 3 | 0.028 | 3 | 0.028 | 0.22 | 0 | 0 | 0 |
| | 56-55-3 | Benzo(a)anthracene | | | | no | 64 | 45 | 0.1 | 0.019 | 58.1 | 0.019 | 1.7 | 0 | 0 | 0 |
| | 83-32-9 | Acenaphthene | | | 960 | no | 64 | 23 | 8.1 | 0.6 | 130 | 0.6 | 6.46 | 0 | 0 | 0 |
| | 85-01-8 | Phenanthrene | | | | no | 64 | 44 | 5 | 0.06 | 680 | 0.06 | 18.0 | 0 | 0 | 0 |
| | 86-73-7 | Fluorene | | | 640 | no | 64 | 52 | 5 | 0.16 | 242 | 0.16 | 8.8 | 0 | 0 | 0 |
| 91-20-3 | Naphthalene | | | 160 | no | 64 | 16 | 80 | 0.76 | 80 | 0.76 | 5.0 | 0 | 0 | 0 | |
| | | cPAH ¹ | 0.1 | | 160 | yes | 64 | 56 | 0.0755 | 0.01761 | 47.75 | 0.01756 | 1.32 | 36 | 26 | 0 |
| Oil and Grease TPH | TPH_O&G | Oil and Grease | na | -- | -- | na | 12 | 100 | -- | -- | 132,000 | 2,700 | 31,150 | 12 | -- | -- |
| | TPH | TPH | 500 | -- | -- | yes | 56 | 66 | 1,000 | 500 | 1,058,000 | 1.1 | 38,955 | 0 | -- | -- |
| | TPH-D | TPH-Diesel | 500 | -- | -- | yes | 232 | 93 | 500 | 77 | 300,000 | 20 | 7,951 | 181 | -- | -- |
| | TPH-G | TPH-Gas | 800 | -- | -- | yes | 231 | 69 | 500 | 1 | 5,980 | 1 | 671 | 59 | -- | -- |
| | TPH-O | TPH-Oil | 500 | -- | -- | yes | 181 | 86 | 500,000 | 93.9 | 500,000 | 49 | 6,782 | 108 | -- | -- |
| VOC | 71-43-2 | Benzene | 5 | -- | -- | yes | 286 | 50 | 10 | 0.2 | 1,100 | 0.2 | 37.30 | 73 | -- | -- |
| | 100-41-4 | Ethylbenzene | 700 | -- | -- | no | 286 | 33 | 20 | 0.2 | 359 | 0.2 | 6.15 | 0 | -- | -- |
| | 108-88-3 | Toluene | 1000 | -- | -- | no | 286 | 43 | 7.45 | 0.2 | 351 | 0.2 | 7.47 | 0 | -- | -- |
| | 1330-20-7 | Total Xylene | 1000 | -- | -- | no | 286 | 50 | 31 | 0.3 | 1,941 | 0.3 | 26.7 | 2 | -- | -- |

Notes:

1. Total cPAH concentration expressed as TEQ-adjusted concentration adjusted using Toxicity Equivalency Factors for Maximum Required cPAHs (Table 708-2 under WAC 173-340-708).

CAS = Chemical Abstract Service

cPAH = carcinogenic polycyclic aromatic hydrocarbon

µg/L = microgram per liter

MTCA = Model Toxics Control Act


na = not available

SVOC = Semivolatile Organic Compound


TPH = Total Petroleum Hydrocarbon


VOC = Volatile Organic Compound

FIGURES

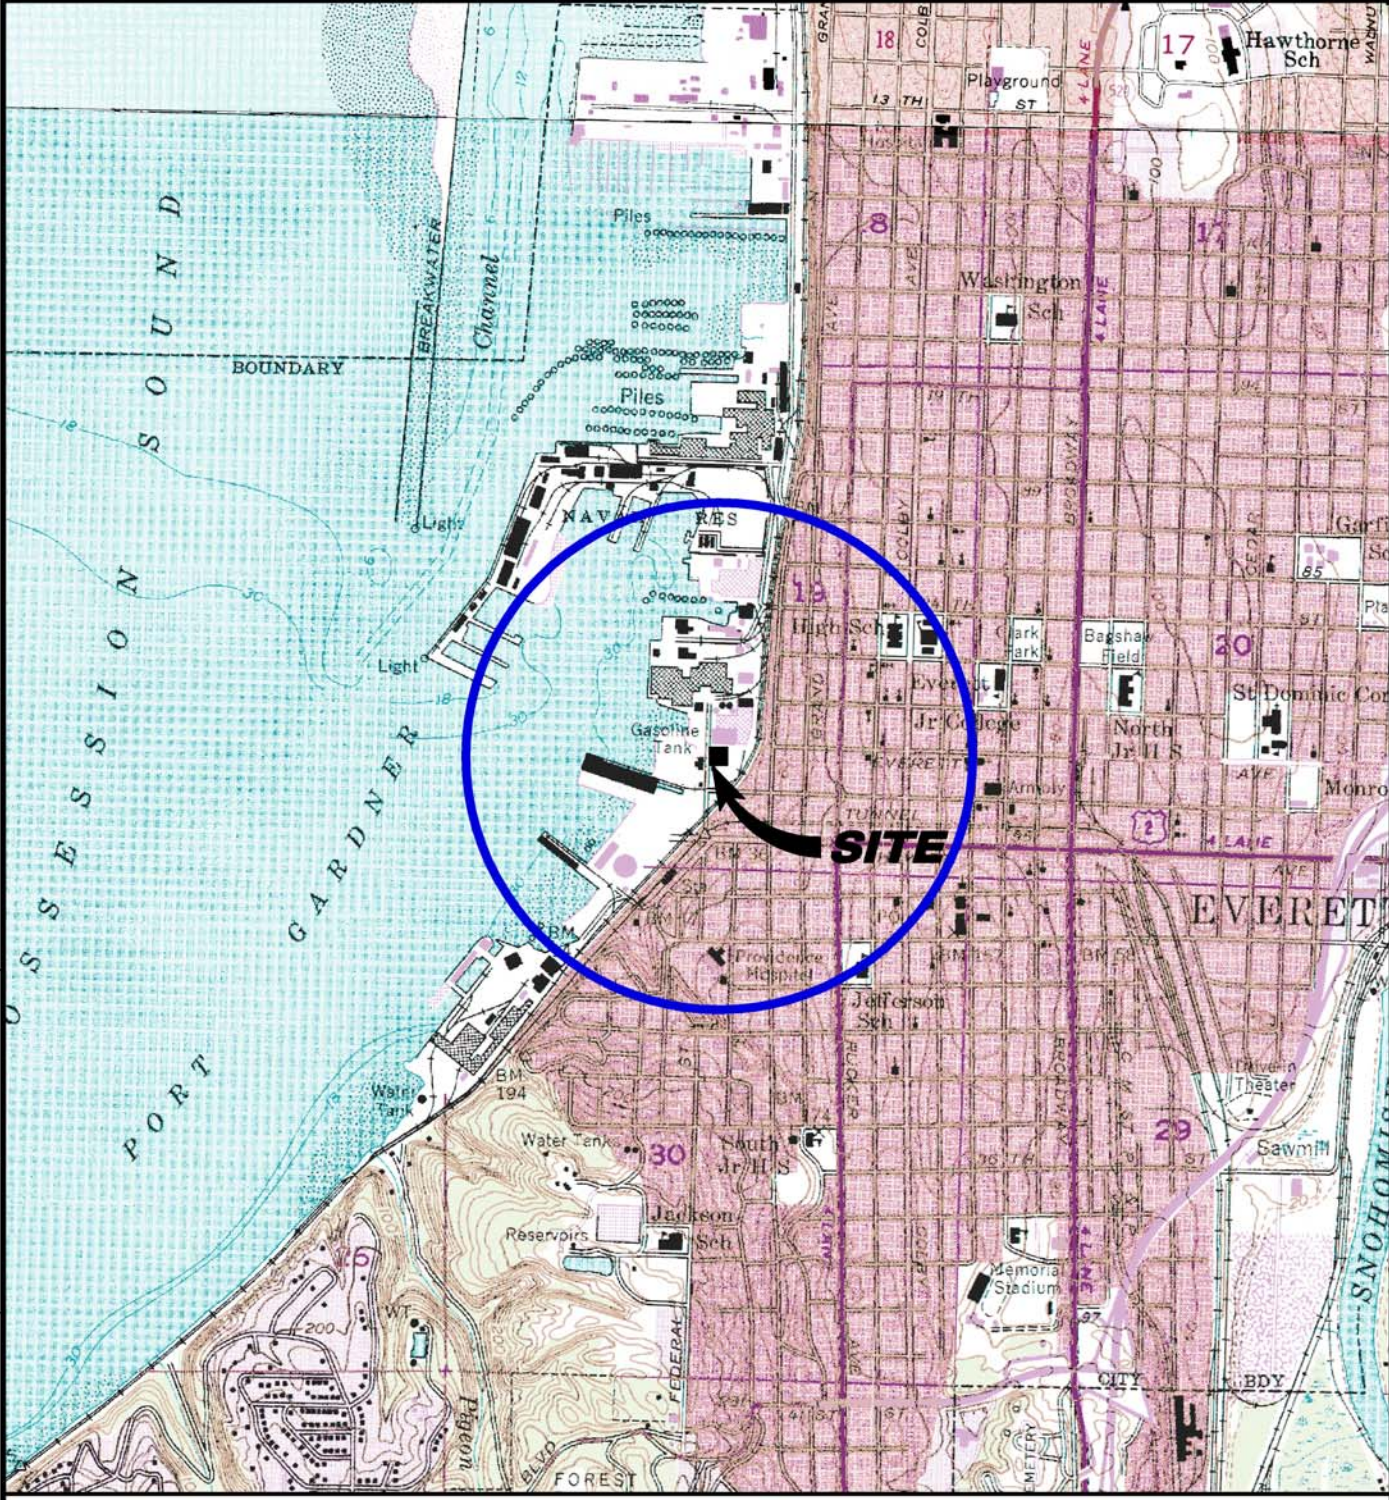

EXPLANATION

 1/2-MILE RADIUS CIRCLE



SCALE: 1:24,000

SOURCE: USGS Quad Topo of Everett and Marysville, Photorevised 1973.


amec
 AMEC EARTH & ENVIRONMENTAL, INC.
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201


SITE LOCATION MAP
 EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728
 2717/2731 FEDERAL AVENUE
 EVERETT, WASHINGTON

FIGURE
 1




SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

| | | | | | |
|---|---|------------------|---|---------|------------------------------|
| CLIENT LOGO | CLIENT: | DWN BY: JRS | | PROJECT | DATE: |
| | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | CHK'D BY: AS | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | | FENRUARY 2010 |
| AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 |  | DATUM: NONE | TITLE | | PROJECT NO: 9-915-15716-C |
| | | PROJECTION: NONE | PLAN OF THE PROPERTY AND VICINITY | | REV. NO.: |
| | | SCALE: AS SHOWN | | | FIGURE No. 2 |

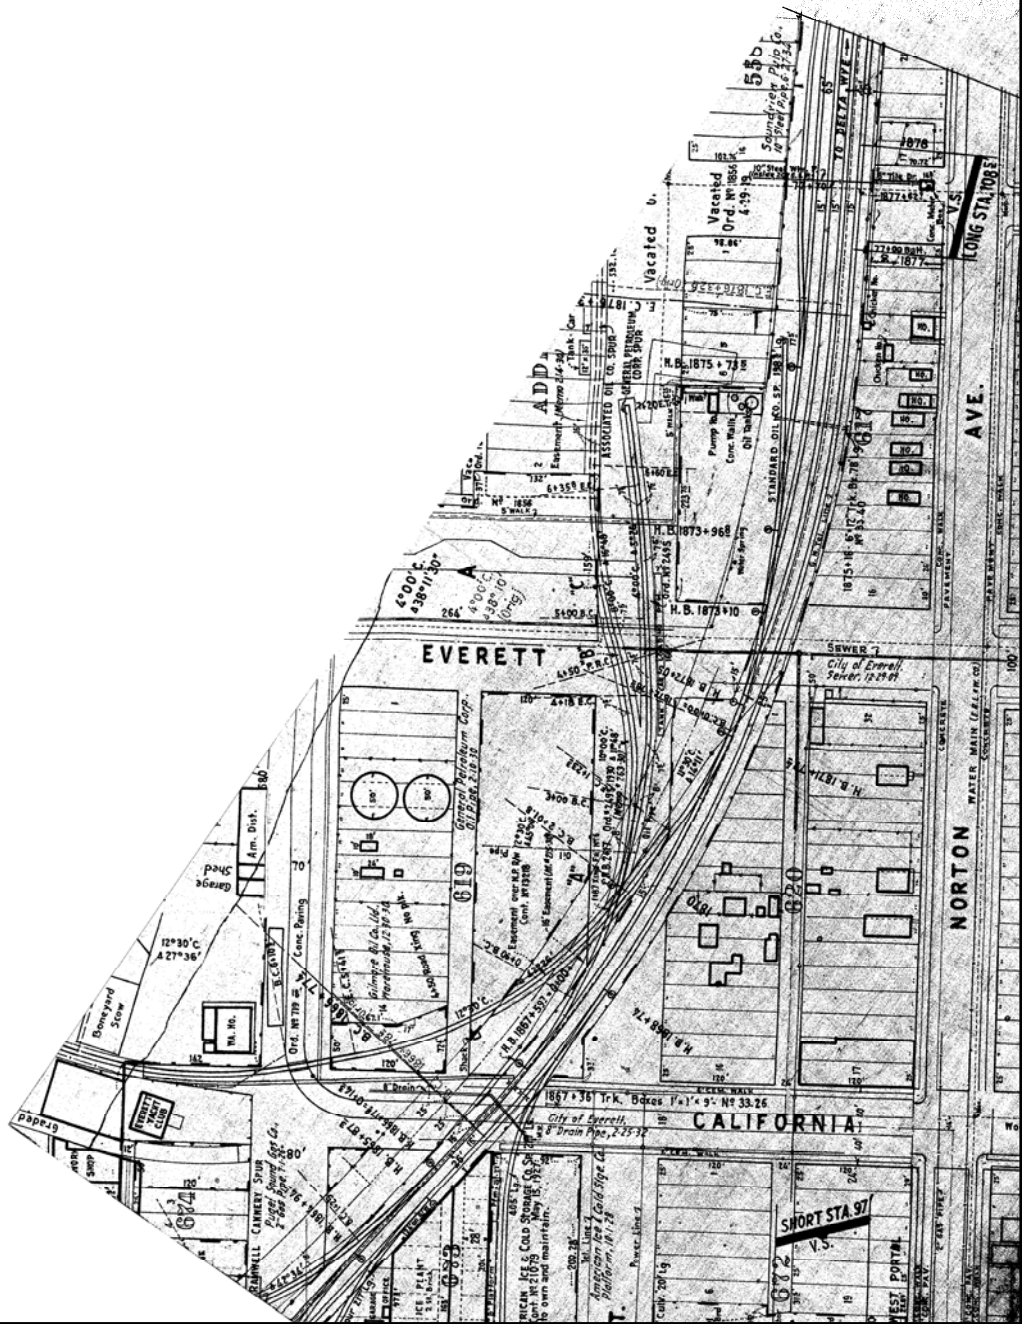

Note:
 Parcels layer from Snohomish County, ftp://ftp.snoco.org
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:
**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ DATUM: NAD83 DATE: AUGUST 2009


CHKD BY: AIS/MS REV. NO.: 1 PROJECT NO.: 9-915-15716C

TITLE: **1930 GREAT NORTHERN RAILWAY EVERETT MAP**


PROJECTION: WA SP North SCALE: 1 inch = 200 feet FIGURE No.: **FIGURE 3**

LEGEND

- Above Ground Tanks (ASTs) in 1930 Map
- Buildings in 1930 Map
- Taxlot Parcels

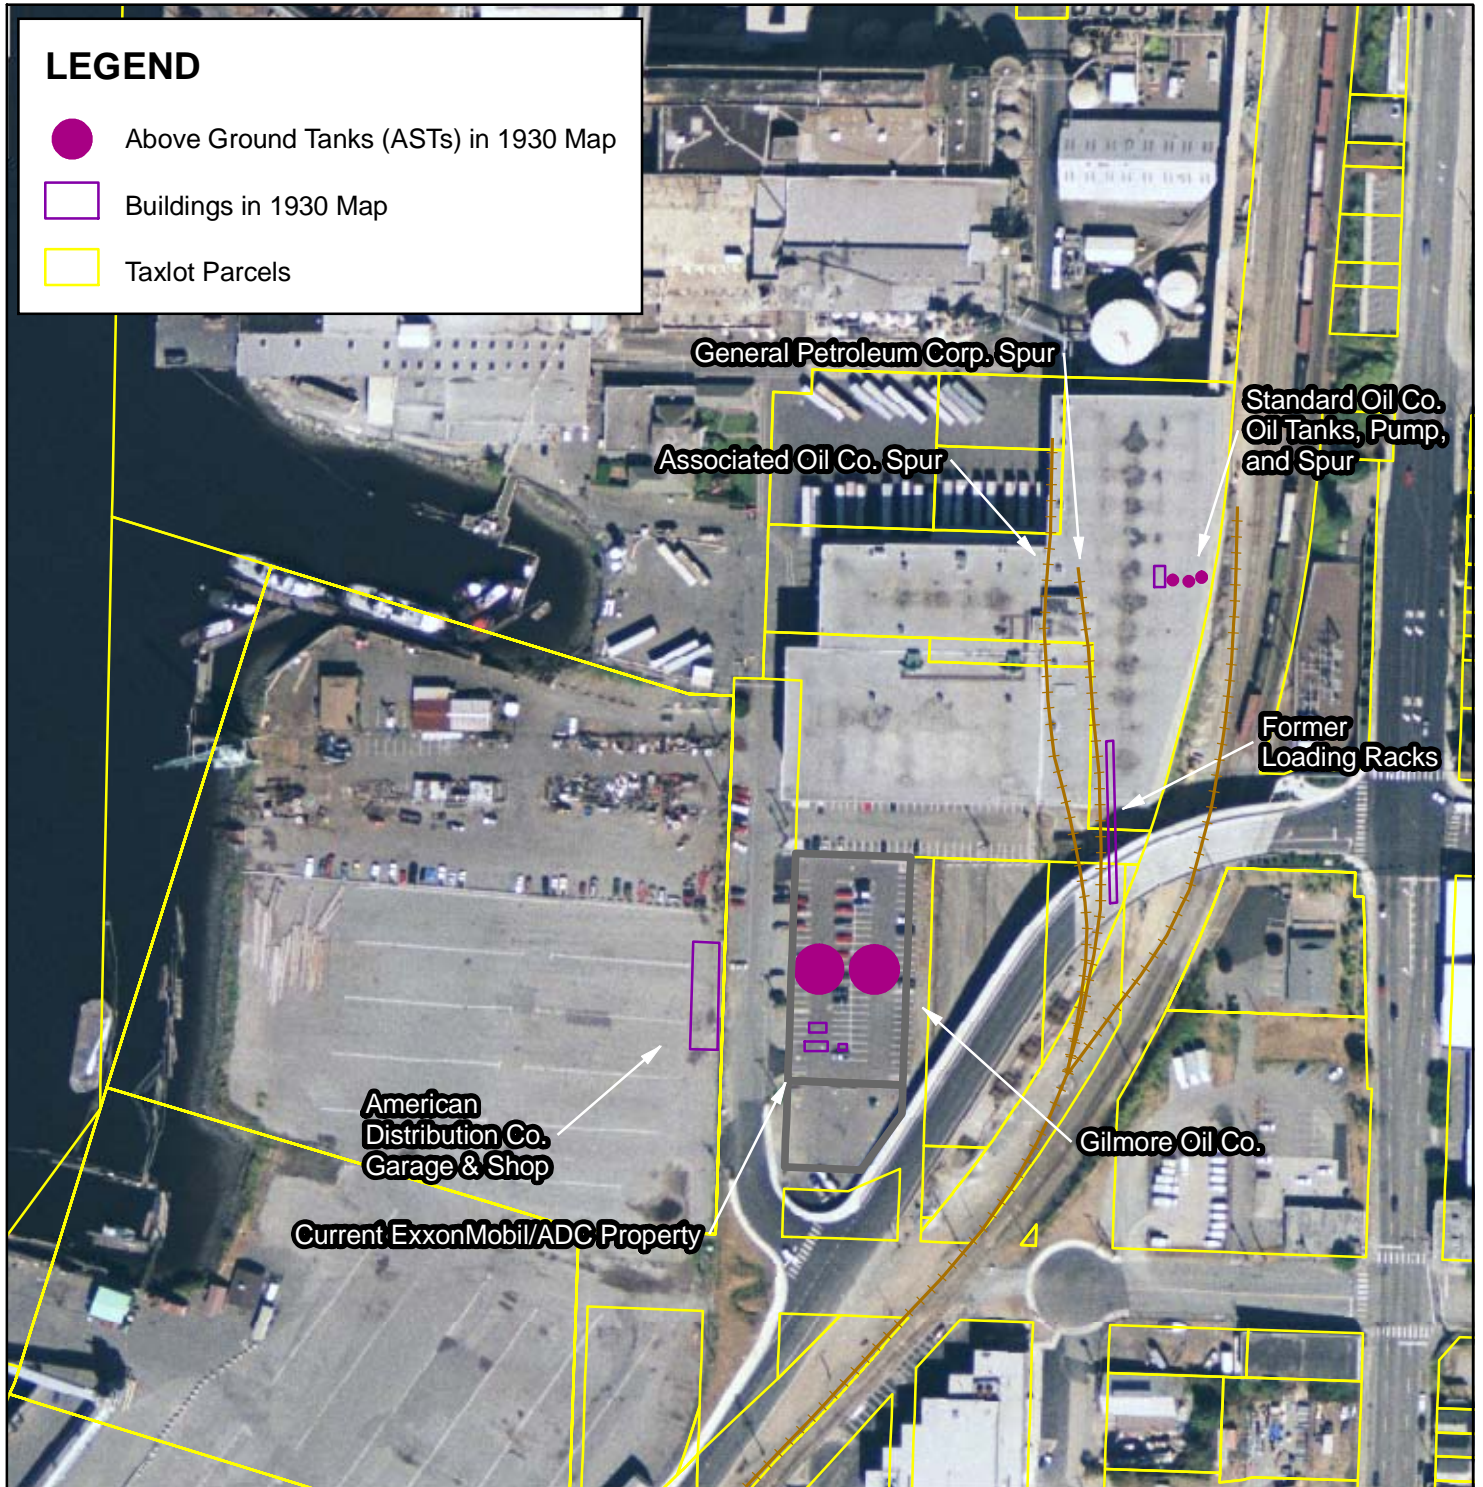

Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:
**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**


PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

| | | |
|----------------|-----------------|----------------------|
| DWN BY: BRJ | DATUM: NAD83 | DATE: AUGUST 2009 |
|----------------|-----------------|----------------------|


| | | |
|--------------------|----------------|------------------------------|
| CHKD BY: AIS/MS | REV. NO.: 1 | PROJECT NO.: 9-915-15716C |
|--------------------|----------------|------------------------------|

TITLE: **FEATURES SEEN IN
 1930 GREAT NORTHERN RAILWAY EVERETT MAP
 OVER 2003 AERIAL**

| | | |
|----------------------------|-----------------------------|--------------------------------|
| PROJECTION: WA SP North | SCALE: 1 inch = 200 feet | FIGURE No.: FIGURE 4 |
|----------------------------|-----------------------------|--------------------------------|

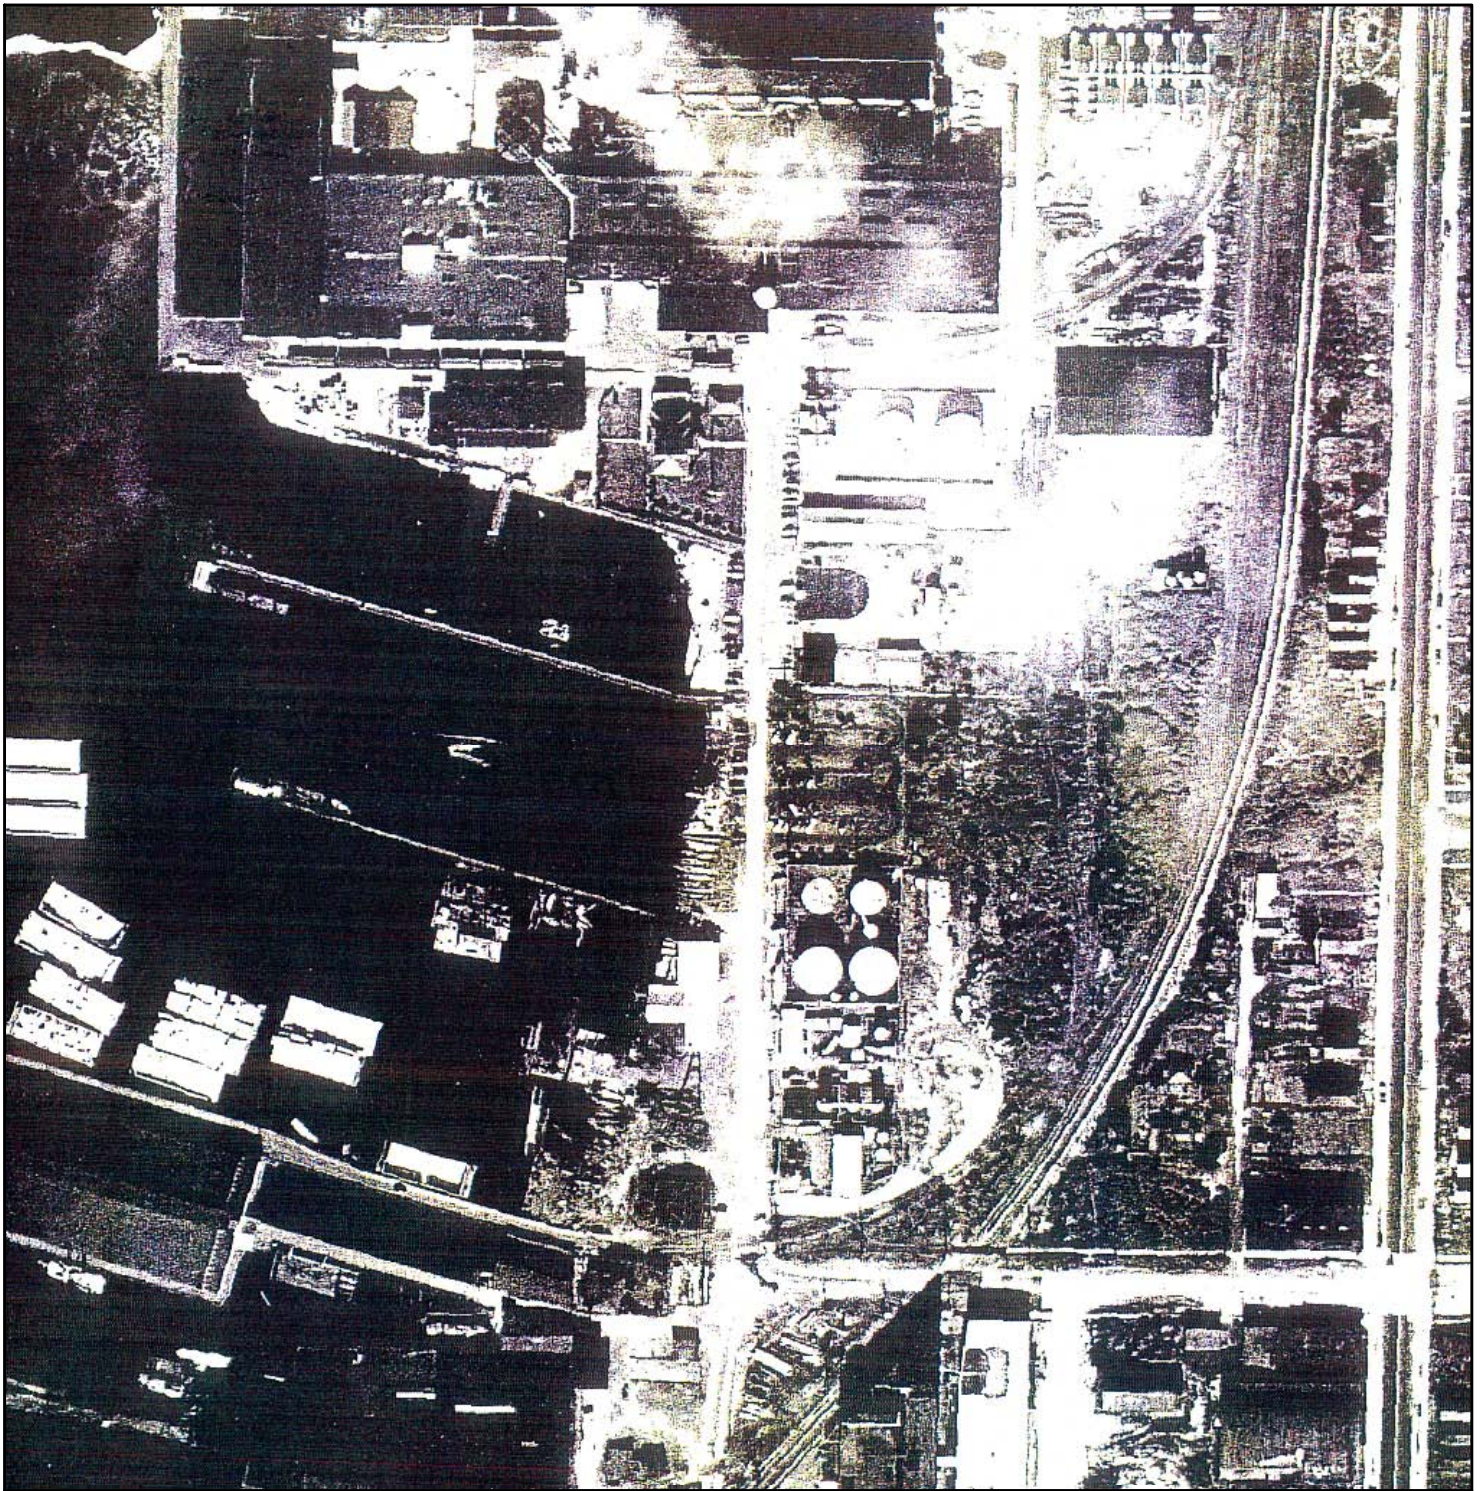

Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ

DATUM: NAD83

DATE: AUGUST 2009

CHK'D BY: AIS/MS

REV. NO.: 1

PROJECT NO.: 9-915-15716C

TITLE: **AERIAL 1947**


PROJECTION: WA SP North

SCALE: 1 inch = 200 feet


FIGURE No.: **FIGURE 5**

LEGEND


- Above Ground Tanks (ASTs) in 1947 Aerial
- Buildings in 1947 Aerial
- Taxlot Parcels

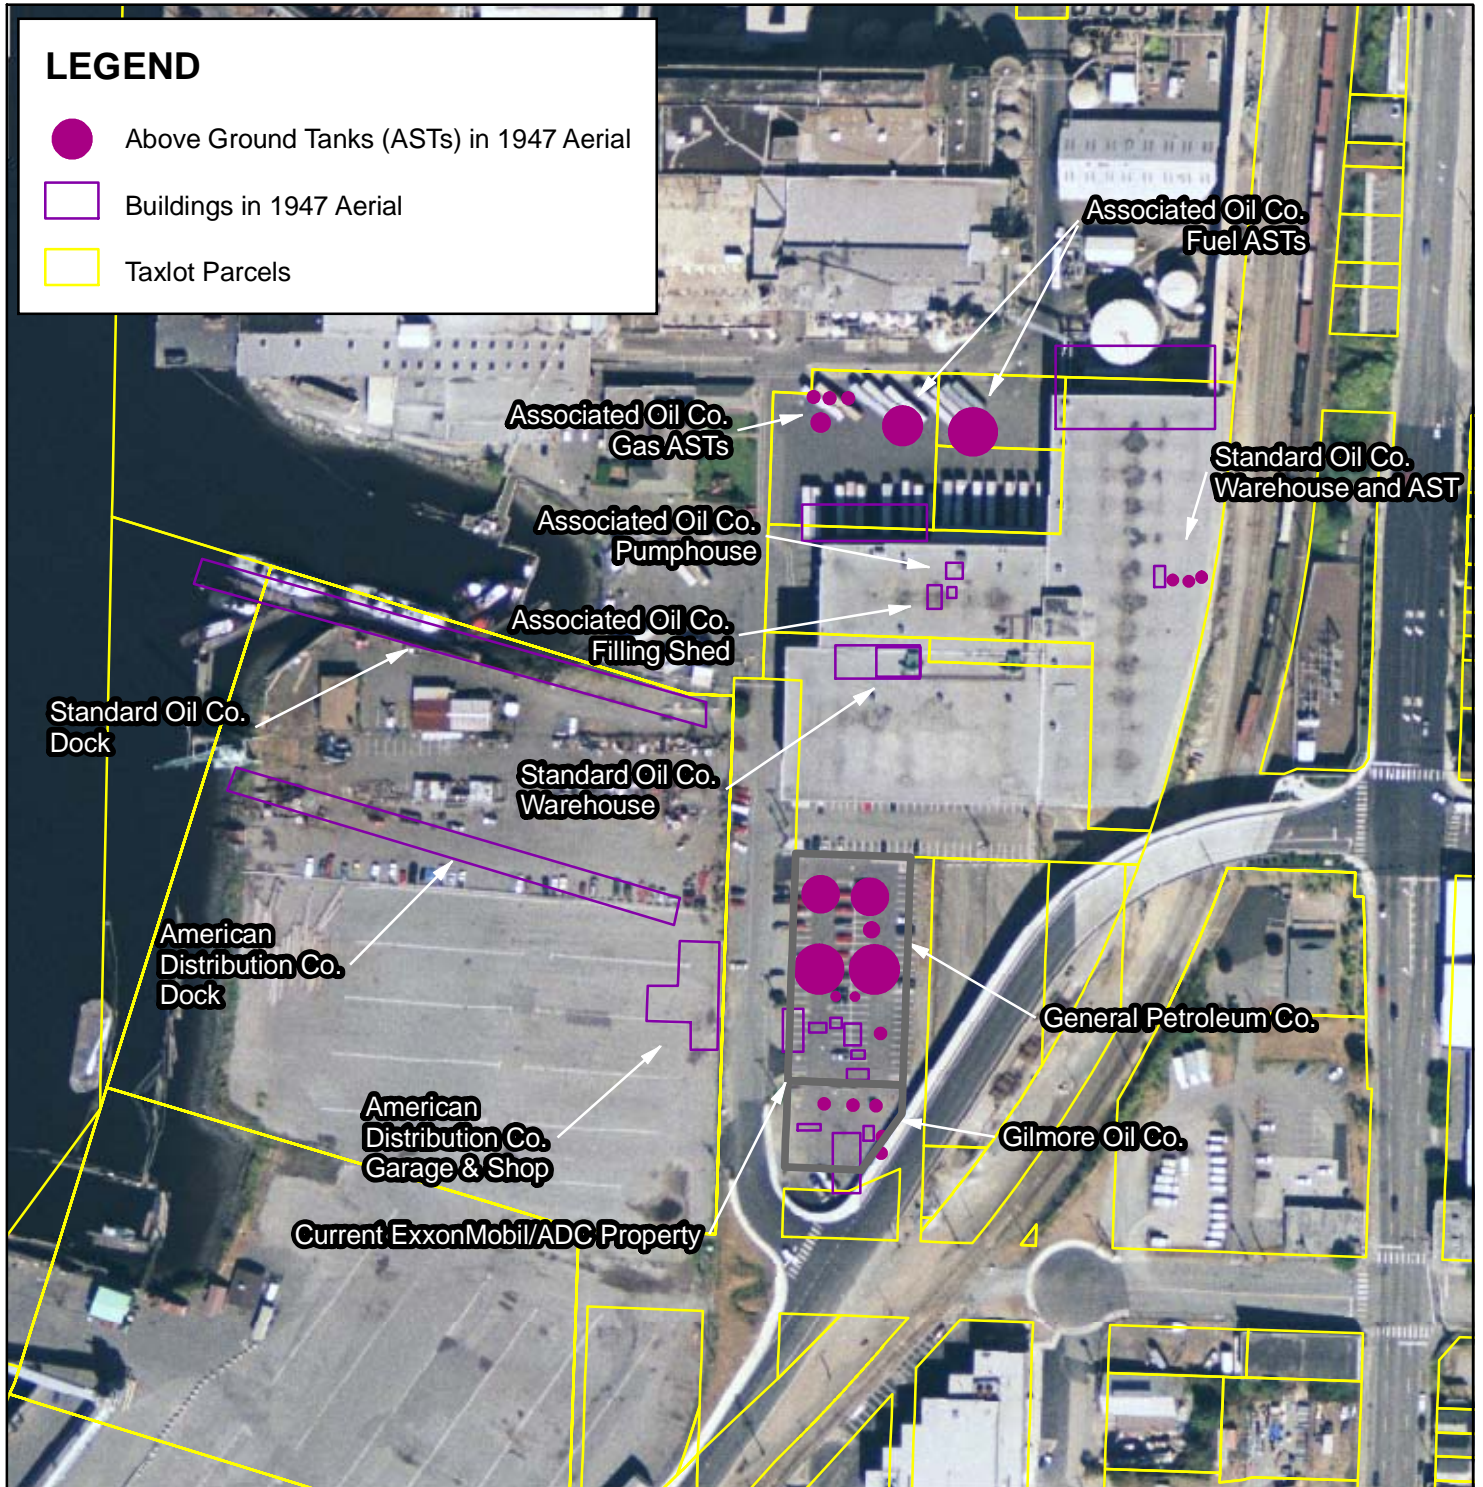


Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



| | | | | | |
|---|--|-------------------------|--------------------------|--|--|
| AMEC Earth & Environmental 11820 North Creek Parkway North Bothell, Washington 98011 | | | | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING CO. | |
| PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | | DWN BY: BRJ | DATUM: NAD83 | DATE: AUGUST 2009 | |
| TITLE: FEATURES SEEN IN 1947 AERIAL OVER 2003 AERIAL | | CHKD BY: AIS/MS | REV. NO.: 1 | PROJECT NO.: 9-915-15716C | |
| | | PROJECTION: WA SP North | SCALE: 1 inch = 200 feet | FIGURE No.: FIGURE 6 | |

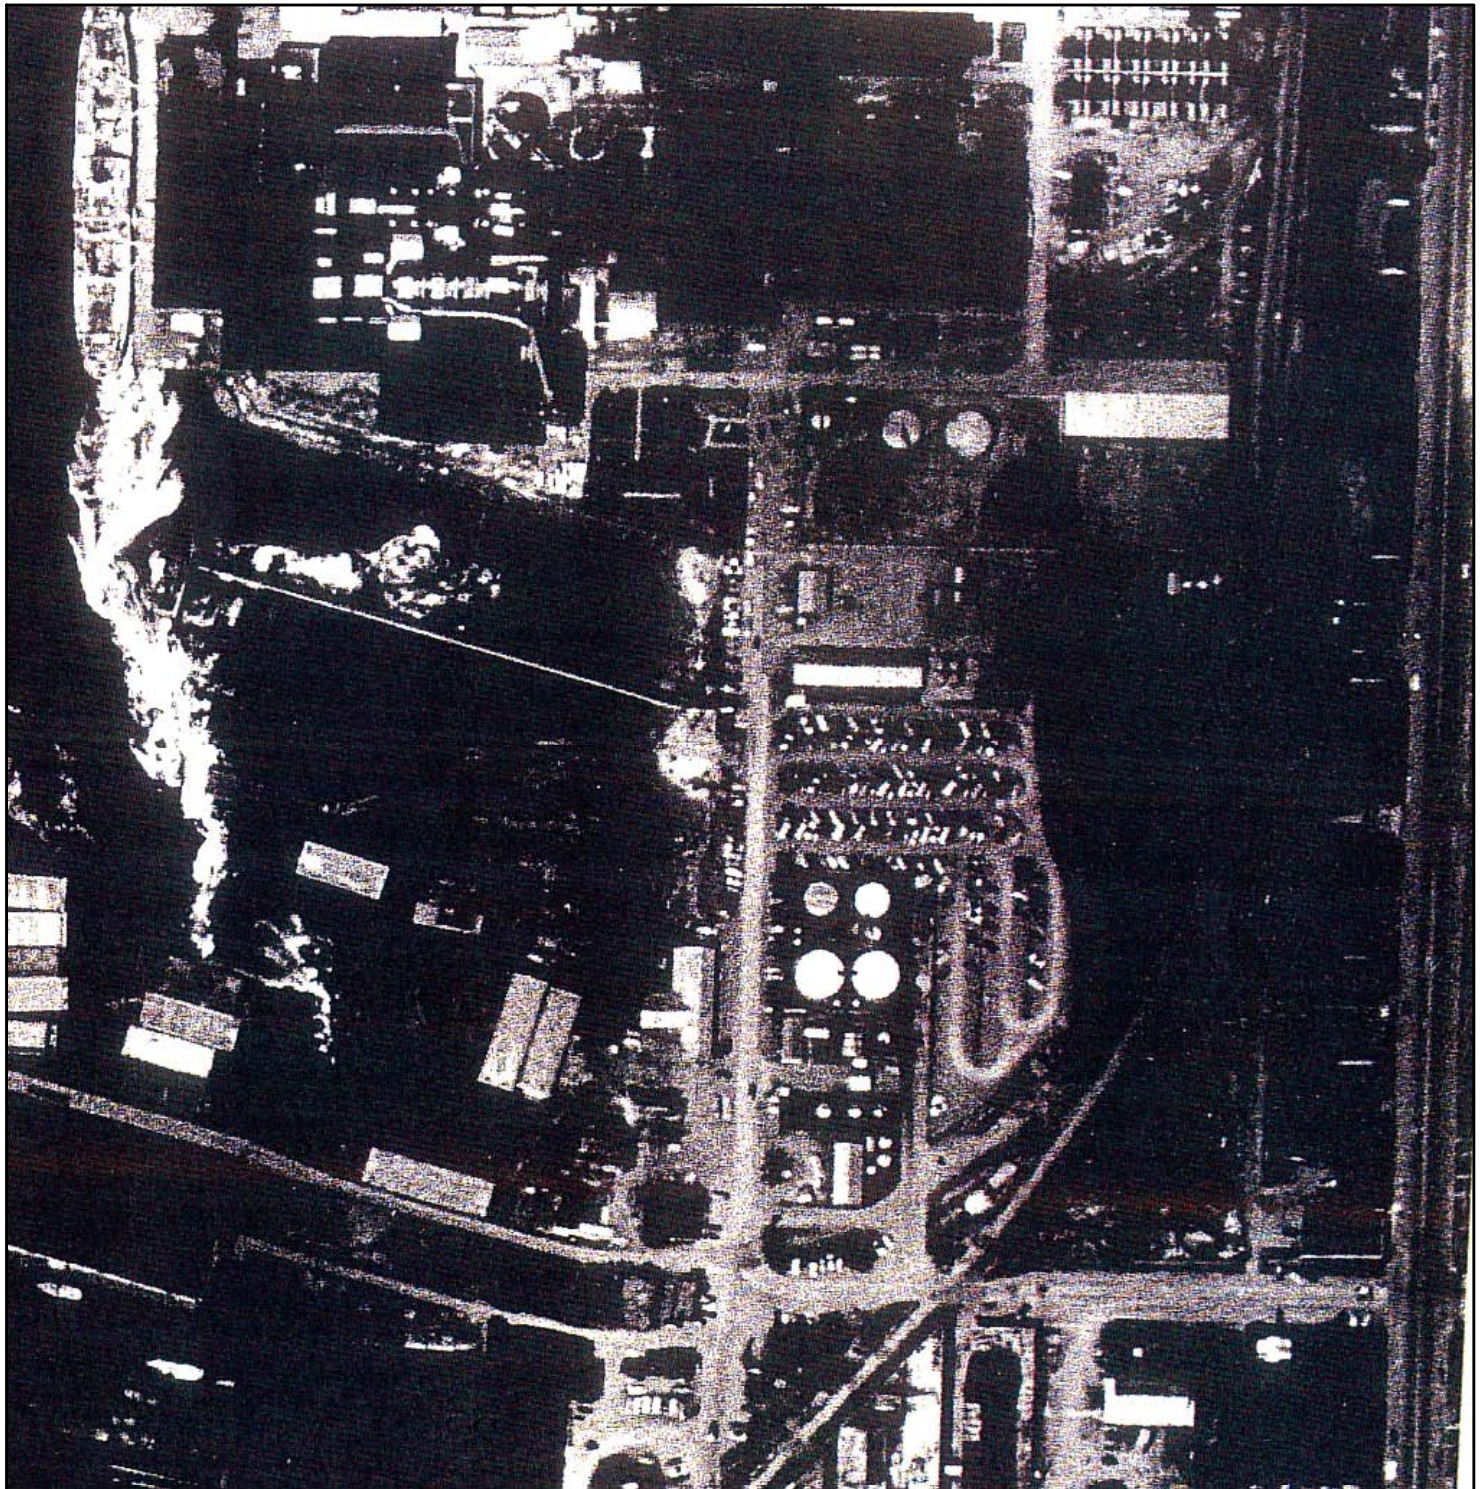

Note:
 Parcels layer from **Snohomish County**, <ftp://ftp.snoco.org>
 2003 aerial from **Washington Department of Transportation**



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: **BRJ**

DATUM: **NAD83**

DATE: **AUGUST 2009**

CHK'D BY: **AIS/MS**

REV. NO.: **1**

PROJECT NO.: **9-915-15716C**

TITLE: **AERIAL 1955**


PROJECTION: **WA SP North**

SCALE: **1 inch = 200 feet**


FIGURE No.: **FIGURE 7**

LEGEND


- Above Ground Tanks (ASTs) in 1955 Aerial
- Buildings in 1955 Aerial
- Taxlot Parcels

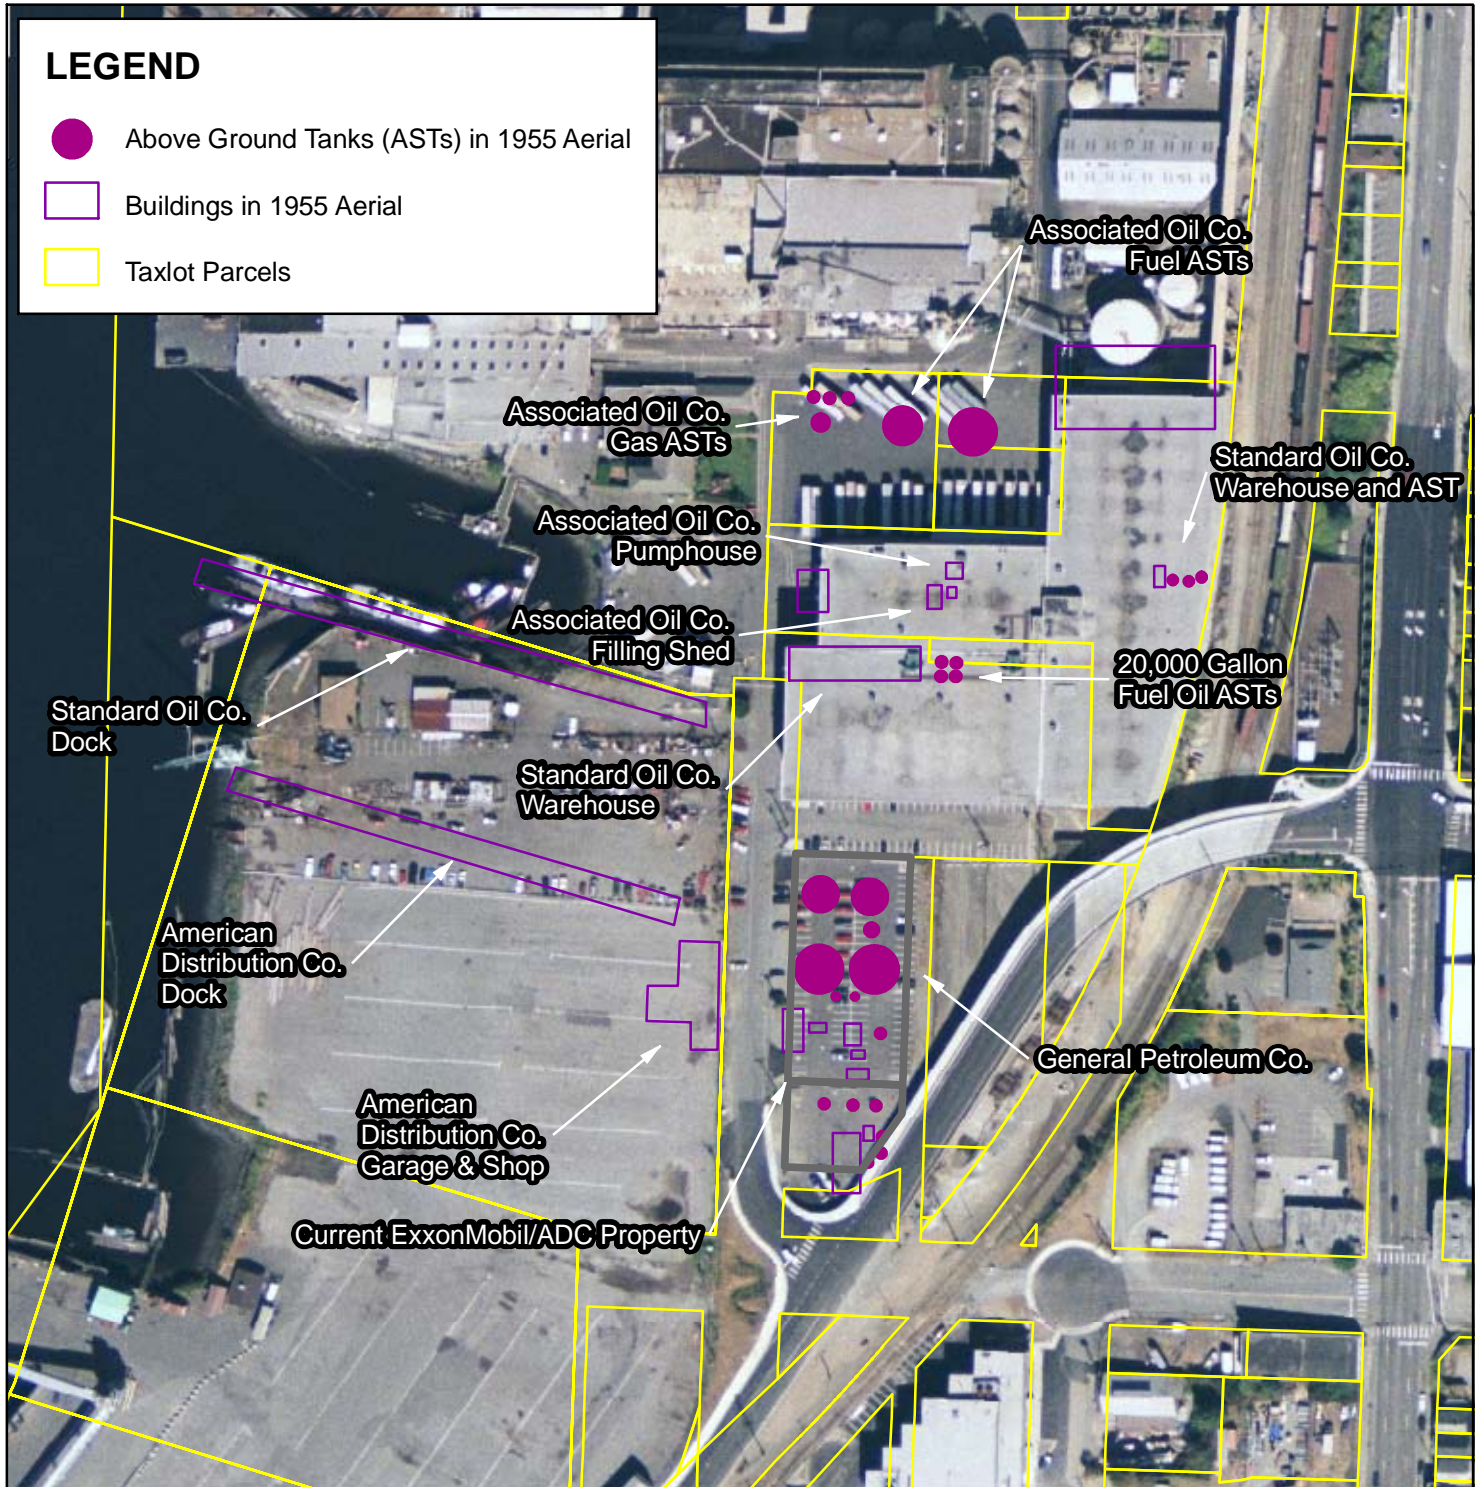


Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



| | | | | | |
|---|--|-------------------------|--------------------------|--|--|
| AMEC Earth & Environmental 11820 North Creek Parkway North Bothell, Washington 98011 | | | | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING CO. | |
| PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | | DWN BY: BRJ | DATUM: NAD83 | DATE: AUGUST 2009 | |
| TITLE: FEATURES SEEN IN 1955 AERIAL OVER 2003 AERIAL | | CHKD BY: AIS/MS | REV. NO.: 1 | PROJECT NO.: 9-915-15716C | |
| | | PROJECTION: WA SP North | SCALE: 1 inch = 200 feet | FIGURE No.: FIGURE 8 | |

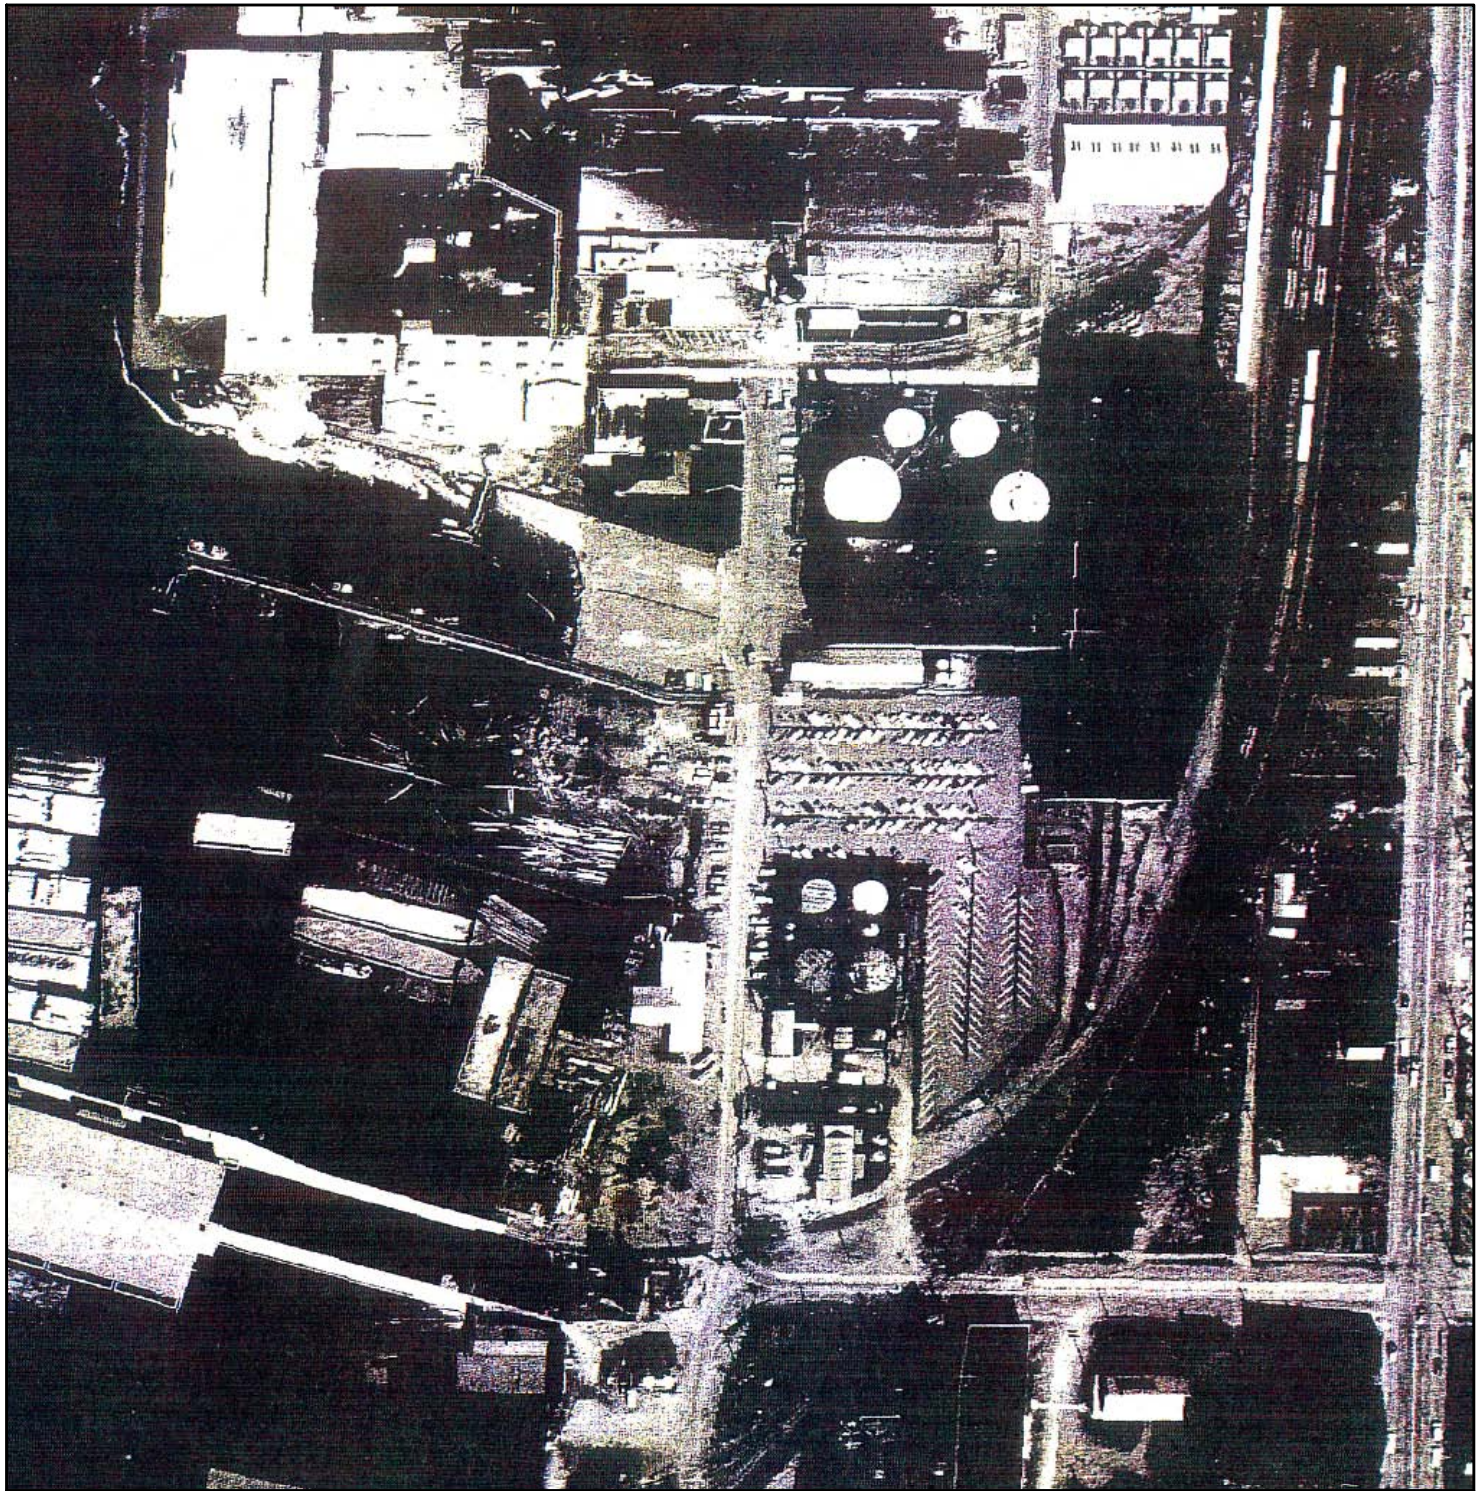

Note:
 Parcels layer from **Snohomish County**, <ftp://ftp.snoco.org>
 2003 aerial from **Washington Department of Transportation**



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: **BRJ**

DATUM: **NAD83**

DATE: **AUGUST 2009**

CHK'D BY: **AIS/MS**

REV. NO.: **1**

PROJECT NO.: **9-915-15716C**

TITLE: **AERIAL 1967**


PROJECTION: **WA SP North**

SCALE: **1 inch = 200 feet**


FIGURE No.: **FIGURE 9**

LEGEND


- Above Ground Tanks (ASTs) in 1967 Aerial
- Buildings in 1967 Aerial
- Taxlot Parcels

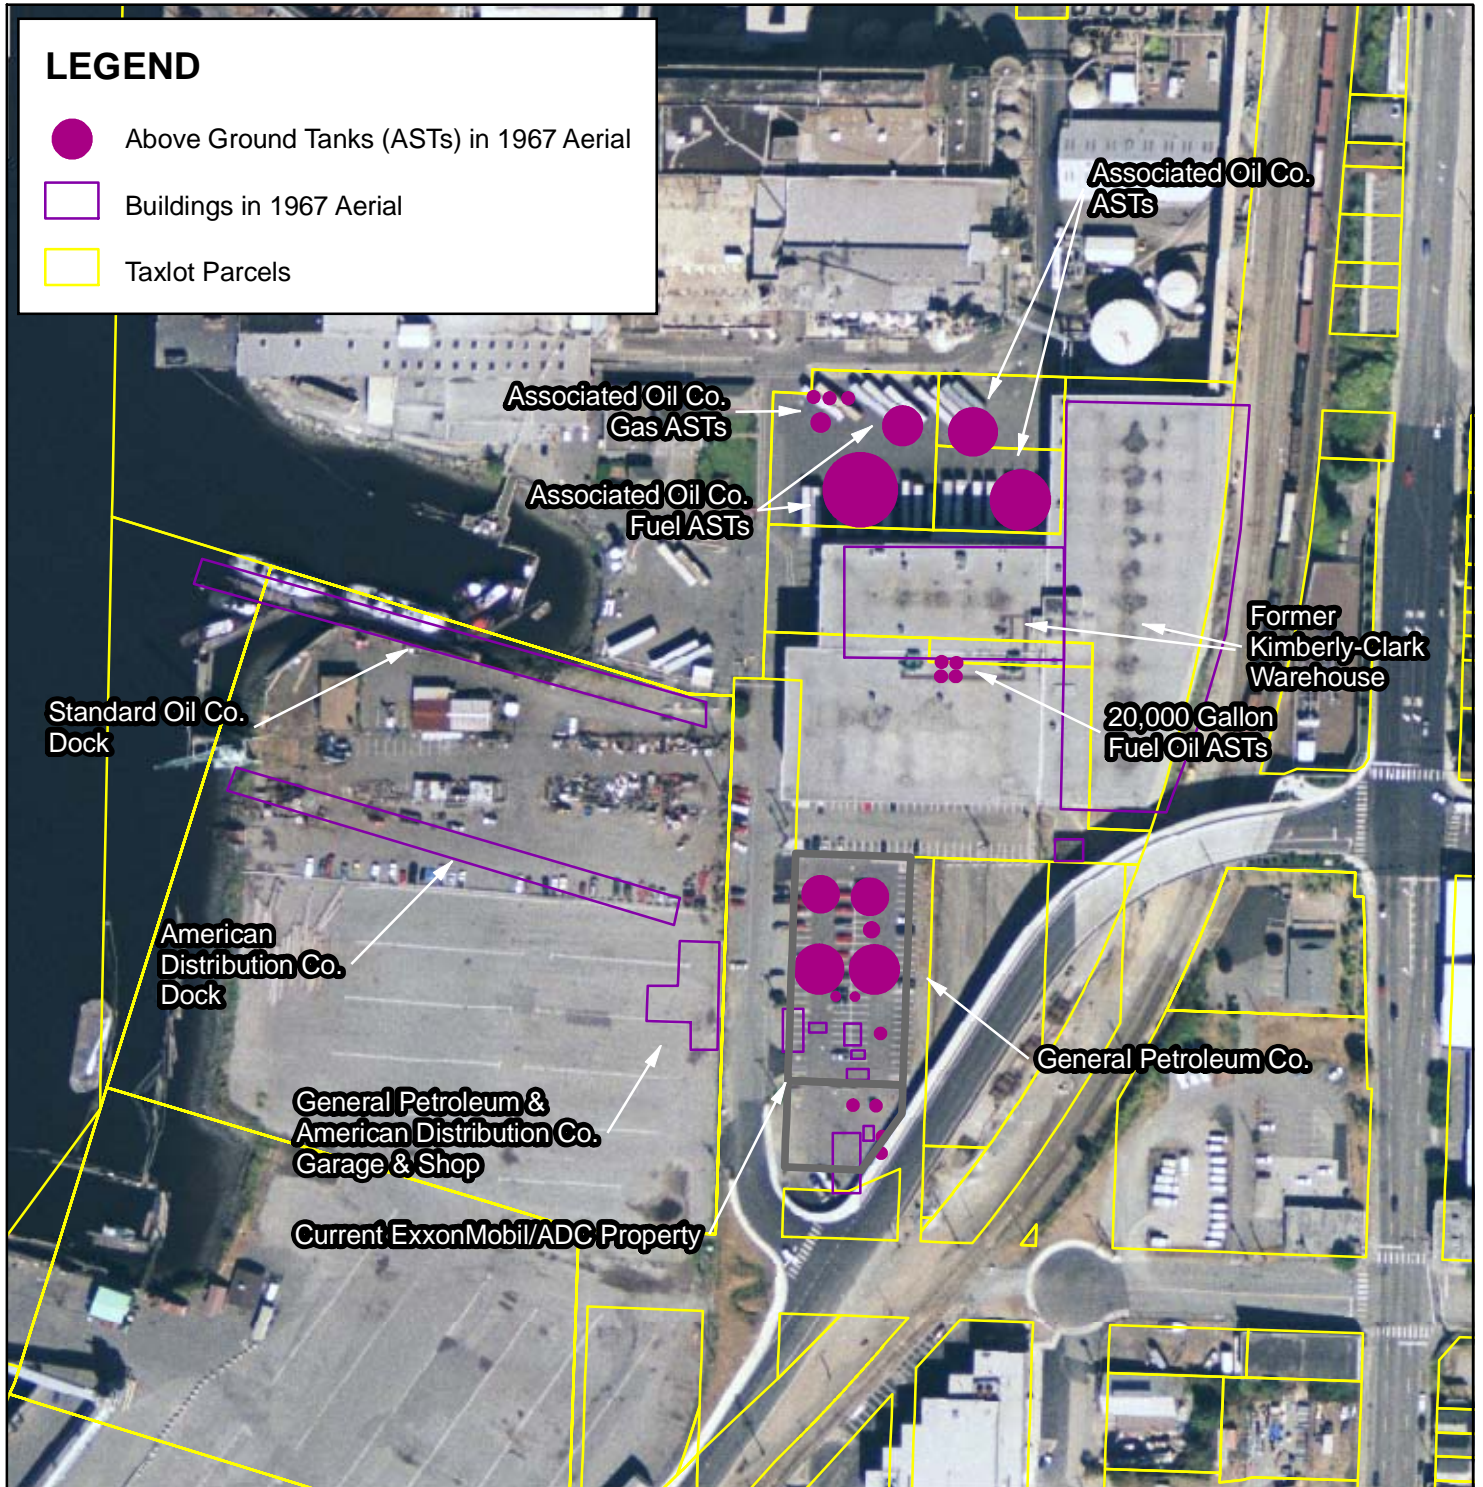


Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



| | | | | | |
|---|--|-------------------------|--------------------------|--|--|
| AMEC Earth & Environmental 11820 North Creek Parkway North Bothell, Washington 98011 | | | | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING CO. | |
| PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | | DWN BY: BRJ | DATUM: NAD83 | DATE: AUGUST 2009 | |
| TITLE: FEATURES SEEN IN 1967 AERIAL OVER 2003 AERIAL | | CHKD BY: AIS/MS | REV. NO.: 1 | PROJECT NO.: 9-915-15716C | |
| | | PROJECTION: WA SP North | SCALE: 1 inch = 200 feet | FIGURE No.: FIGURE 10 | |

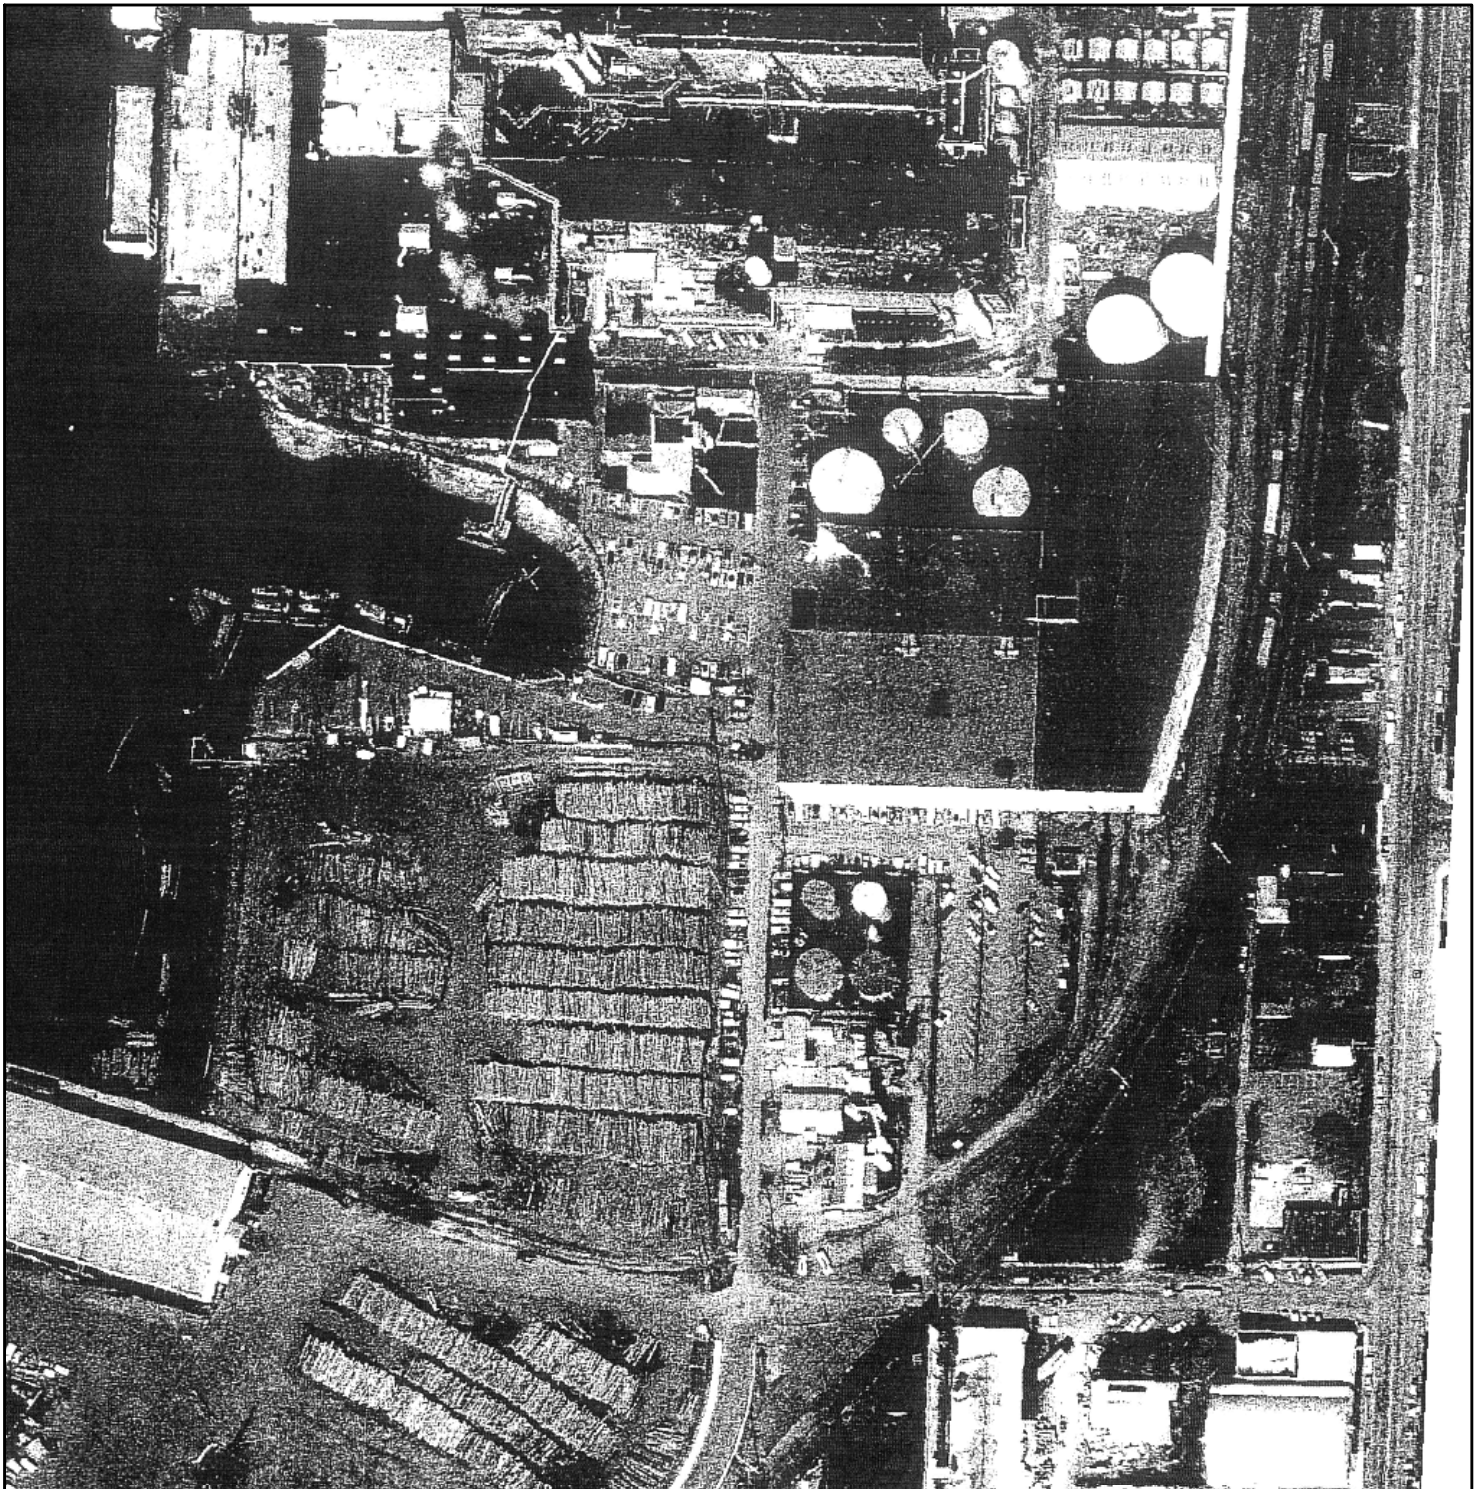

Note:
 Parcels layer from Snohomish County, ftp://ftp.snoco.org
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ

DATUM: NAD83

DATE: AUGUST 2009

CHK'D BY: AIS/MS

REV. NO.: 1

PROJECT NO.: 9-915-15716C

TITLE: **AERIAL 1976**


PROJECTION: WA SP North

SCALE: 1 inch = 200 feet


FIGURE No.: **FIGURE 11**

LEGEND

- Above Ground Tanks (ASTs) in 1976 Aerial
- Buildings in 1976 Aerial
- Taxlot Parcels

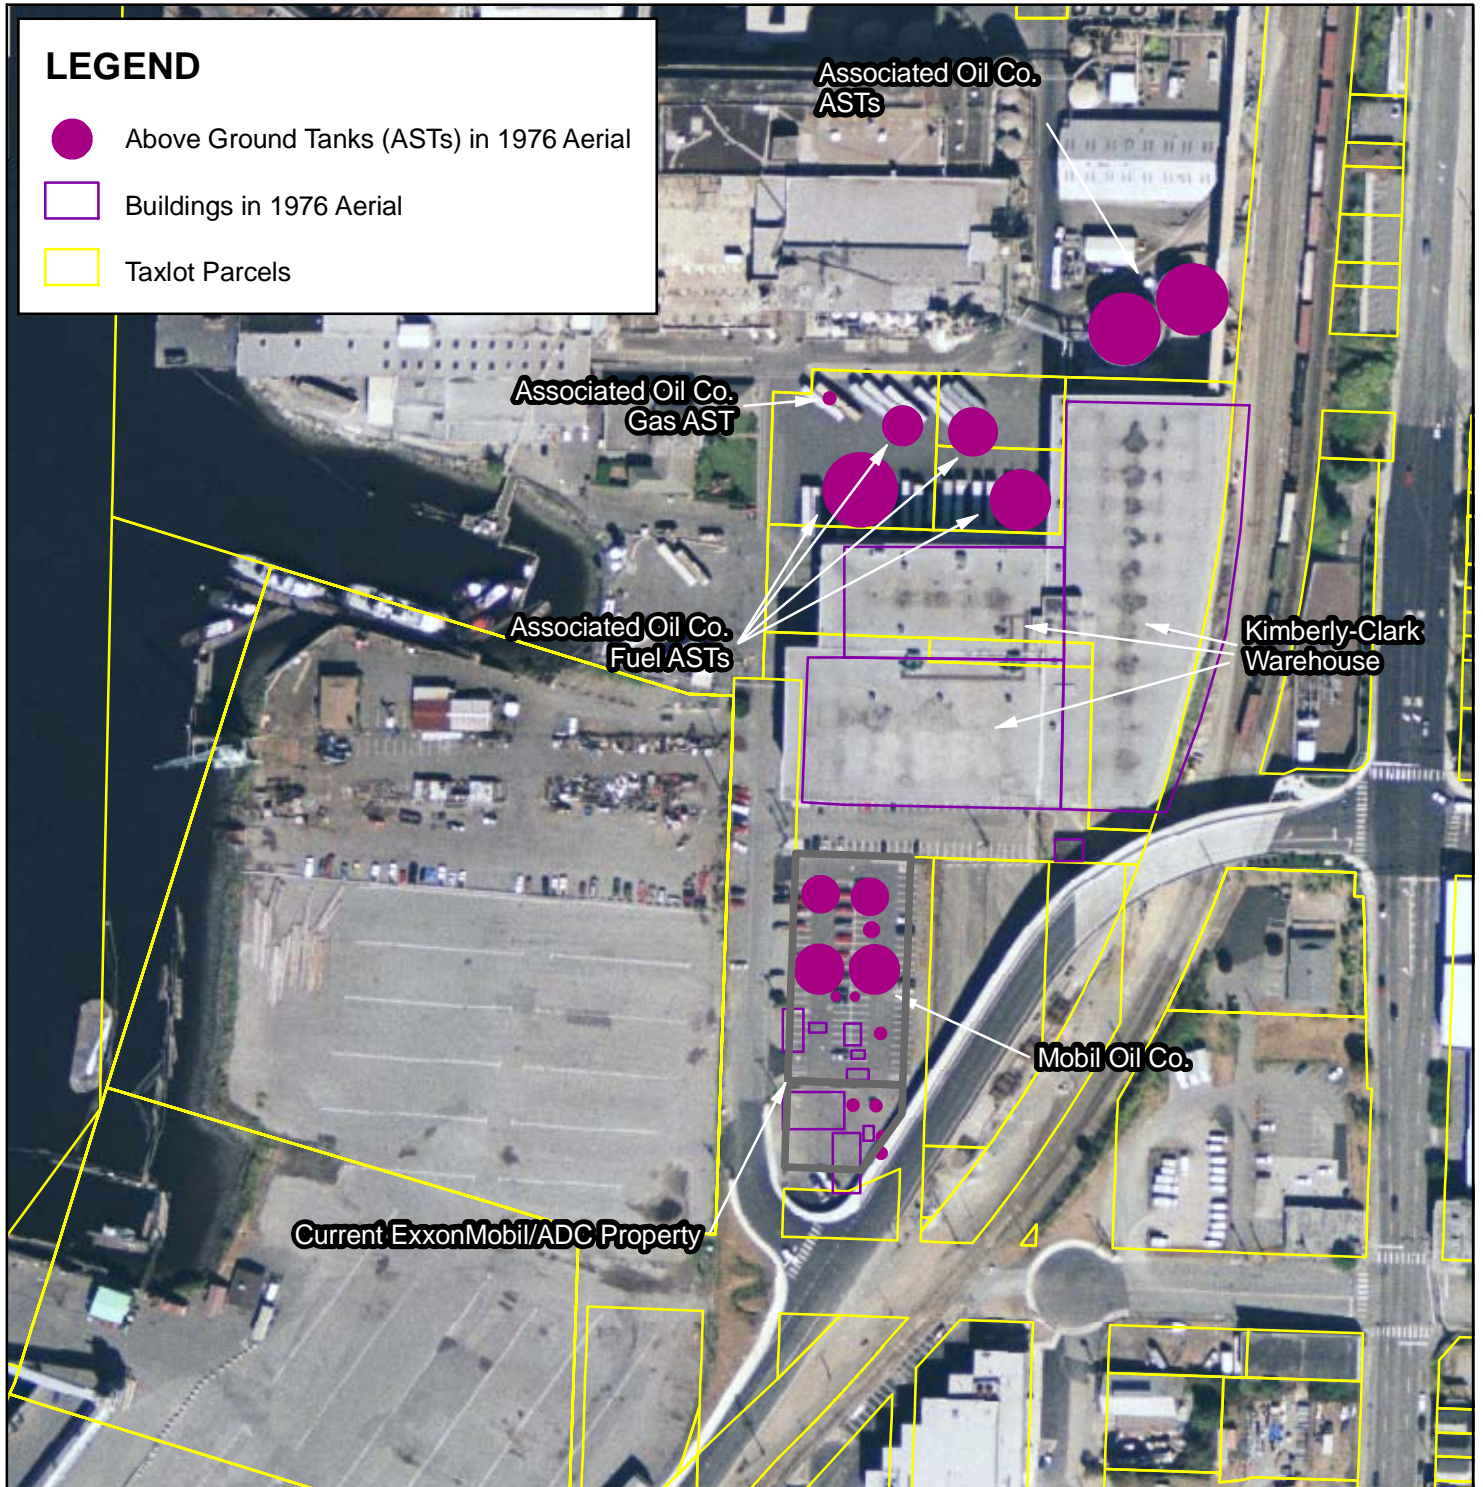

Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:
**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ DATUM: NAD83 DATE: AUGUST 2009


CHKD BY: AIS/MS REV. NO.: 1 PROJECT NO.: 9-915-15716C

TITLE: **FEATURES SEEN IN
 1976 AERIAL
 OVER 2003 AERIAL**

PROJECTION: WA SP North SCALE: 1 inch = 200 feet FIGURE No.: **FIGURE 12**



Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ

DATUM: NAD83

DATE: AUGUST 2009

CHK'D BY: AIS/MS

REV. NO.: 1

PROJECT NO.: 9-915-15716C




TITLE: **AERIAL 1993**


PROJECTION: WA SP North

SCALE: 1 inch = 200 feet


FIGURE No.: **FIGURE 13**

LEGEND

-  Above Ground Tanks (ASTs) in 1993 Aerial
-  Buildings in 1993 Aerial
-  Taxlot Parcels

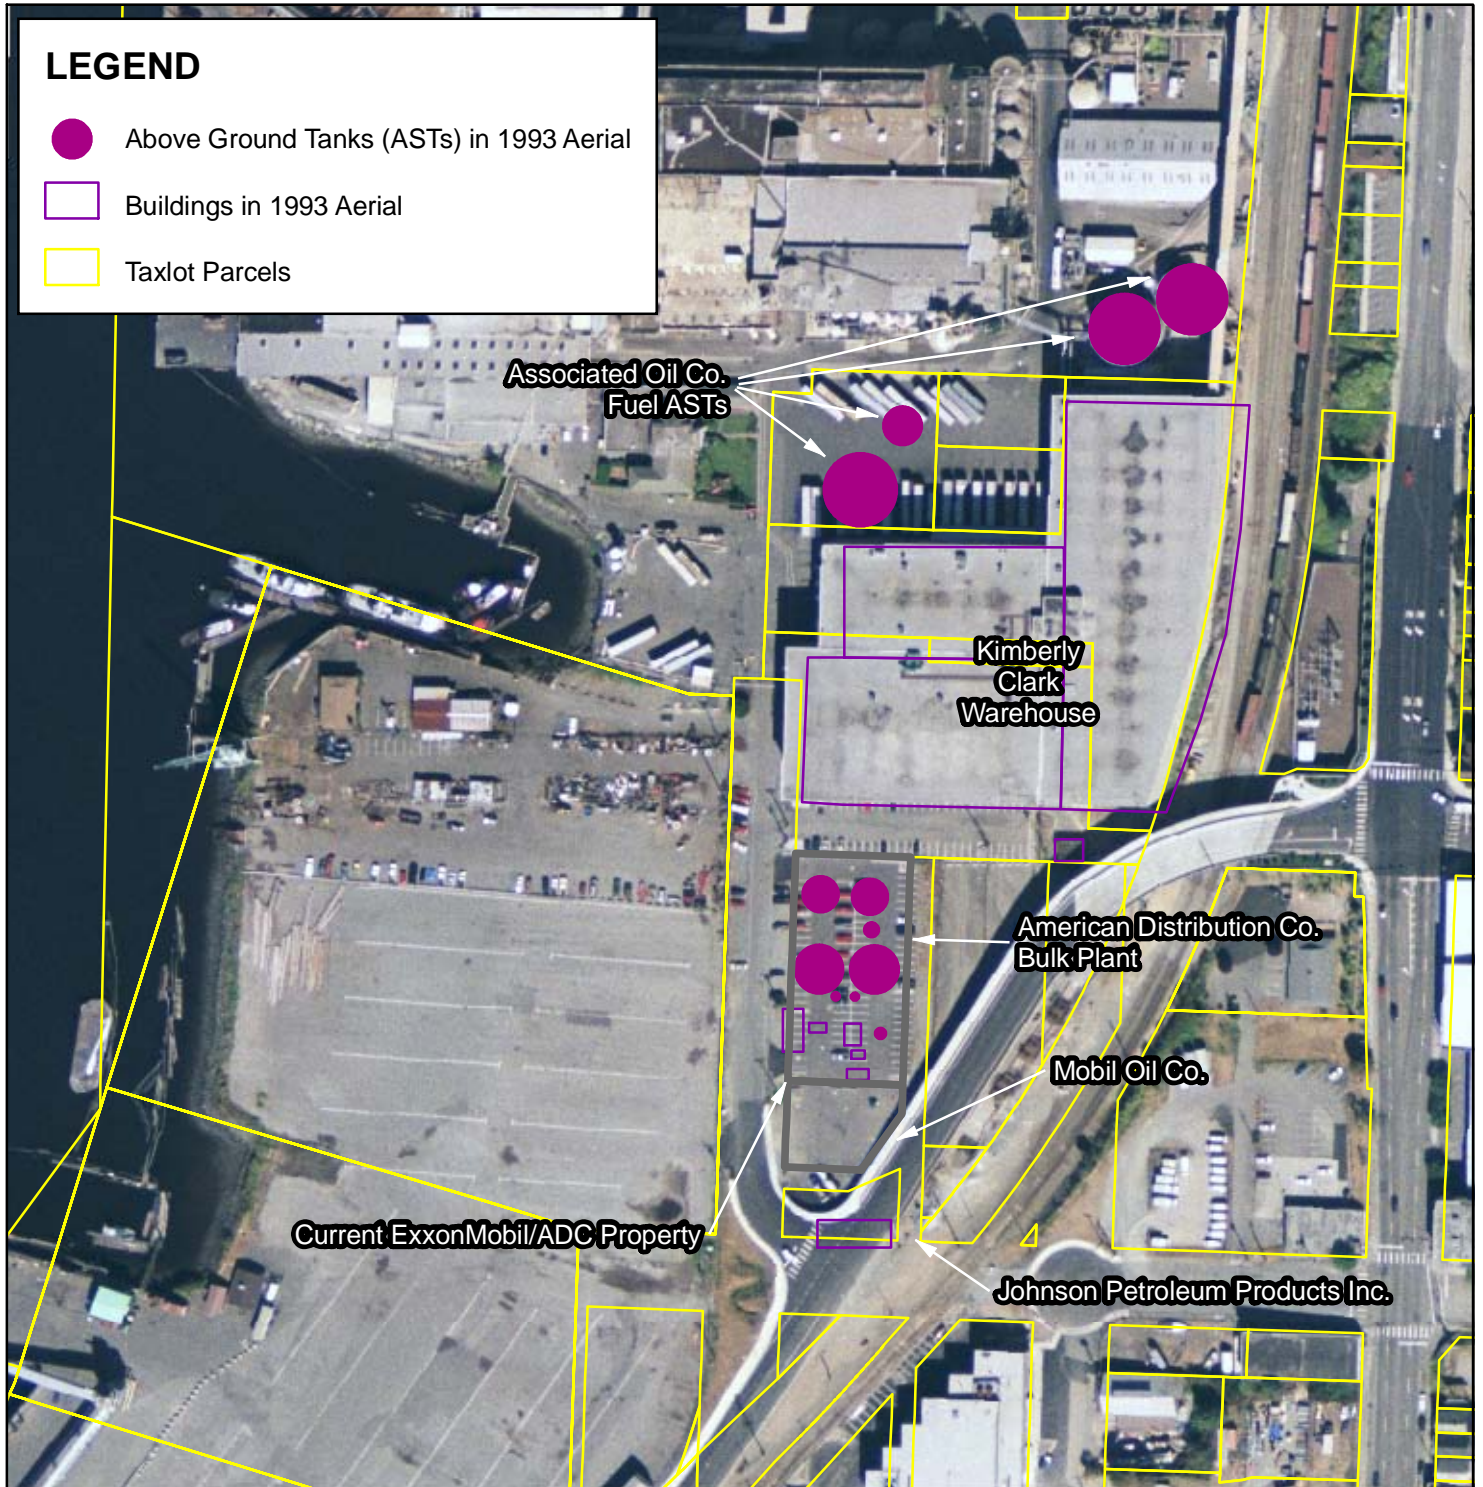

Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:
**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**


PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ DATUM: NAD83 DATE: AUGUST 2009

CHKD BY: AIS/MS REV. NO.: 1 PROJECT NO.: 9-915-15716C

TITLE: **FEATURES SEEN IN
 1993 AERIAL
 OVER 2003 AERIAL**

PROJECTION: WA SP North SCALE: 1 inch = 200 feet FIGURE No.: **FIGURE 14**

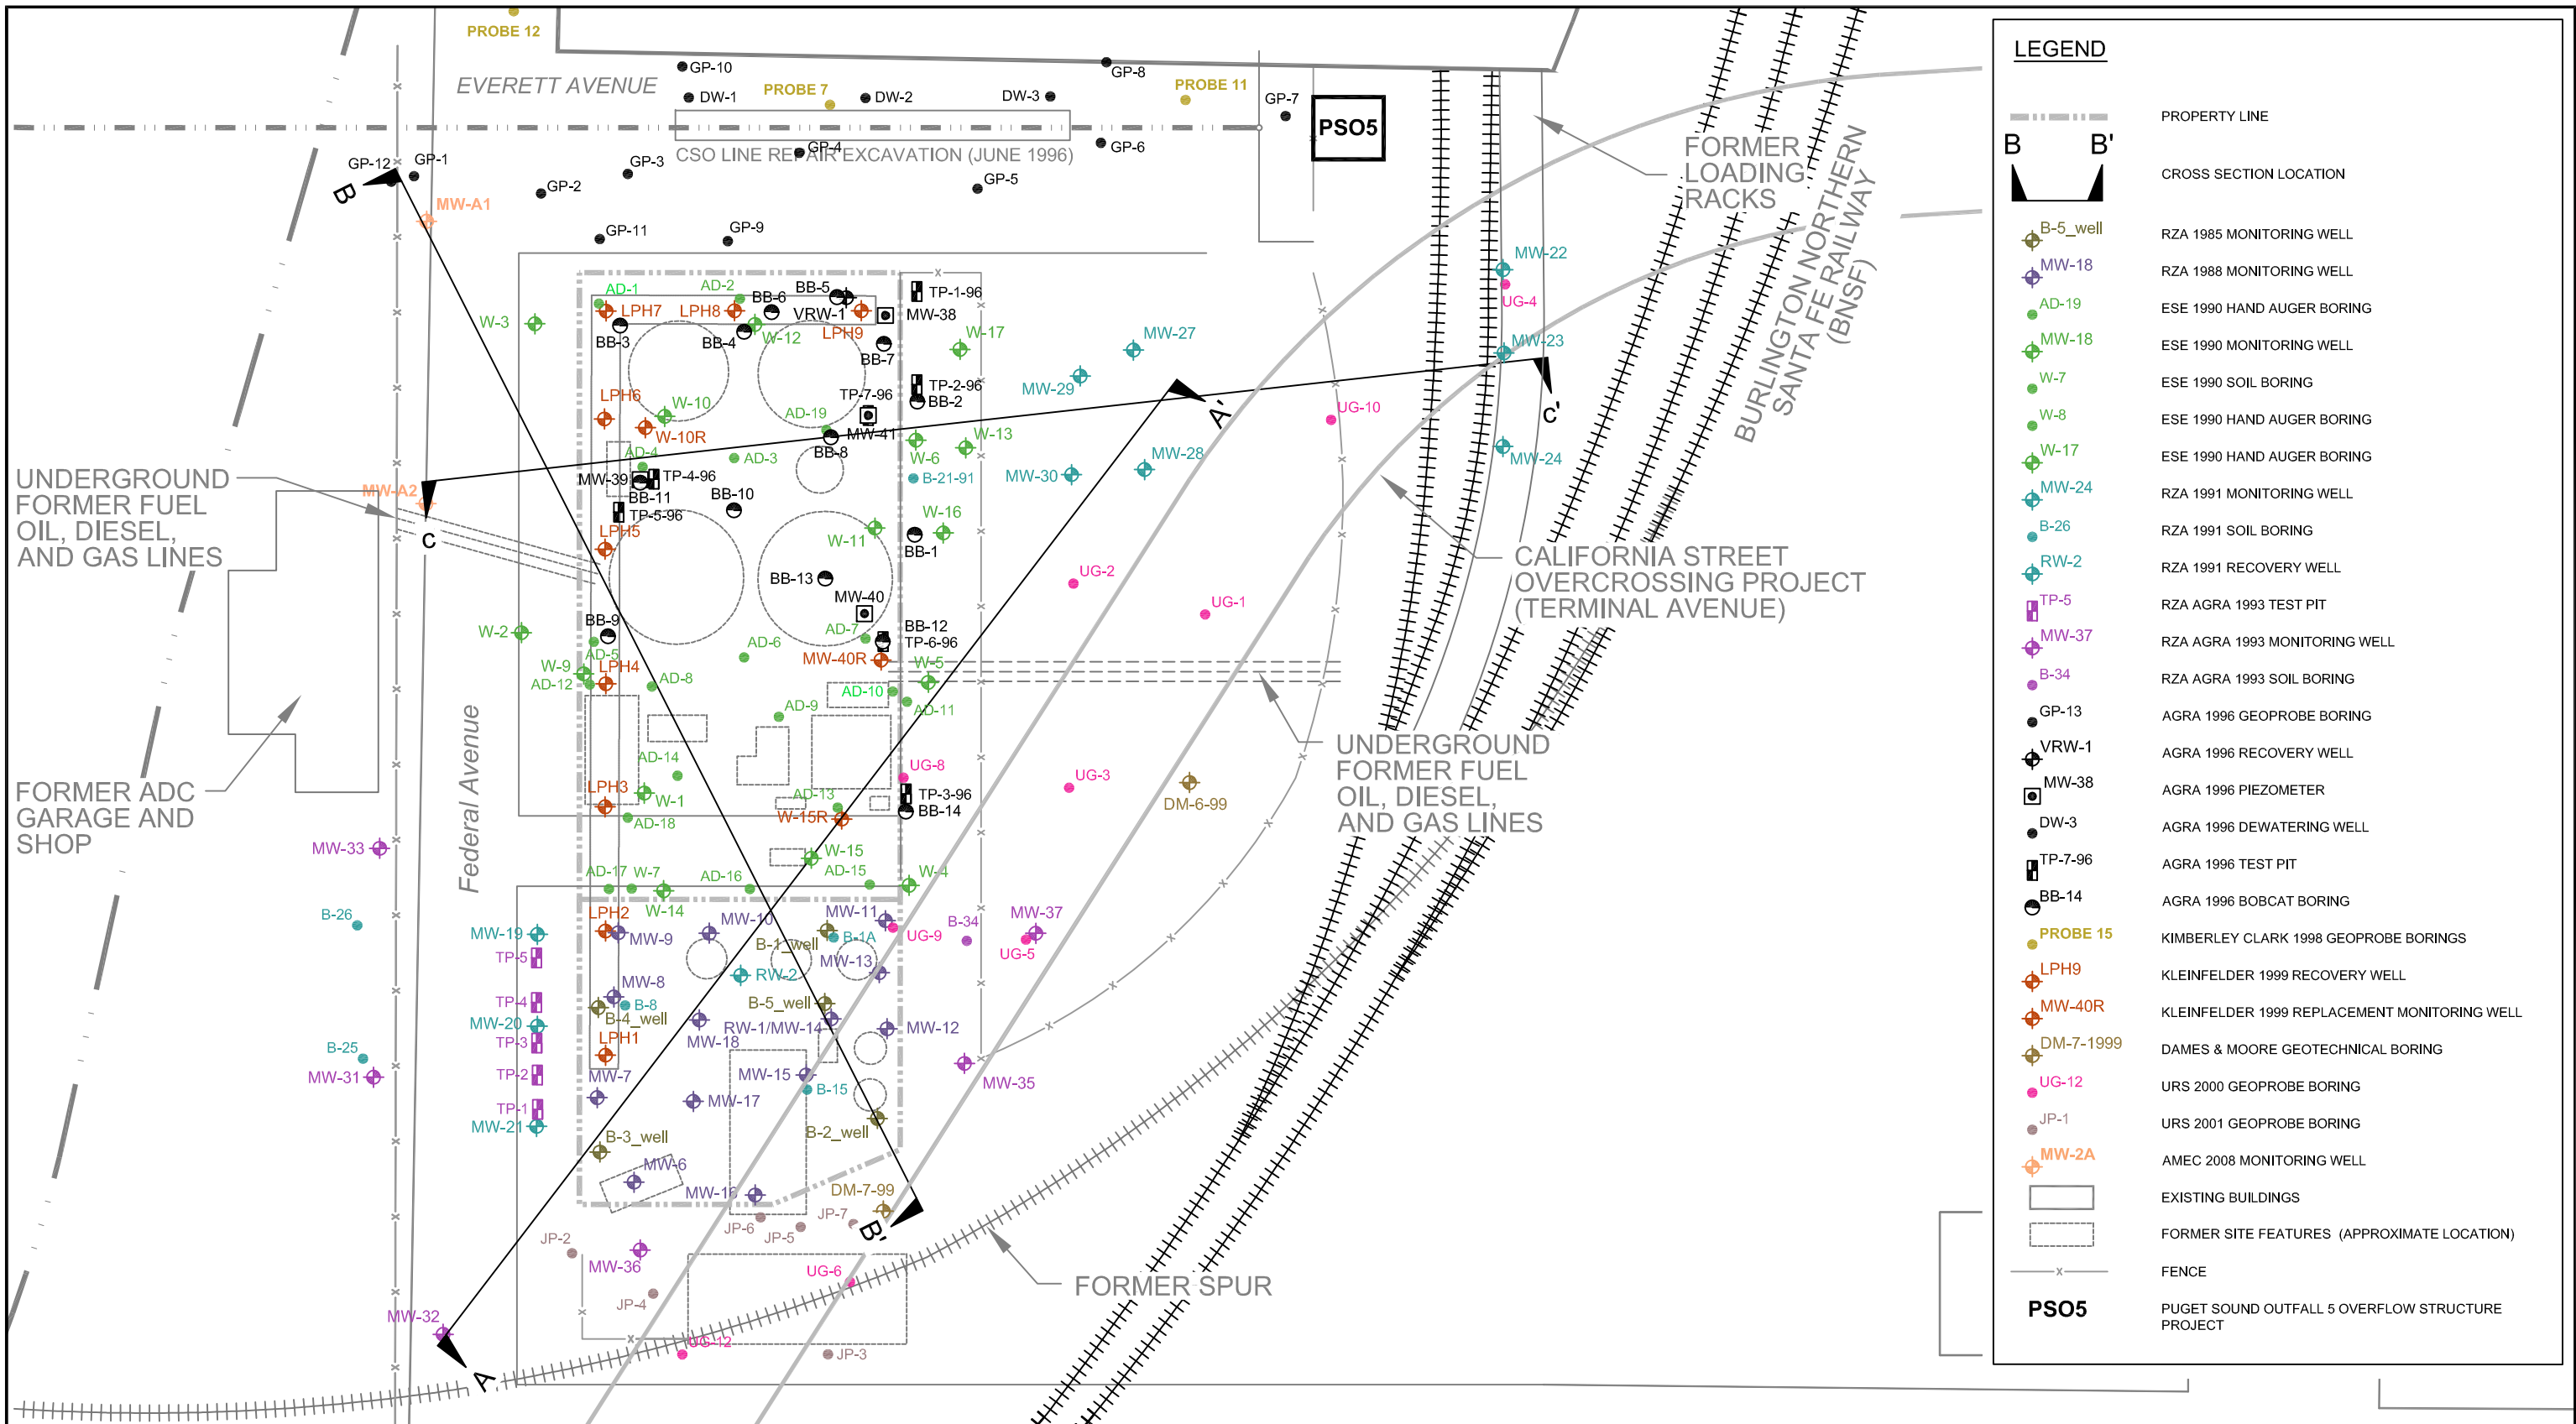

| LEGEND | |
|--------|--|
| | PROPERTY LINE |
| | CROSS SECTION LOCATION |
| | RZA 1985 MONITORING WELL |
| | RZA 1988 MONITORING WELL |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 MONITORING WELL |
| | ESE 1990 SOIL BORING |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 HAND AUGER BORING |
| | RZA 1991 MONITORING WELL |
| | RZA 1991 SOIL BORING |
| | RZA 1991 RECOVERY WELL |
| | RZA AGRA 1993 TEST PIT |
| | RZA AGRA 1993 MONITORING WELL |
| | RZA AGRA 1993 SOIL BORING |
| | AGRA 1996 GEOPROBE BORING |
| | AGRA 1996 RECOVERY WELL |
| | AGRA 1996 PIEZOMETER |
| | AGRA 1996 DEWATERING WELL |
| | AGRA 1996 TEST PIT |
| | AGRA 1996 BOBCAT BORING |
| | KIMBERLEY CLARK 1998 GEOPROBE BORINGS |
| | KLEINFELDER 1999 RECOVERY WELL |
| | KLEINFELDER 1999 REPLACEMENT MONITORING WELL |
| | DAMES & MOORE GEOTECHNICAL BORING |
| | URS 2000 GEOPROBE BORING |
| | URS 2001 GEOPROBE BORING |
| | AMEC 2008 MONITORING WELL |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |
| | PUGET SOUND OUTFALL 5 OVERFLOW STRUCTURE PROJECT |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO


CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

| | |
|----------------------|---|
| DWN BY: JRS / BRJ | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 |
| CHK'D BY: AS/MS | |
| DATUM: NONE | |
| PROJECTION: NONE | |
| SCALE: 1" = 60' | TITLE HISTORICAL EXPLORATIONS AND LOCATIONS OF GEOLOGIC CROSS SECTIONS A-A', B-B', AND C-C' |

| |
|------------------------------|
| DATE: AUGUST 2009 |
| PROJECT NO: 9-915-15716-C |
| REV. NO.: 1 |
| FIGURE No. 15 |

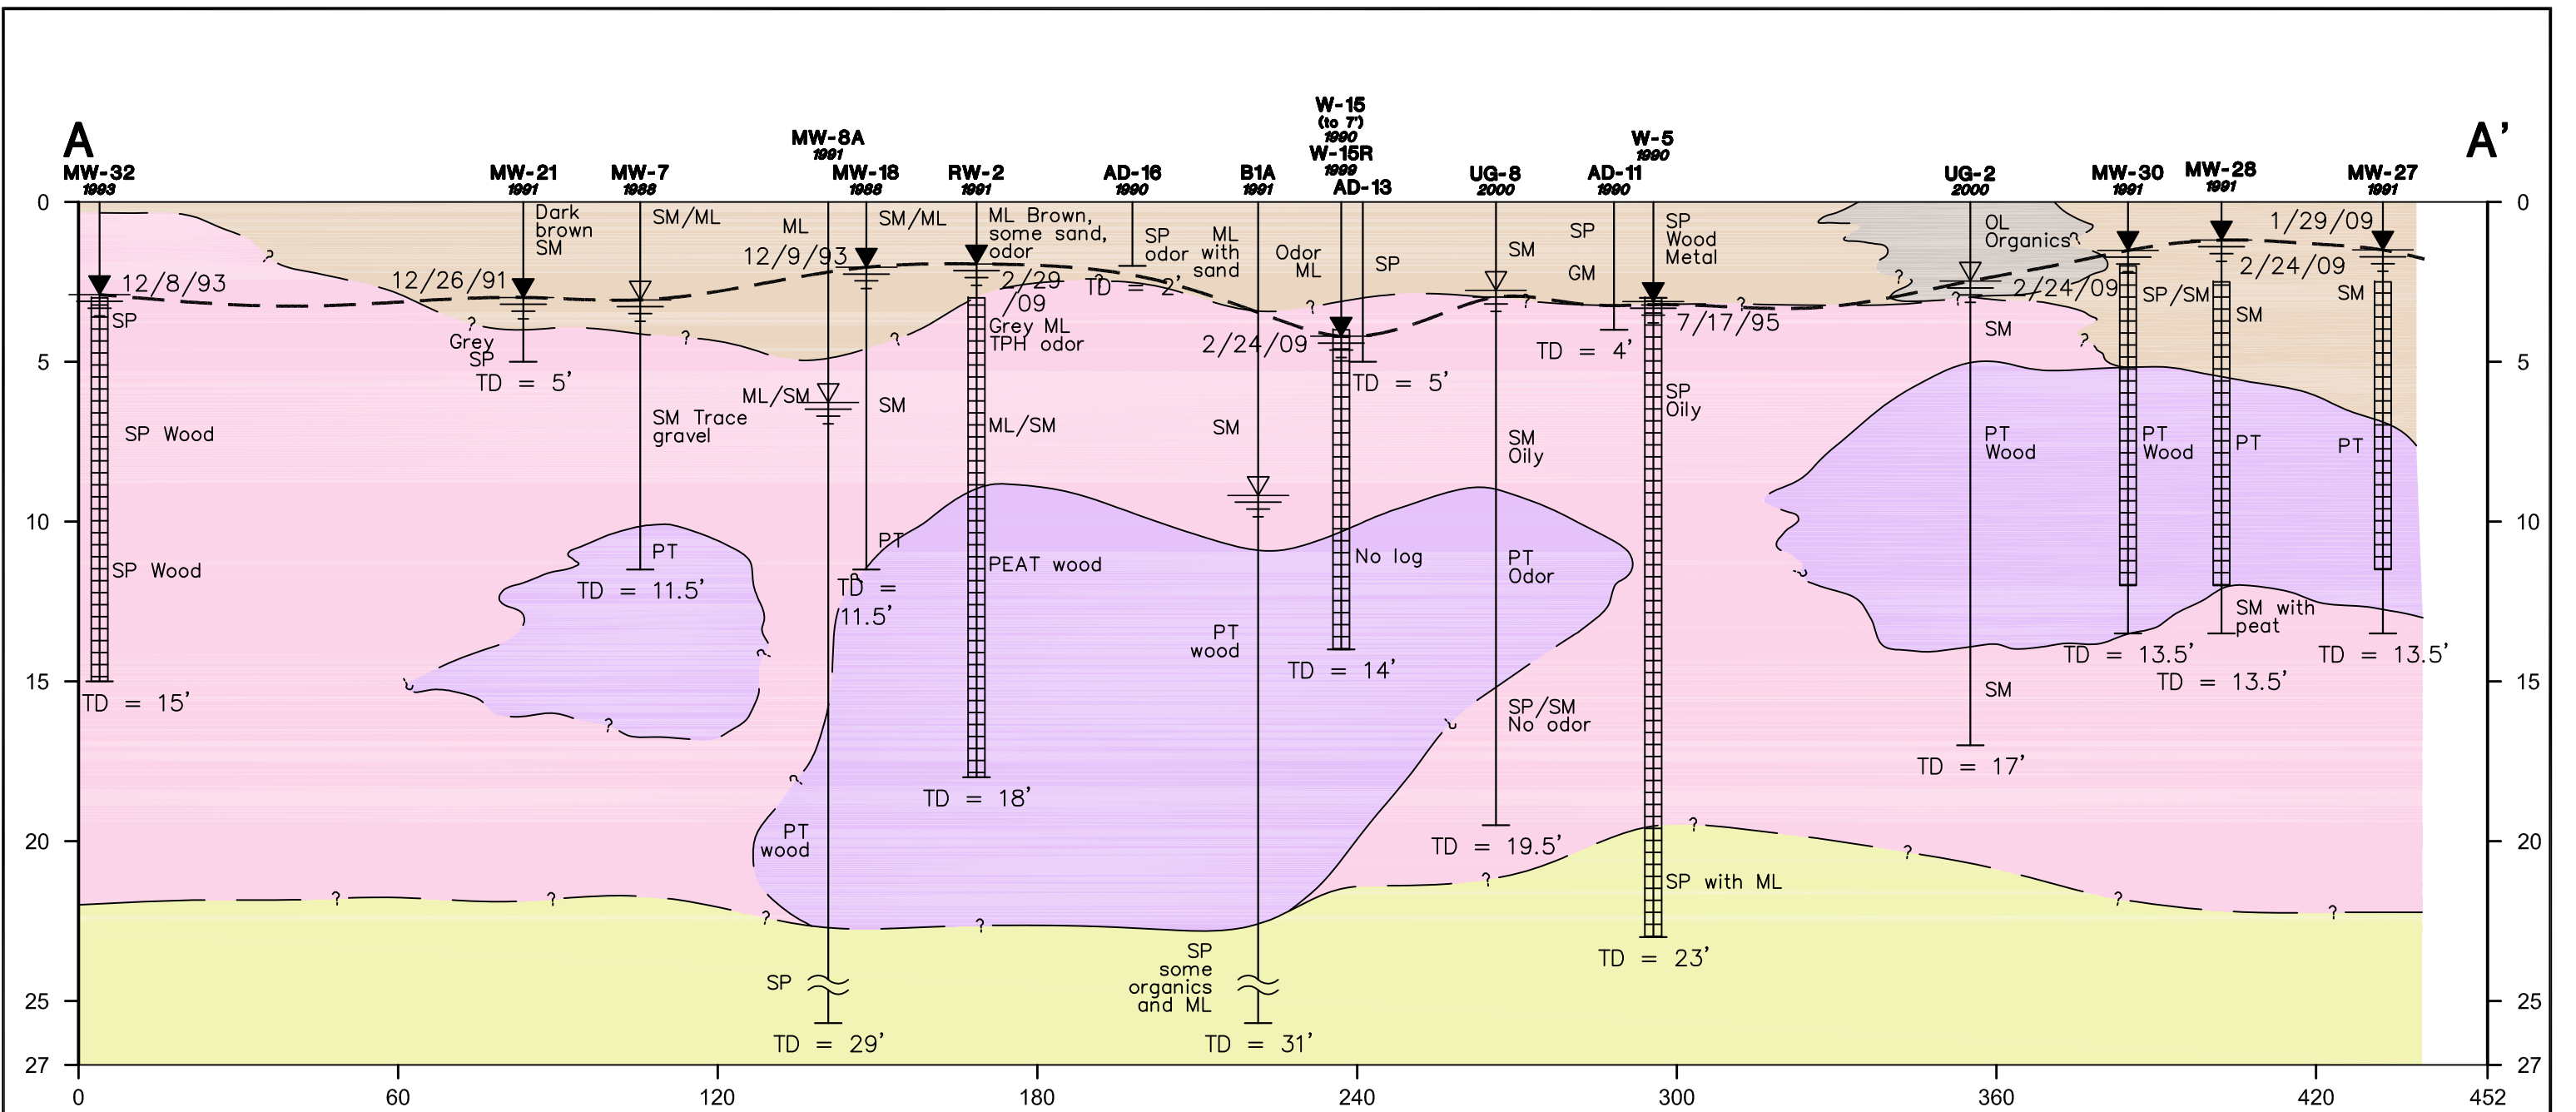


LEGEND

| | | | | | | | | |
|---------------------------------|--------------------------------|--------------------------|----------|--|----------------------|----------------------------------|----------------------|--------------------------------|
| FILL | MARSHLAND MATERIALS | TRANSITIONAL BEDS | 12/26/91 | Static water level measured after drilling and date measured | AD-16 1990 | Boring number and year installed | MW-30 1991 | Well number and year installed |
| SM/SP Brown silty SAND and SAND | SM/SP Grey silty SAND and SAND | ML SILT with organics | | Water level during drilling | | | | |
| OL Organic SILT | PT PEAT with wood | SP Dense coarse SAND | | Unconfined groundwater table | | | | |
| | ML SILT | | | | | | | |
| | GP/GM Silty GRAVEL/GRAVEL | | | | | | | |


TD = 2' Total depth in feet TD = 15' Total depth in feet

| | | | | |
|--|---|---|--|--|
| SCALE IN VERTICAL FEET SCALE IN HORIZONTAL FEET | CLIENT LOGO CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | DWN BY: JRS CHK'D BY: AS DATUM: NONE PROJECTION: NONE SCALE: AS SHOWN | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 TITLE GEOLOGIC CROSS SECTION A-A' | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C REV. NO.: FIGURE No. 16 |
| | | | | |

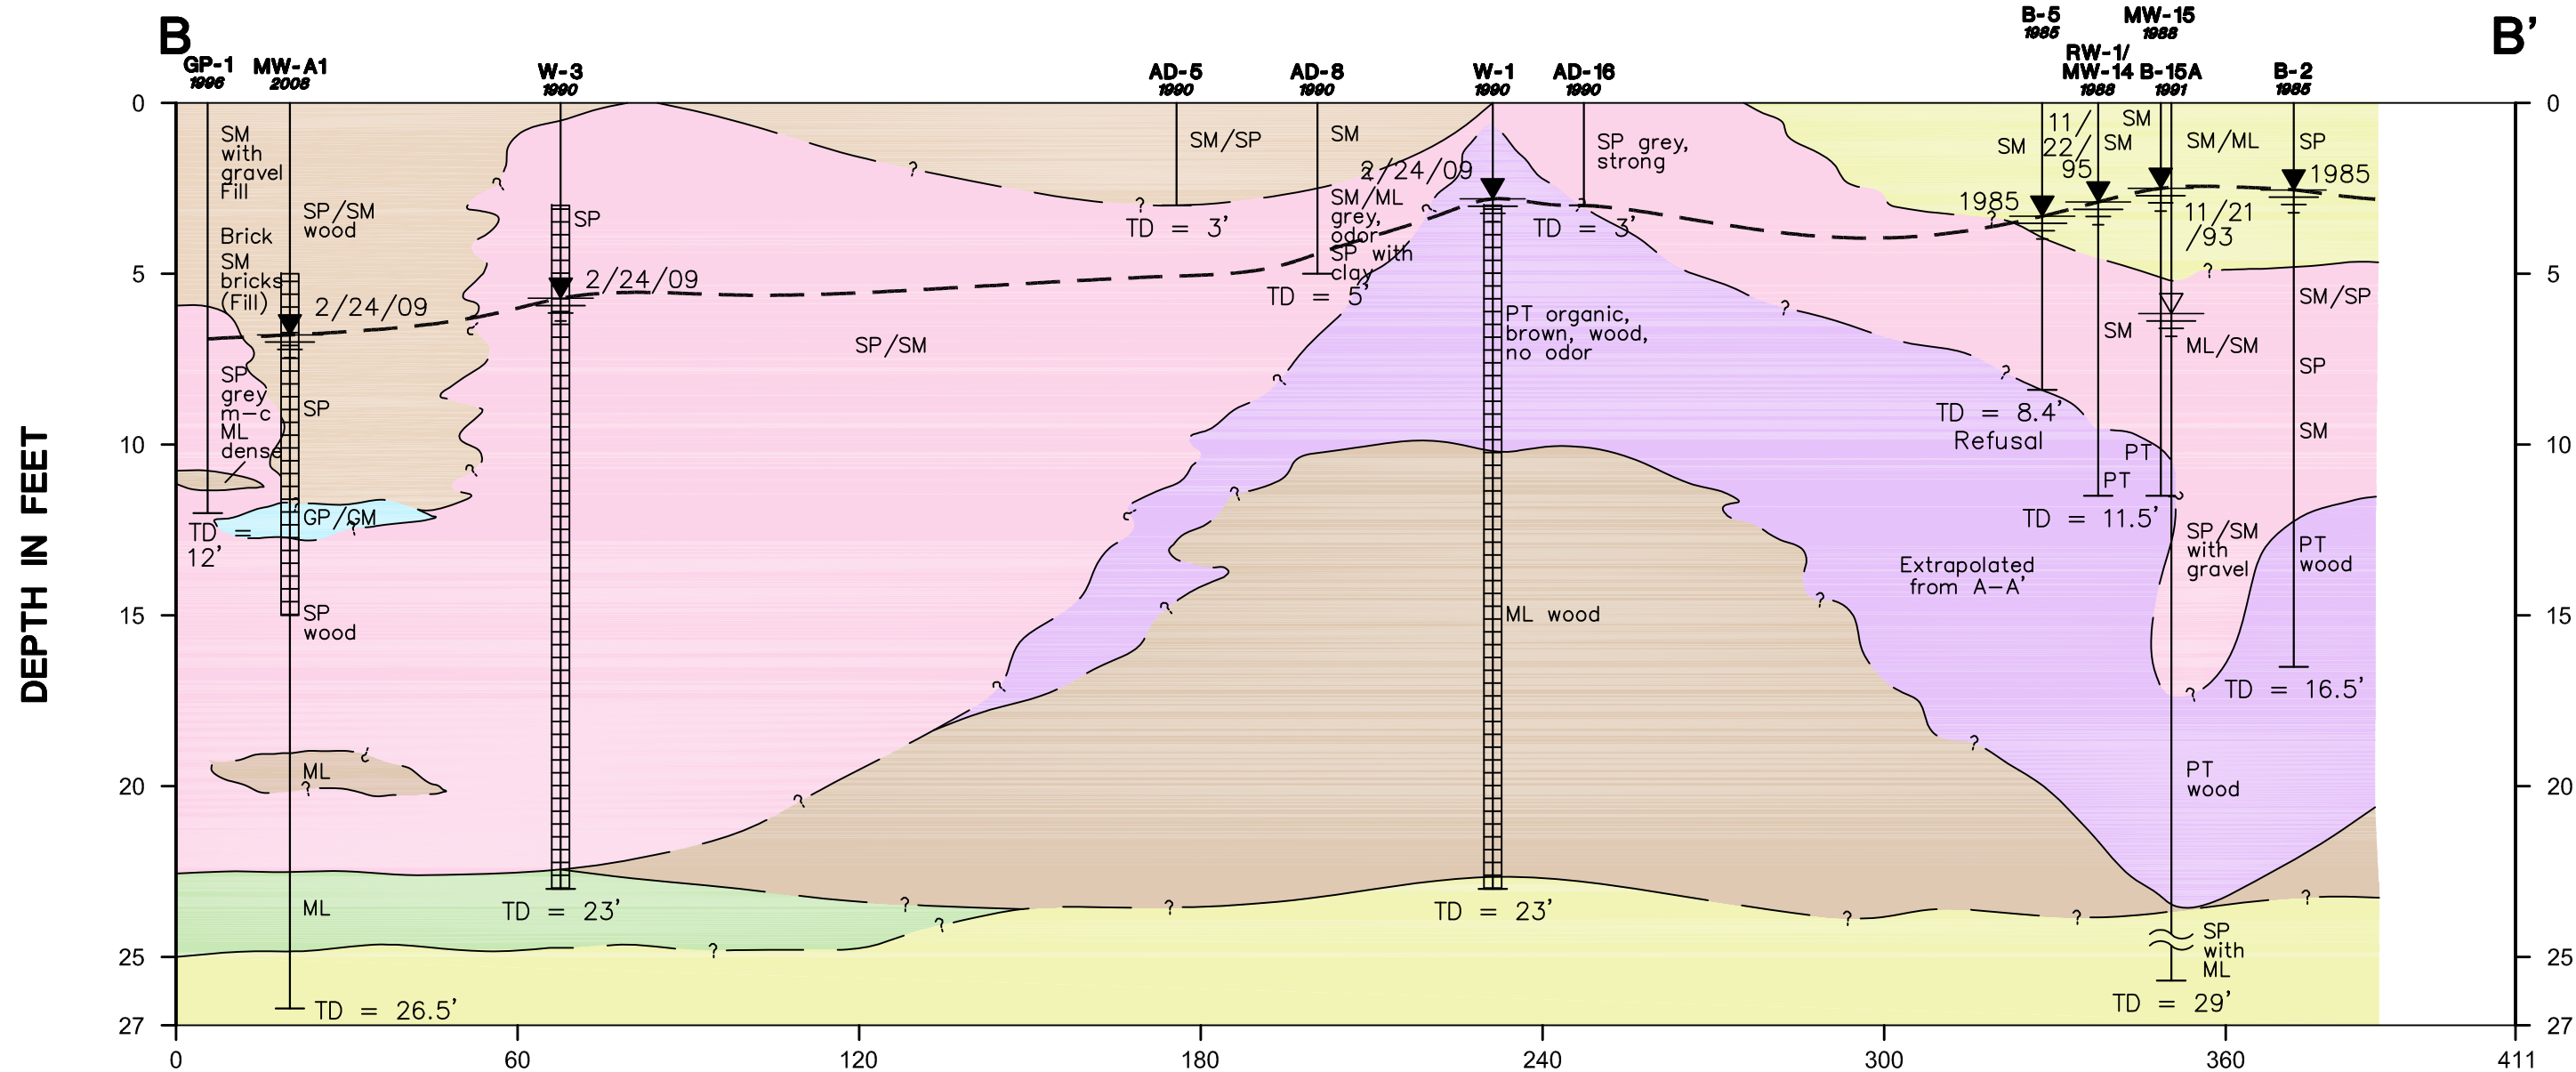


LEGEND

| | | | | | | | | |
|---------------------------------|--------------------------------|--------------------------|------------------------------|--|------------------------------|----------------------------------|-------------------|--------------------------------|
| FILL | MARSHLAND MATERIALS | TRANSITIONAL BEDS | 12/26/91 | Static water level measured after drilling and date measured | AD-8 1990 | Boring number and year installed | MW-A1 2008 | Well number and year installed |
| SM/SP Brown silty SAND and SAND | SM/SP Grey silty SAND and SAND | ML SILT with organics | Water level during drilling | TD = 5' Total depth in feet | TD = 23' Total depth in feet | Screen interval | | |
| OL Organic SILT | PT PEAT with wood | SP Dense coarse SAND | Unconfined groundwater table | | | | | |
| ML SILT | GP/GM Silty GRAVEL/GRAVEL | | | | | | | |



| | | | | |
|---|--|-------------|-----------------------------|---------------|
| CLIENT LOGO | CLIENT: | DWN BY: | PROJECT | DATE: |
| | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | JRS | EXXONMOBIL/ADC PROPERTY | AUGUST 2009 |
| AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | | CHK'D BY: | ECOLOGY SITE ID 2728 | PROJECT NO: |
| | | AS | | 9-915-15716-C |
| | | DATUM: | TITLE | REV. NO.: |
| | | NONE | GEOLOGIC CROSS SECTION B-B' | |
| | | PROJECTION: | | FIGURE No. |
| | | NONE | | 17 |
| | | SCALE: | | |
| | | AS SHOWN | | |

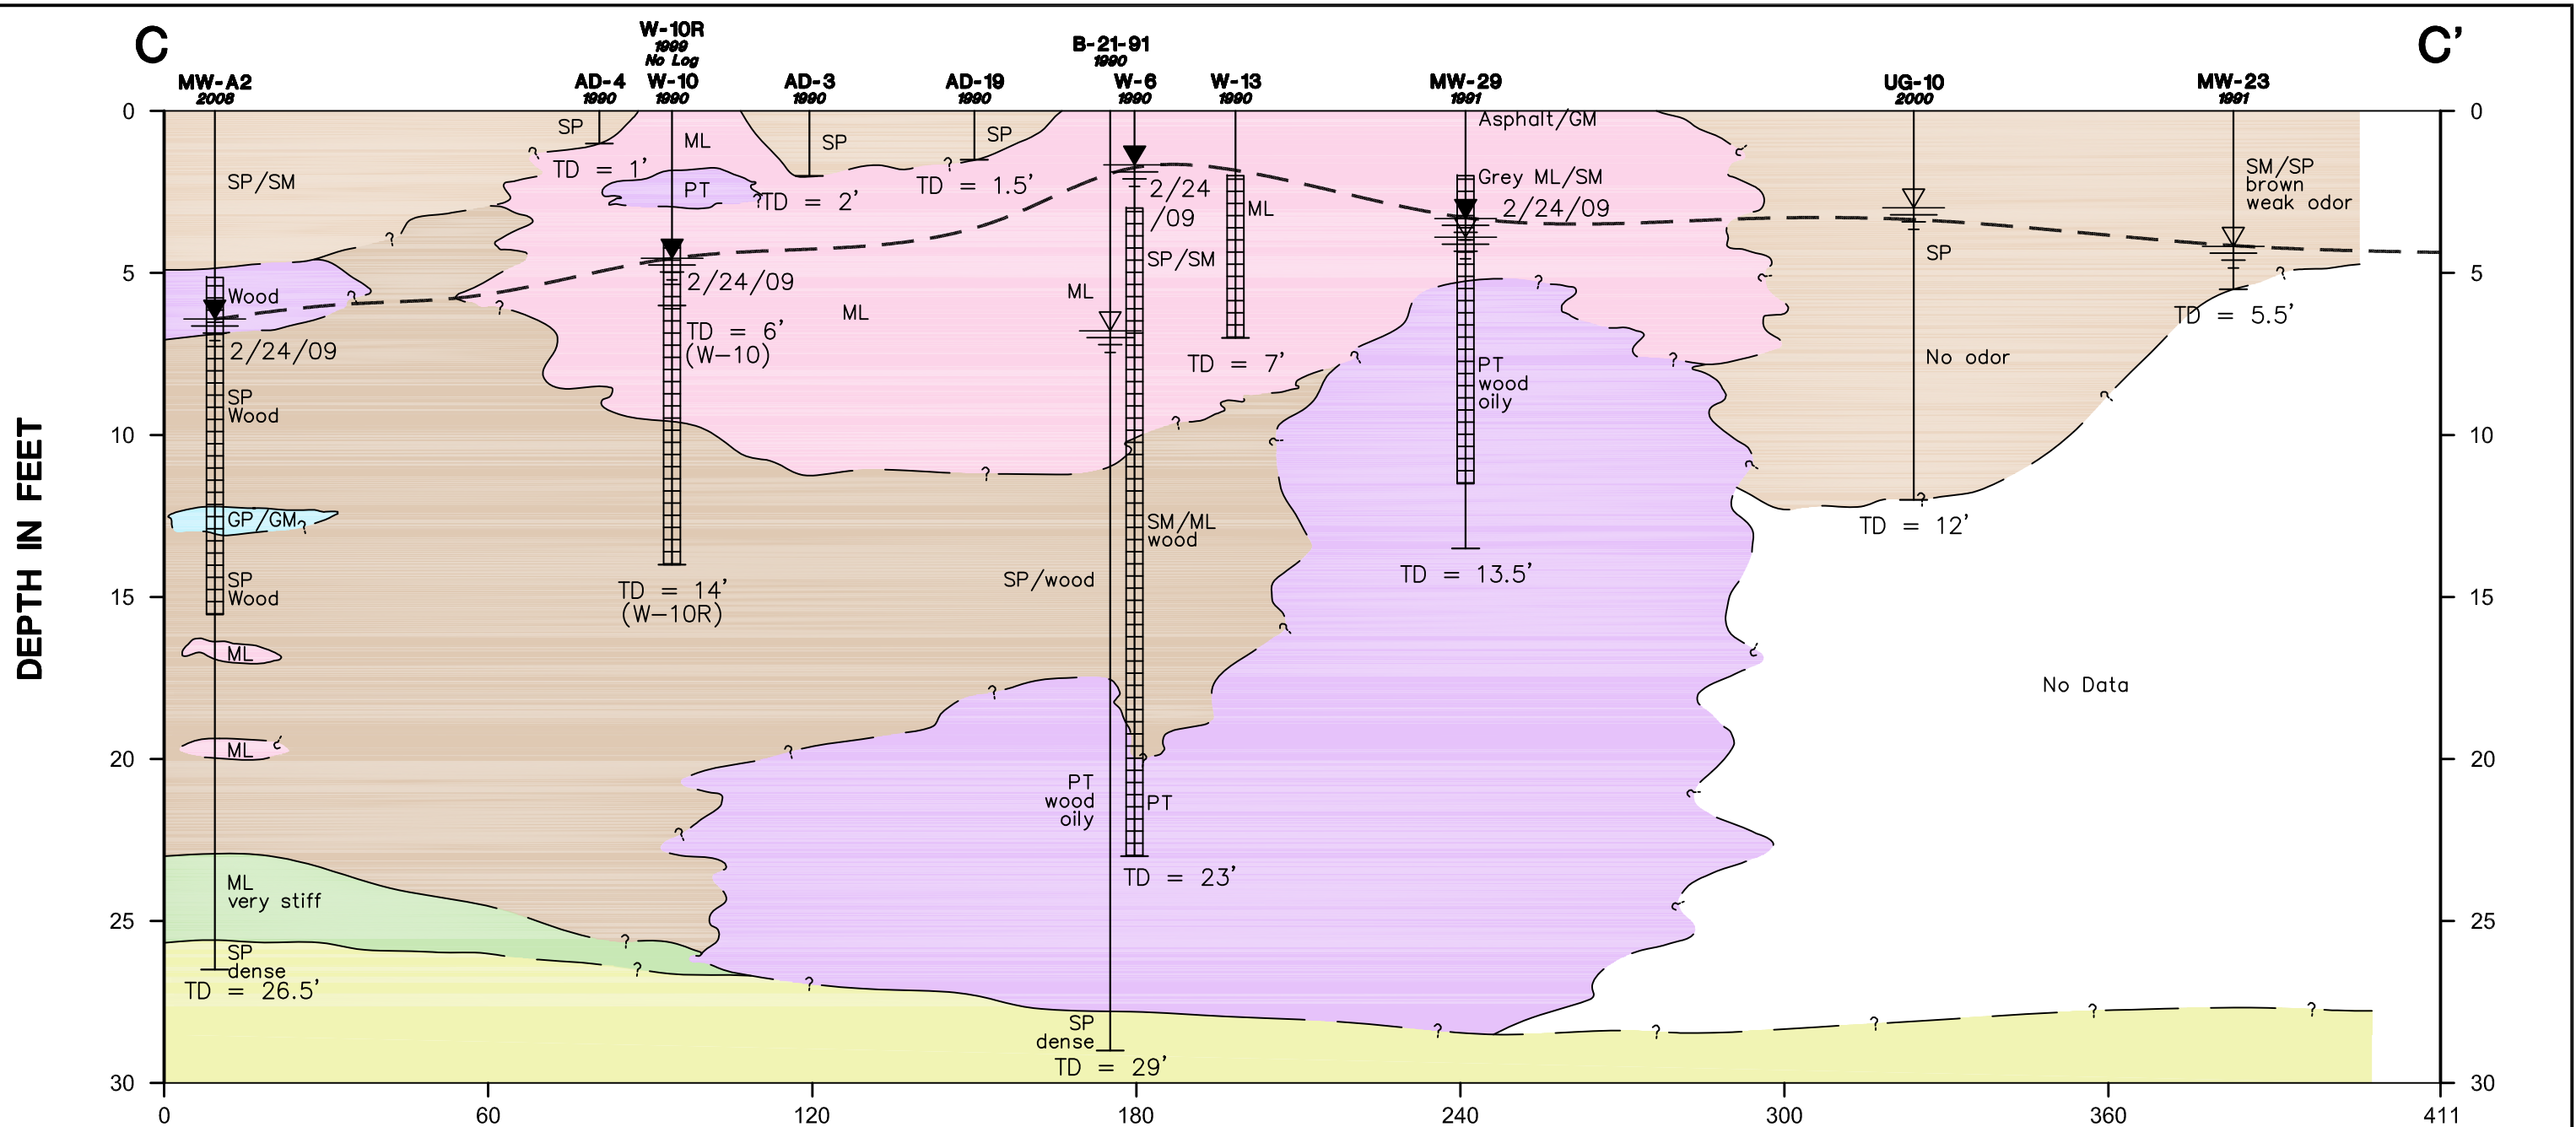

LEGEND



| | | | | | | | | |
|---------------------------------|--------------------------------|--------------------------|----------|--|------------------|----------------------------------|-------------------|--------------------------------|
| FILL | MARSHLAND MATERIALS | TRANSITIONAL BEDS | 12/26/91 | Static water level measured after drilling and date measured | AD-4 1990 | Boring number and year installed | MW-A2 2008 | Well number and year installed |
| SM/SP Brown silty SAND and SAND | SM/SP Grey silty SAND and SAND | ML SILT with organics | | Water level during drilling | | | | |
| OL Organic SILT | PT PEAT with wood | SP Dense coarse SAND | | Unconfined groundwater table | | | | |
| | ML SILT | | | | | | | |
| | GP/GM Silty GRAVEL/GRAVEL | | | | | | | |

TD = 1' Total depth in feet TD = 26' Total depth in feet

| | | | | | |
|---|--|-------------------------------------|--------------|---|---------------------------|
| SCALE IN VERTICAL FEET SCALE IN HORIZONTAL FEET | CLIENT LOGO | CLIENT: | DWN BY: JRS | PROJECT: | DATE: AUGUST 2009 |
| | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | | CHK'D BY: AS | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | PROJECT NO: 9-915-15716-C |
| AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | | | | DATUM: NONE | REV. NO.: |
| | | PROJECTION: NONE SCALE: AS SHOWN | | TITLE: | FIGURE No. 18 |

MW22 MW23 MW24

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

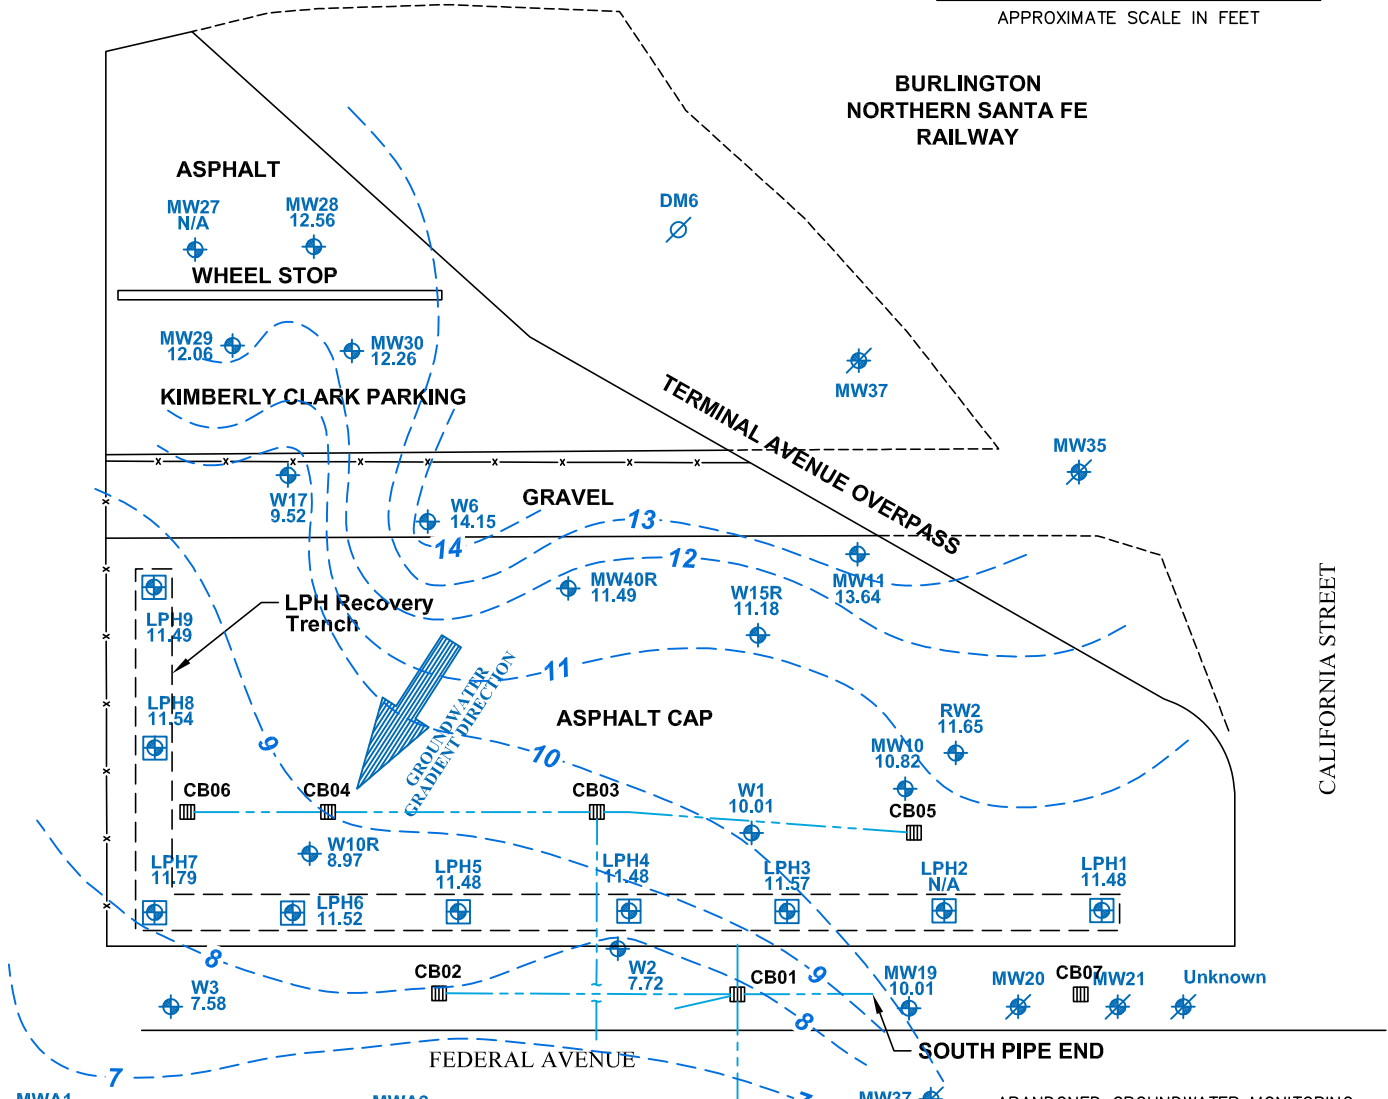

MWA1 6.89

EXPLANATION

- MW2 GROUNDWATER MONITORING WELL
- 12.56 GROUNDWATER ELEVATION (FEET ABOVE MEAN SEA LEVEL, FEBRUARY 24, 2009)
- NM NOT MEASURED
- NE NOT ESTABLISHED
- - - - - INFERRED GROUNDWATER ELEVATION CONTOUR LINE (FEET ABOVE MEAN SEA LEVEL)
- INFERRED GROUNDWATER FLOW DIRECTION

- MW37 ABANDONED GROUNDWATER MONITORING WELL
- LPH9 LPH RECOVERY WELL
- DM6 ABANDONED PIEZOMETER
- RW2 FORMERLY MW18
- N/A NOT AVAILABLE
- x- FENCE
- CATCH BASIN
- - - - - STORM DRAIN LINE

NOTE: Groundwater elevations in LPH wells were not used in contouring.

AMEC Earth & Environmental

11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201



CLIENT LOGO

CLIENT

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY



PROJECT EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728

DWN BY: JRS DATUM: NONE DATE: AUGUST 2009

TITLE **GROUNDWATER ELEVATION AND FLOW DIRECTION ON FEBRUARY 24, 2009**

CHK'D BY: AS/MS REV. NO.: PROJECT NO: 9-915-15716-C
PROJECTION: NONE SCALE: AS SHOWN FIGURE No. **19**

MW22 MW23 MW24

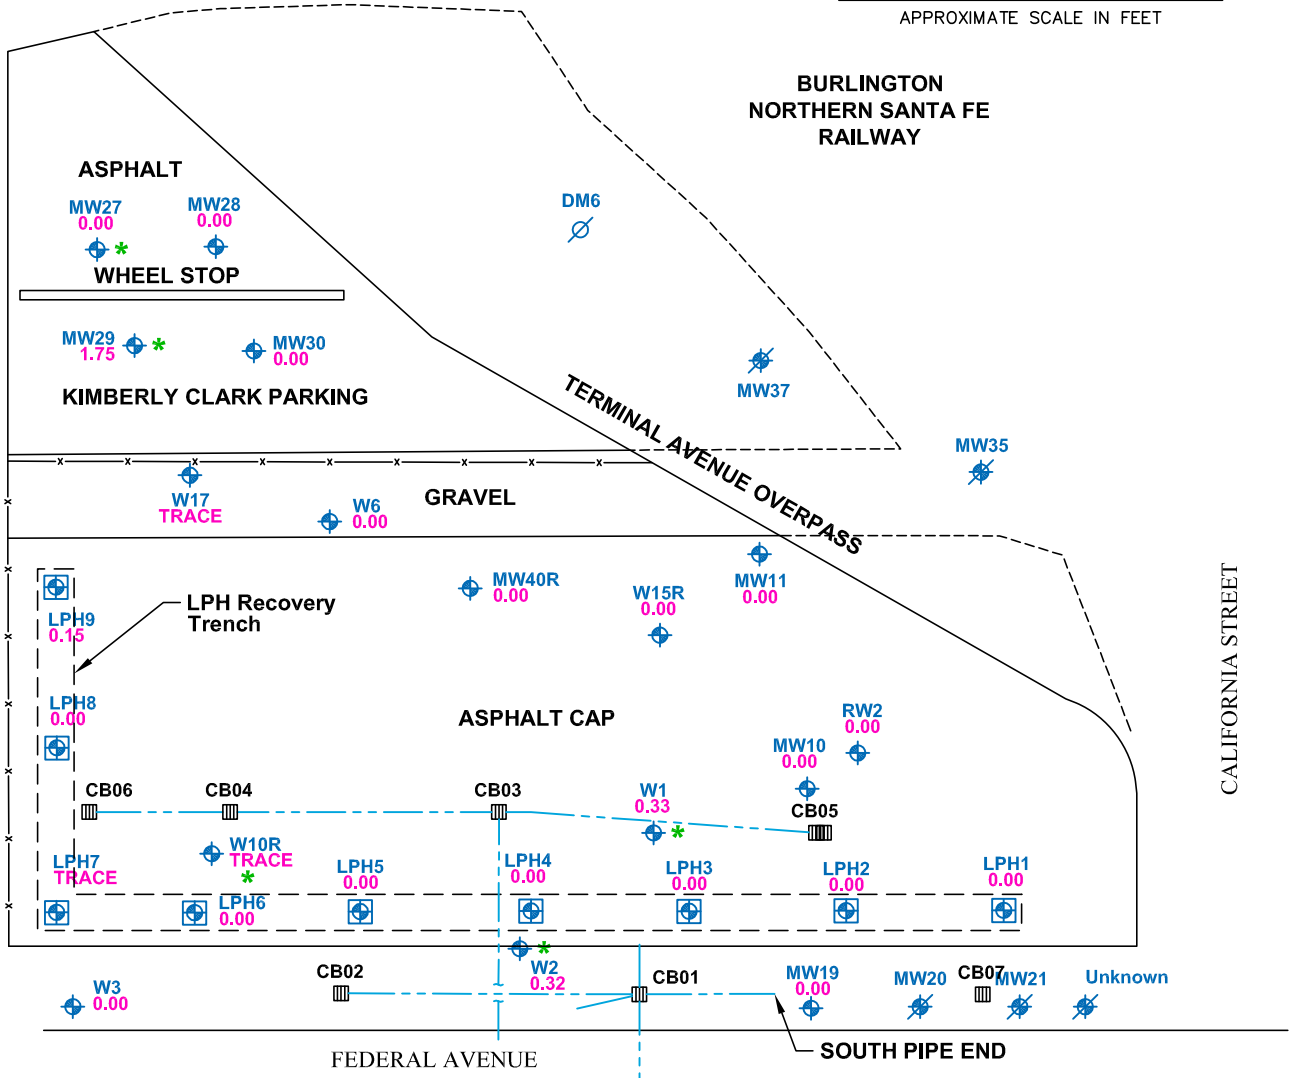

MWA1
0.00

MWA2
0.00

EXPLANATION

- MW2 GROUNDWATER MONITORING WELL
- 1.75 AVERAGE LIQUID-PHASE PETROLEUM HYDROCARBON (LPH) THICKNESS IN FEET*
- * OLEOPHILIC SOCK
- MW37 ABANDONED GROUNDWATER MONITORING WELL
- LPH9 LPH RECOVERY WELL

- DM6 ABANDONED PIEZOMETER
- RW2 FORMERLY MW18
- x-x-x FENCE
- ▤ CATCH BASIN
- - - STORM DRAIN LINE

* Values averaged from data collected September 2008 to February 2009.

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201



CLIENT LOGO

CLIENT

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

PROJECT EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728

DWN BY: JRS

DATUM: NONE

DATE: JUNE 2009

TITLE AVERAGE LPH THICKNESS FROM SEPTEMBER 2008 TO FEBRUARY 2009

CHK'D BY: AS/MS

REV. NO.:


PROJECT NO: 9-915-15716-C

PROJECTION: NONE

SCALE: AS SHOWN

FIGURE No. 20


SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.



| | | | | | |
|---------|---------|---------|---------|---------|---------|
| 8/28/08 | 2/12/09 | 8/28/08 | 2/12/09 | 8/28/08 | 2/12/09 |
| 134 | 145 | 314 | 239 | ND | 280 |
| 2,850 | 2,080 | 2,100 | 1,400 | 27,900 | 444 |
| 2,600 | 414 | 1,840 | 364 | 23,800 | 323 |
| ND | ND | ND | ND | ND | ND |
| ND | ND | ND | ND | ND | ND |
| ND | ND | ND | ND | ND | ND |
| ND | ND | ND | ND | ND | ND |

**BURLINGTON
NORTHERN SANTA FE
RAILWAY**

| | |
|---------|---------|
| 8/28/08 | 2/12/09 |
| 1,070 | 855 |
| 10,600 | 3,110 |
| 8,990 | 959 |
| 4.91 | 3.65 |
| 1.2 | 3.39 |
| 2.29 | 1.25 |
| 5.97 | 6.4 |

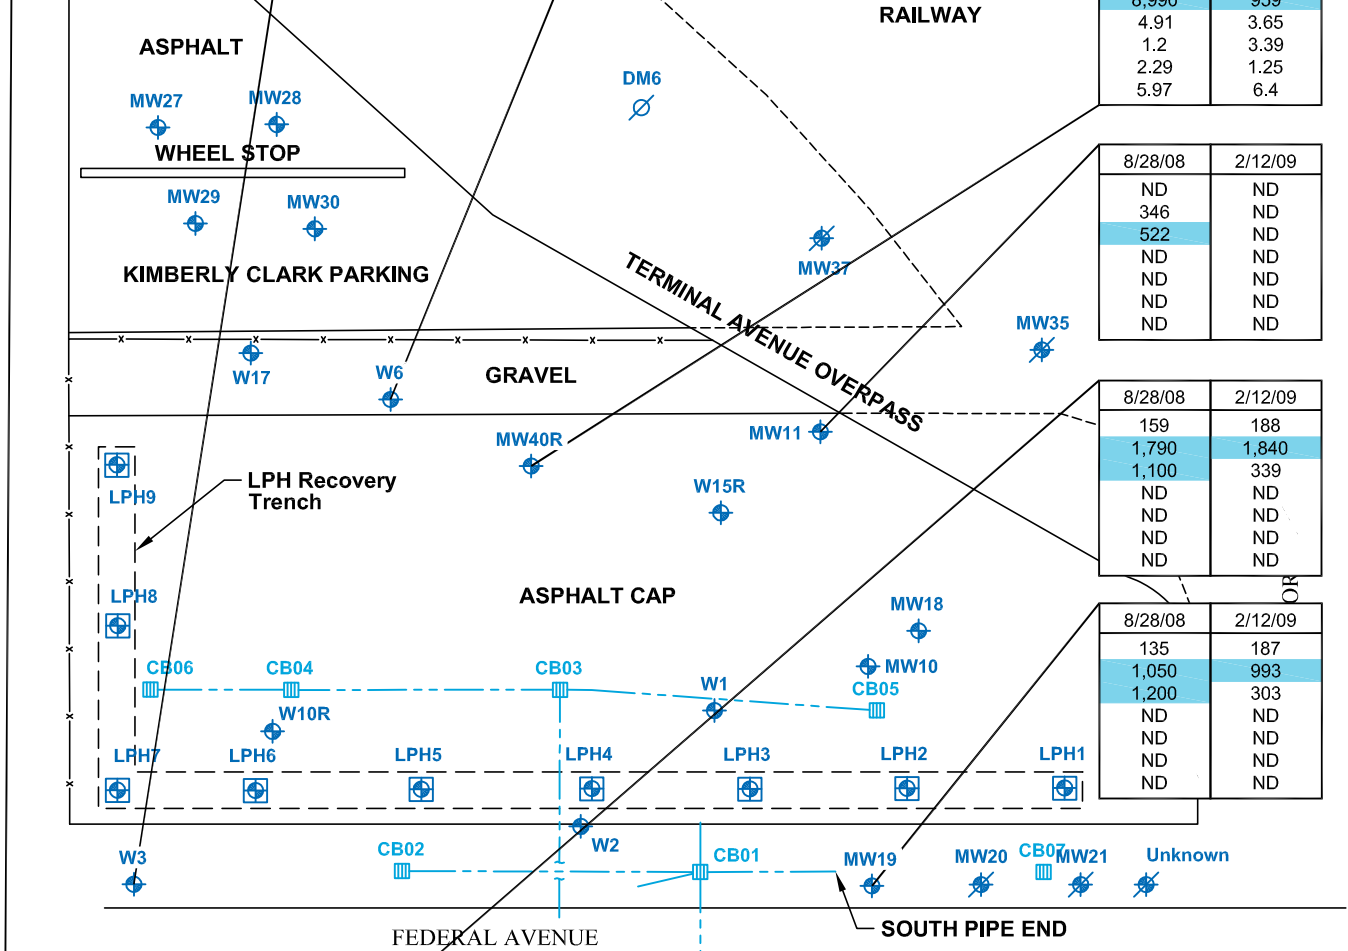

| | |
|---------|---------|
| 8/28/08 | 2/12/09 |
| ND | ND |
| 346 | ND |
| 522 | ND |
| ND | ND |
| ND | ND |
| ND | ND |
| ND | ND |

| | |
|---------|---------|
| 8/28/08 | 2/12/09 |
| 159 | 188 |
| 1,790 | 1,840 |
| 1,100 | 339 |
| ND | ND |
| ND | ND |
| ND | ND |
| ND | ND |

| | |
|---------|---------|
| 8/28/08 | 2/12/09 |
| 135 | 187 |
| 1,050 | 993 |
| 1,200 | 303 |
| ND | ND |
| ND | ND |
| ND | ND |
| ND | ND |

EXPLANATION

- MW2 GROUNDWATER MONITORING WELL
- MW37 ABANDONED GROUNDWATER MONITORING WELL
- LPH9 LPH RECOVERY WELL
- DM6 ABANDONED PIEZOMETER
- x- FENCE
- CATCH BASIN
- - - STORM DRAIN LINE

| | |
|---------|--|
| 2/12/09 | SAMPLE DATE |
| 855 | TOTAL PETROLEUM HYDROCARBONS AS GASOLINE |
| 3,110 | TOTAL PETROLEUM HYDROCARBONS AS DIESEL |
| 959 | TOTAL PETROLEUM HYDROCARBONS AS OIL |
| 3.65 | BENZENE |
| 3.39 | TOLUENE |
| 1.25 | ETHYLBENZENE |
| 6.4 | TOTAL XYLENES |
| | ABOVE MTCA A CLEANUP LEVEL |
| ND | NOT DETECTED |

AMEC Earth & Environmental

11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201



CLIENT LOGO

CLIENT

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**


PROJECT **EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728**

DWN BY: JRS DATUM: NONE DATE: AUGUST 2009

TITLE **GROUNDWATER SAMPLE
ANALYTICAL RESULTS
AUGUST 2008 & FEBRUARY 2009**

CHK'D BY: AS/MS REV. NO.: PROJECT NO: 9-915-15716-C
PROJECTION: NONE SCALE: AS SHOWN FIGURE No. **21**

G:\91\15000\15716-C - Exxon Mobil\15716-C-16.dwg - Layout1 - Aug. 17, 2009 11:14am - jeffrey.sanders

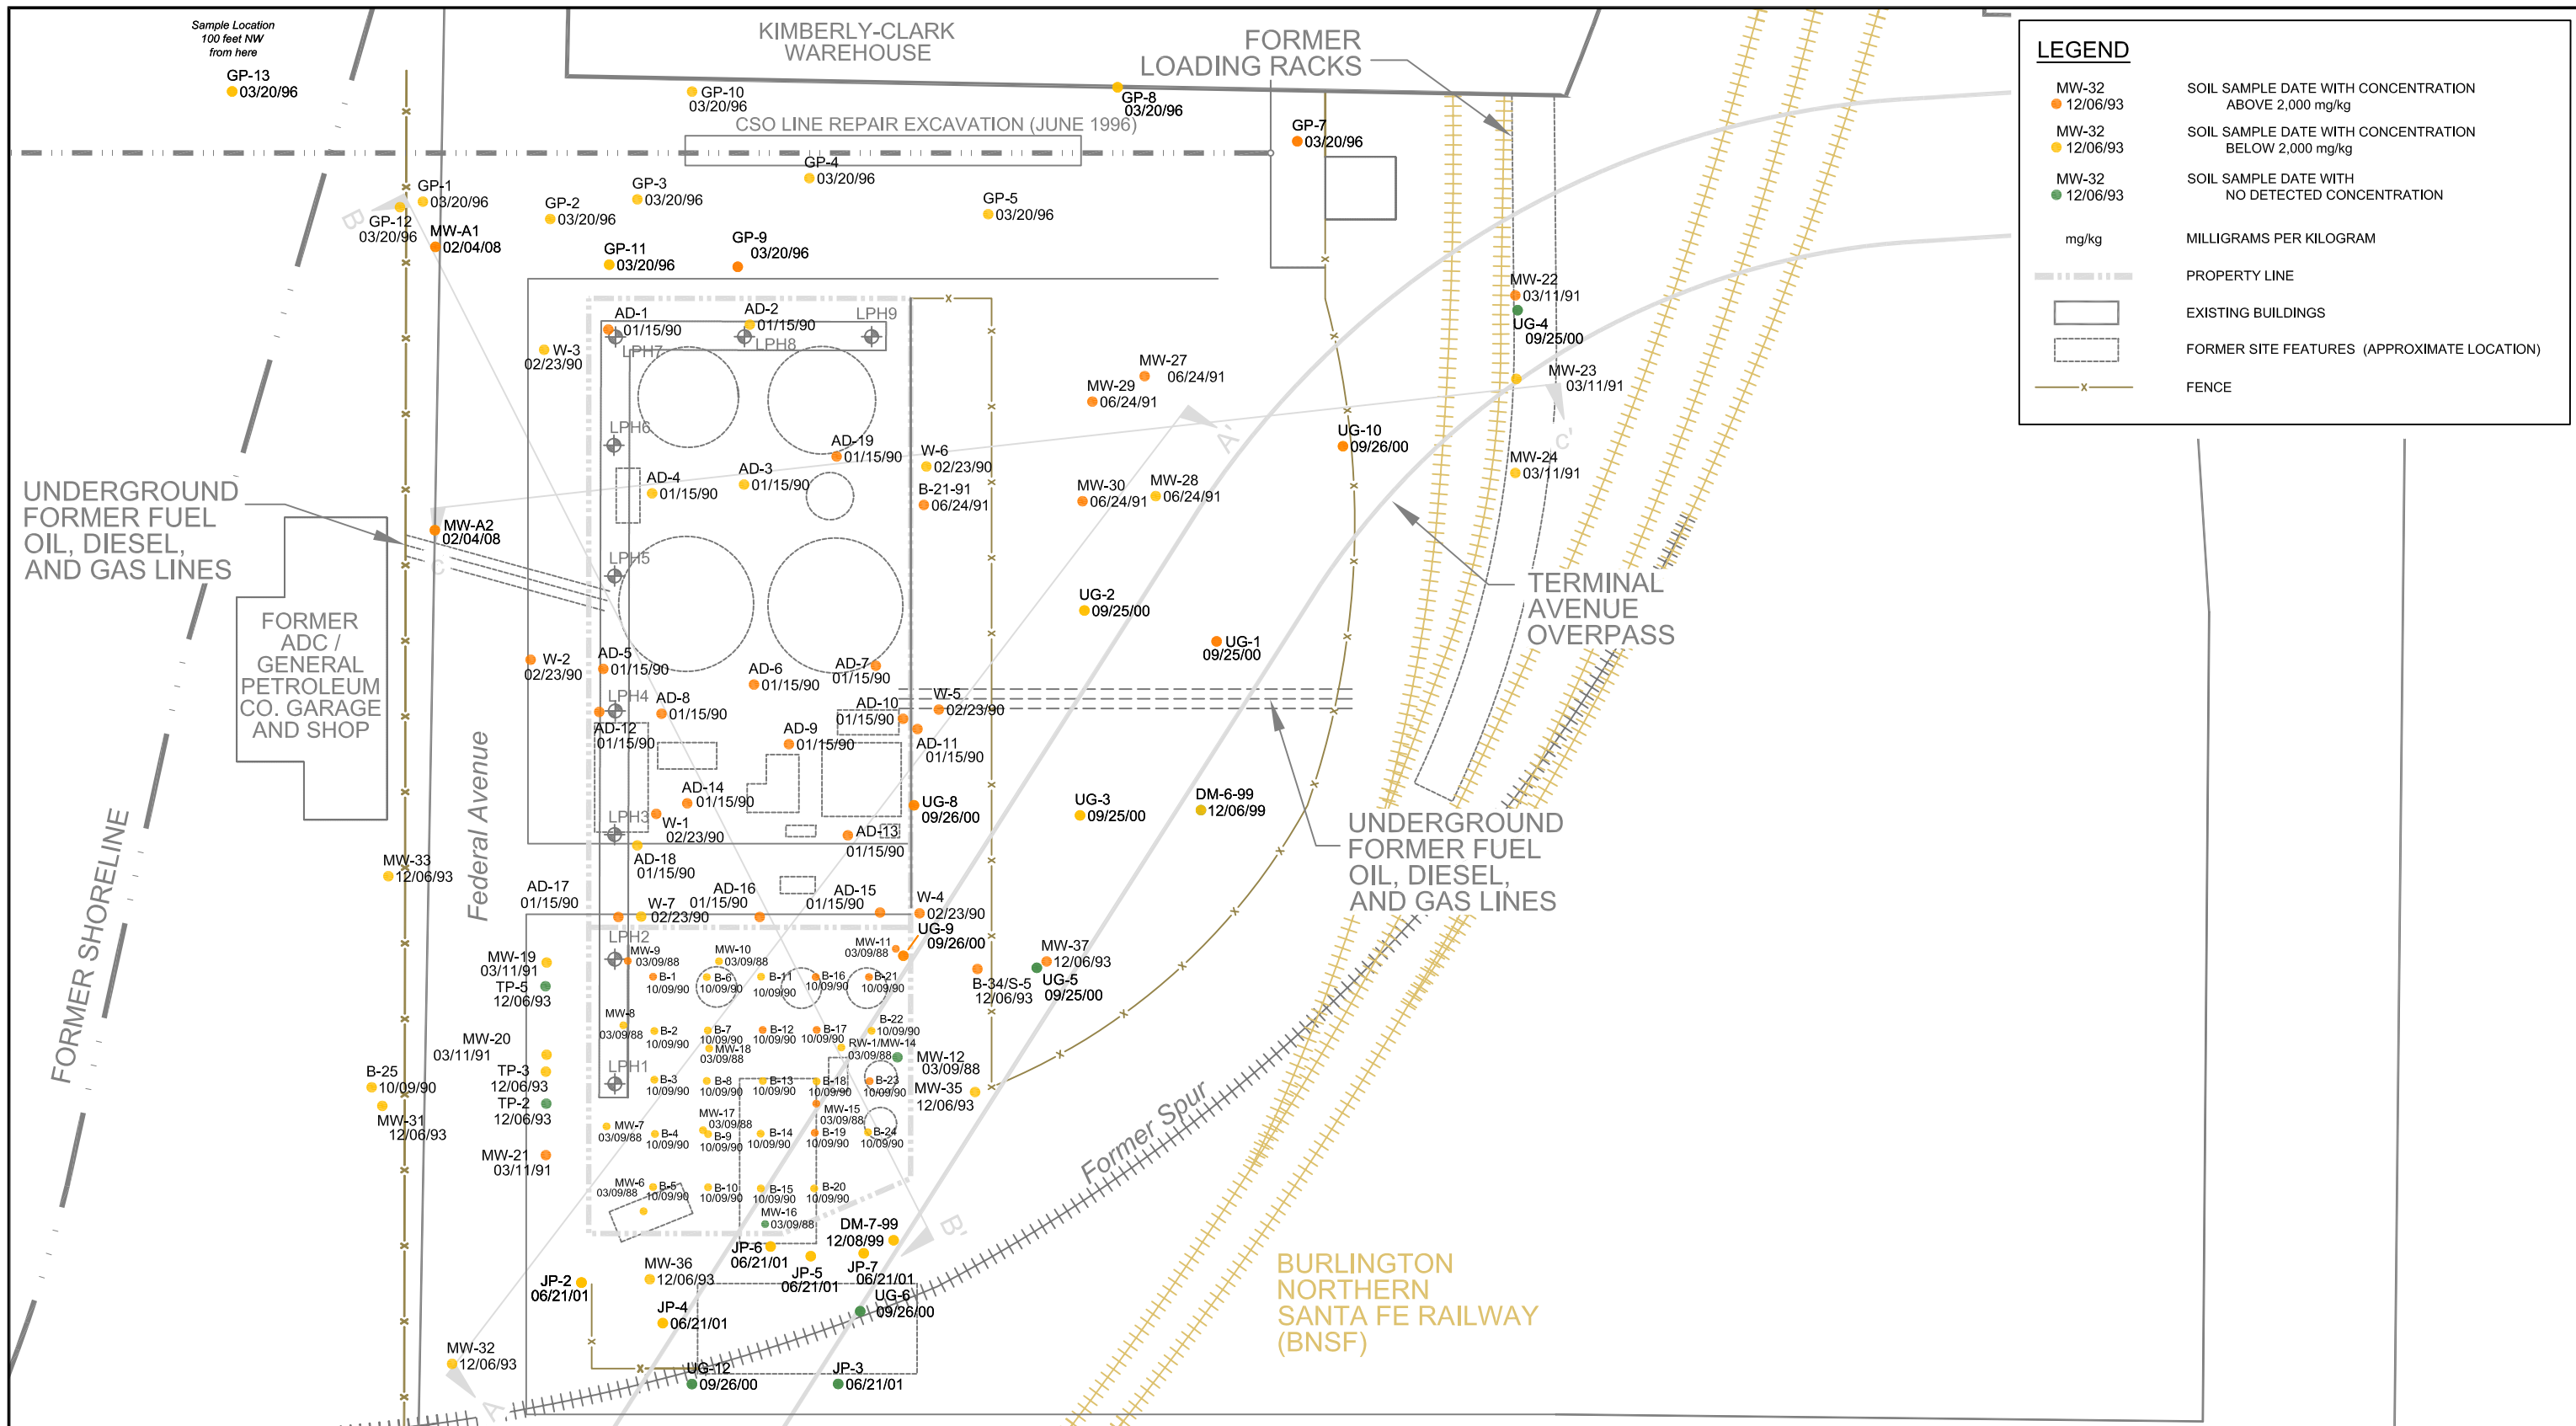

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ

CHK'D BY: AIS

DATUM: NONE

PROJECTION: NONE

SCALE: 1" = 60'

PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE


**HORIZONTAL DISTRIBUTION
 OF TPH-DIESEL, TPH-OIL,
 AND UNDIFFERENTIATED TPH IN SOIL**

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.: 1


FIGURE No. 22

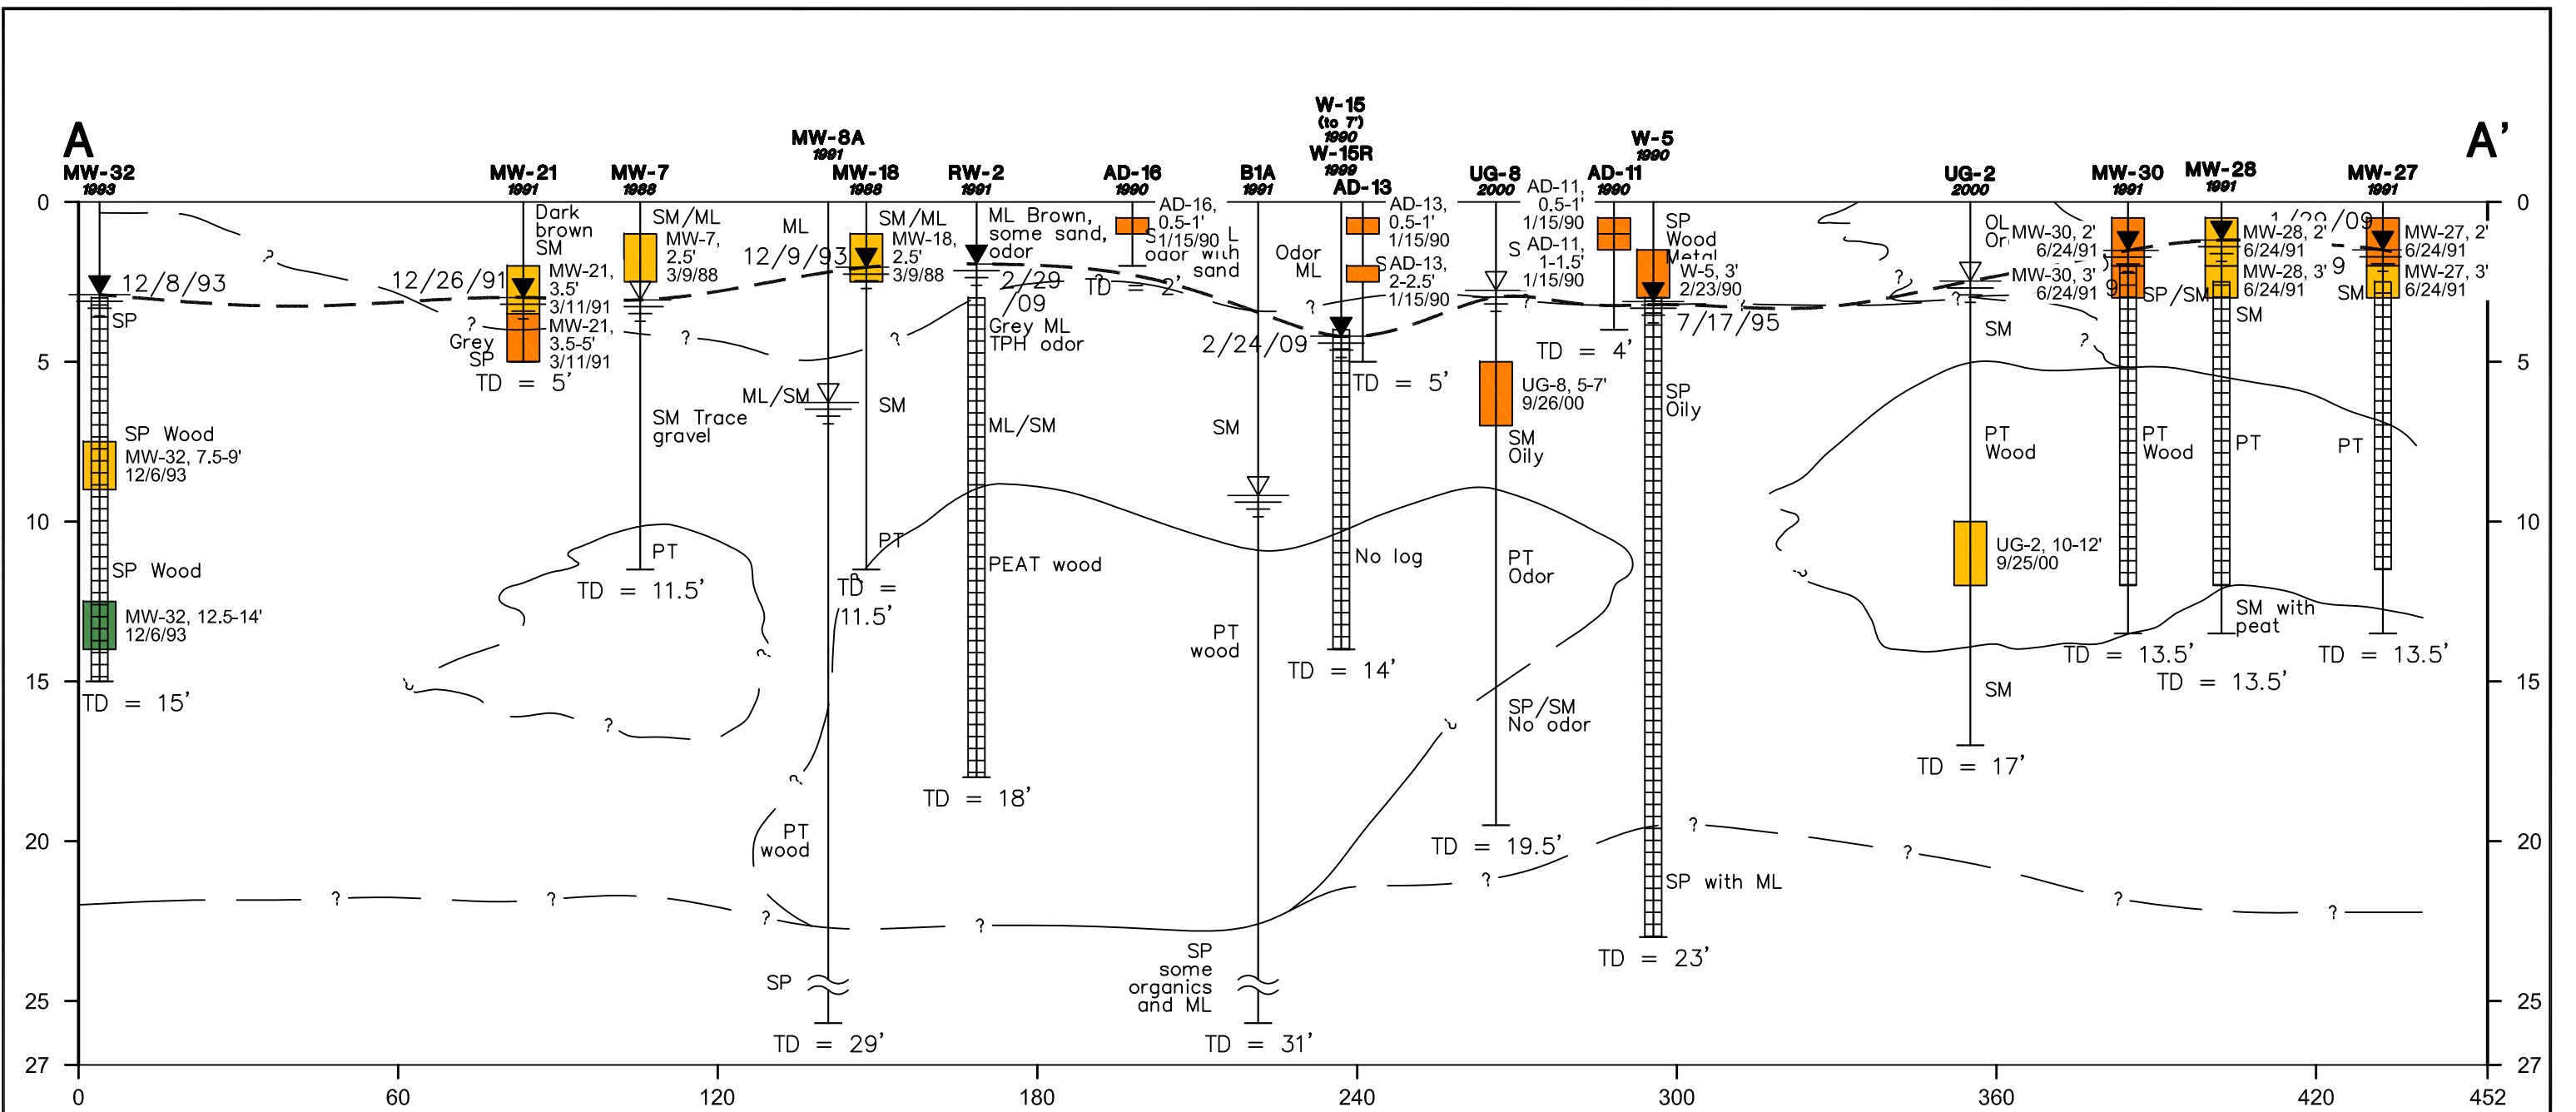

LEGEND

- 12/26/91: Static water level measured after drilling and date measured
- Water level during drilling
- Unconfined groundwater table
- AD-16 1990: Boring number and year installed
- MW-30 1991: Well number and year installed
- TD = 2': Total depth in feet
- TD = 15': Total depth in feet
- TPH-D or TPH (Undifferentiated):
 - Orange: Detected ≥ 2,000 mg/kg
 - Yellow: Detected < 2,000 mg/kg
 - Green: Not detected
- mg/kg: Milligram per kilogram
- UG-2, 10-12' 9/25/00: Sample depth and date collected

| | | | | | | |
|---|--------------------|---|--|-------------------------|--|--|
| <p>SCALE IN VERTICAL FEET</p> <p>SCALE IN HORIZONTAL FEET</p> | <p>CLIENT LOGO</p> | <p>CLIENT:</p> <p align="center">EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY</p> | | <p>DWN BY: JRS</p> | <p>PROJECT</p> <p align="center">EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728</p> | <p>DATE:</p> <p align="center">AUGUST 2009</p> |
| | | <p>AMEC Earth & Environmental</p> <p>11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201</p> | | <p>CHK'D BY: AS</p> | | <p>PROJECT</p> <p align="center">9-915-15716-C</p> |
| <p>AMERICAN ENVIRONMENTAL CONSULTANTS</p> | | | | <p>DATUM: NONE</p> | <p>TITLE</p> <p align="center">VERTICAL DISTRIBUTION OF TPH-D OR TPH (UNDIFFERENTIATED) IN SOIL: CROSS SECTION A-A'</p> | <p>REV. NO.:</p> |
| <p>11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201</p> | | | | <p>PROJECTION: NONE</p> | | <p>FIGURE No.</p> <p align="right">23</p> |
| <p>SCALE: AS SHOWN</p> | | | | | | |

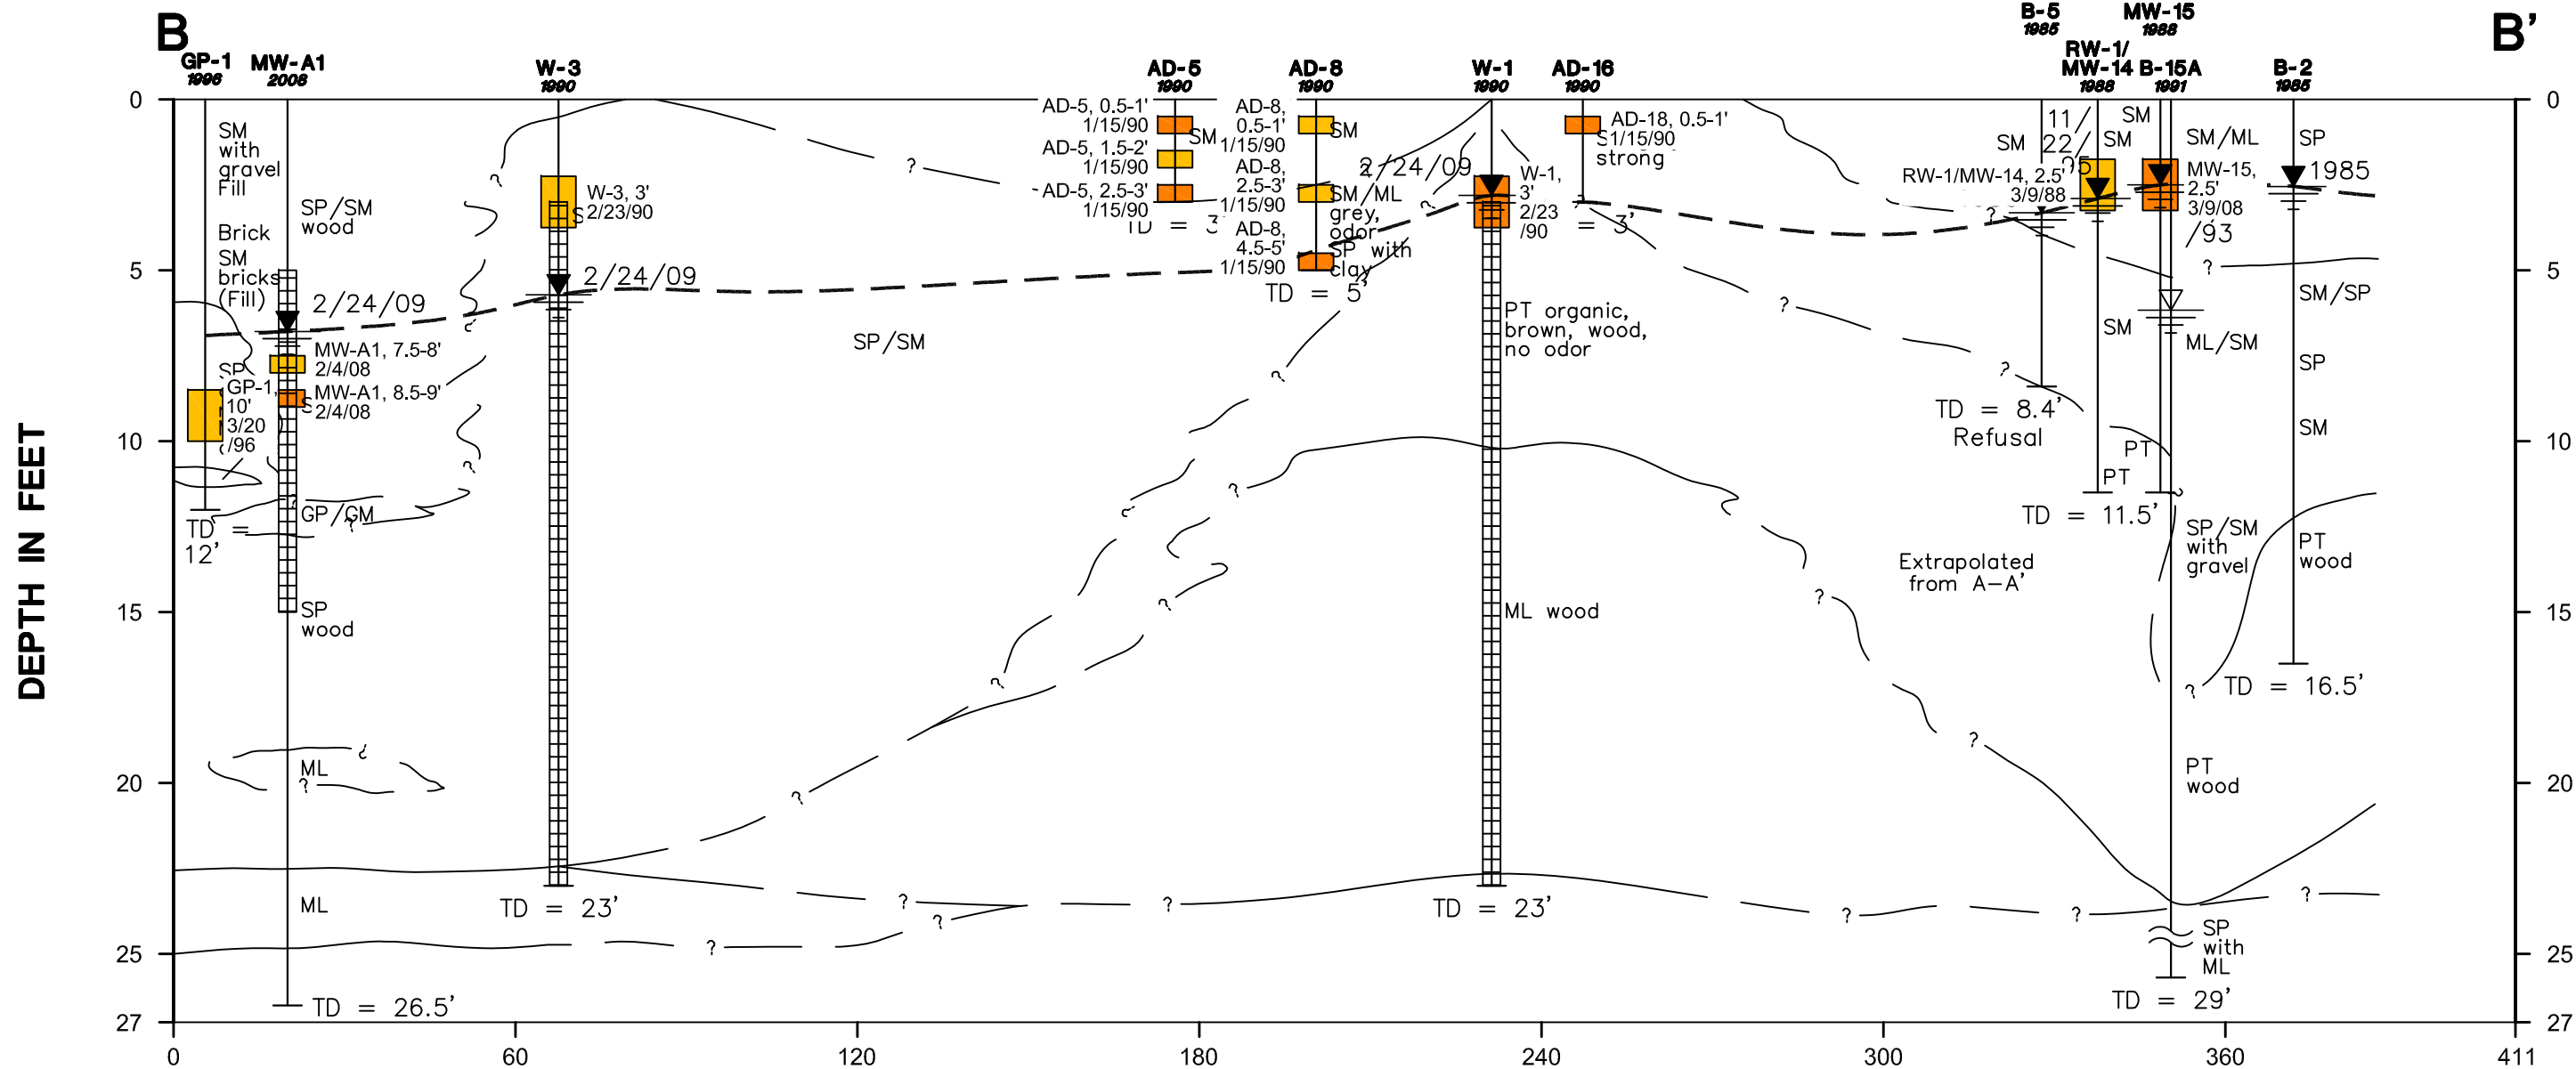

LEGEND


12/26/91
 Static water level measured after drilling and date measured
 Water level during drilling
 Unconfined groundwater table

AD-5 1990
 Boring number and year installed
 TD = 3' Total depth in feet

MW-A1 2008
 Well number and year installed
 TD = 23' Total depth in feet

TPH-D or TPH (Undifferentiated)
 Detected ≥ 2,000 mg/kg
 Detected < 2,000 mg/kg
 Not detected

mg/kg Milligram per kilogram
 AD-18, 0.5-1' 1/15/90 Sample depth and date collected



CLIENT LOGO

CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS
 CHK'D BY: AS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: AS SHOWN

PROJECT
EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728


TITLE
VERTICAL DISTRIBUTION OF TPH-D OR TPH (UNDIFFERENTIATED) IN SOIL: CROSS SECTION B-B'

DATE:
 AUGUST 2009

PROJECT NO:
 9-915-15716-C

REV. NO.:

FIGURE No.
24

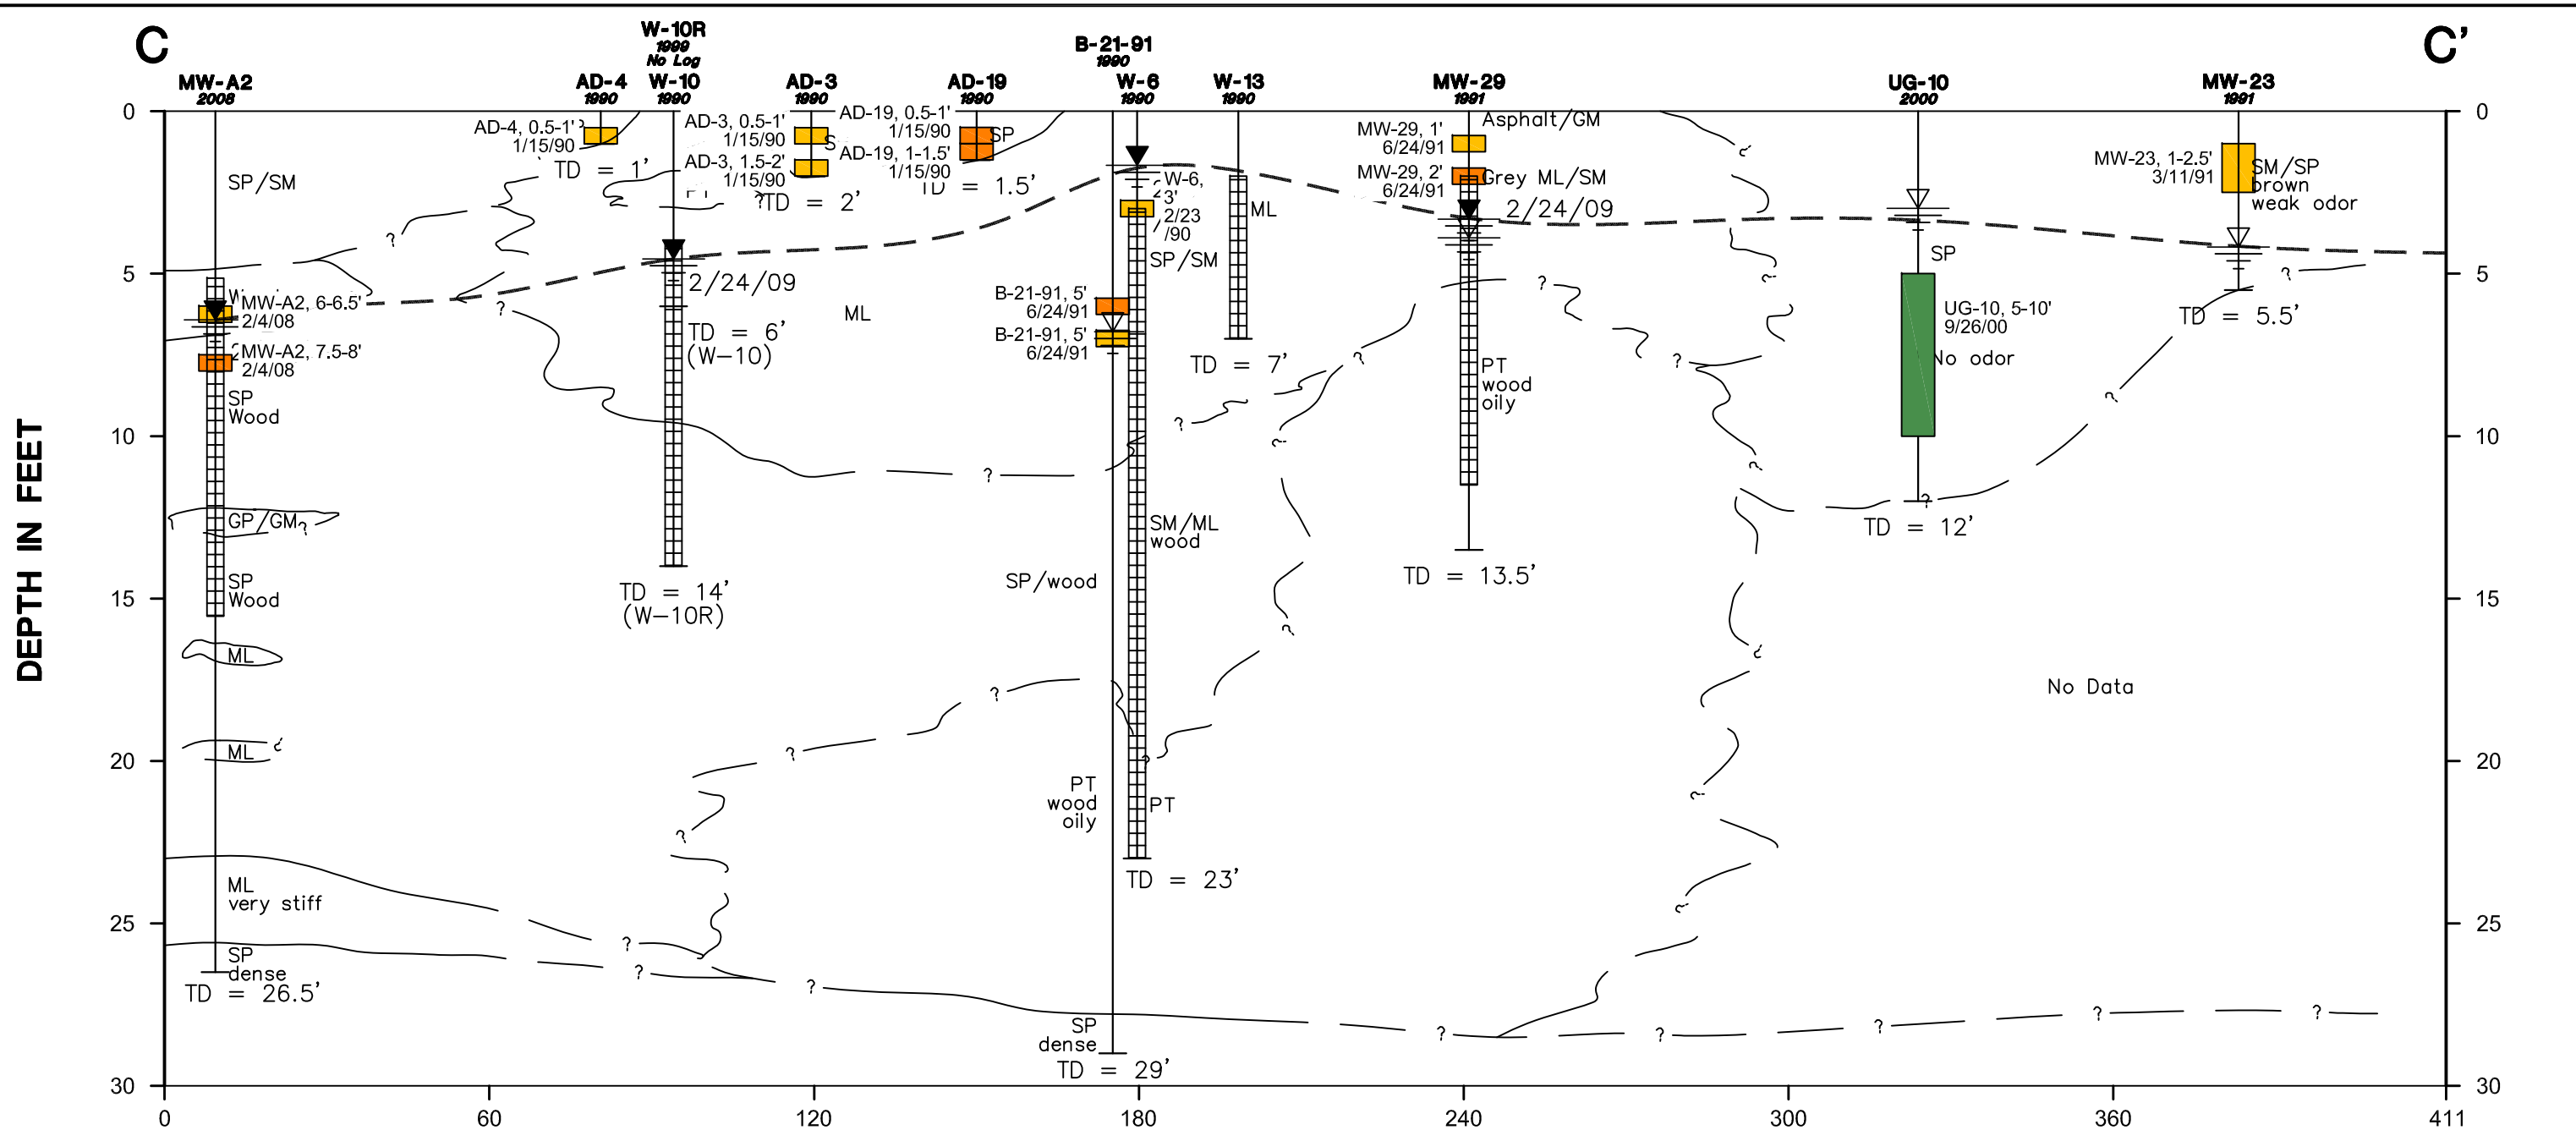

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-4 1990 Boring number and year installed

TD = 1' Total depth in feet

MW-A2 2008 Well number and year installed

Screen interval

TD = 26' Total depth in feet

TPH-D or TPH (Undifferentiated)


Detected $\geq 2,000$ mg/kg

Detected $< 2,000$ mg/kg

Not detected

mg/kg Milligram per kilogram

UG-10, 5-10' 9/26/00 Sample depth and date collected

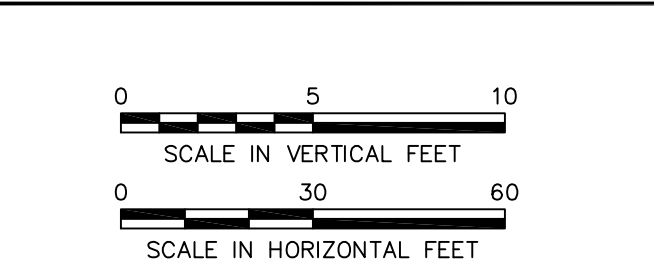

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF TPH-D OR TPH (UNDIFFERENTIATED) IN SOIL: CROSS SECTION C-C'

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. **25**

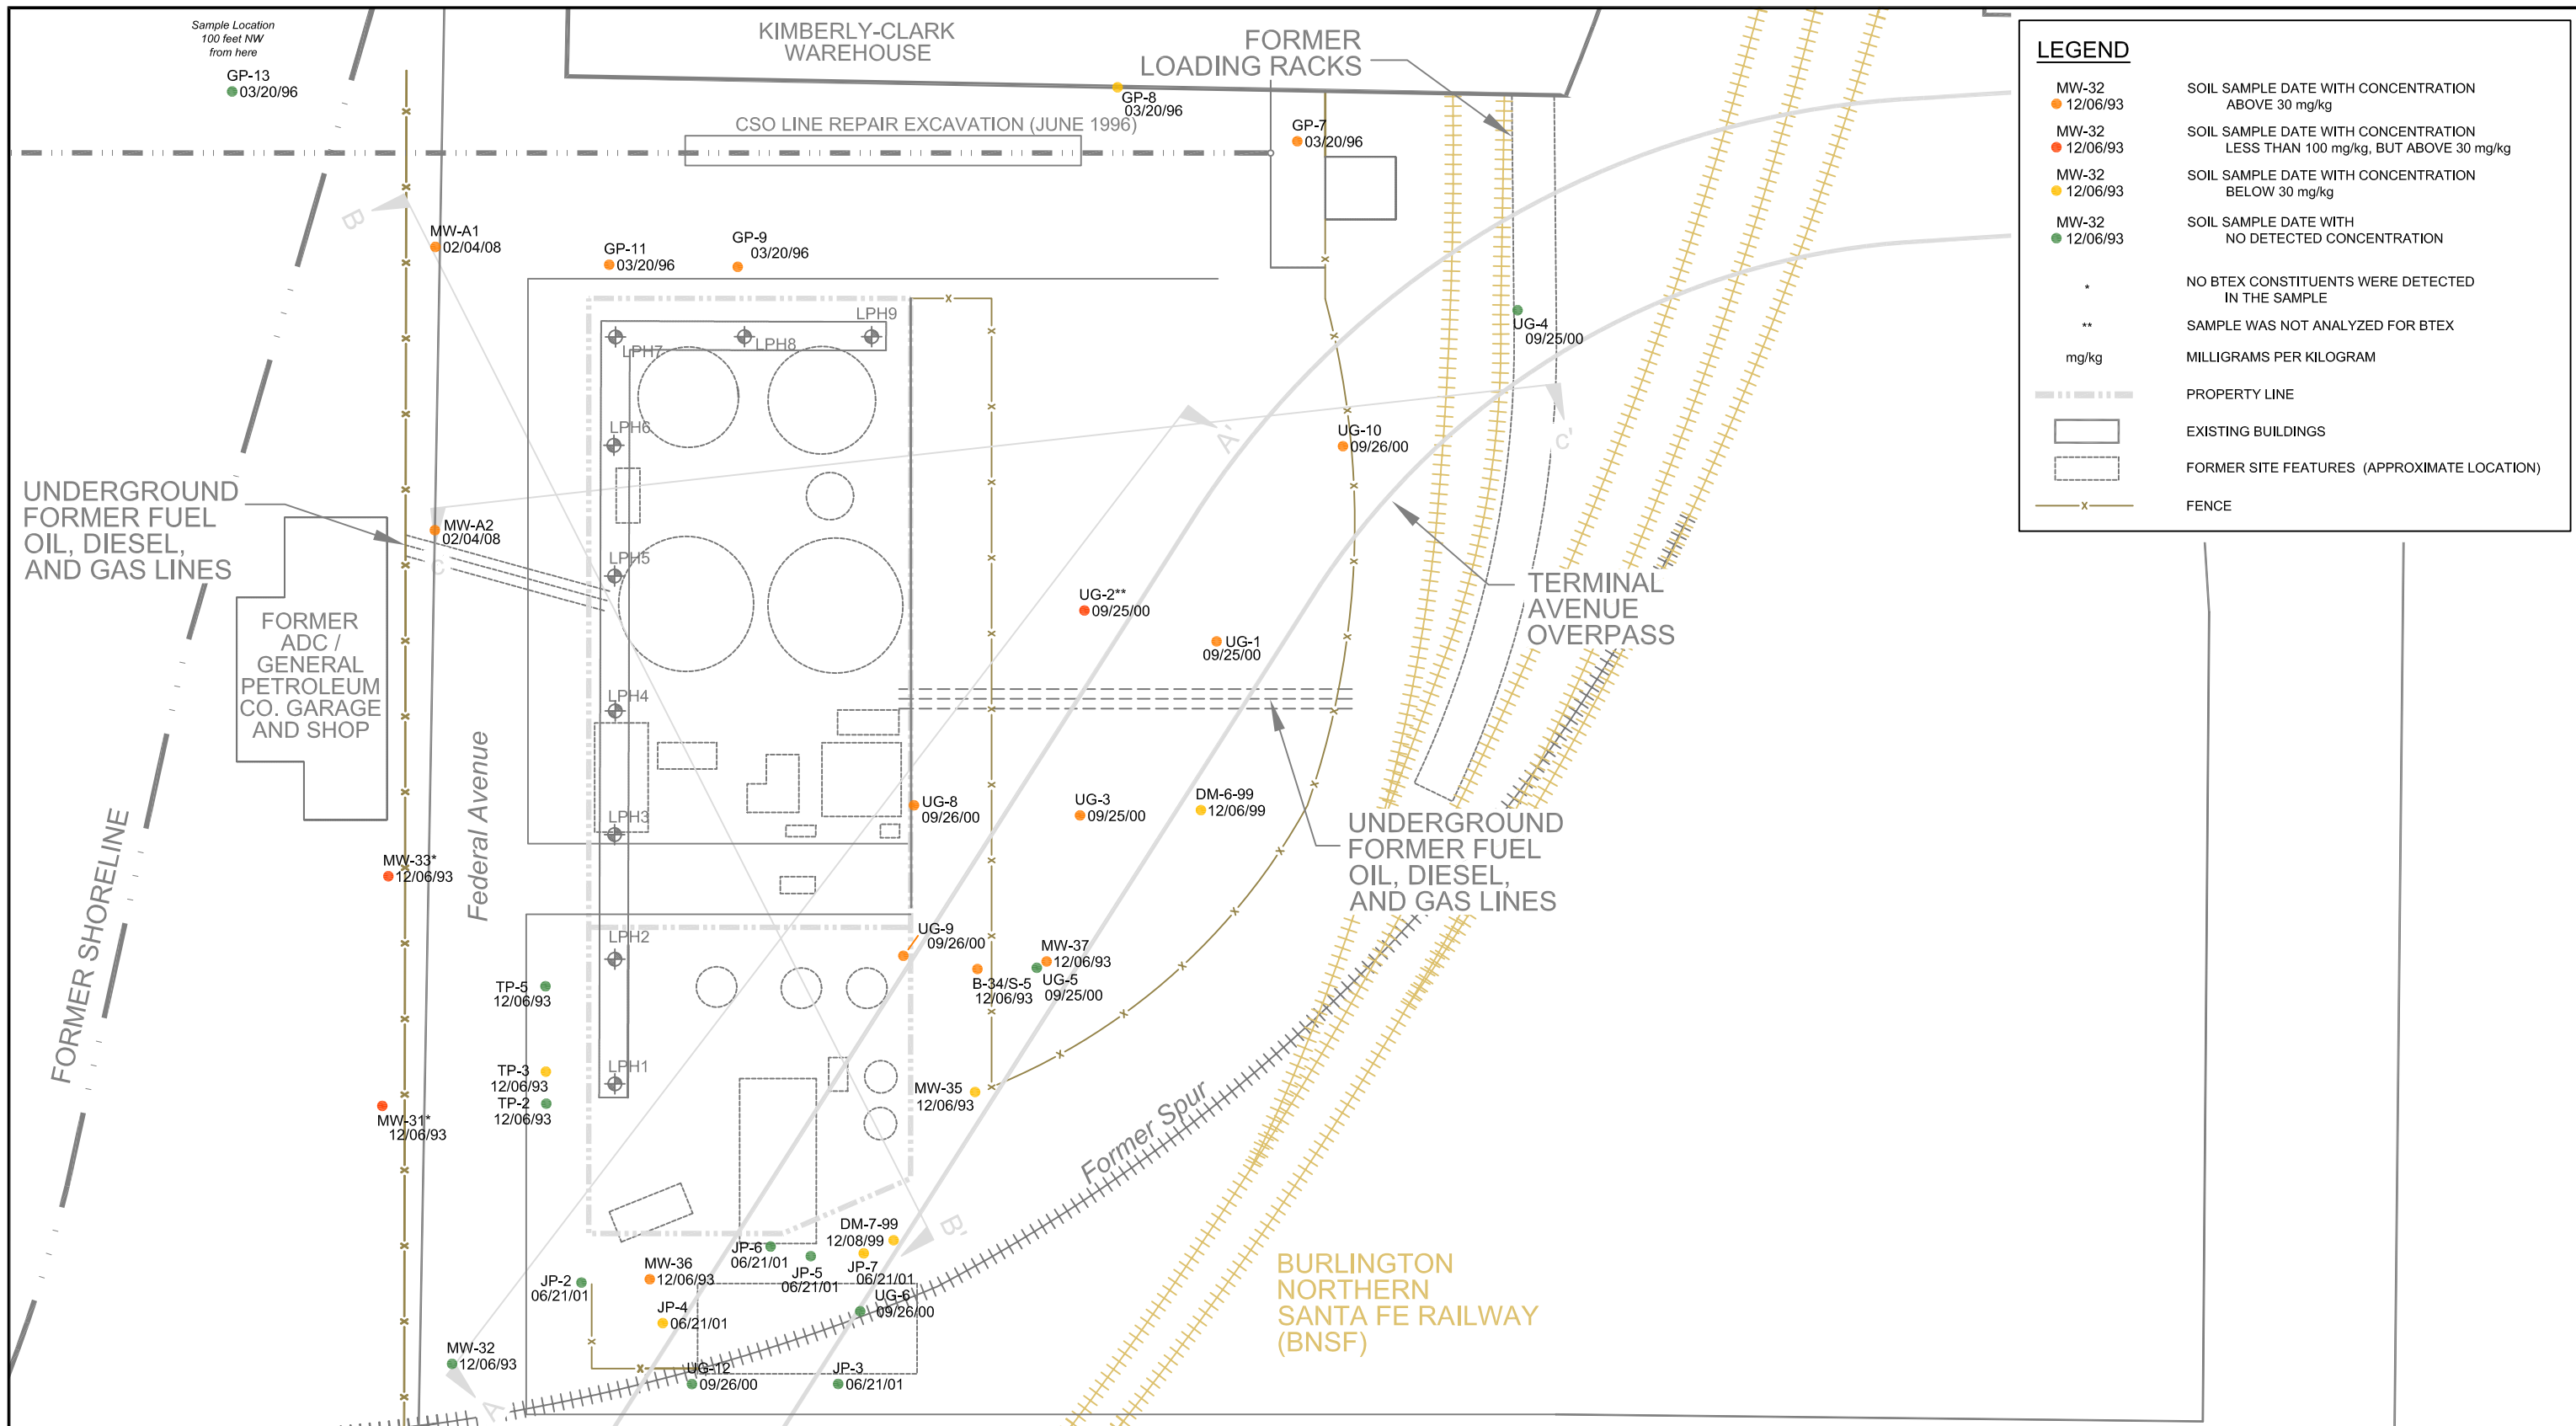

| LEGEND | |
|---------------------|---|
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION ABOVE 30 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION LESS THAN 100 mg/kg, BUT ABOVE 30 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION BELOW 30 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| . | NO BTEX CONSTITUENTS WERE DETECTED IN THE SAMPLE |
| ** | SAMPLE WAS NOT ANALYZED FOR BTEX |
| mg/kg | MILLIGRAMS PER KILOGRAM |
| --- | PROPERTY LINE |
| [Solid Line] | EXISTING BUILDINGS |
| [Dashed Line] | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| -x- | FENCE |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:


EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

| | |
|-------------|-----------|
| DWN BY: | JRS / BRJ |
| CHK'D BY: | AMS |
| DATUM: | NONE |
| PROJECTION: | NONE |
| SCALE: | 1" = 60' |

| | |
|---------|--|
| PROJECT | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 |
| TITLE | HORIZONTAL DISTRIBUTION OF TPH-GASOLINE IN SOIL |

| | |
|--------------|---------------|
| DATE: | AUGUST 2009 |
| PROJECT NO.: | 9-915-15716-C |
| REV. NO.: | 1 |
| FIGURE No. | 26 |

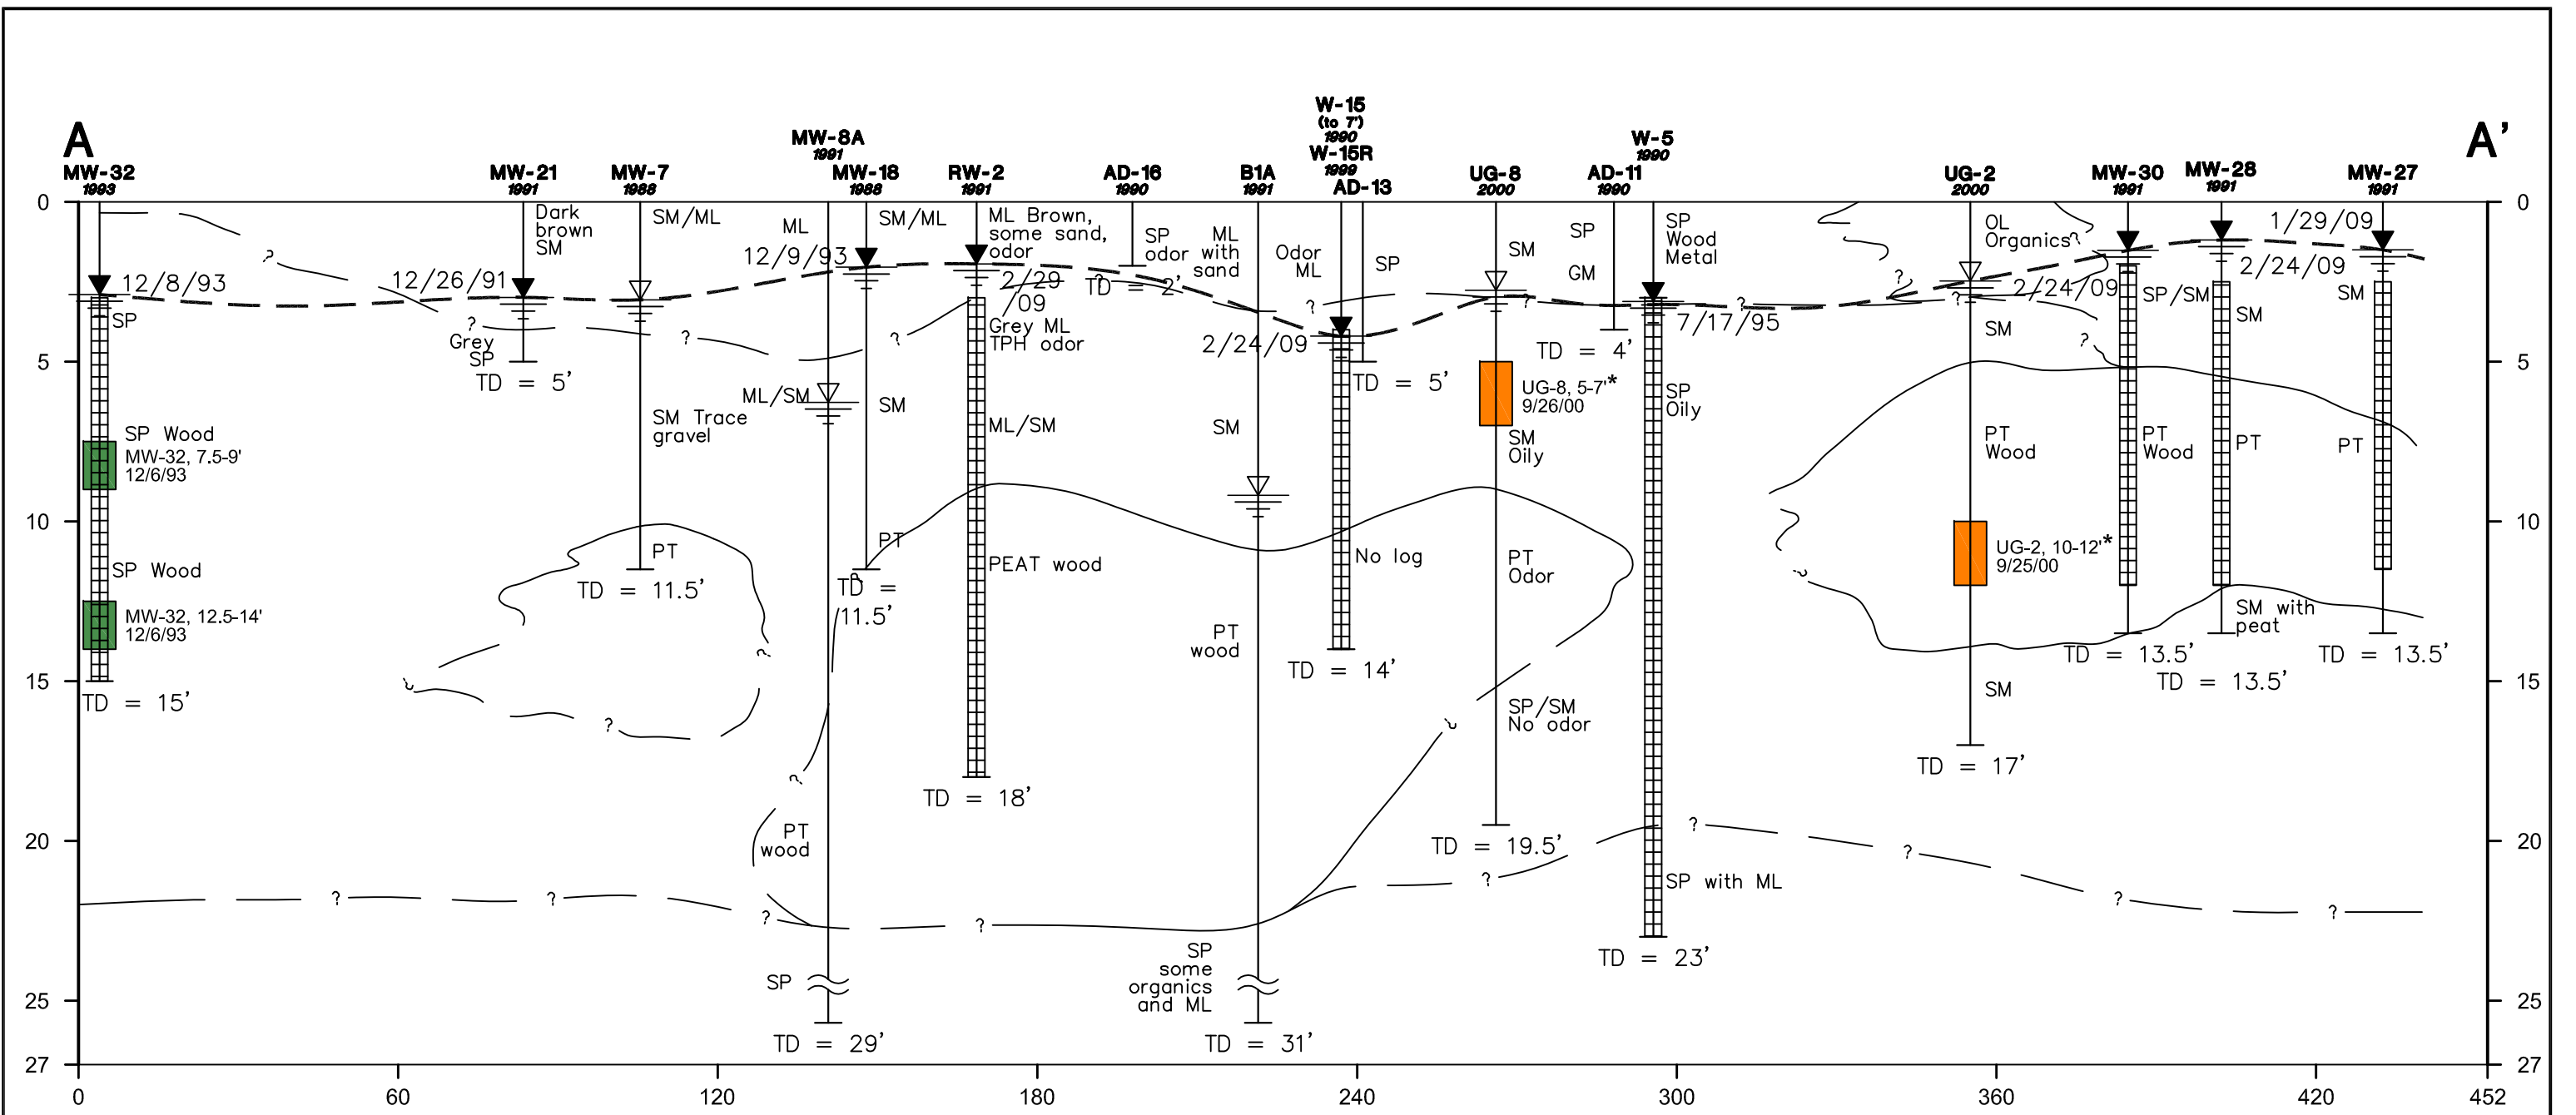

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-16 1990 Boring number and year installed

MW-30 1991 Well number and year installed

Screen interval

TD = 2' Total depth in feet

TD = 15' Total depth in feet

TPH-G

Detected ≥ 30 mg/kg


Detected < 30 mg/kg

Not detected

mg/kg Milligram per kilogram

UG-2, 10-12' 9/25/00 Sample depth and date collected

* Sample was not analyzed for benzene

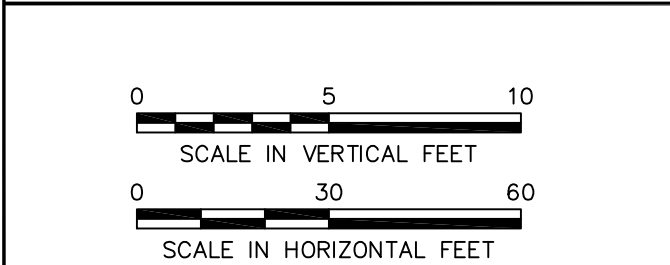

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF TPH-G IN SOIL CROSS SECTION A-A'

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. **27**

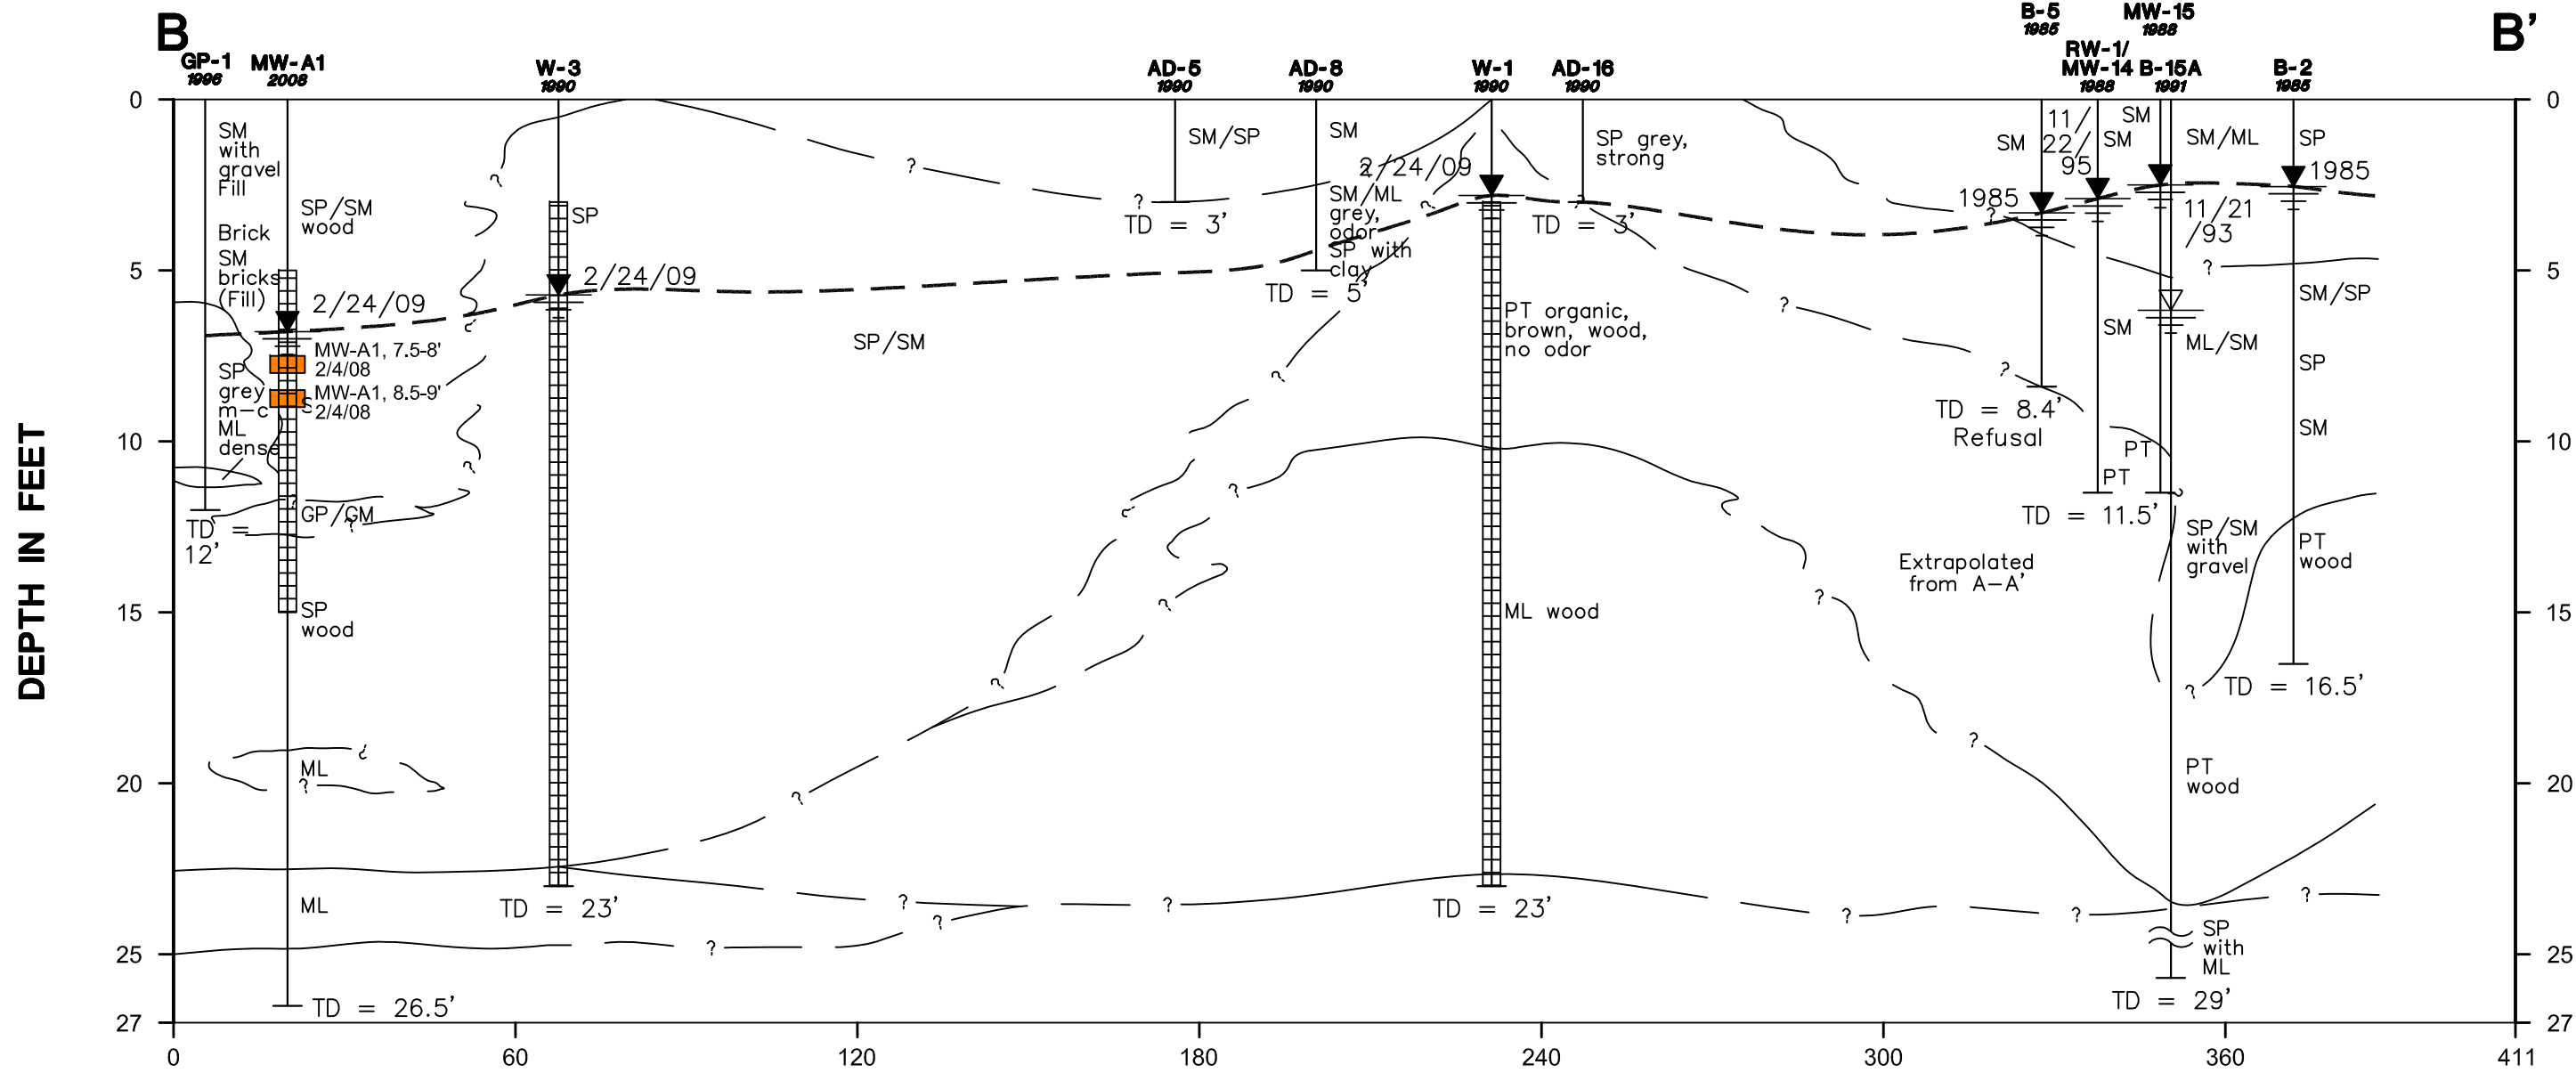

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-5 1990 Boring number and year installed

MW-A1 2008 Well number and year installed

Screen interval

TPH-G

Detected ≥ 30 mg/kg

Detected < 30 mg/kg


Not detected

mg/kg Milligram per kilogram

UG-2, 10-12' 9/25/00 Sample depth and date collected

TD = 3' Total depth in feet

TD = 23' Total depth in feet



CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT: EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728


TITLE: VERTICAL DISTRIBUTION OF TPH-G IN SOIL CROSS SECTION B-B'

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. 28

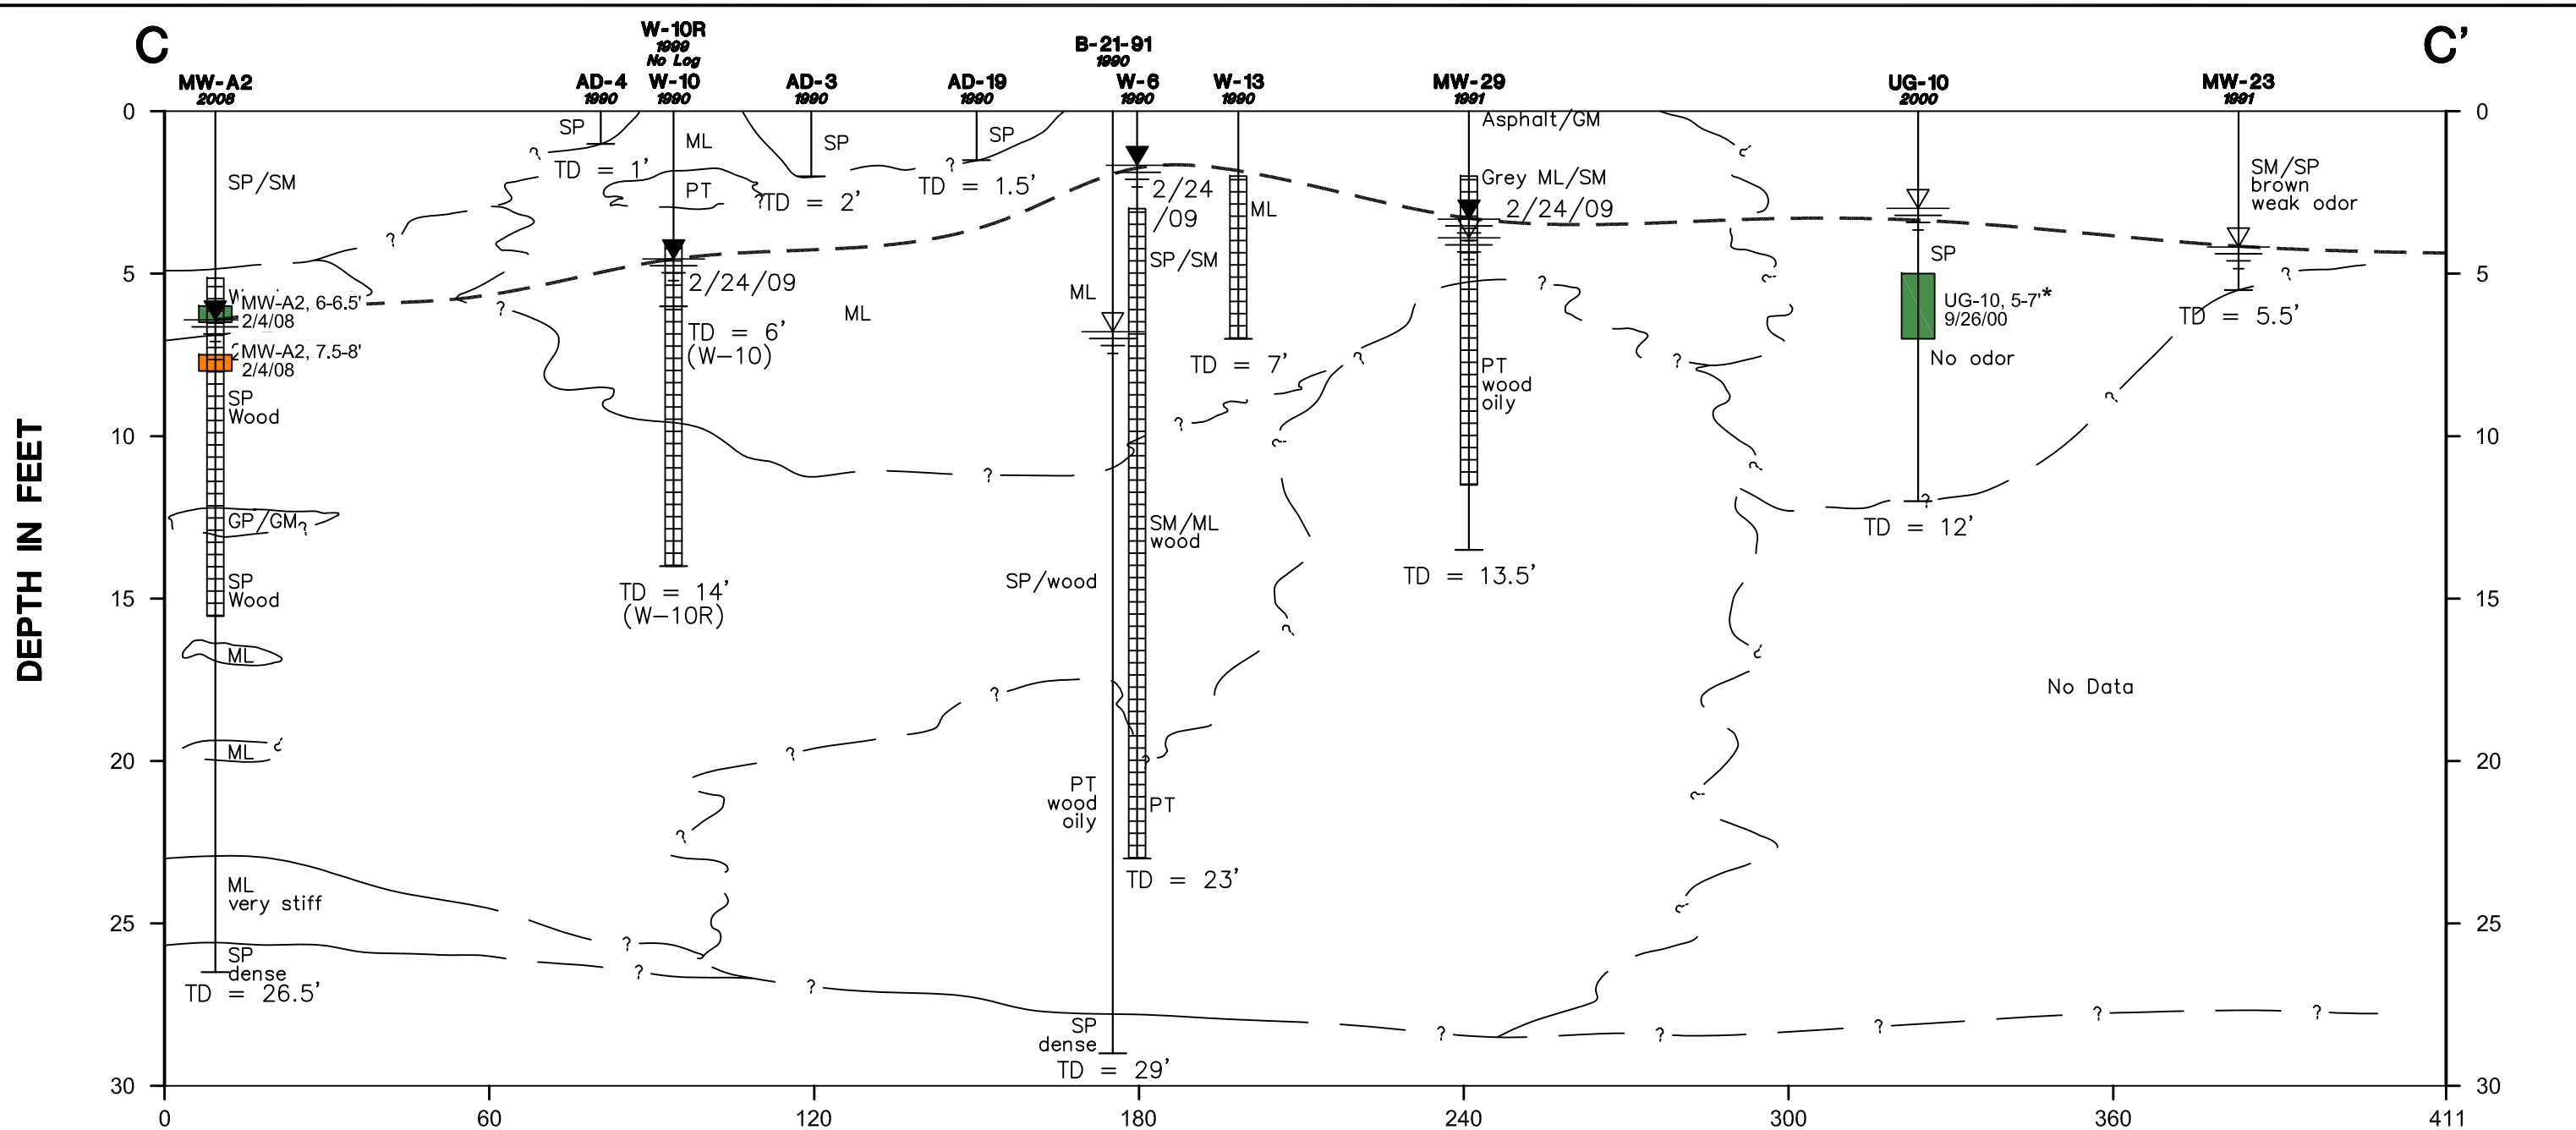

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-4 1990 Boring number and year installed

TD = 1' Total depth in feet

MW-A2 2008 Well number and year installed

Screen interval

TD = 26' Total depth in feet

TPH-G

Detected ≥ 30 mg/kg


Detected < 30 mg/kg

Not detected

mg/kg Milligram per kilogram

UG-10, 5-7' 9/26/00 Sample depth and date collected

* Sample was not analyzed for benzene

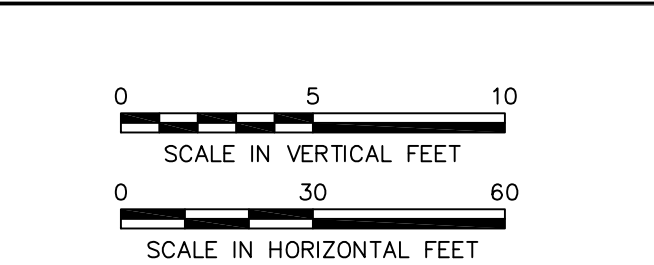

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF TPH-G IN SOIL CROSS SECTION C-C'

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. 29

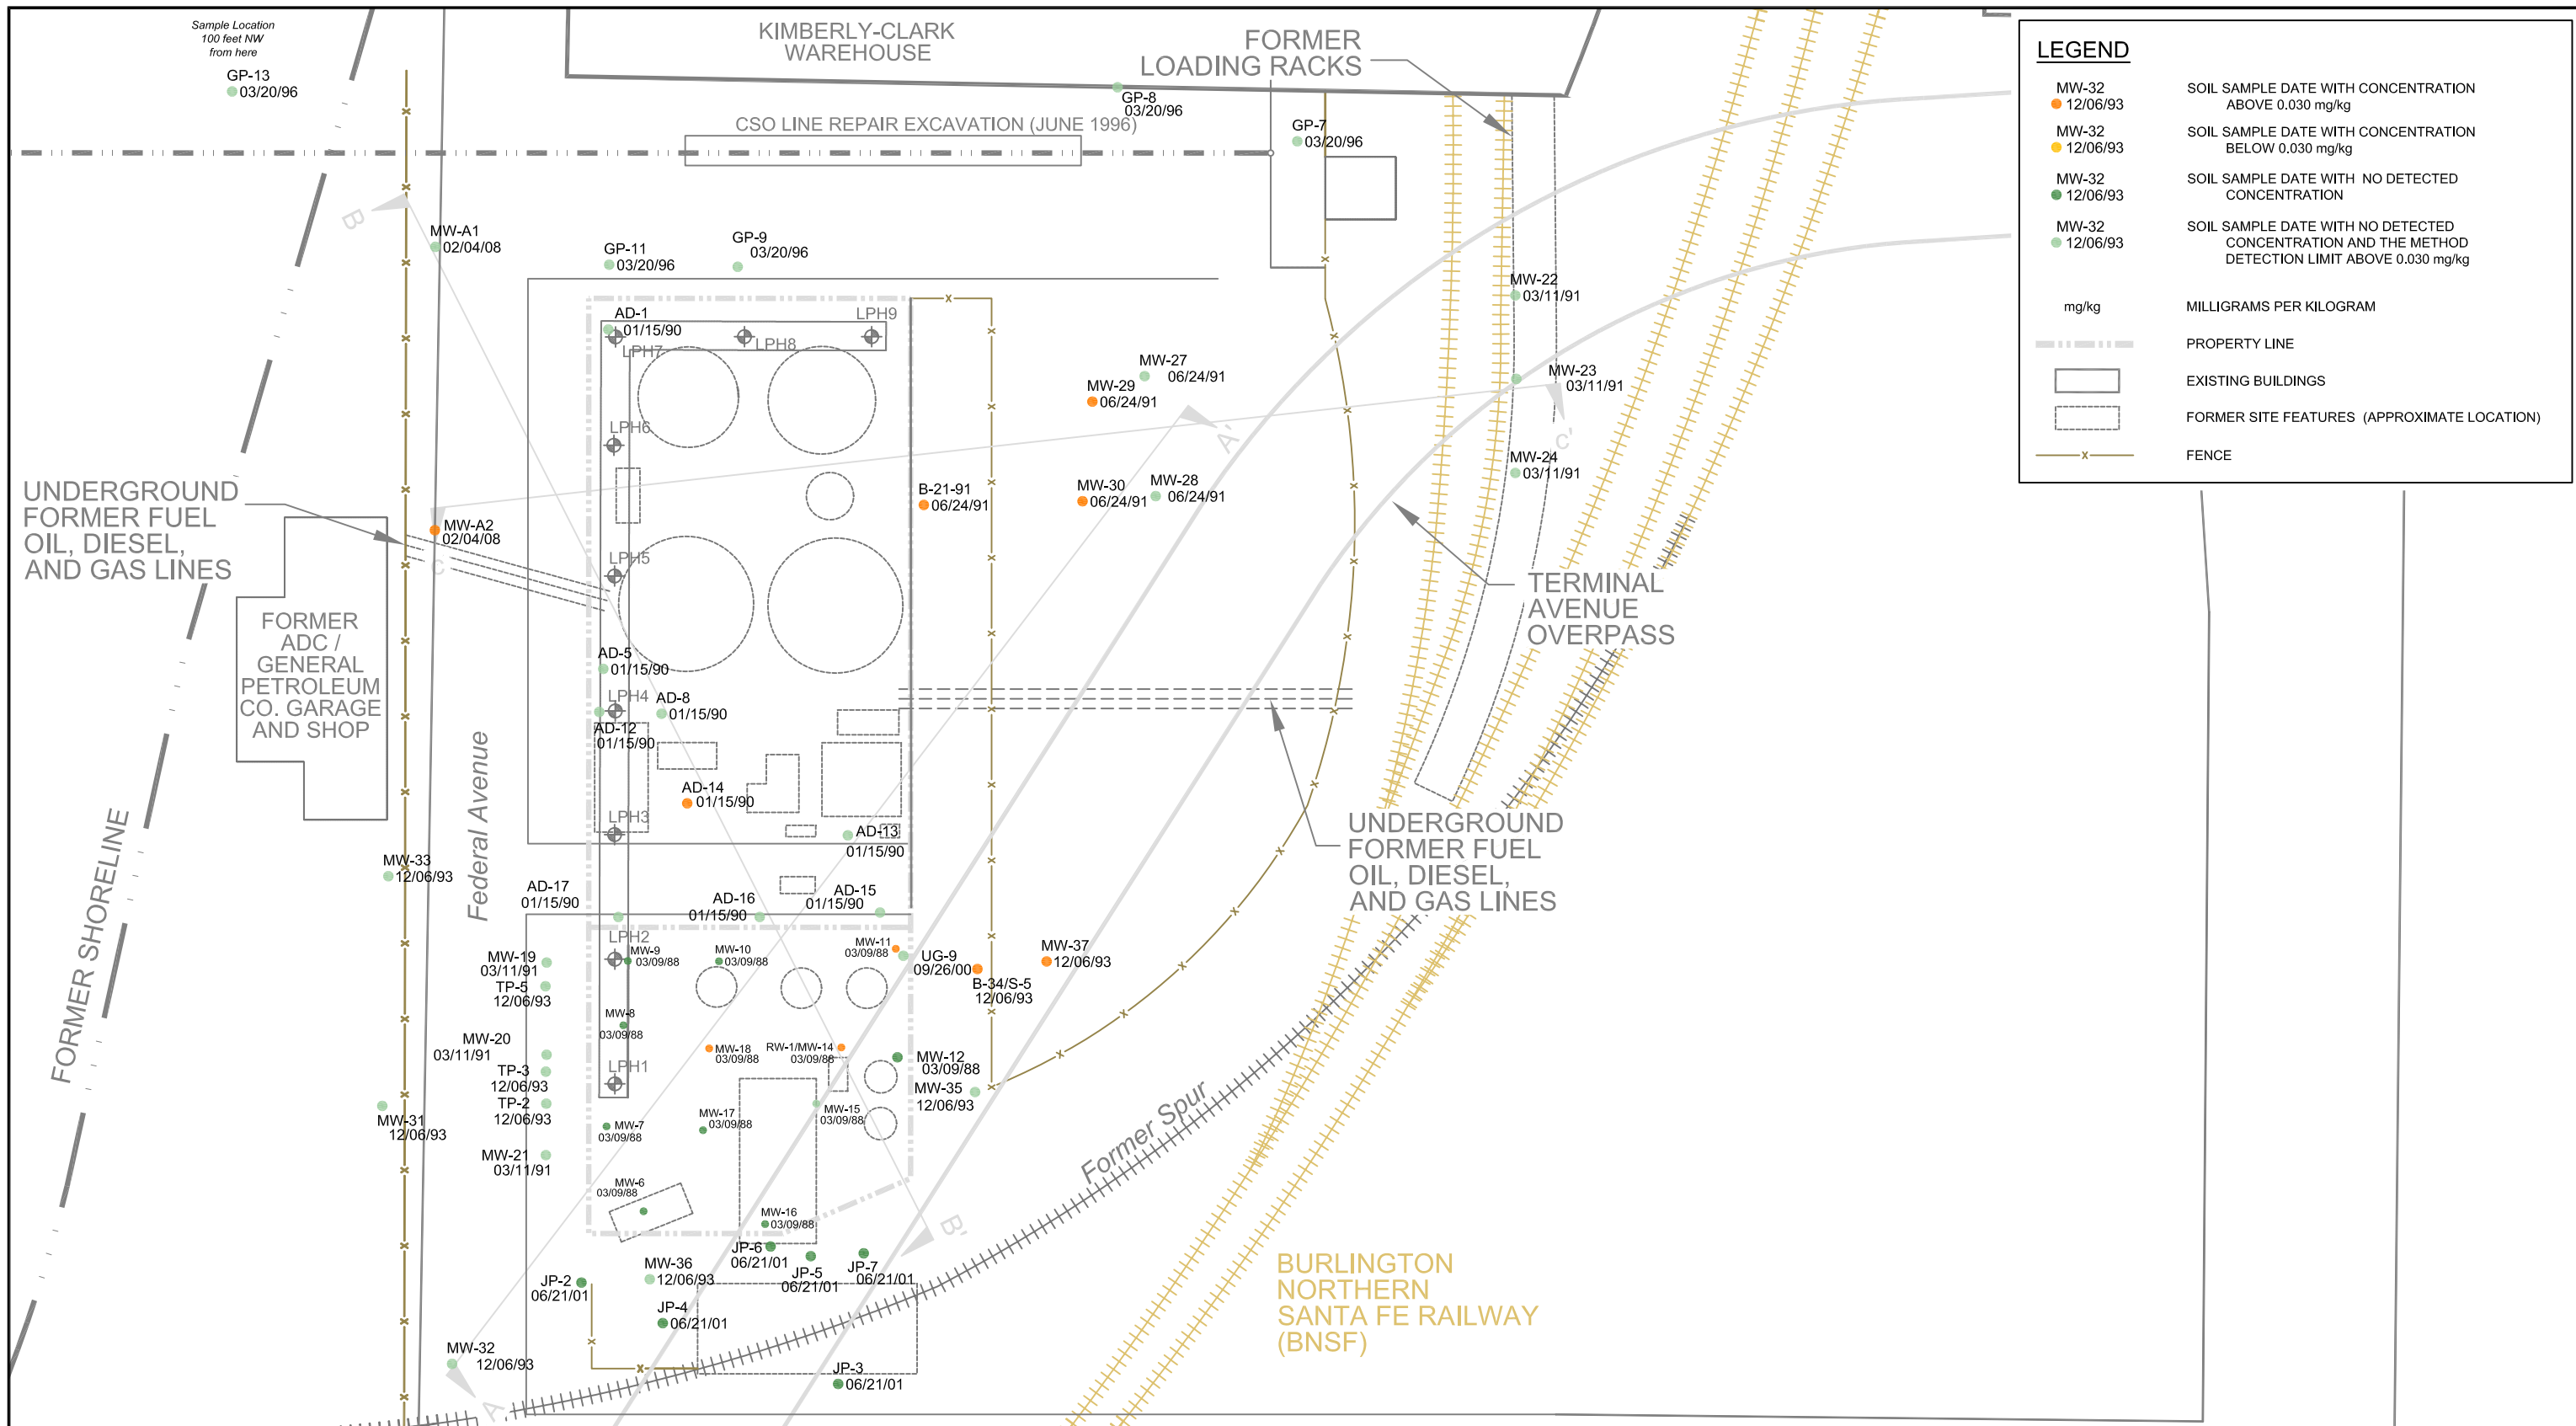

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
 CHK'D BY: AIS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE

**HORIZONTAL DISTRIBUTION
 OF BENZENE IN SOIL**

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.: 1
 FIGURE No. 30

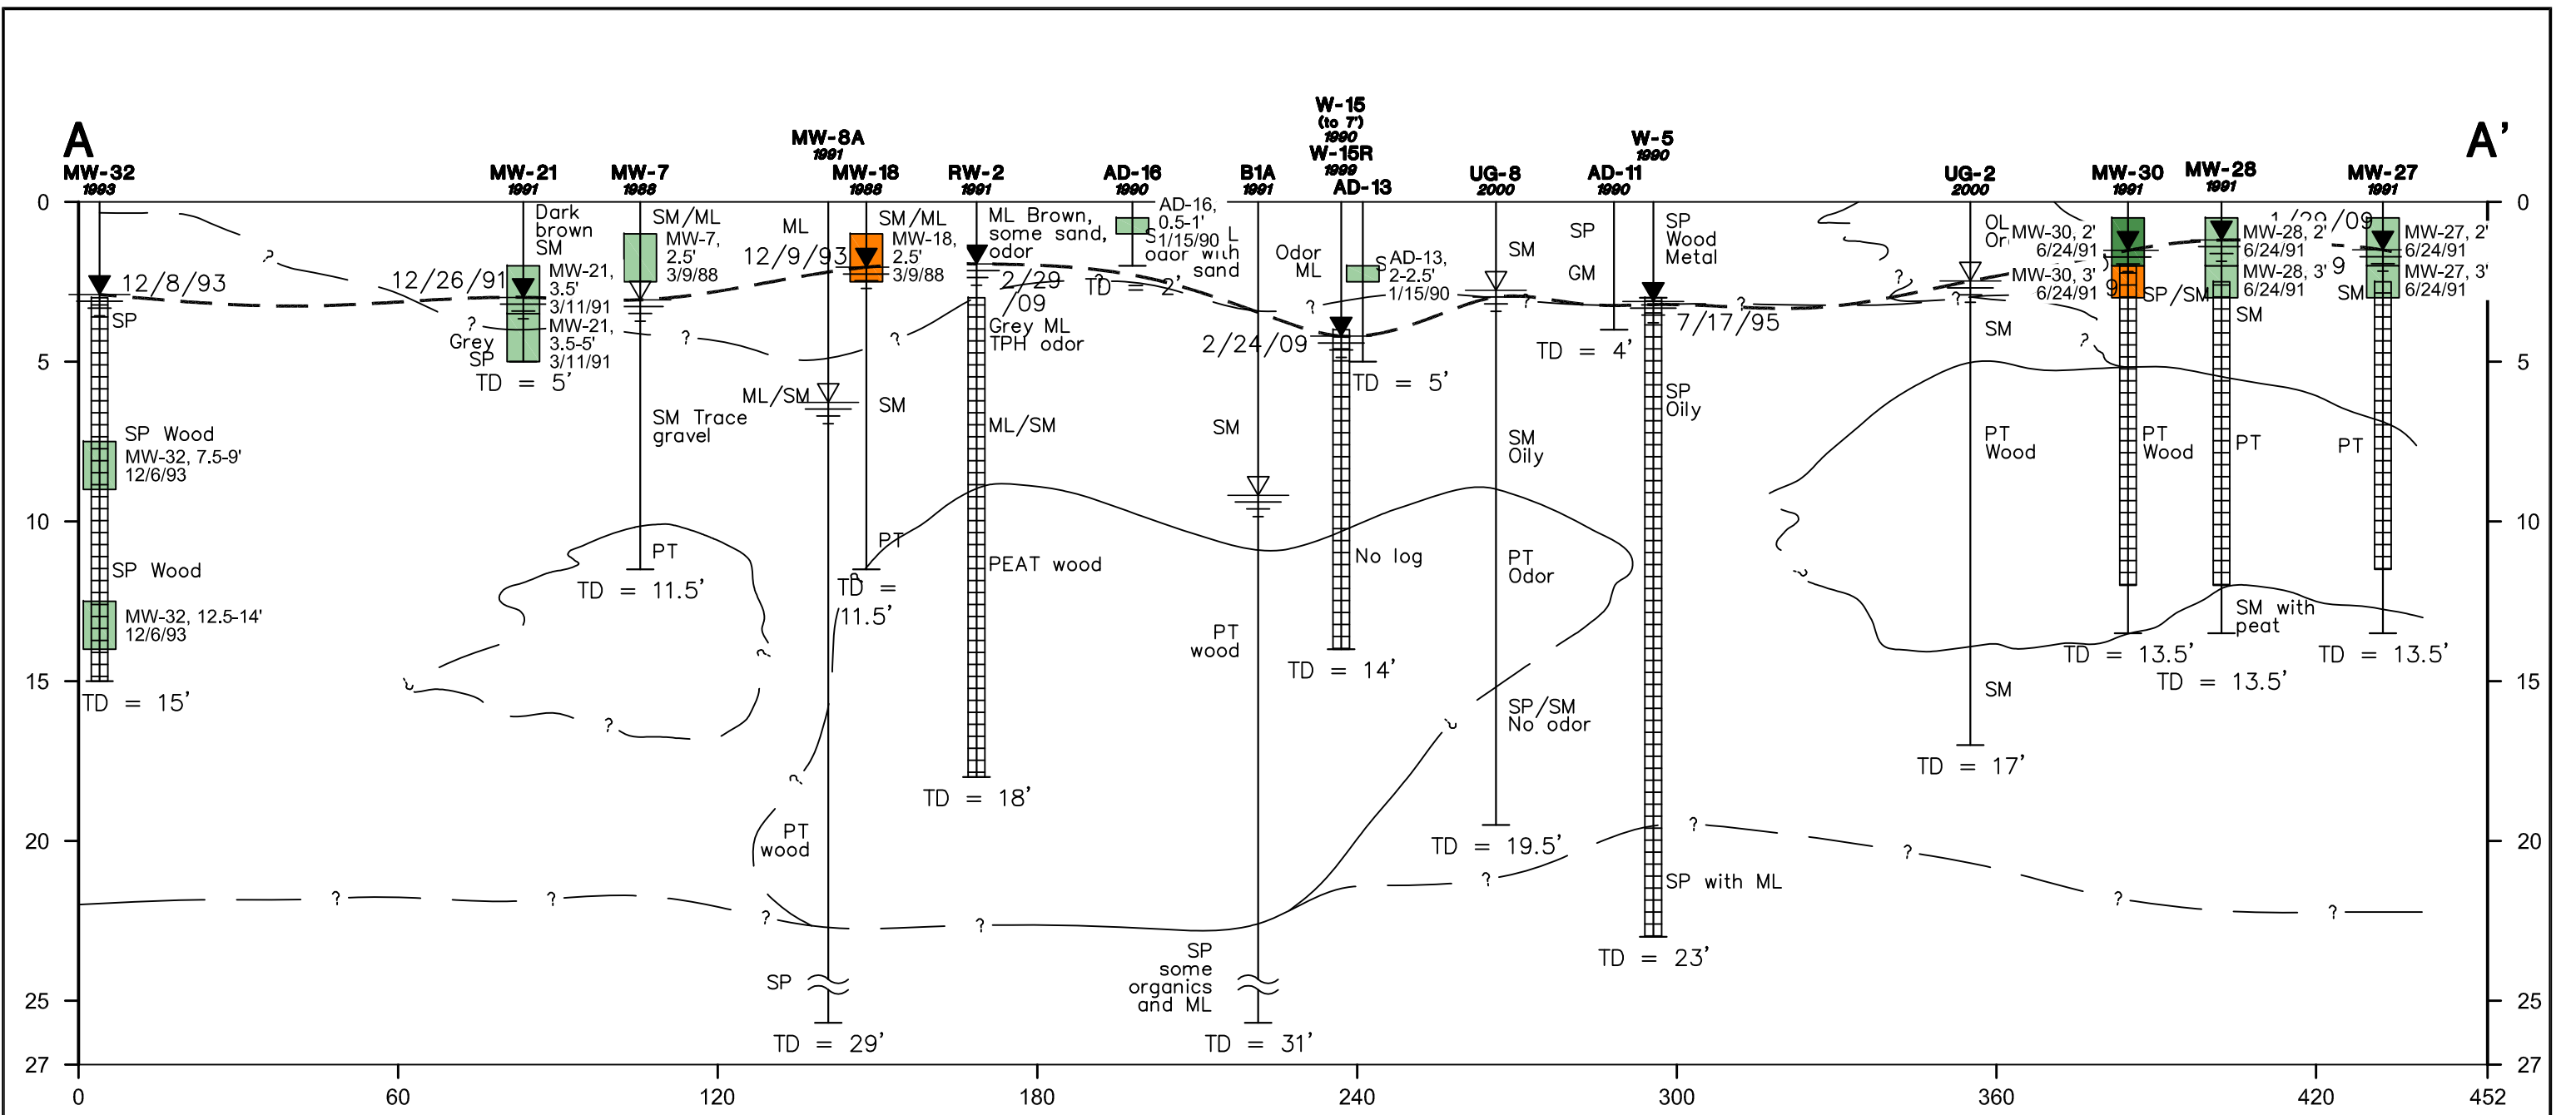

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-16 Boring number and year installed

MW-30 Well number and year installed

Screen interval

Benzene


- Detected ≥ 0.030 mg/kg
- Detected < 0.030 mg/kg
- Not detected
- Not detected, but detection limit above 0.030 mg/kg

mg/kg Milligram per kilogram

MW-27, 2' 6/24/91 Sample depth and date collected

TD = 2' Total depth in feet

TD = 15' Total depth in feet

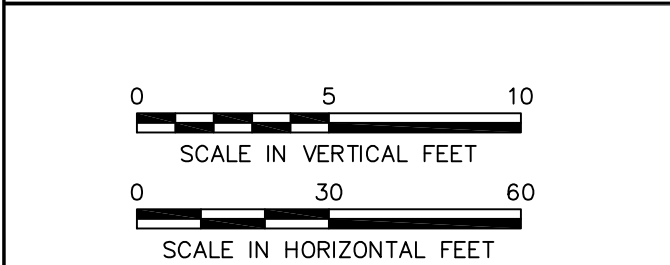

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF BENZENE IN SOIL CROSS SECTION A-A'

DATE: JUNE 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. **31**

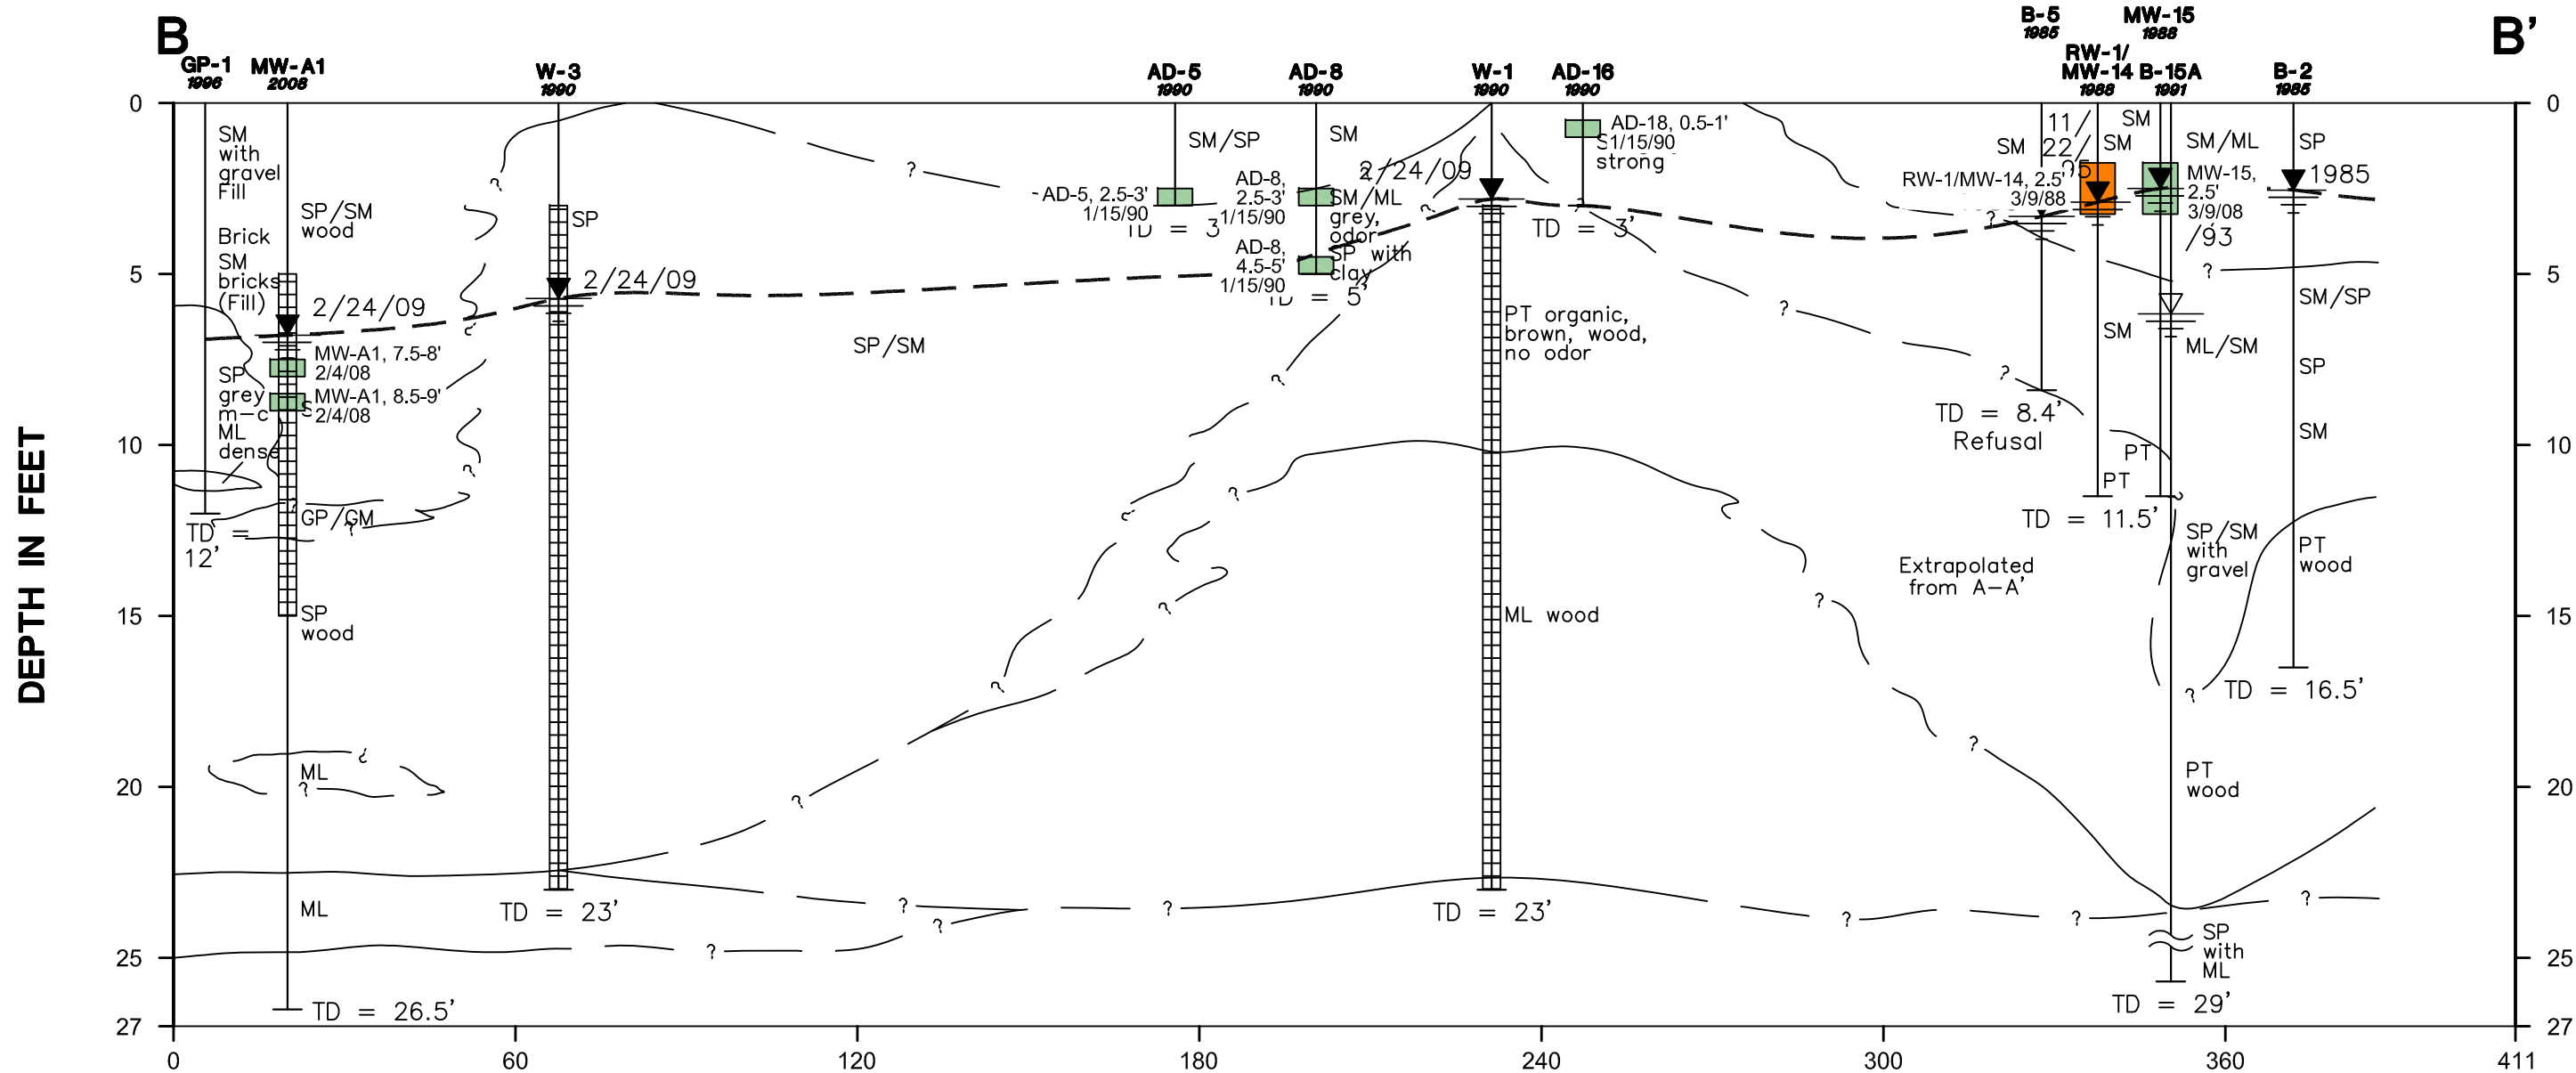

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-5 1990 Boring number and year installed TD = 3' Total depth in feet


MW-A1 2008 Well number and year installed Screen interval TD = 23' Total depth in feet

Benzene

- Detected ≥ 0.030 mg/kg
- Detected < 0.030 mg/kg
- Not detected
- Not detected, but detection limit above 0.030 mg/kg

mg/kg Milligram per kilogram

MW-15, 2.5' 3/9/08 Sample depth and date collected



CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF BENZENE IN SOIL CROSS SECTION B-B'

DATE: JUNE 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. 32

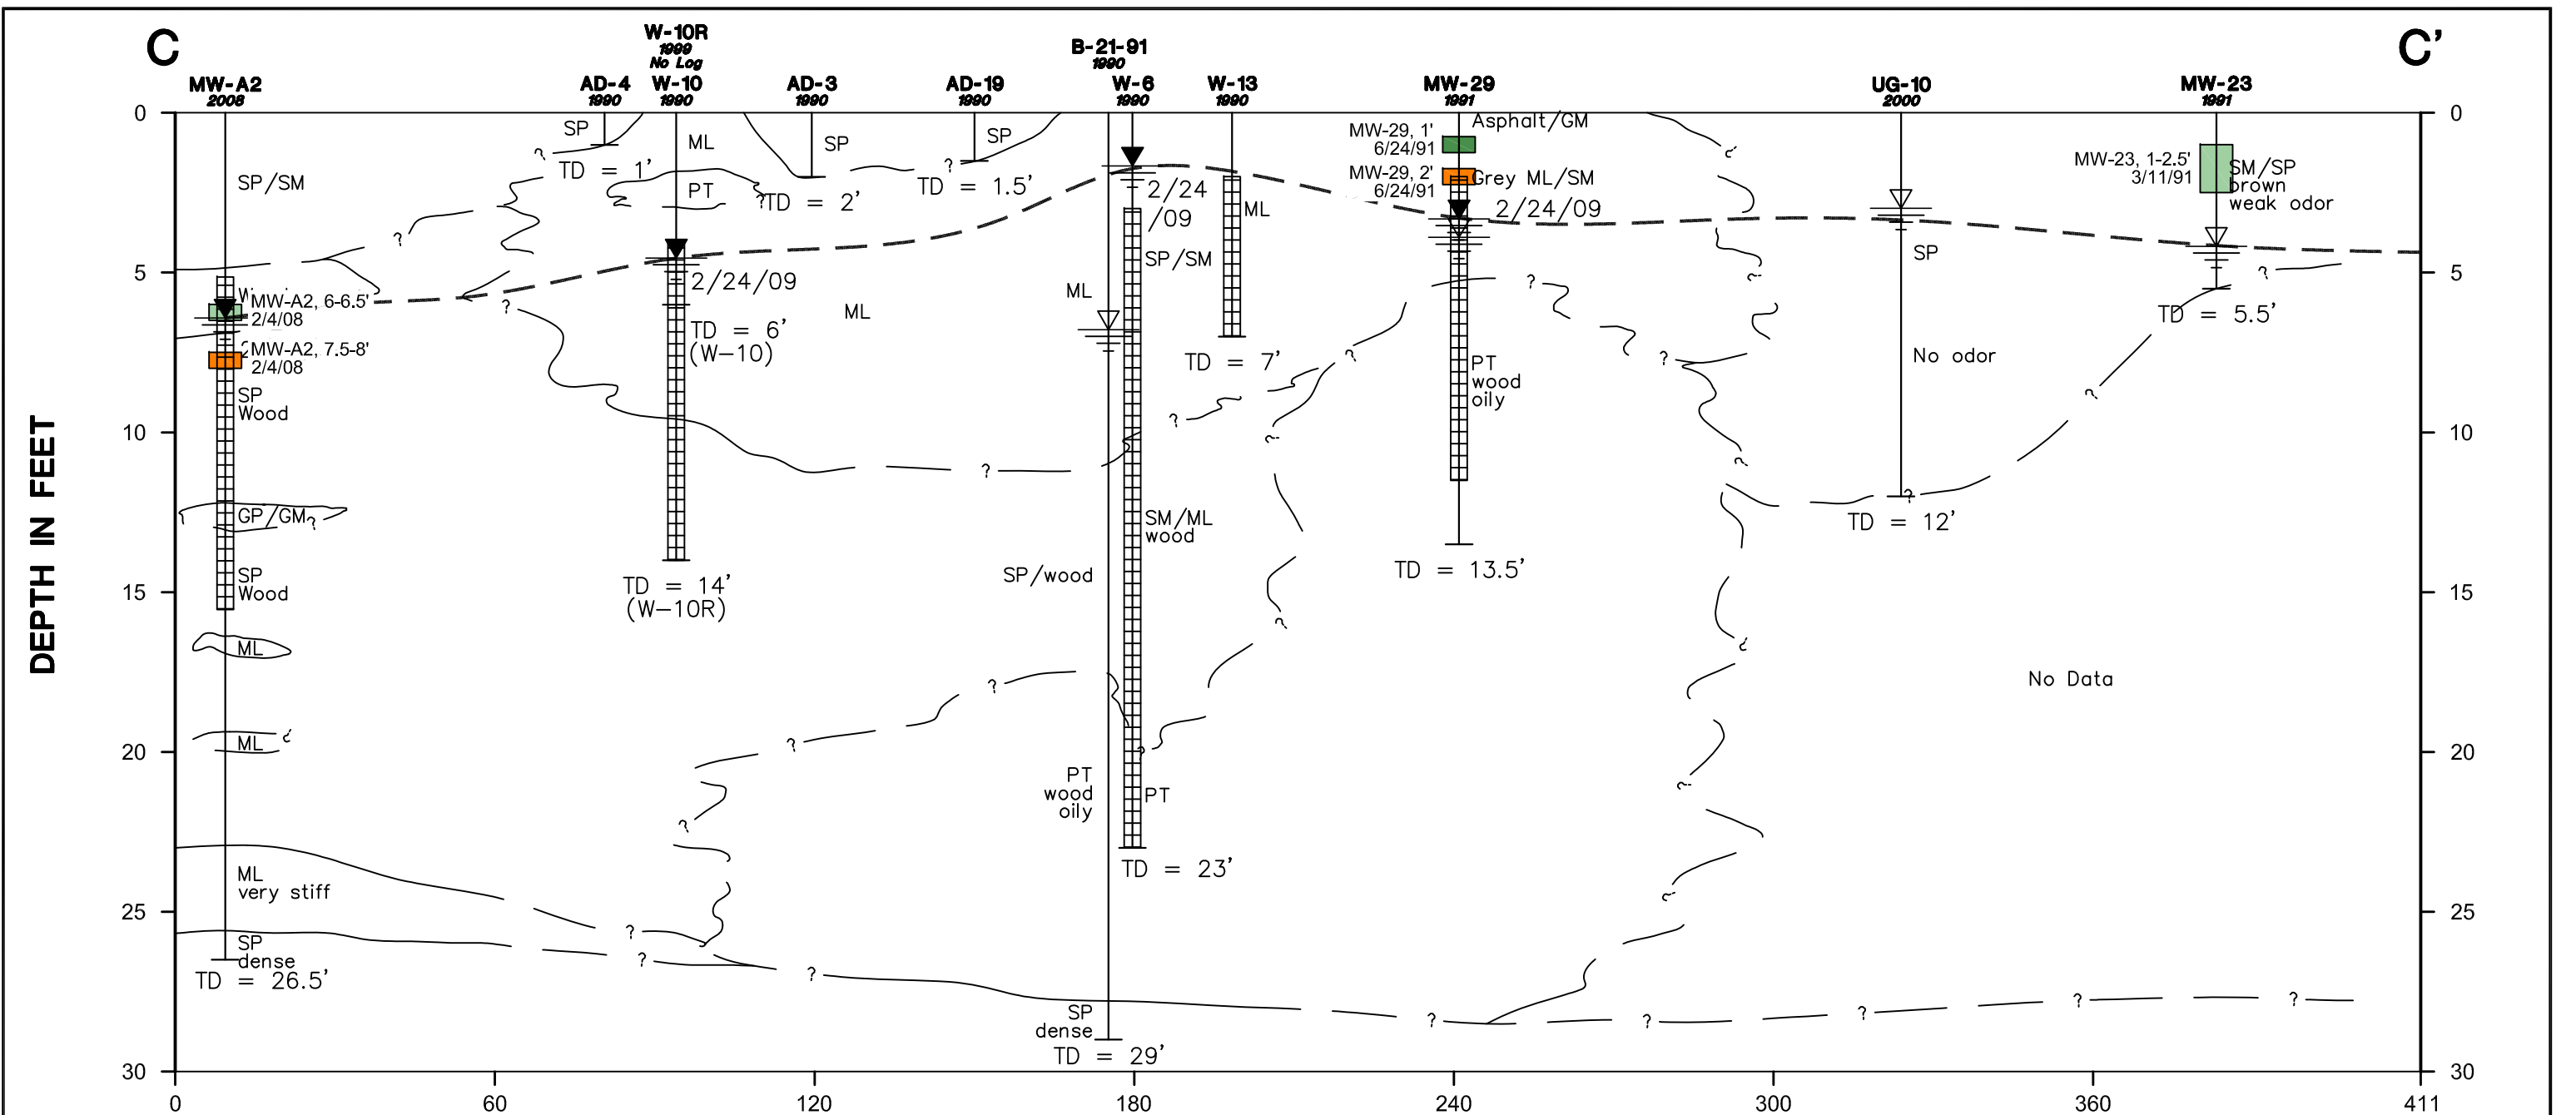

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-4 1990 Boring number and year installed

MW-A2 2008 Well number and year installed

Screen interval

TD = 1' Total depth in feet

TD = 26' Total depth in feet


Benzene

- Detected ≥ 0.030 mg/kg
- Detected < 0.030 mg/kg
- Not detected
- Not detected, but detection limit above 0.030 mg/kg

mg/kg Milligram per kilogram

MW-23, 1-2.5' 3/11/91 Sample depth and date collected

| | | | | | |
|--|---|---------|------------------|---|---------------------------|
| <p>SCALE IN VERTICAL FEET</p> <p>SCALE IN HORIZONTAL FEET</p> | CLIENT LOGO | CLIENT: | DWN BY: JRS | PROJECT | DATE: JUNE 2009 |
| | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | | CHK'D BY: AS | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | PROJECT NO: 9-915-15716-C |
| AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | | | DATUM: NONE | TITLE | REV. NO.: |
| | | | PROJECTION: NONE | VERTICAL DISTRIBUTION OF BENZENE IN SOIL CROSS SECTION C-C' | FIGURE No. 33 |
| | | | SCALE: AS SHOWN | | |

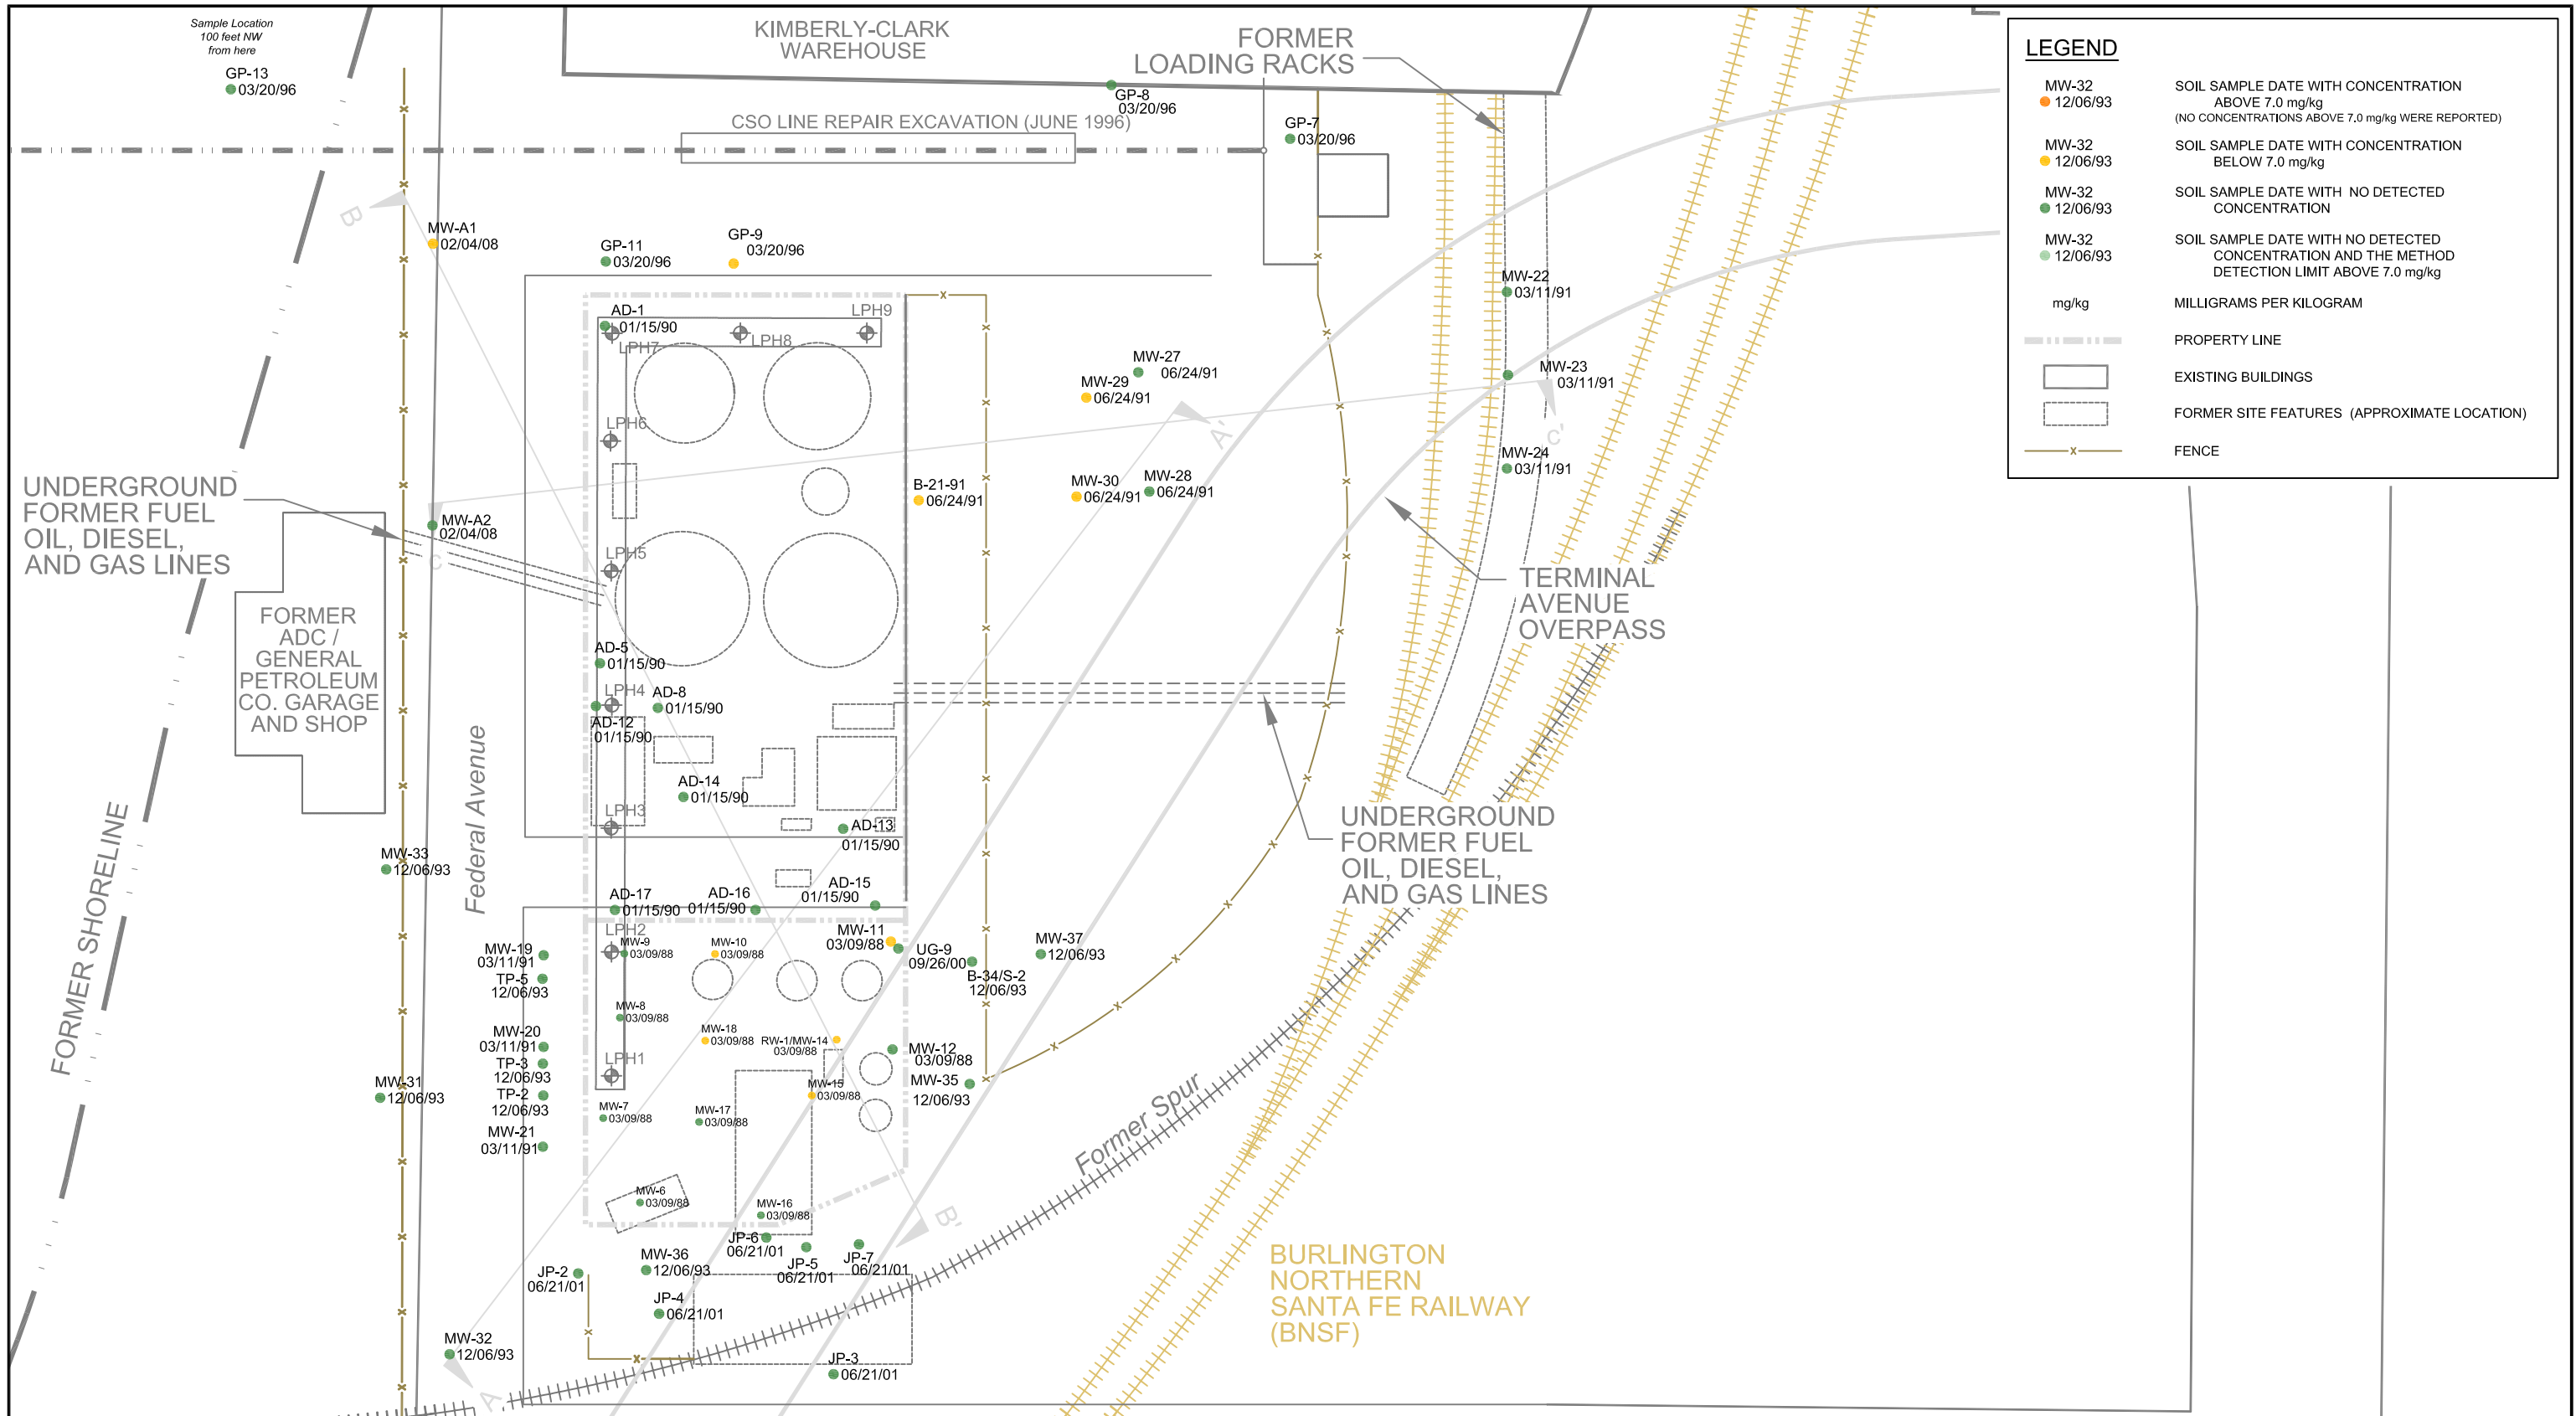

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
 CHK'D BY: AIS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE

**HORIZONTAL DISTRIBUTION
 OF TOLUENE IN SOIL**

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.: 1
 FIGURE No. 34

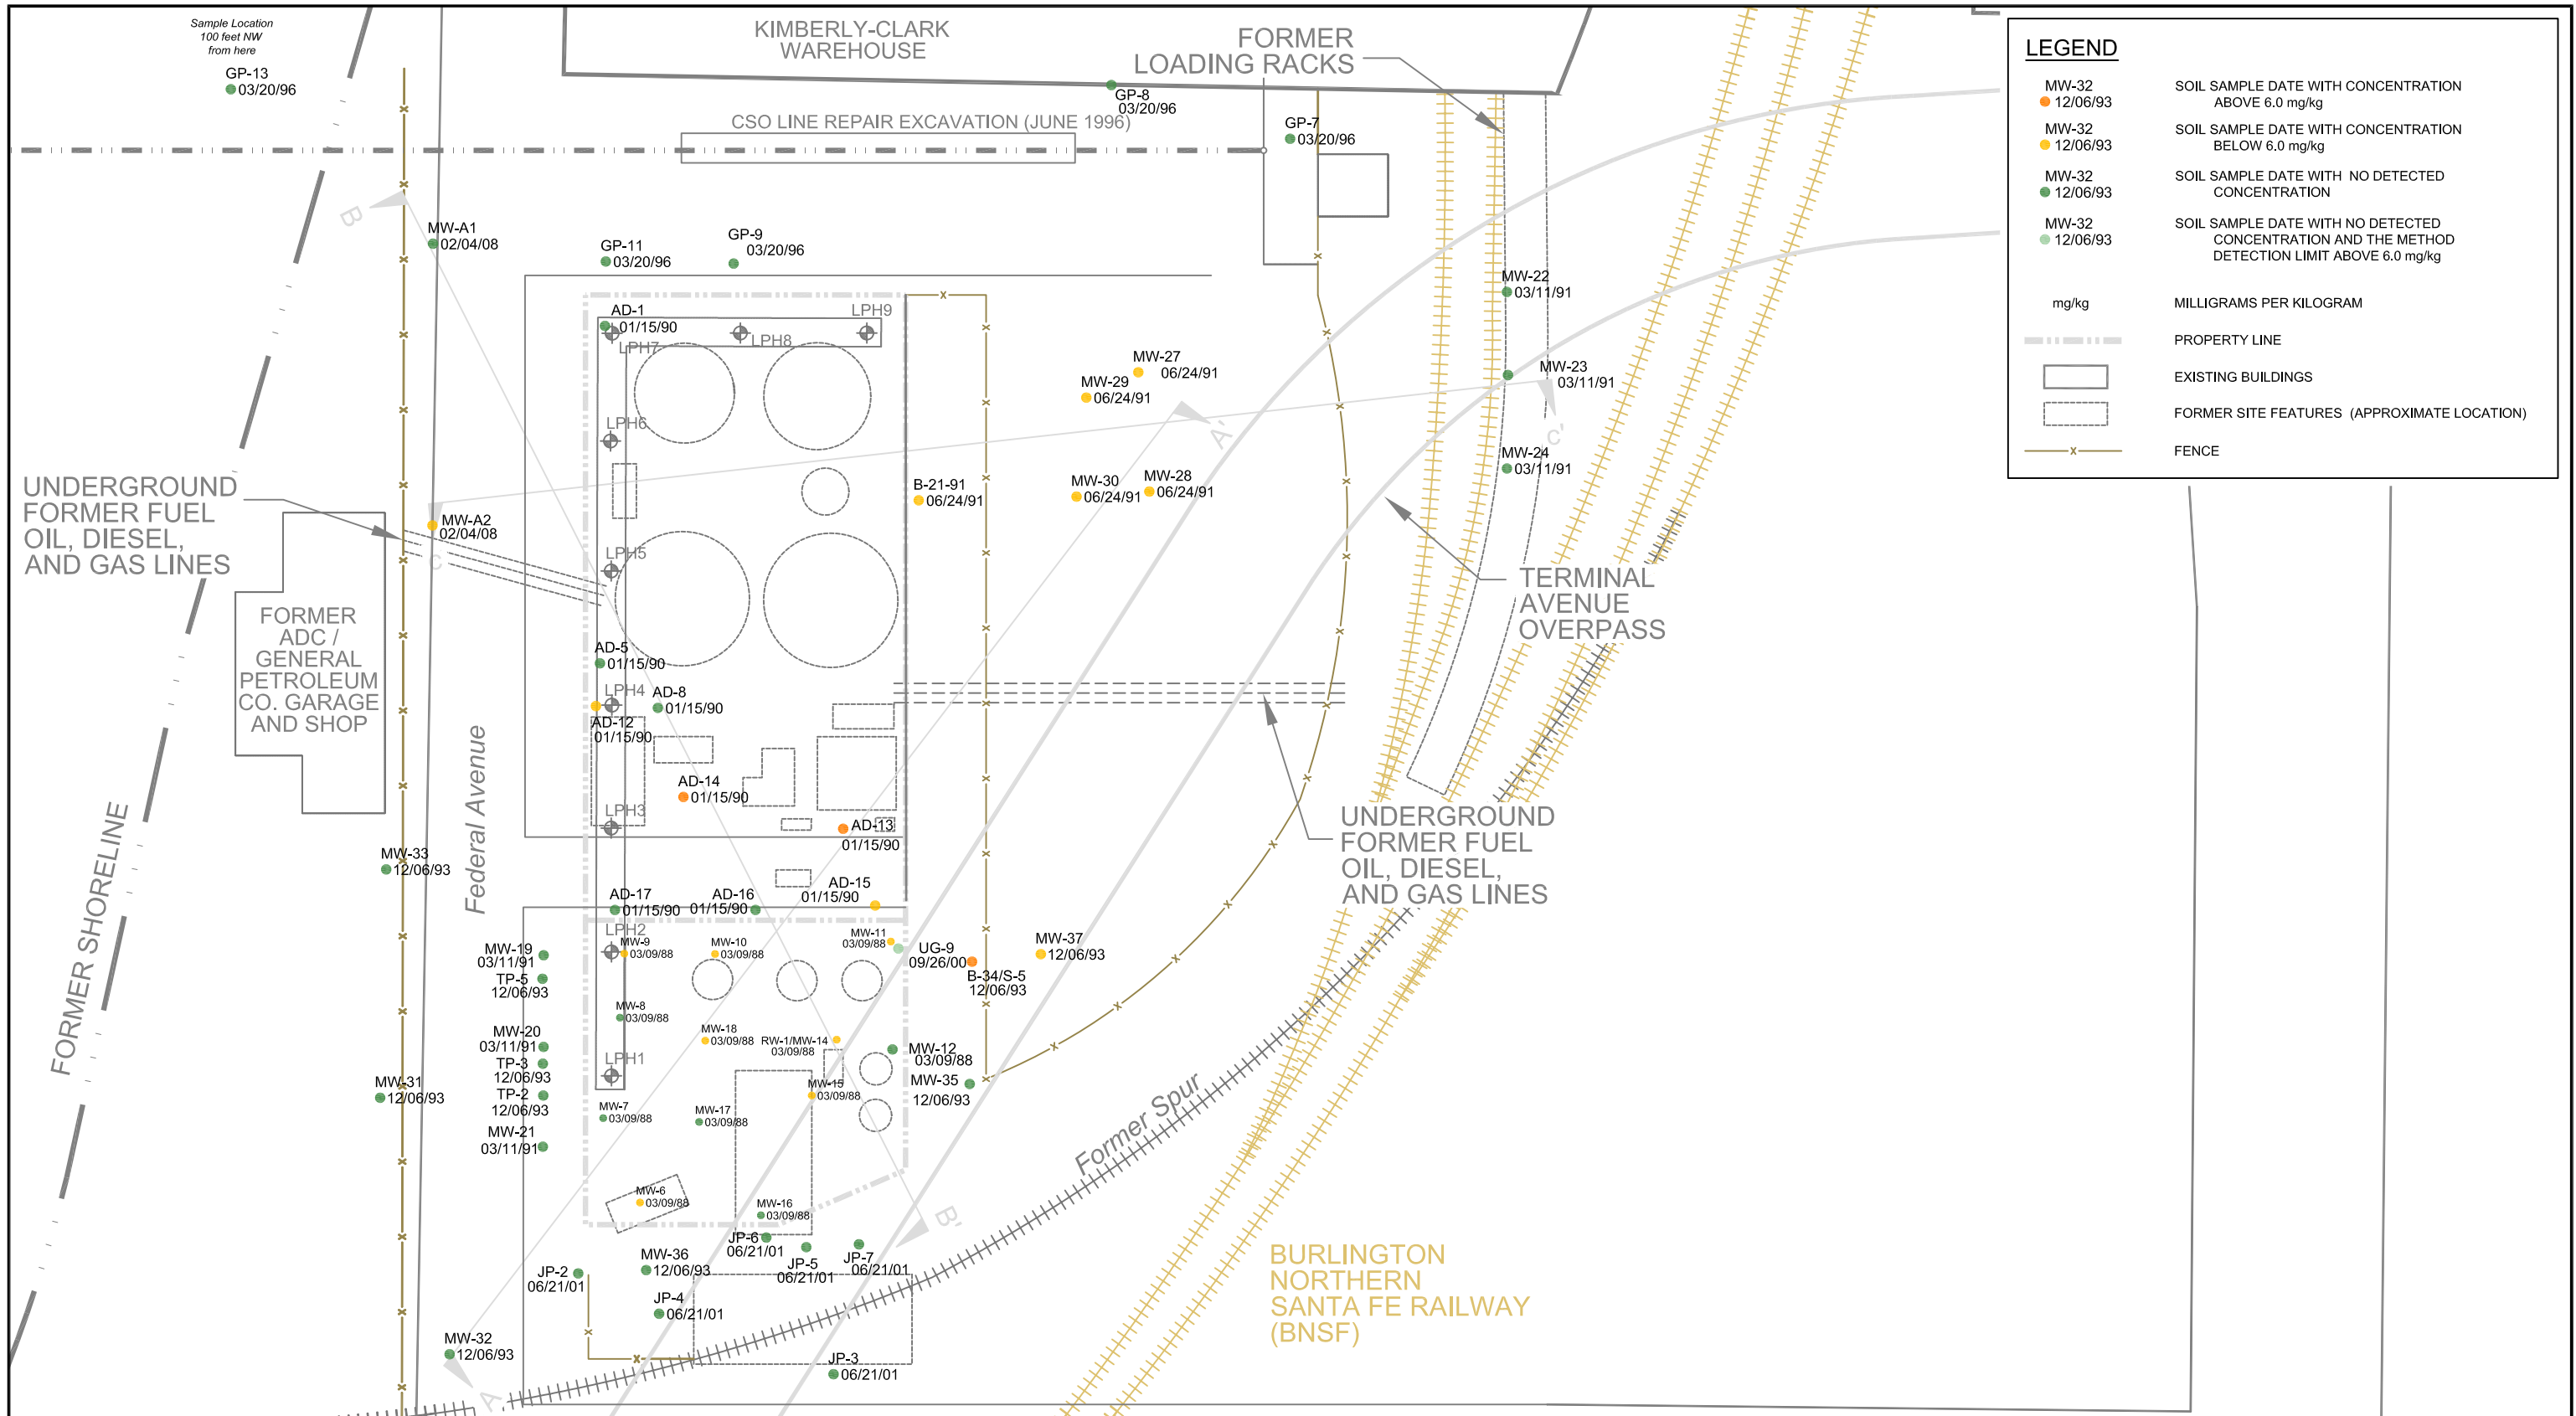

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
 CHK'D BY: AIS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE


**HORIZONTAL DISTRIBUTION
 OF ETHYLBENZENE IN SOIL**

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.: 1
 FIGURE No. 35

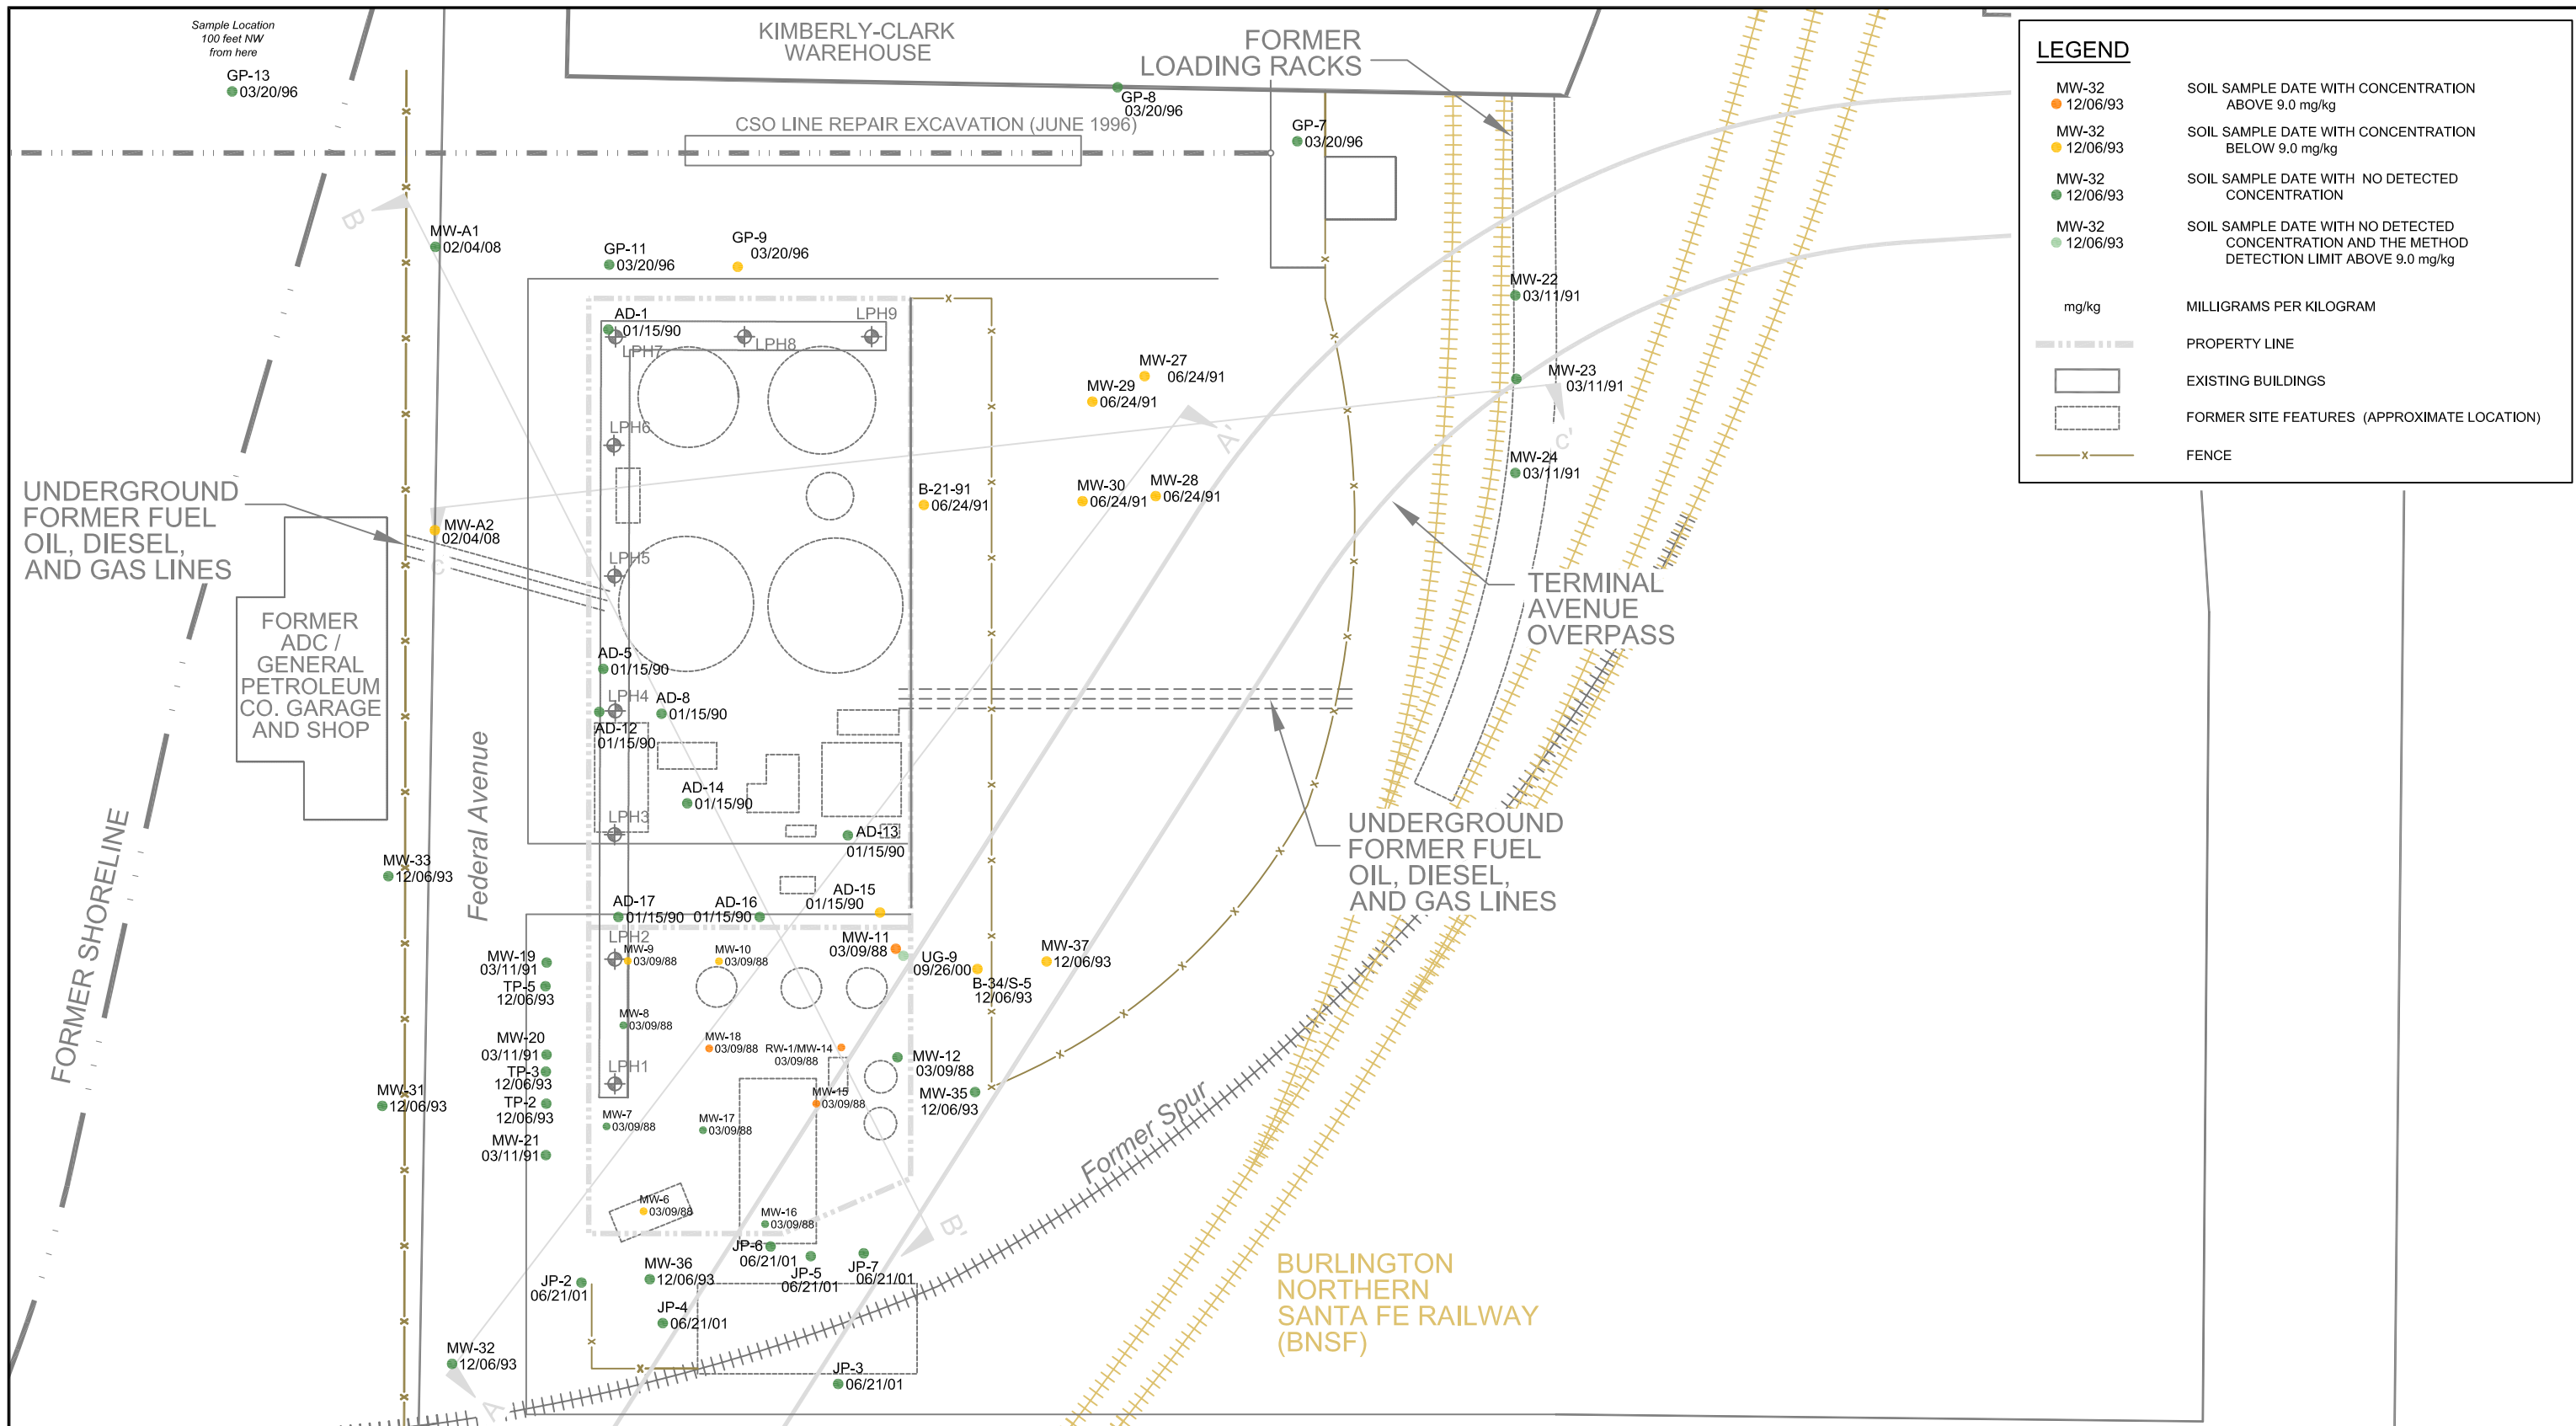

| LEGEND | |
|---------------------|--|
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION ABOVE 9.0 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION BELOW 9.0 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH NO DETECTED CONCENTRATION AND THE METHOD DETECTION LIMIT ABOVE 9.0 mg/kg |
| mg/kg | MILLIGRAMS PER KILOGRAM |
| --- | PROPERTY LINE |
| [Solid Line] | EXISTING BUILDINGS |
| [Dashed Line] | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| -x- | FENCE |

| | | | | | |
|---|-----------------|---|--|--|--|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc. SCALE IN FEET | CLIENT LOGO | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | DWN BY: JRS / BRJ CHK'D BY: AIS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C REV. NO.: 1 FIGURE No. 36 |
| | | AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | TITLE HORIZONTAL DISTRIBUTION OF TOTAL XYLENE IN SOIL | | |

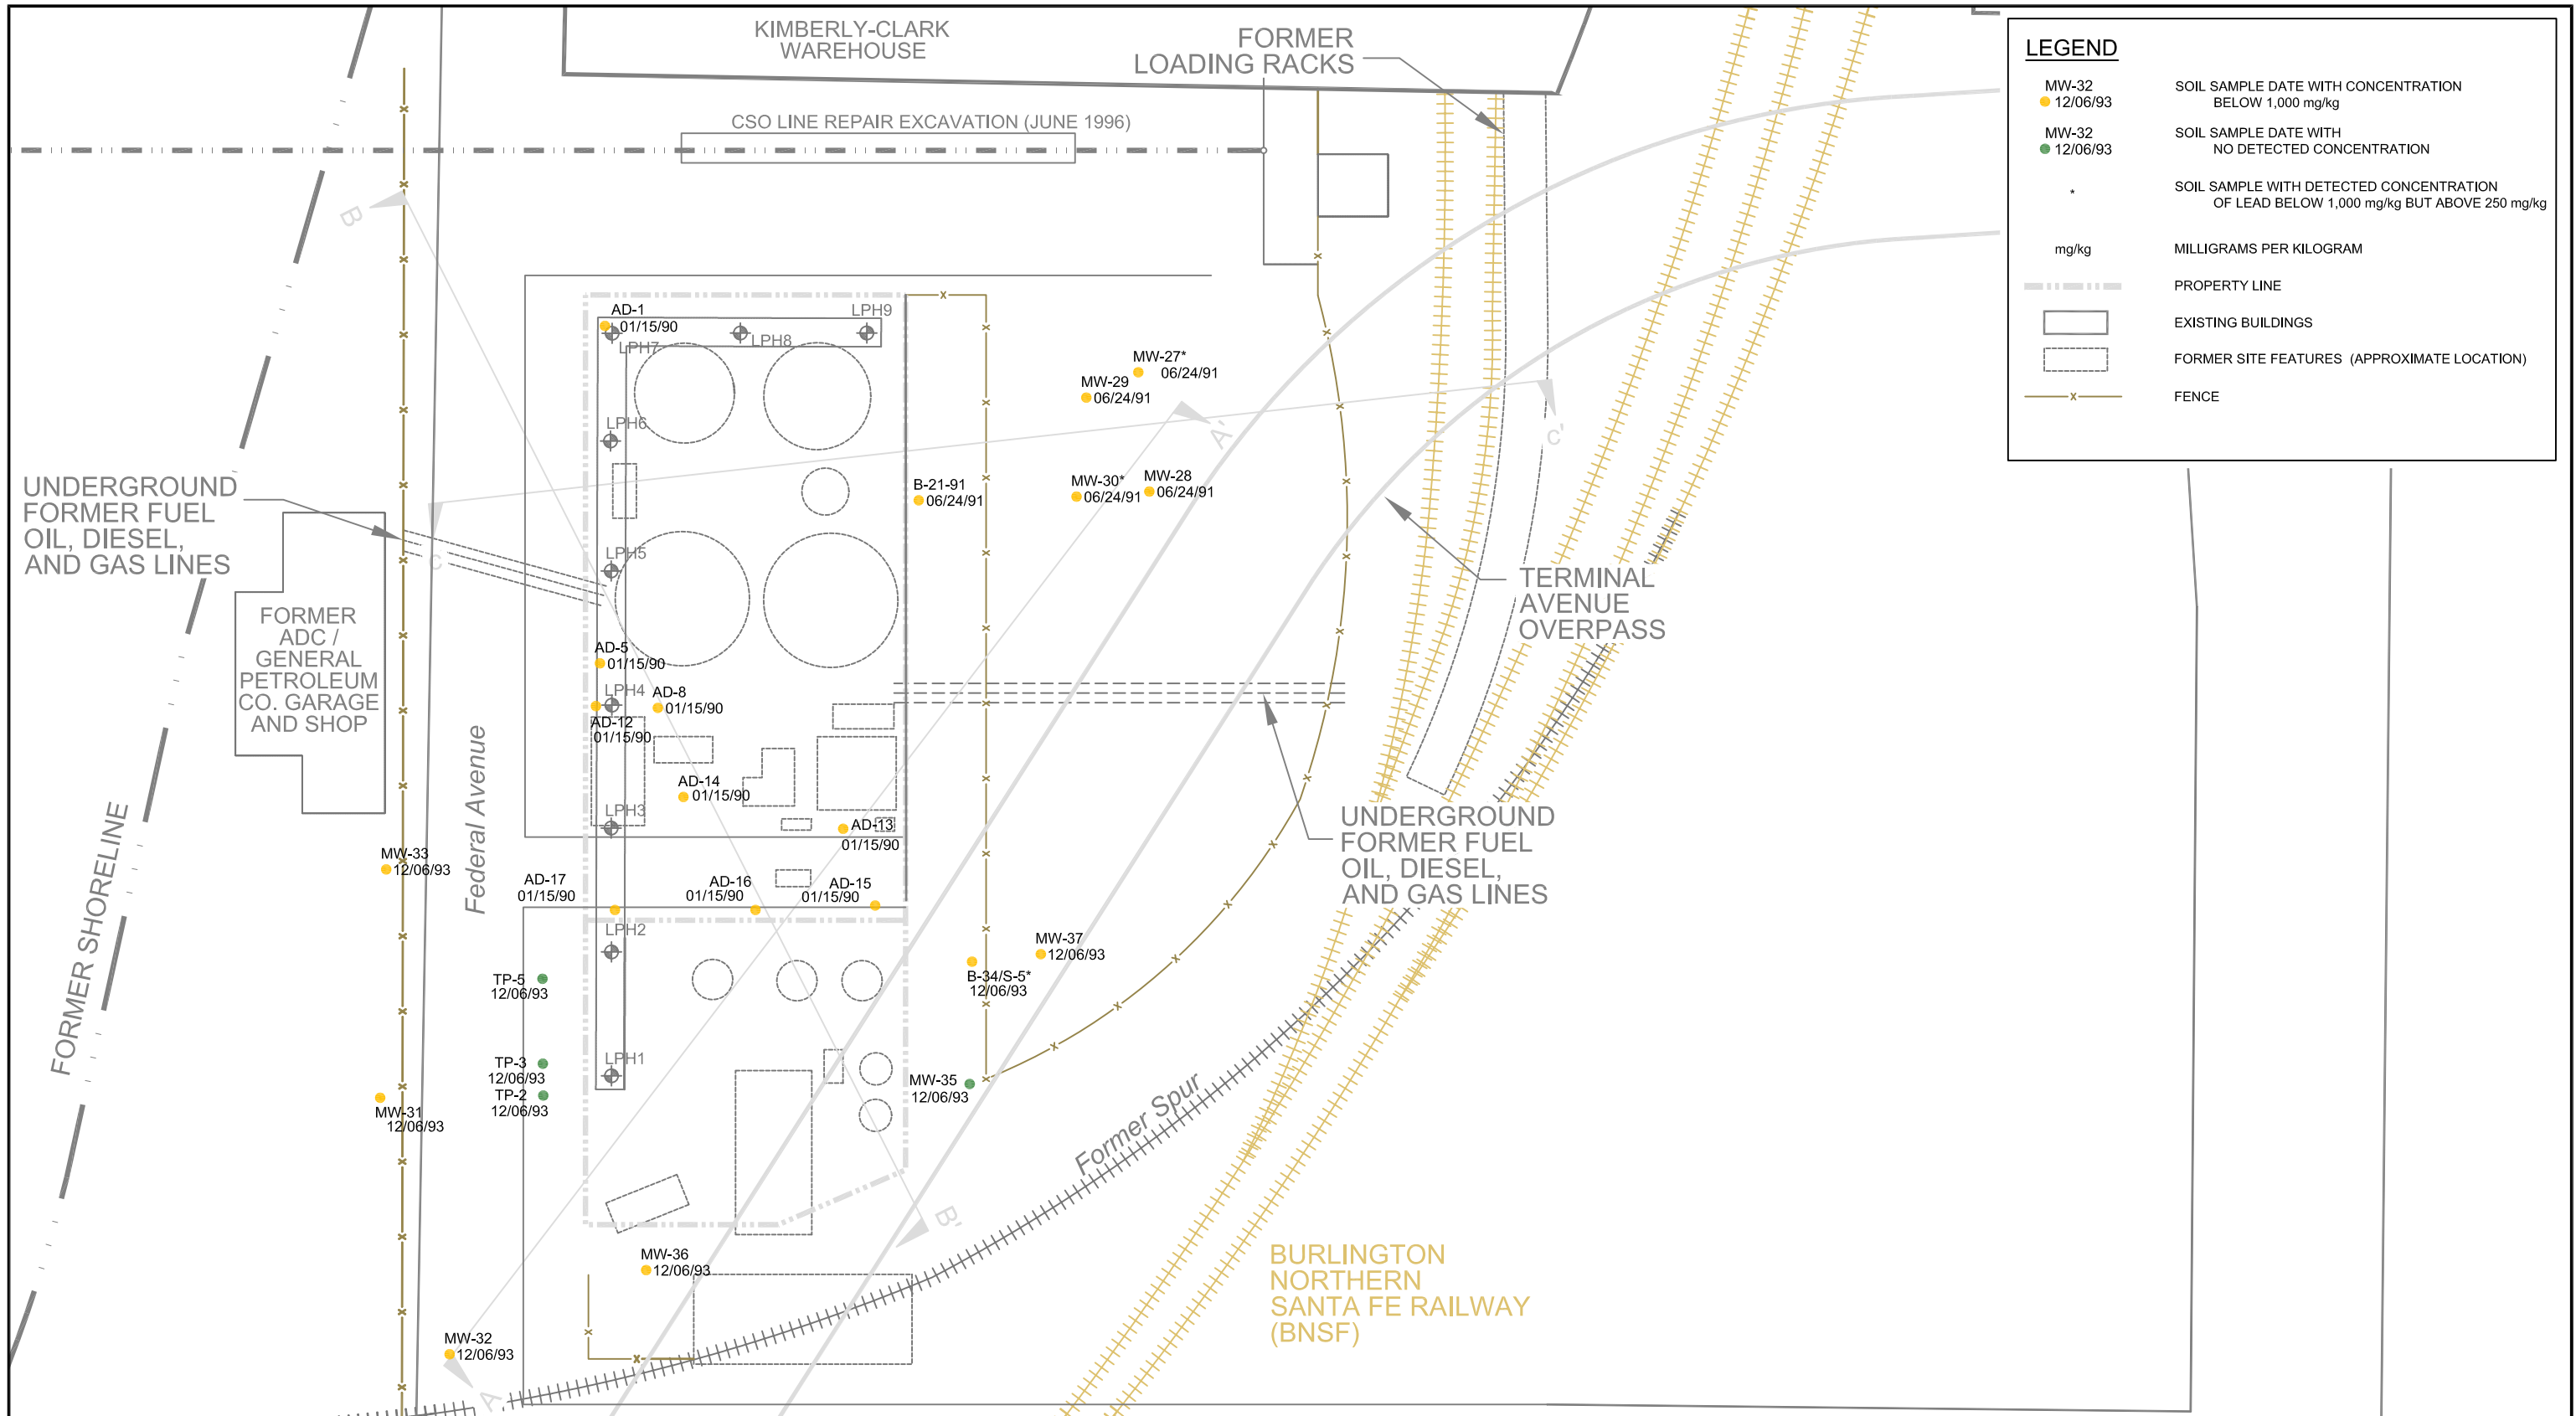

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

| | |
|-------------|-----------|
| DWN BY: | JRS / BRJ |
| CHK'D BY: | AMS |
| DATUM: | NONE |
| PROJECTION: | NONE |
| SCALE: | 1" = 60' |


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE

**HORIZONTAL DISTRIBUTION
 OF LEAD IN SOIL**

| | |
|--------------|---------------|
| DATE: | AUGUST 2009 |
| PROJECT NO.: | 9-915-15716-C |
| REV. NO.: | 1 |
| FIGURE No. | 37 |

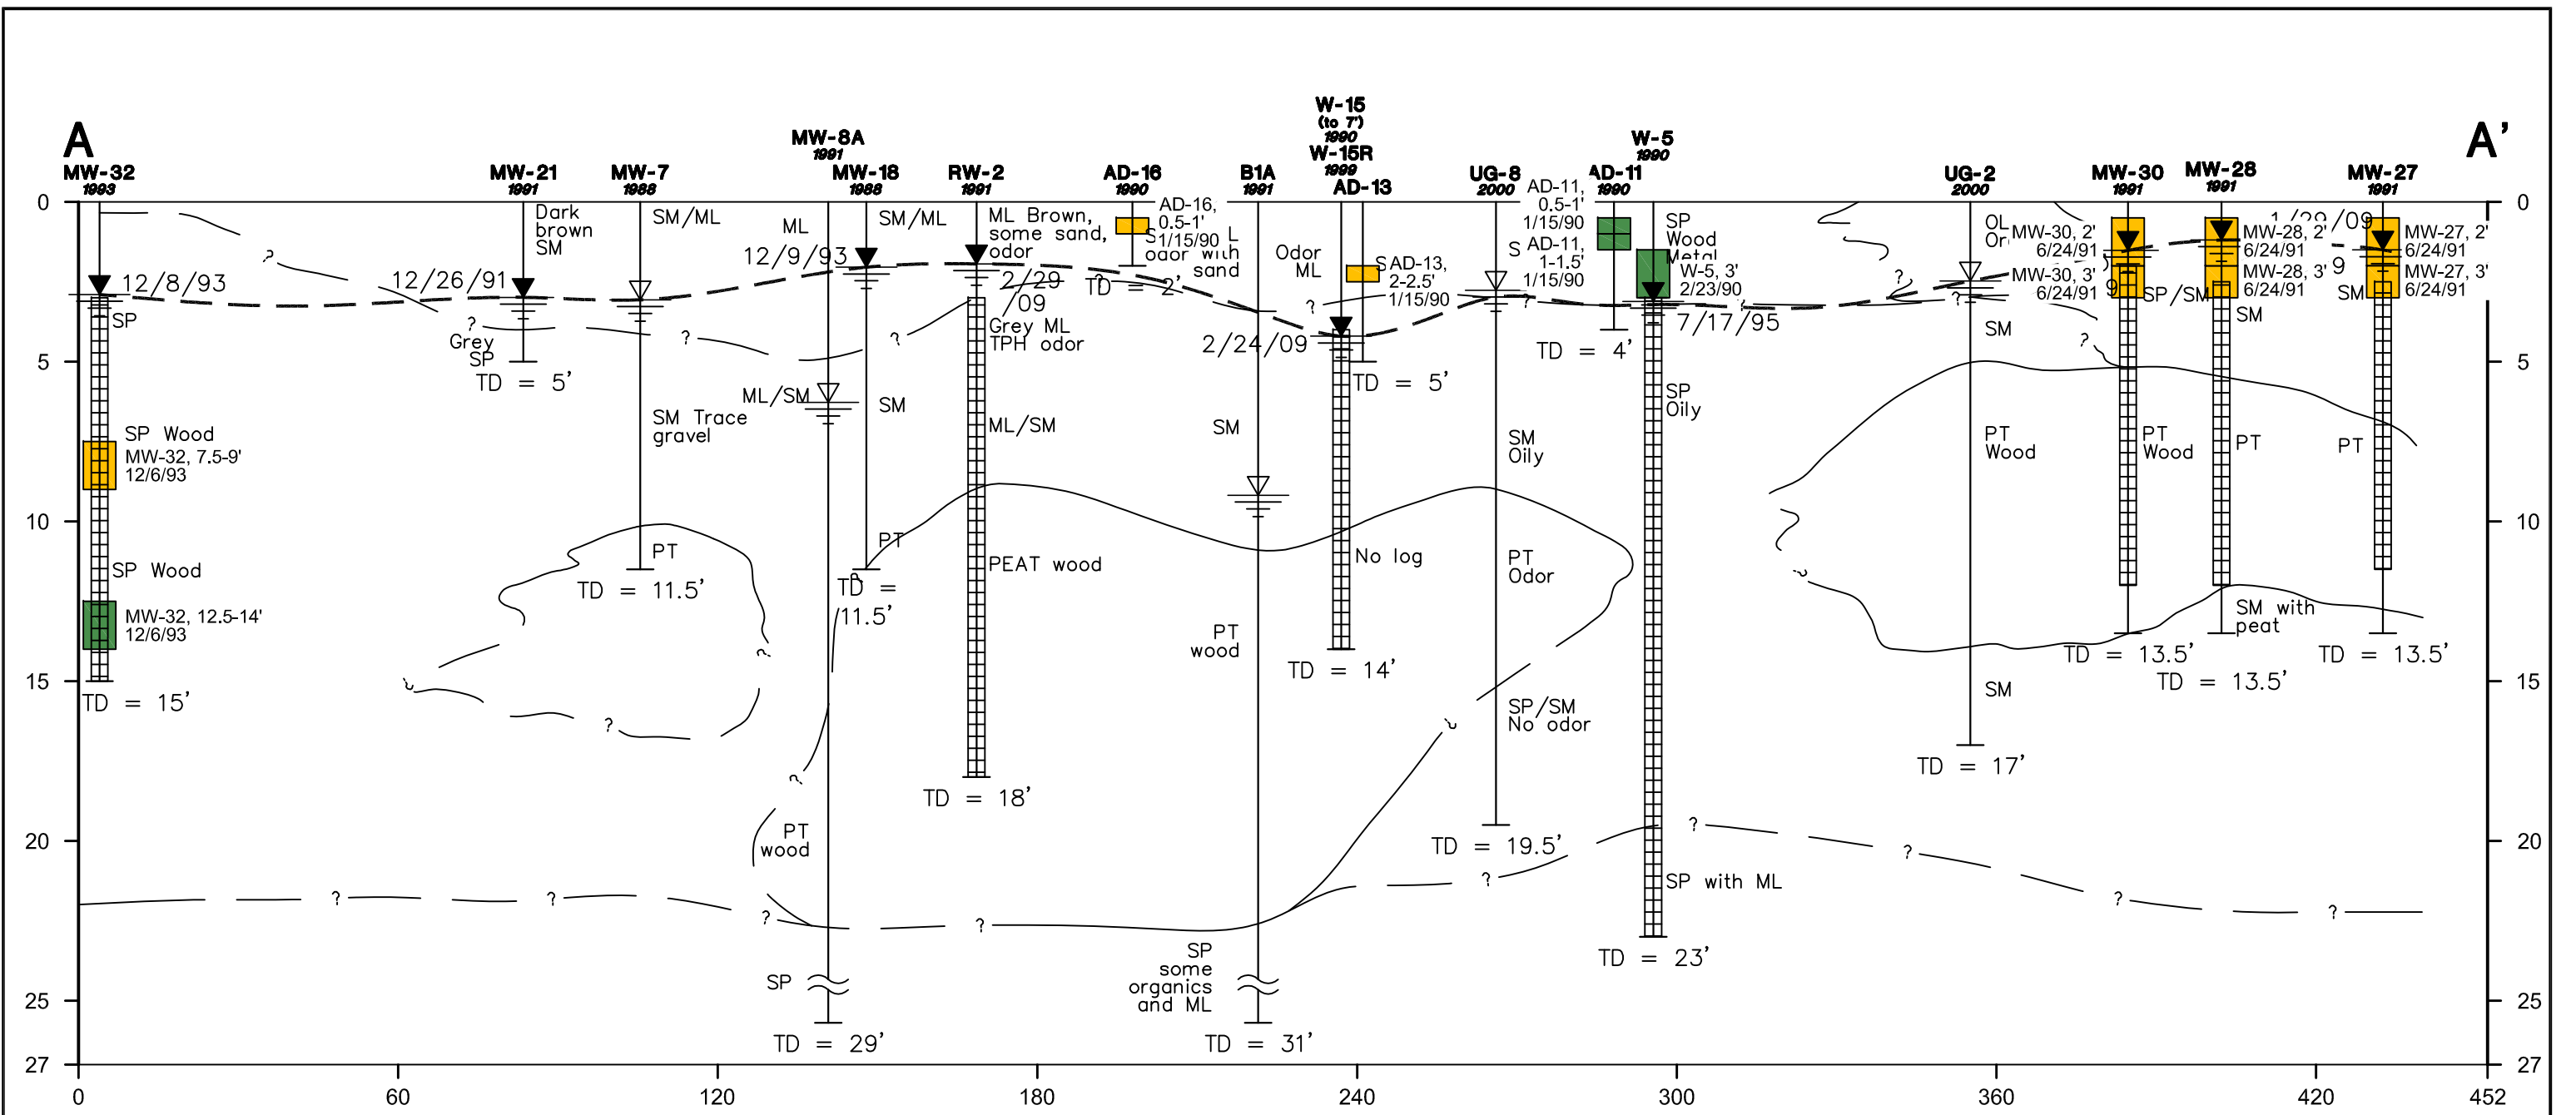

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-16 Boring number and year installed

MW-30 Well number and year installed

Screen interval

TD = 2' Total depth in feet

TD = 15' Total depth in feet


Lead

- Detected $\geq 1,000$ mg/kg
- Detected $< 1,000$ mg/kg
- Not detected

mg/kg Milligram per kilogram

MW-28, 2' 6/24/91 Sample depth and date collected

| | | | | | | |
|---|--------------------|---|--|-------------------------|---|---|
| <p>SCALE IN VERTICAL FEET</p> <p>SCALE IN HORIZONTAL FEET</p> | <p>CLIENT LOGO</p> | <p>CLIENT:</p> <p style="text-align: center;">EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY</p> | | <p>DWN BY: JRS</p> | <p>PROJECT</p> <p style="text-align: center;">EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728</p> | <p>DATE:</p> <p style="text-align: center;">AUGUST 2009</p> |
| | | <p>AMEC Earth & Environmental</p> <p>11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201</p> | | <p>CHK'D BY: AS</p> | | <p>PROJECT NO:</p> <p style="text-align: center;">9-915-15716-C</p> |
| | | | | <p>DATUM: NONE</p> | <p>TITLE</p> <p style="text-align: center;">VERTICAL DISTRIBUTION OF LEAD IN SOIL CROSS SECTION A-A'</p> | <p>REV. NO.:</p> |
| | | | | <p>PROJECTION: NONE</p> | | <p>FIGURE No.</p> <p style="text-align: center;">38</p> |
| | | | | <p>SCALE: AS SHOWN</p> | | |

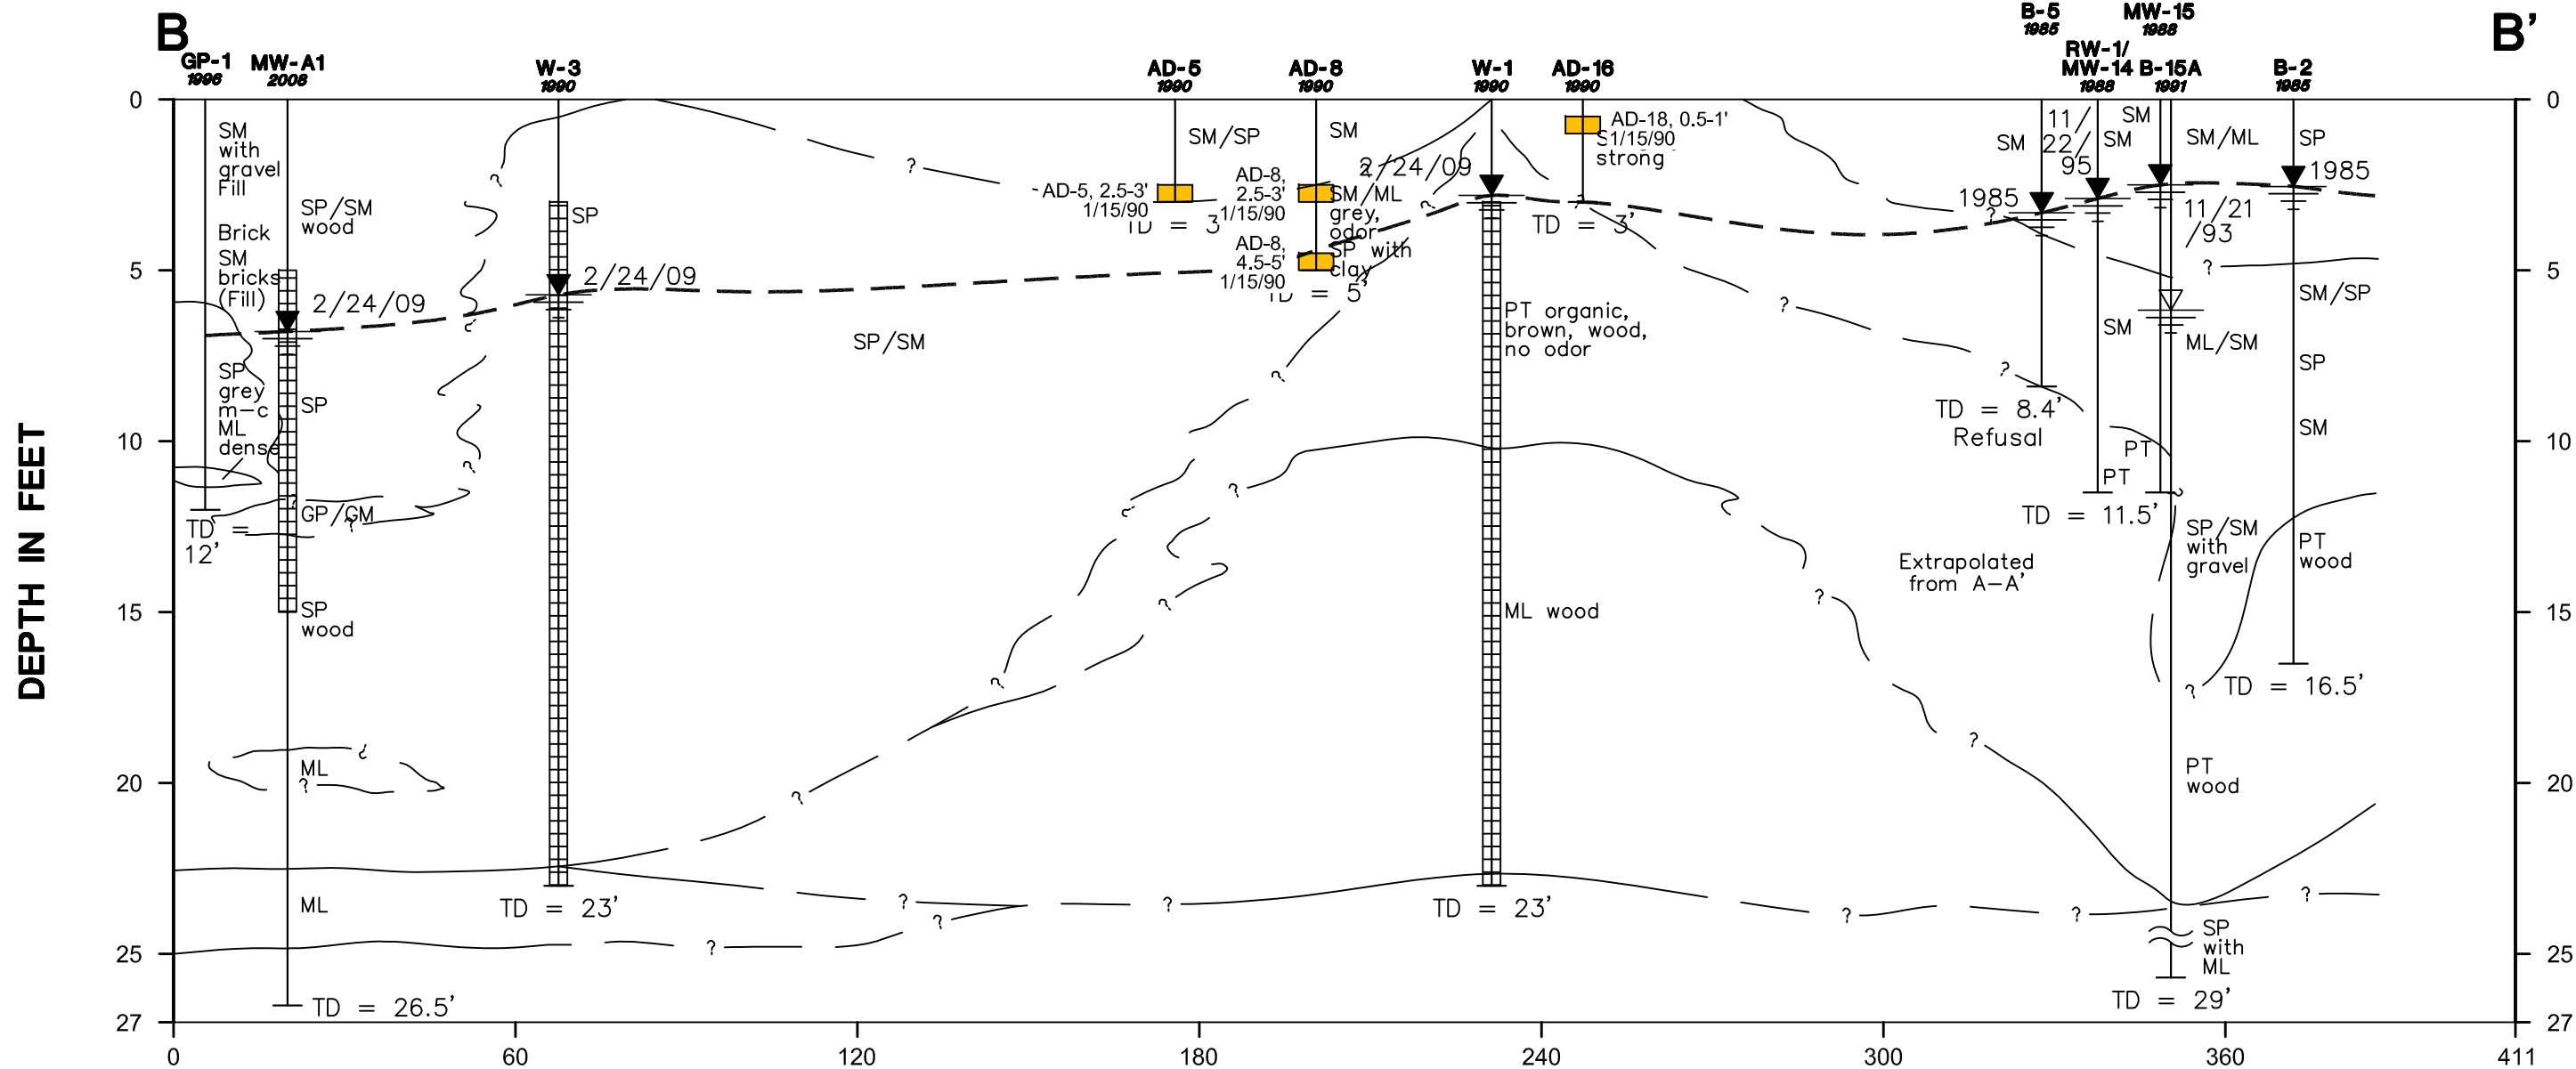

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

--- Unconfined groundwater table

AD-5 1990 Boring number and year installed

MW-A1 2008 Well number and year installed

Screen interval

TD = 3' Total depth in feet

TD = 23' Total depth in feet

Lead


Detected $\geq 1,000$ mg/kg

Detected $< 1,000$ mg/kg

Not detected

mg/kg Milligram per kilogram

AD-18, 0.5-1' 1/15/90 Sample depth and date collected



CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF LEAD IN SOIL
CROSS SECTION B-B'

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. **39**

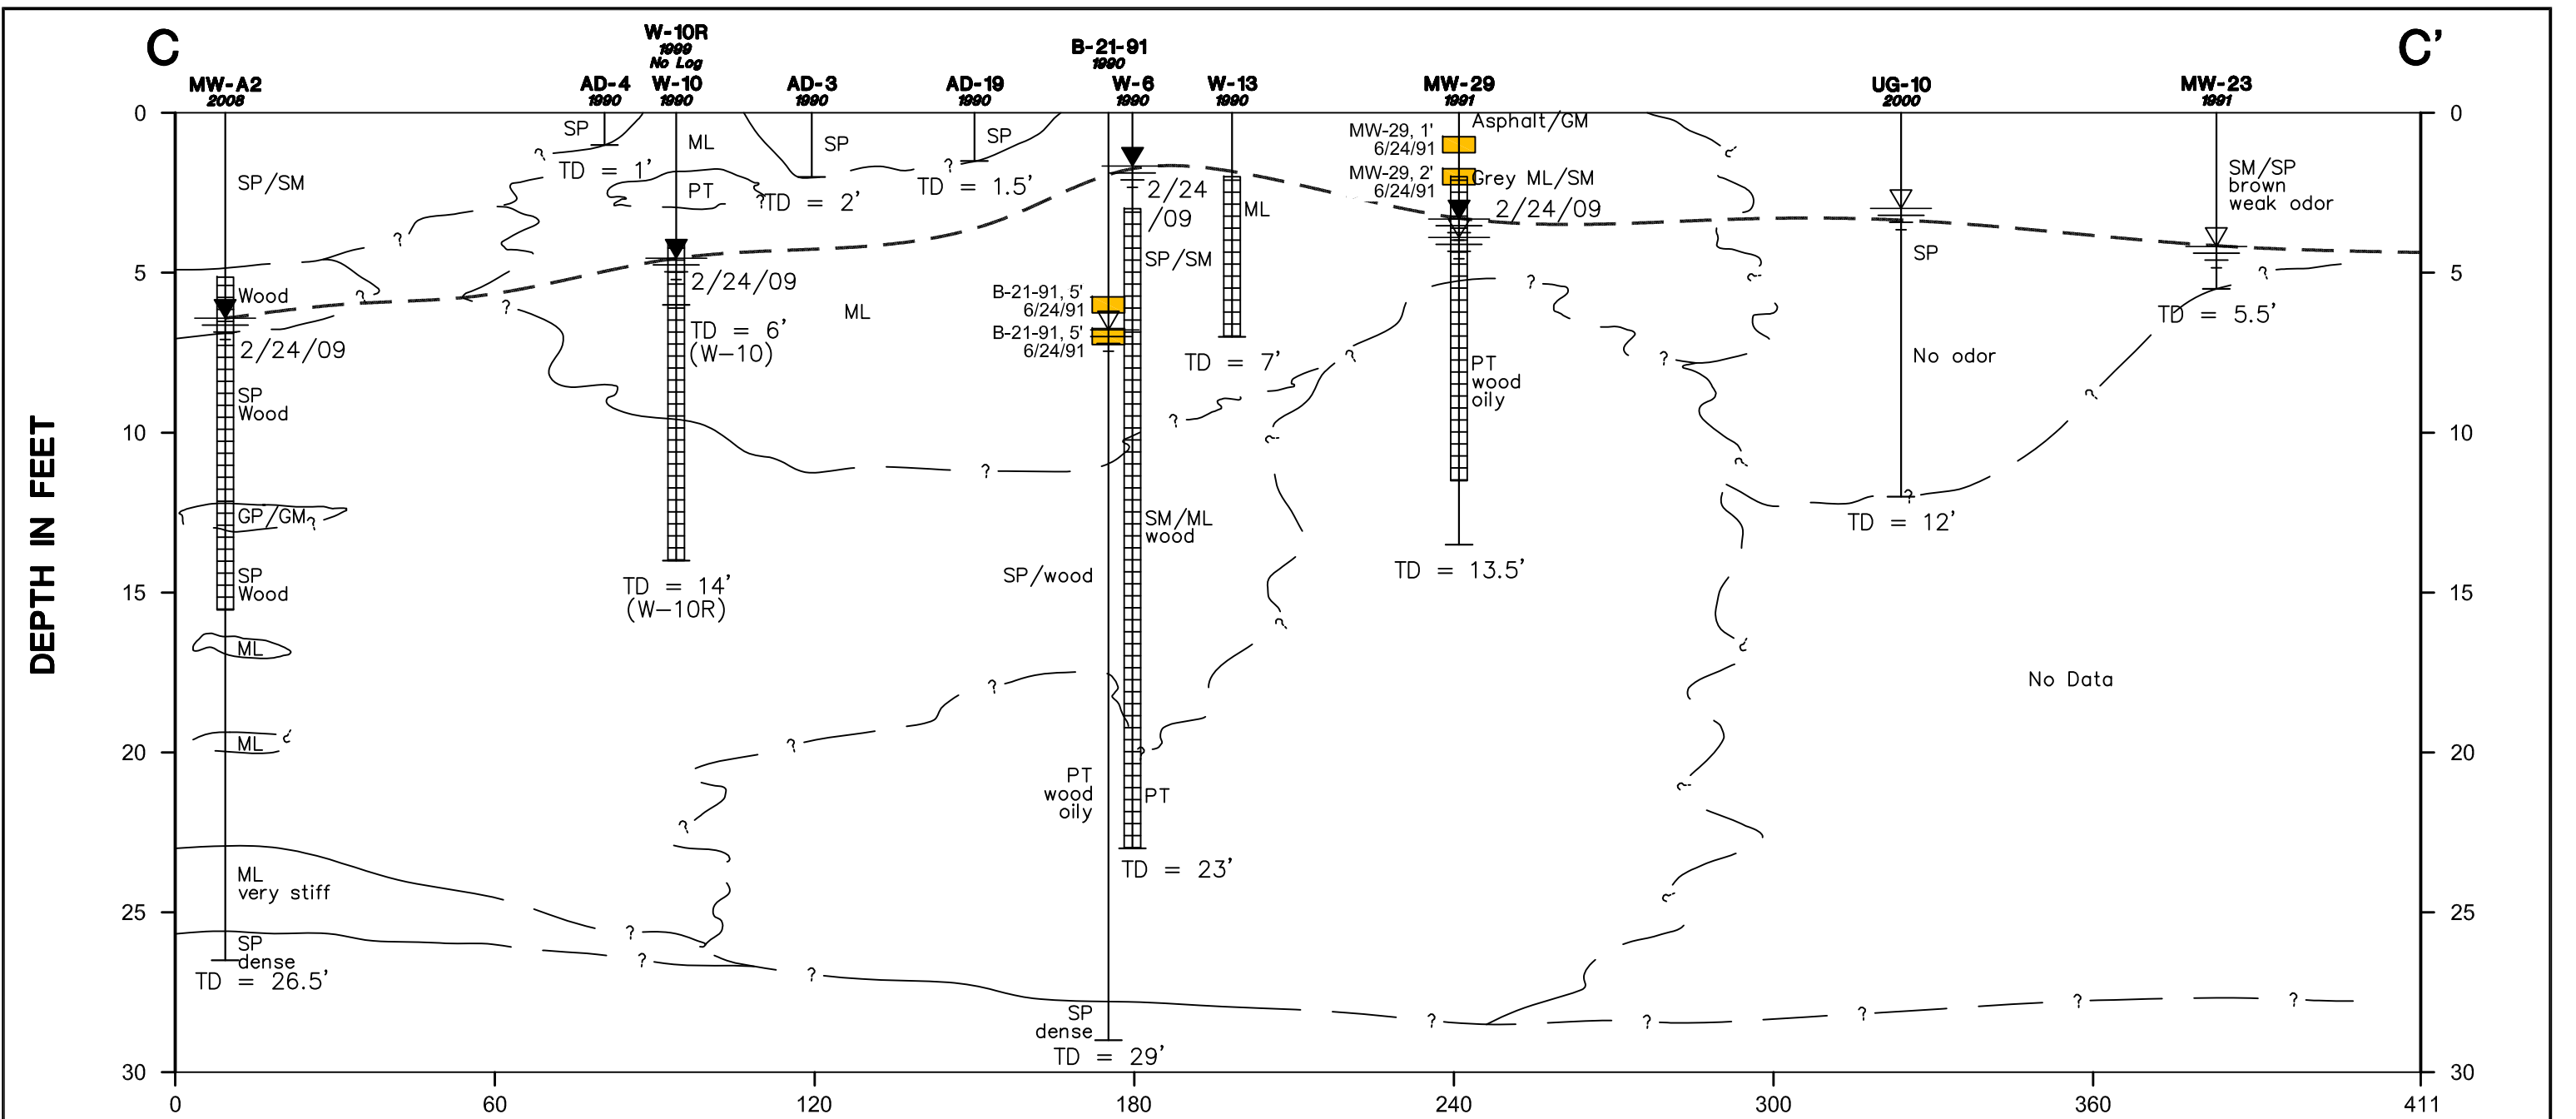

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-4 1990 Boring number and year installed

TD = 1' Total depth in feet

MW-A2 2008 Well number and year installed

TD = 26' Total depth in feet

Screen interval

Lead


Detected $\geq 1,000$ mg/kg

Detected $< 1,000$ mg/kg

Not detected

mg/kg Milligram per kilogram

MW-29, 2' 6/24/91 Sample depth and date collected

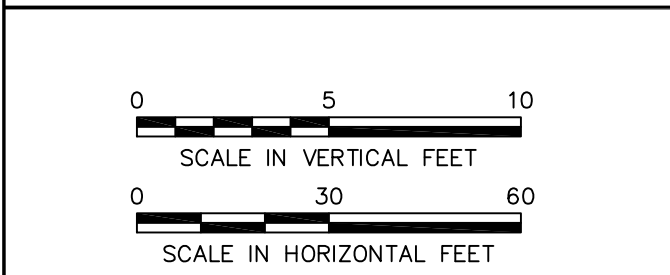

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS
CHK'D BY: AS
DATUM: NONE
PROJECTION: NONE
SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF LEAD IN SOIL CROSS SECTION C-C'

DATE: AUGUST 2009


PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. 40

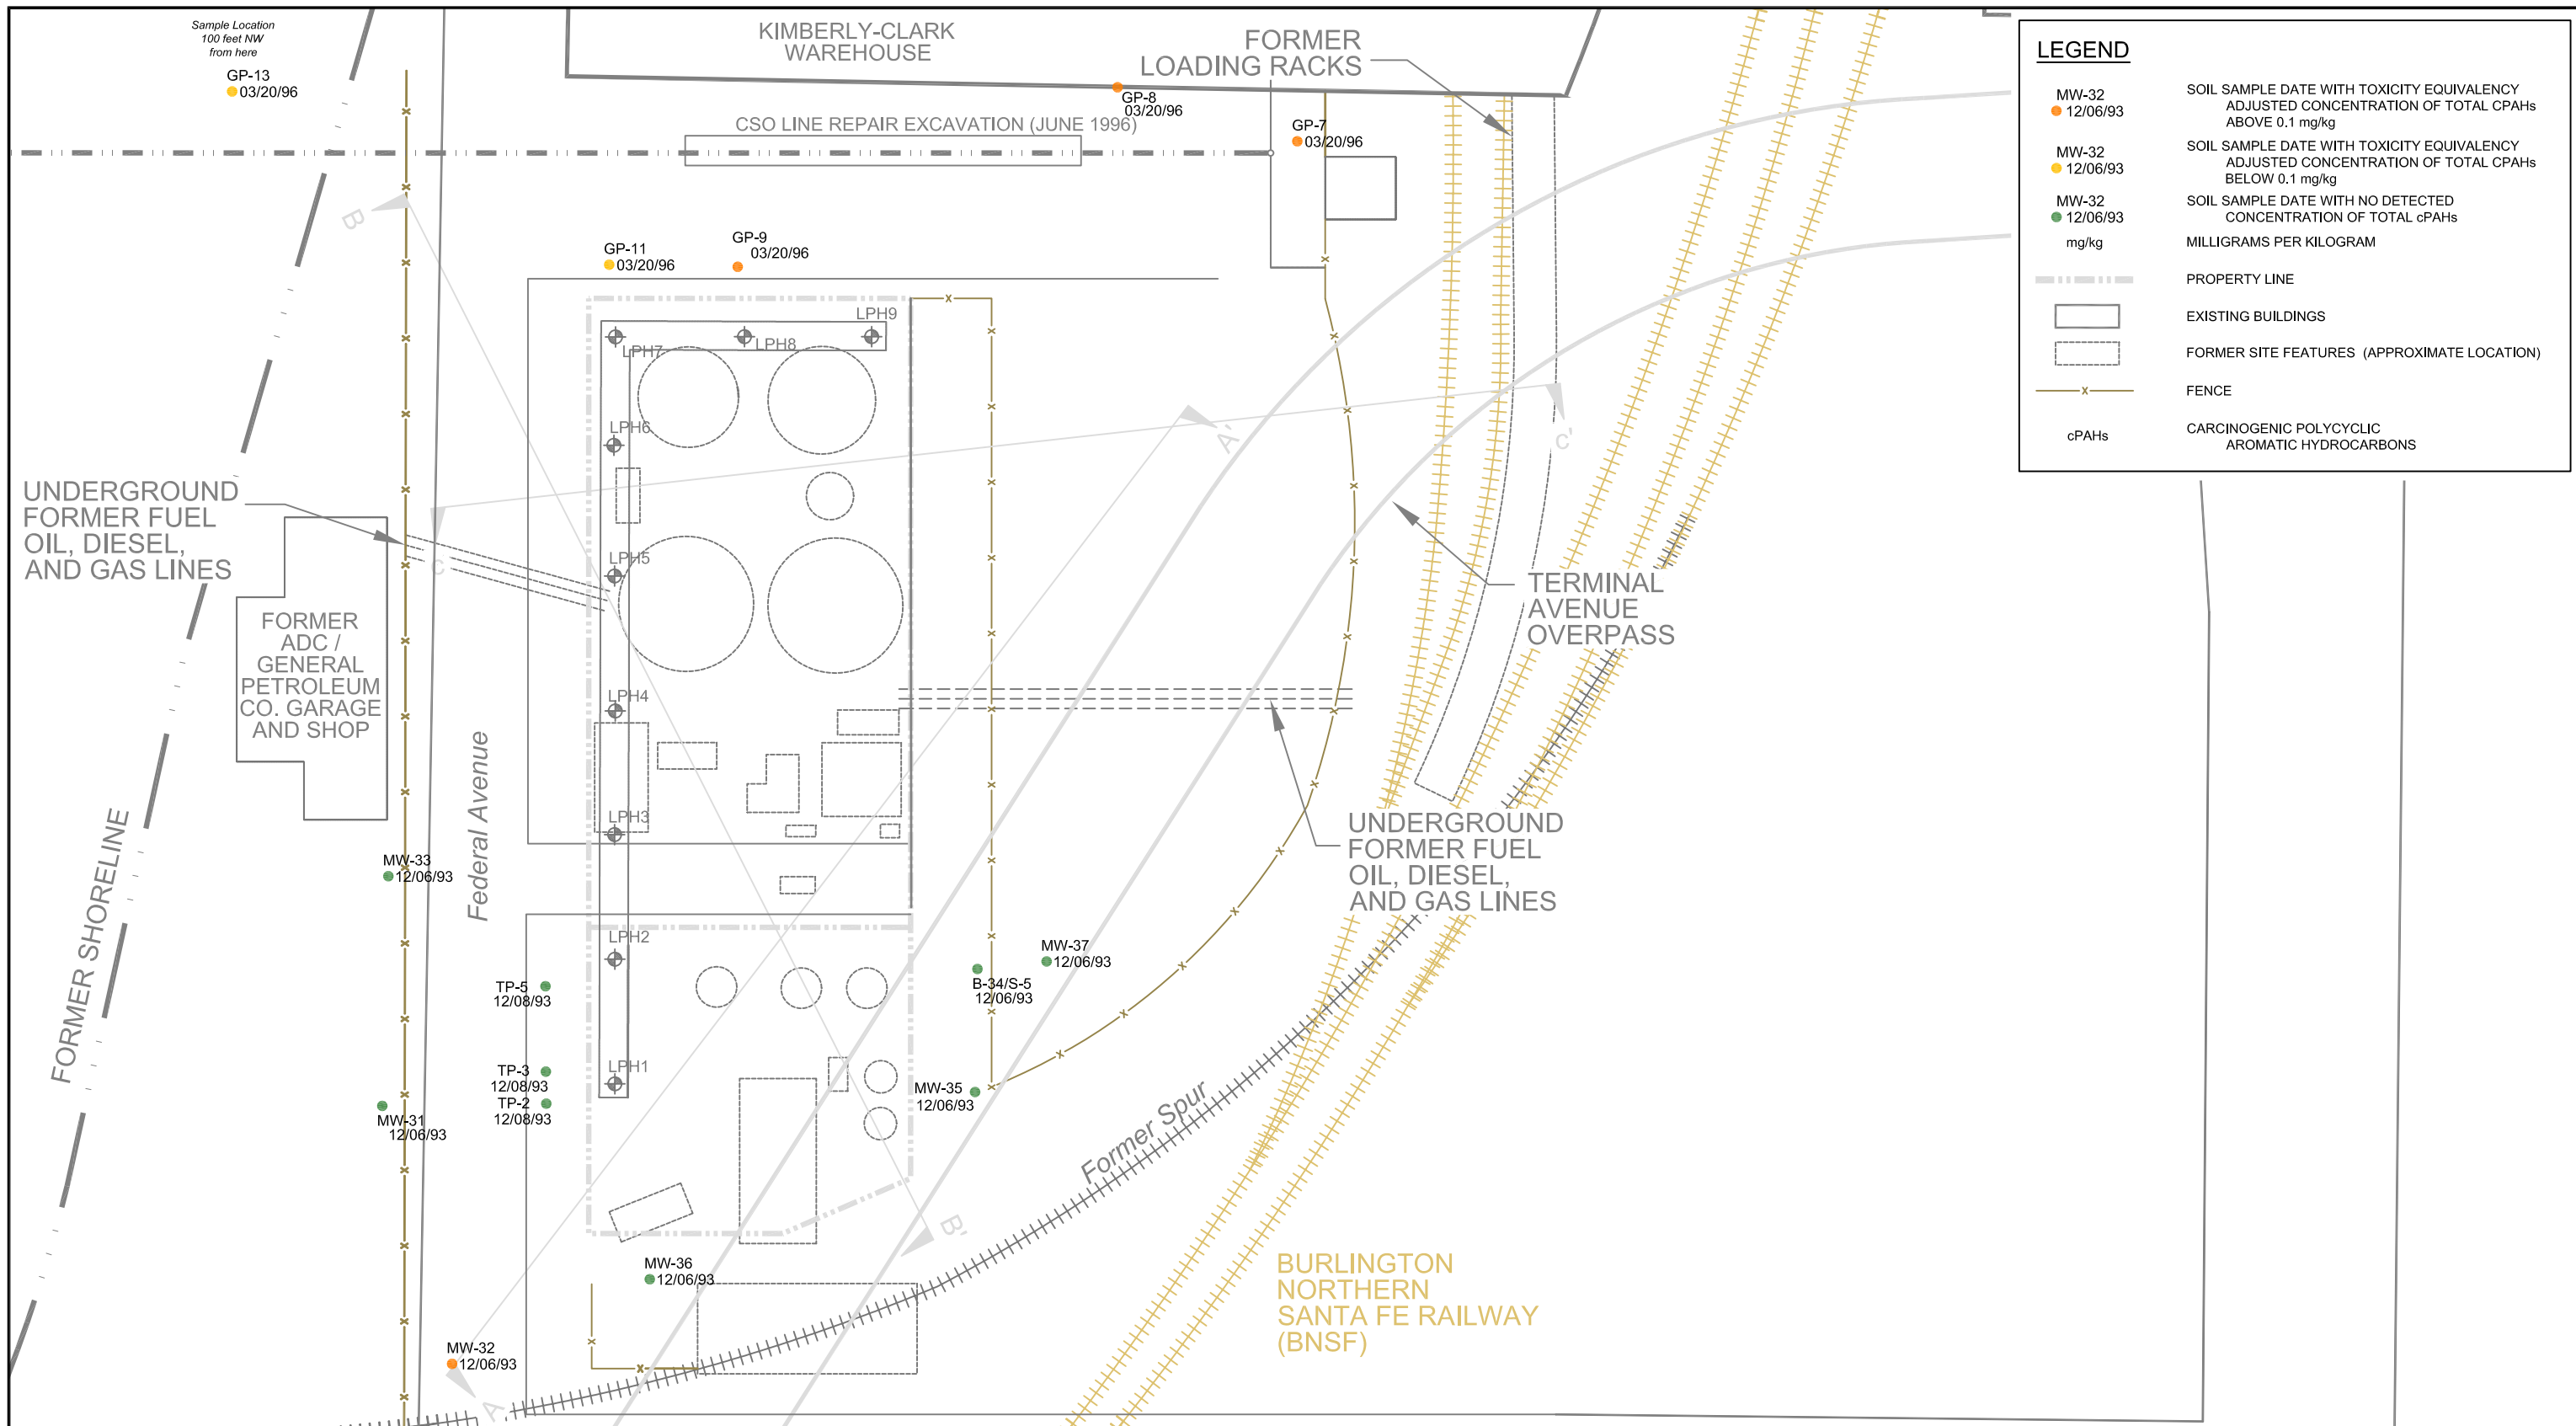


SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

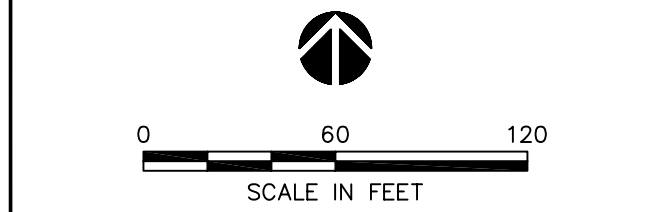

CLIENT LOGO


CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY
 AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201



DWN BY: JRS / BRJ
 CHK'D BY: AIS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'

PROJECT
**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**
 TITLE
**HORIZONTAL DISTRIBUTION
 OF ADJUSTED TOTAL cPAHs
 CONCENTRATION IN SOIL**

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.: 1
 FIGURE No. 41

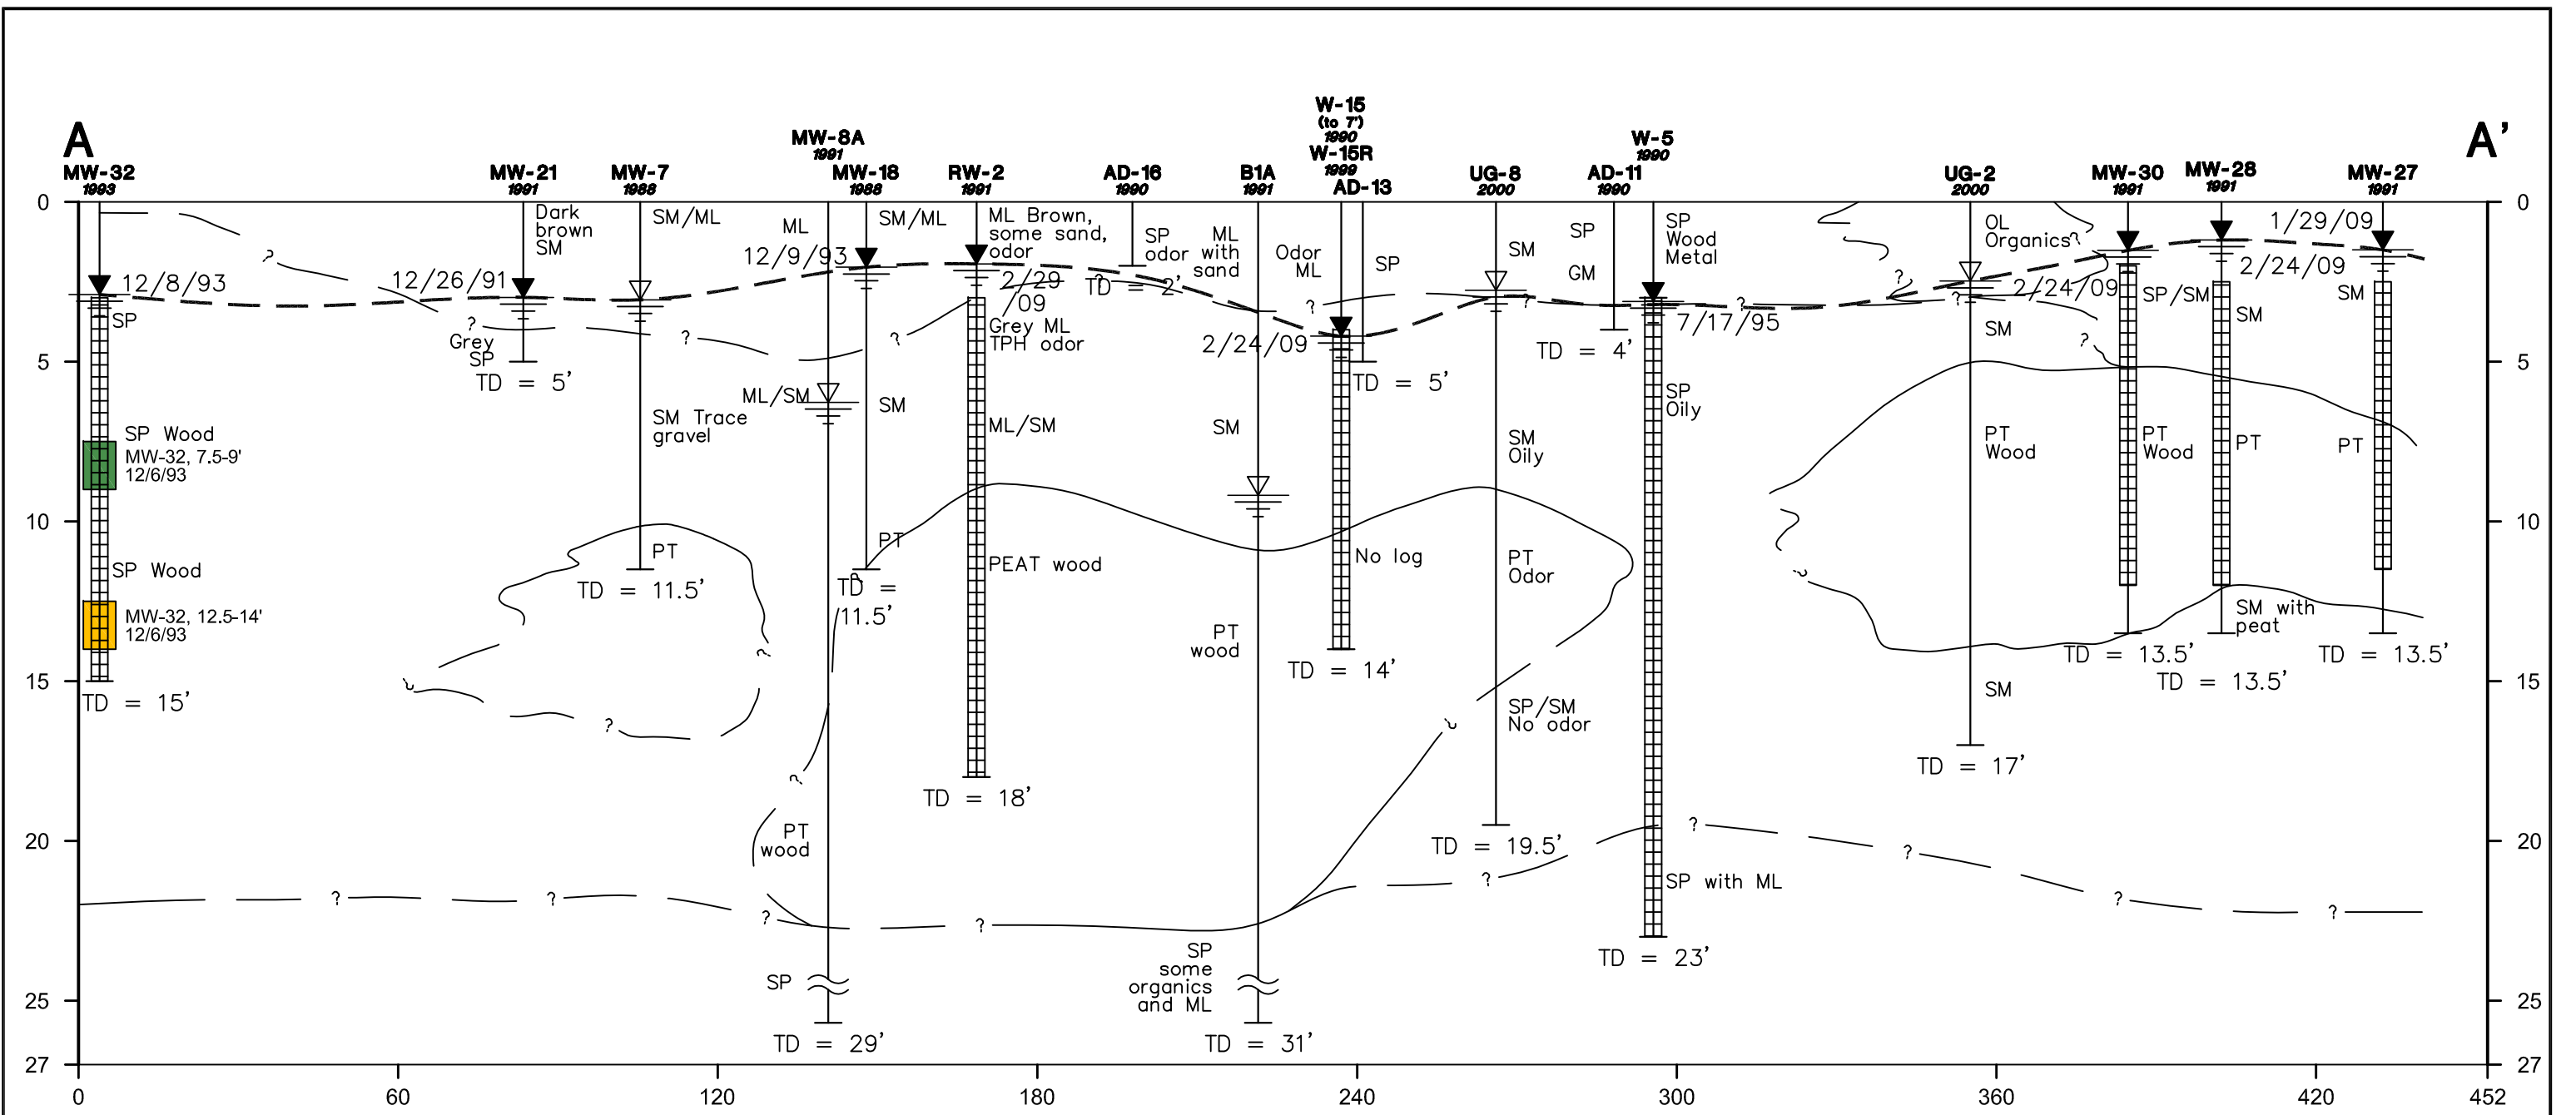

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

--- Unconfined groundwater table

AD-16 1990 Boring number and year installed

TD = 2' Total depth in feet

MW-30 1991 Well number and year installed

Screen interval

TD = 15' Total depth in feet

CARCINOGENIC POLYCYCLIC AROMATIC HYDROCARBON
(Toxicity Equivalent Adjusted Concentration)

Detected ≥ 2.0 mg/kg


Detected < 2.0 mg/kg

Not detected

mg/kg Milligram per kilogram

UG-8, 5-7' 9/26/00 Sample depth and date collected

| | | | | |
|--|---|---|---|--|
| SCALE IN VERTICAL FEET SCALE IN HORIZONTAL FEET | CLIENT LOGO CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | DWN BY: JRS CHK'D BY: AS DATUM: NONE PROJECTION: NONE SCALE: AS SHOWN | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 TITLE VERTICAL DISTRIBUTION OF TOXICITY-ADJUSTED TOTAL cPAHS CONCENTRATIONS IN SOIL CROSS SECTION A-A' | DATE: JUNE 2009 PROJECT NO: 9-915-15716-C REV. NO.: FIGURE No. 42 |
| | | AMEC Earth & Environmental | | |

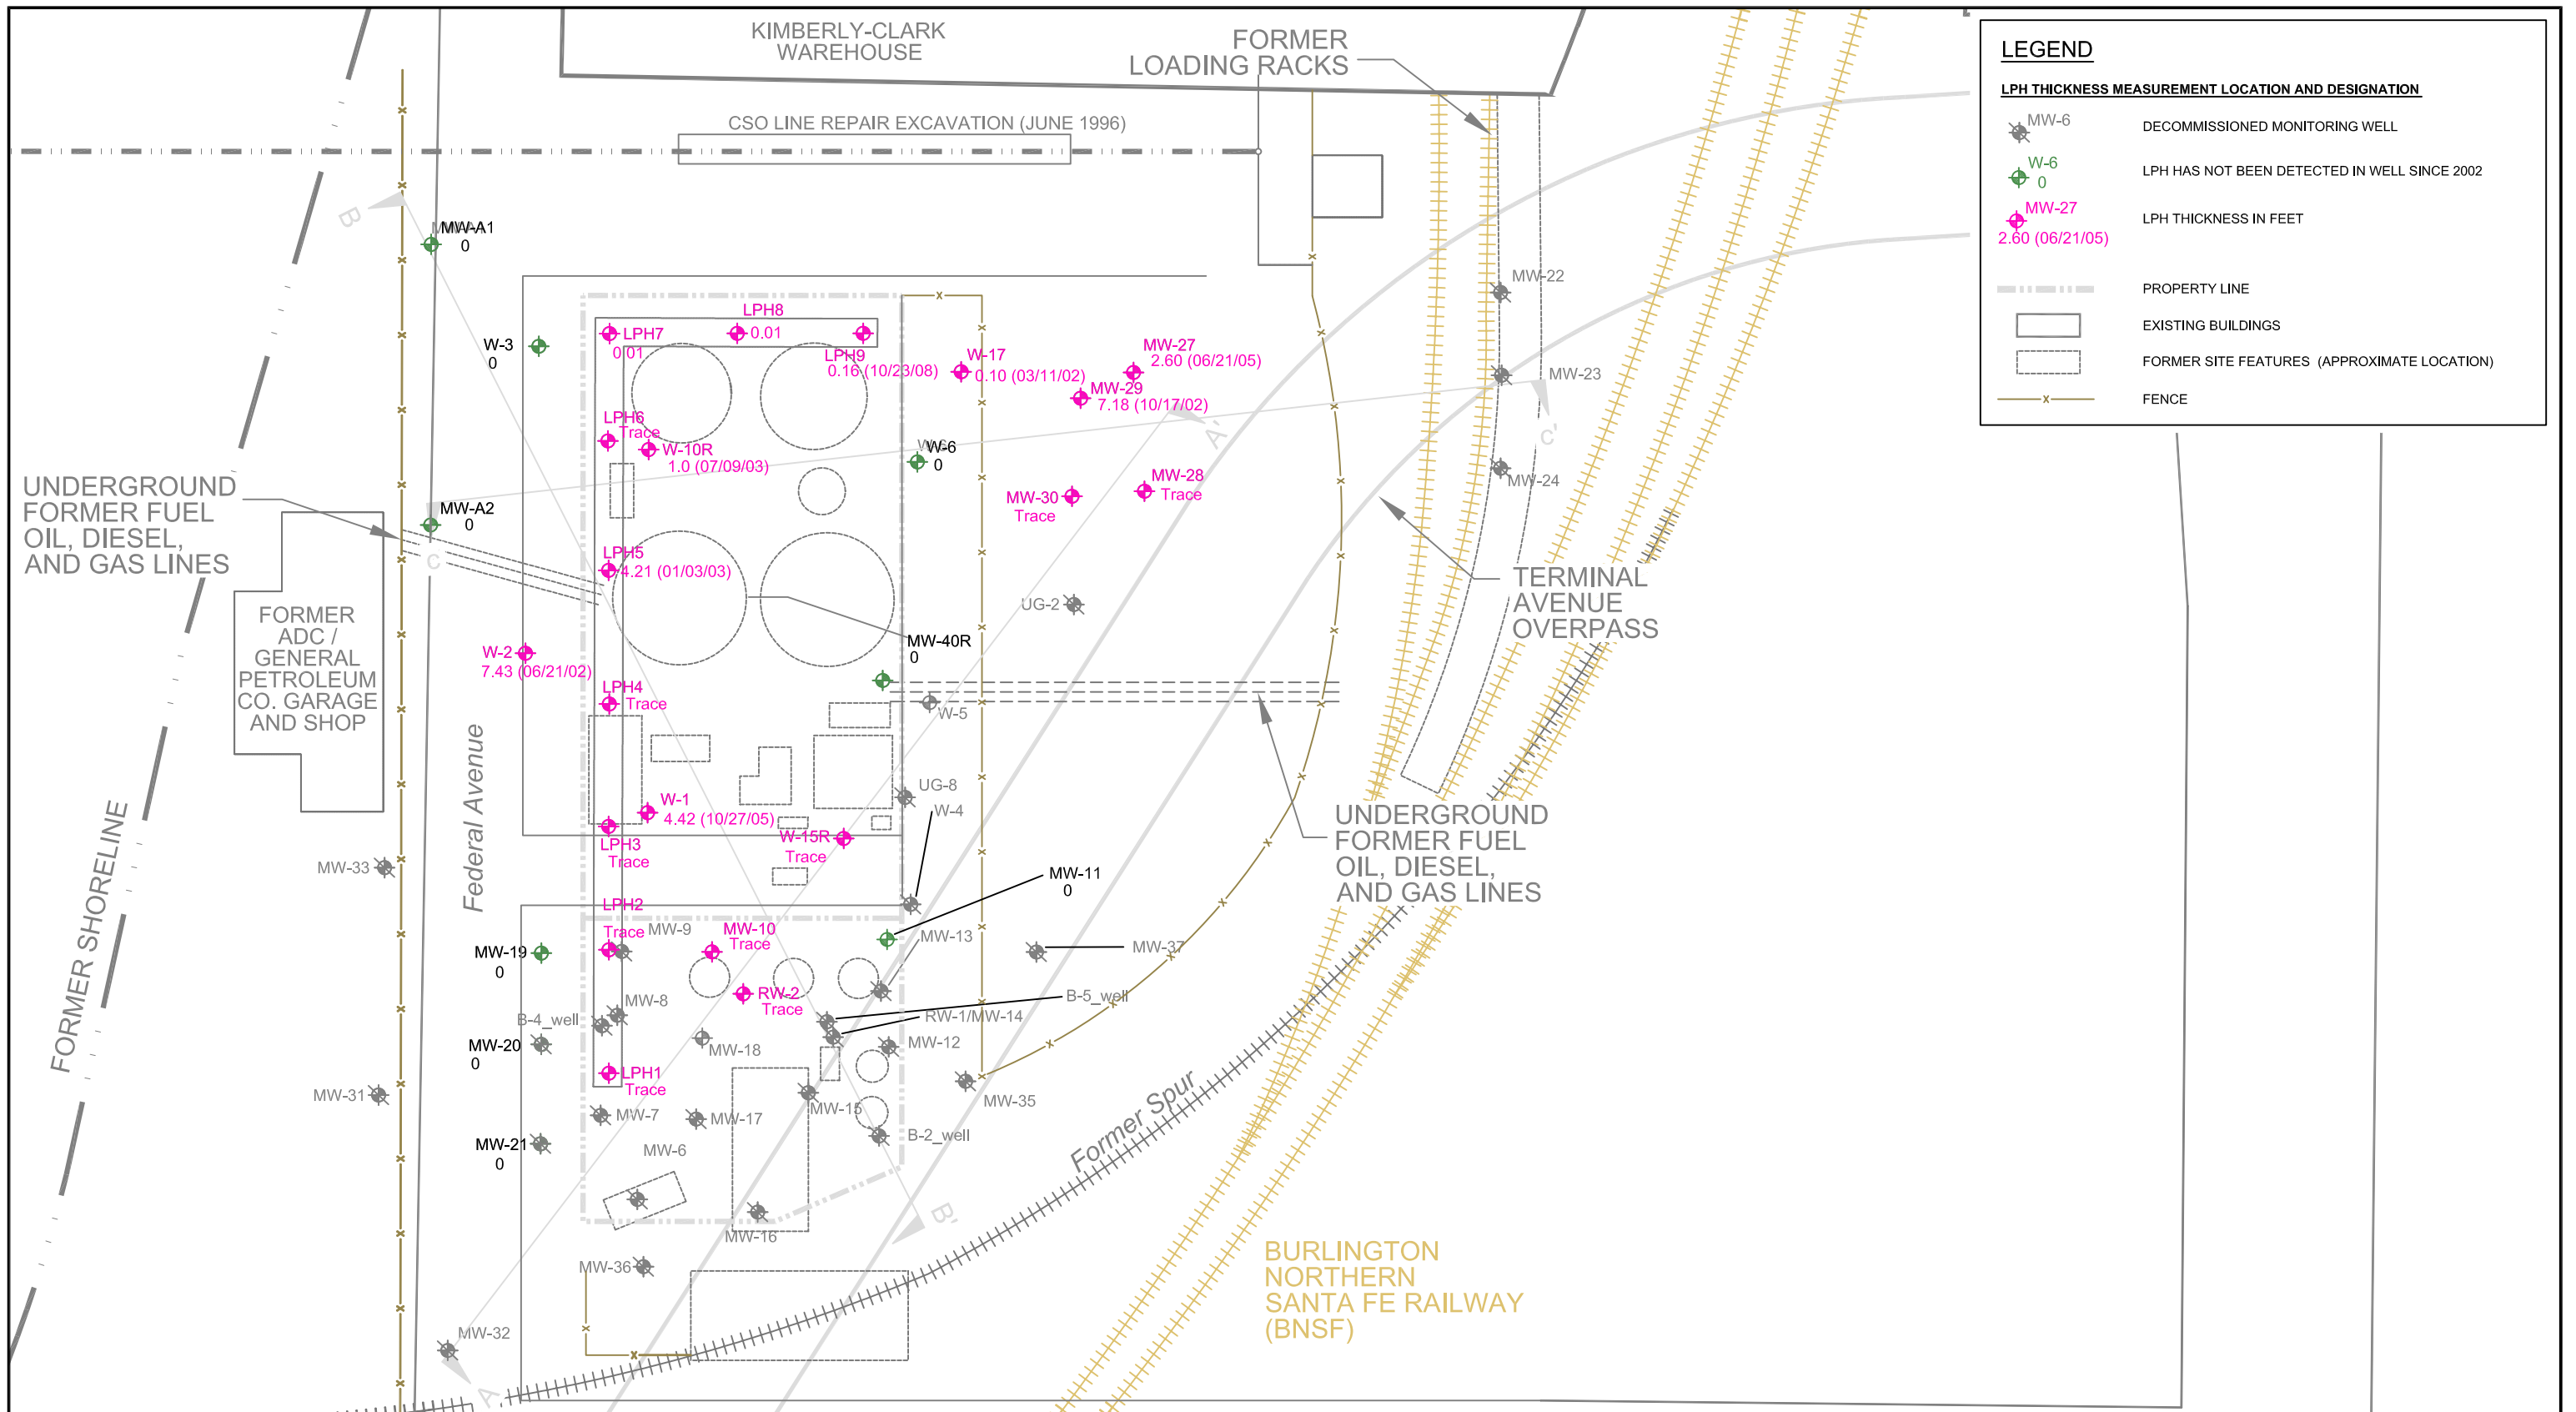

LEGEND

LPH THICKNESS MEASUREMENT LOCATION AND DESIGNATION

- MW-6 DECOMMISSIONED MONITORING WELL
- W-6 LPH HAS NOT BEEN DETECTED IN WELL SINCE 2002
- MW-27 LPH THICKNESS IN FEET
- 2.60 (06/21/05)
- PROPERTY LINE
- EXISTING BUILDINGS
- FORMER SITE FEATURES (APPROXIMATE LOCATION)
- x FENCE

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

| | |
|-------------|-----------|
| DWN BY: | JRS / BRJ |
| CHK'D BY: | AIS/MS |
| DATUM: | NONE |
| PROJECTION: | NONE |
| SCALE: | 1" = 60' |


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE

**LIQUID-PHASE
 PETROLEUM HYDROCARBON
 MAXIMUM THICKNESS SINCE 2002**

| | |
|--------------|---------------|
| DATE: | AUGUST 2009 |
| PROJECT NO.: | 9-915-15716-C |
| REV. NO.: | 1 |
| FIGURE No. | 43 |

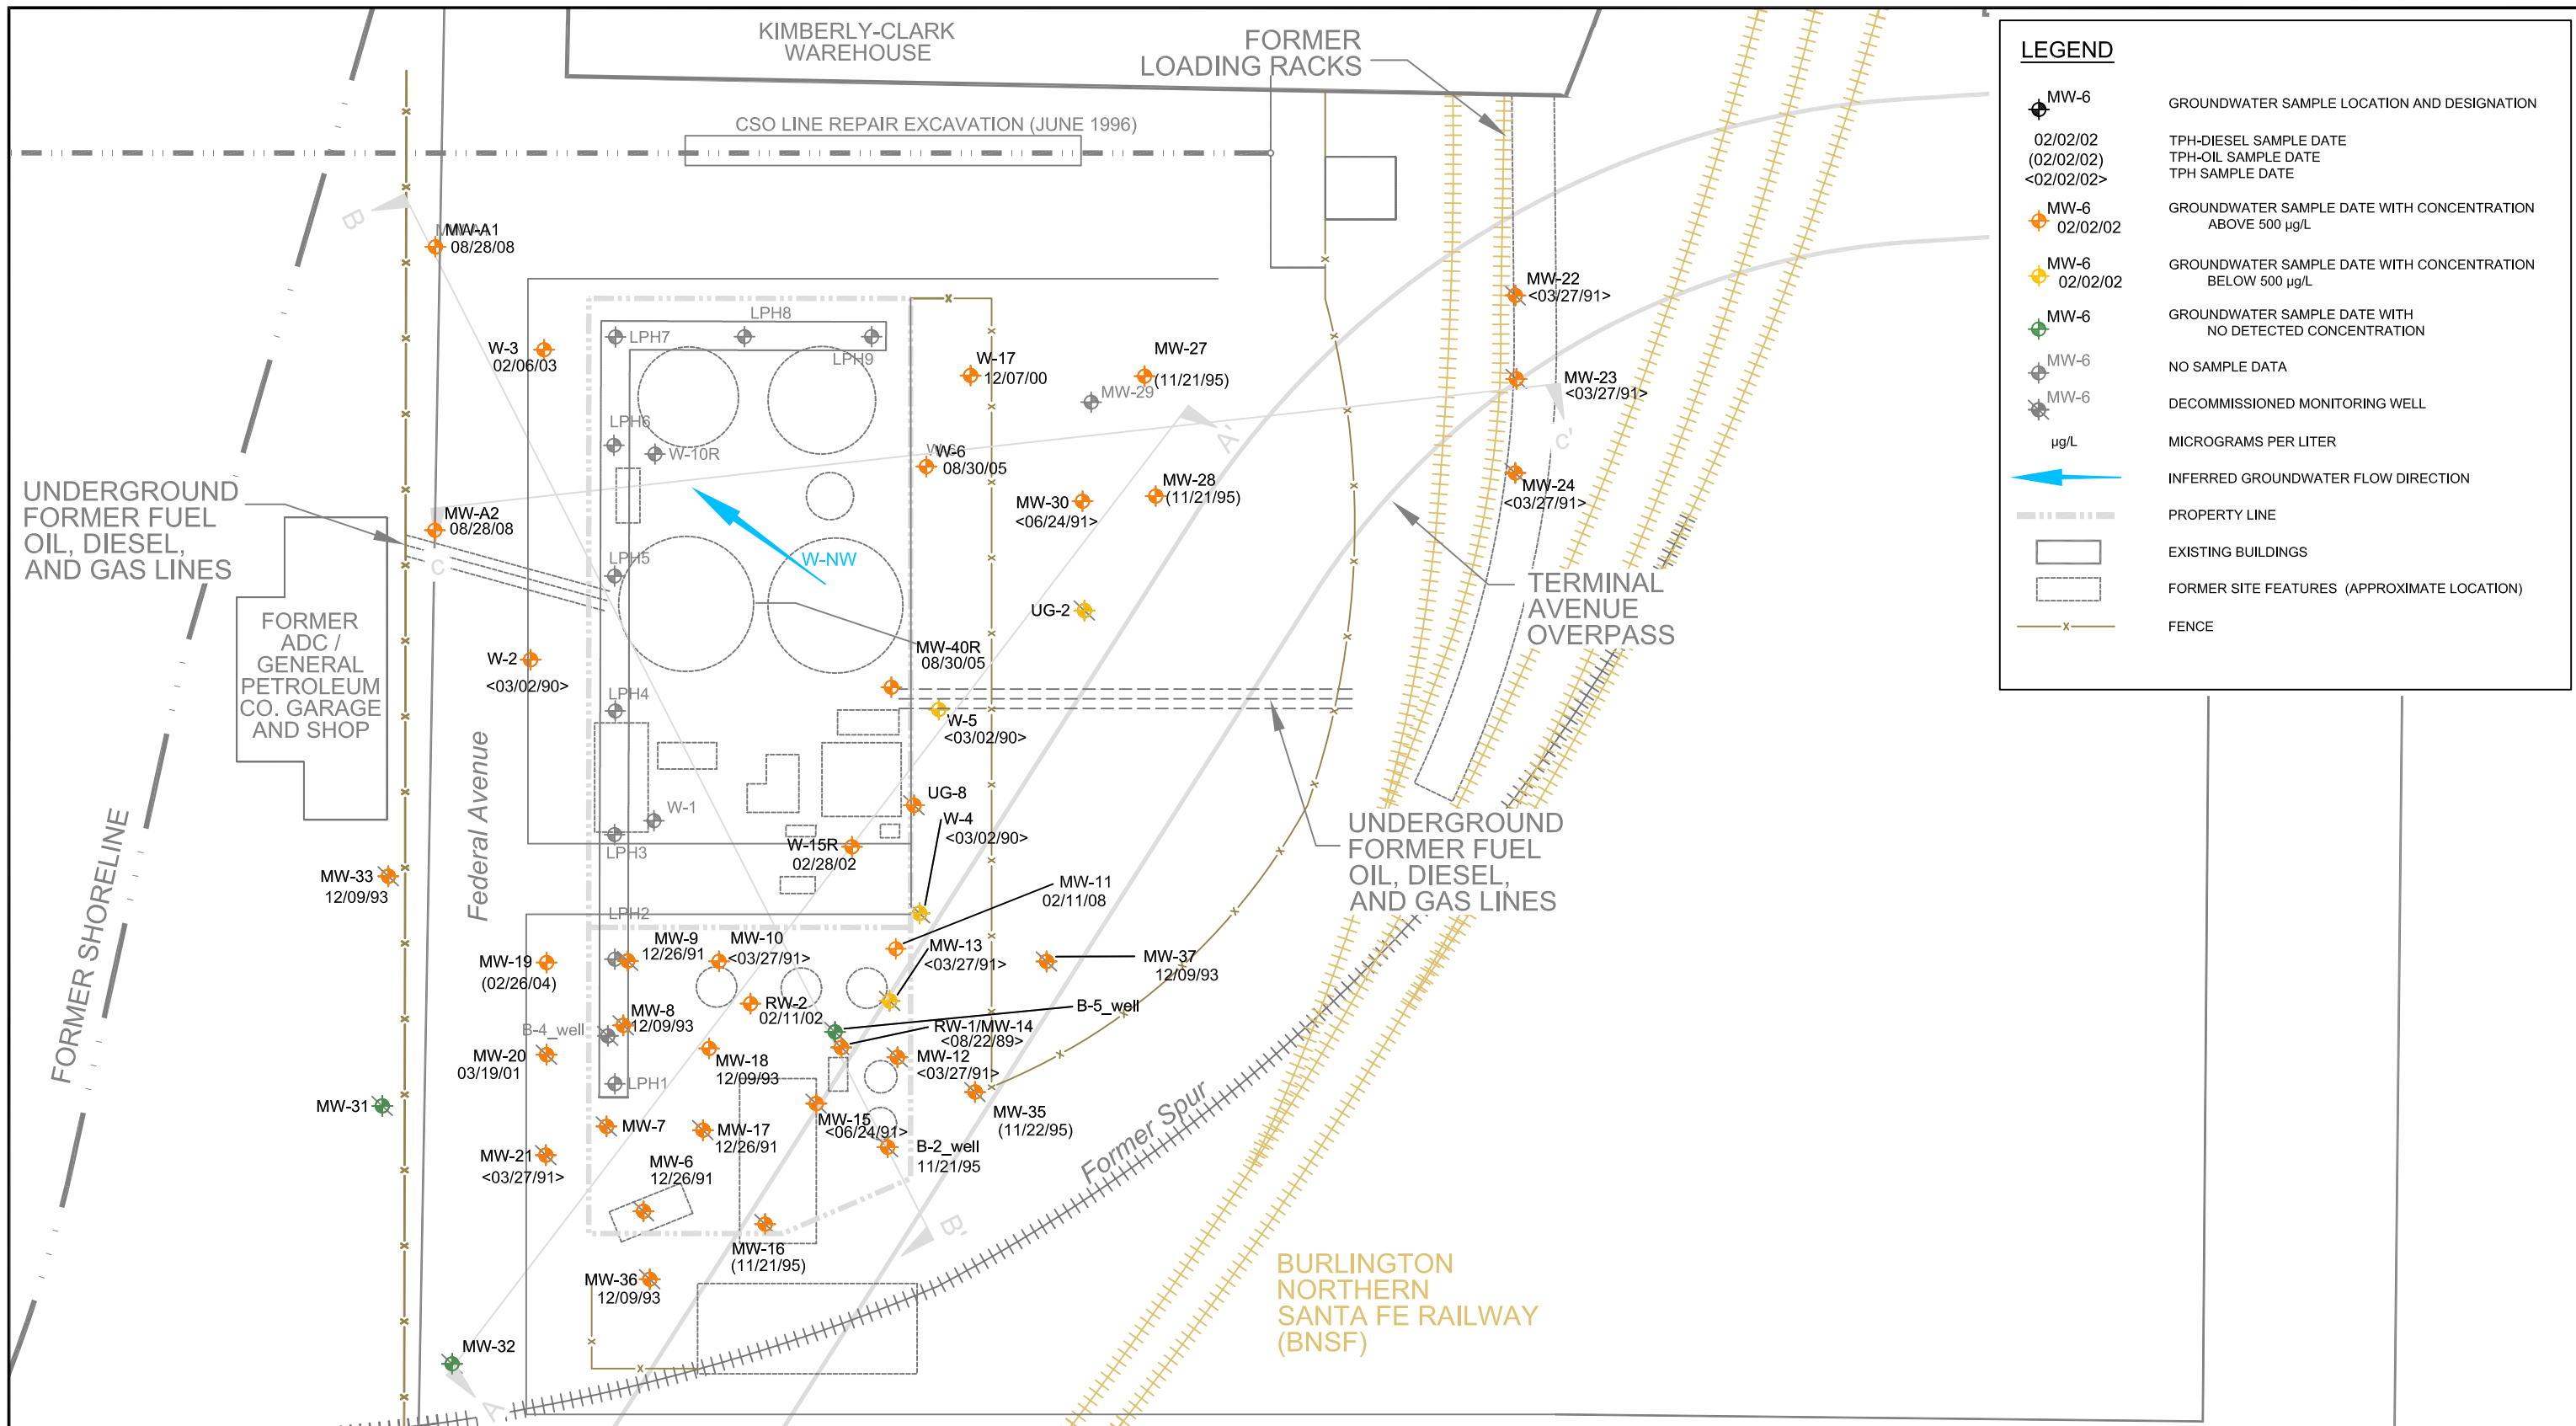

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
 CHK'D BY: AIS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE


**HISTORICAL DISTRIBUTION OF
 TPH-D, TPH-O, AND TPH IN GROUNDWATER
 MAXIMUM DETECTED VALUE**

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.: 1
 FIGURE No. 44

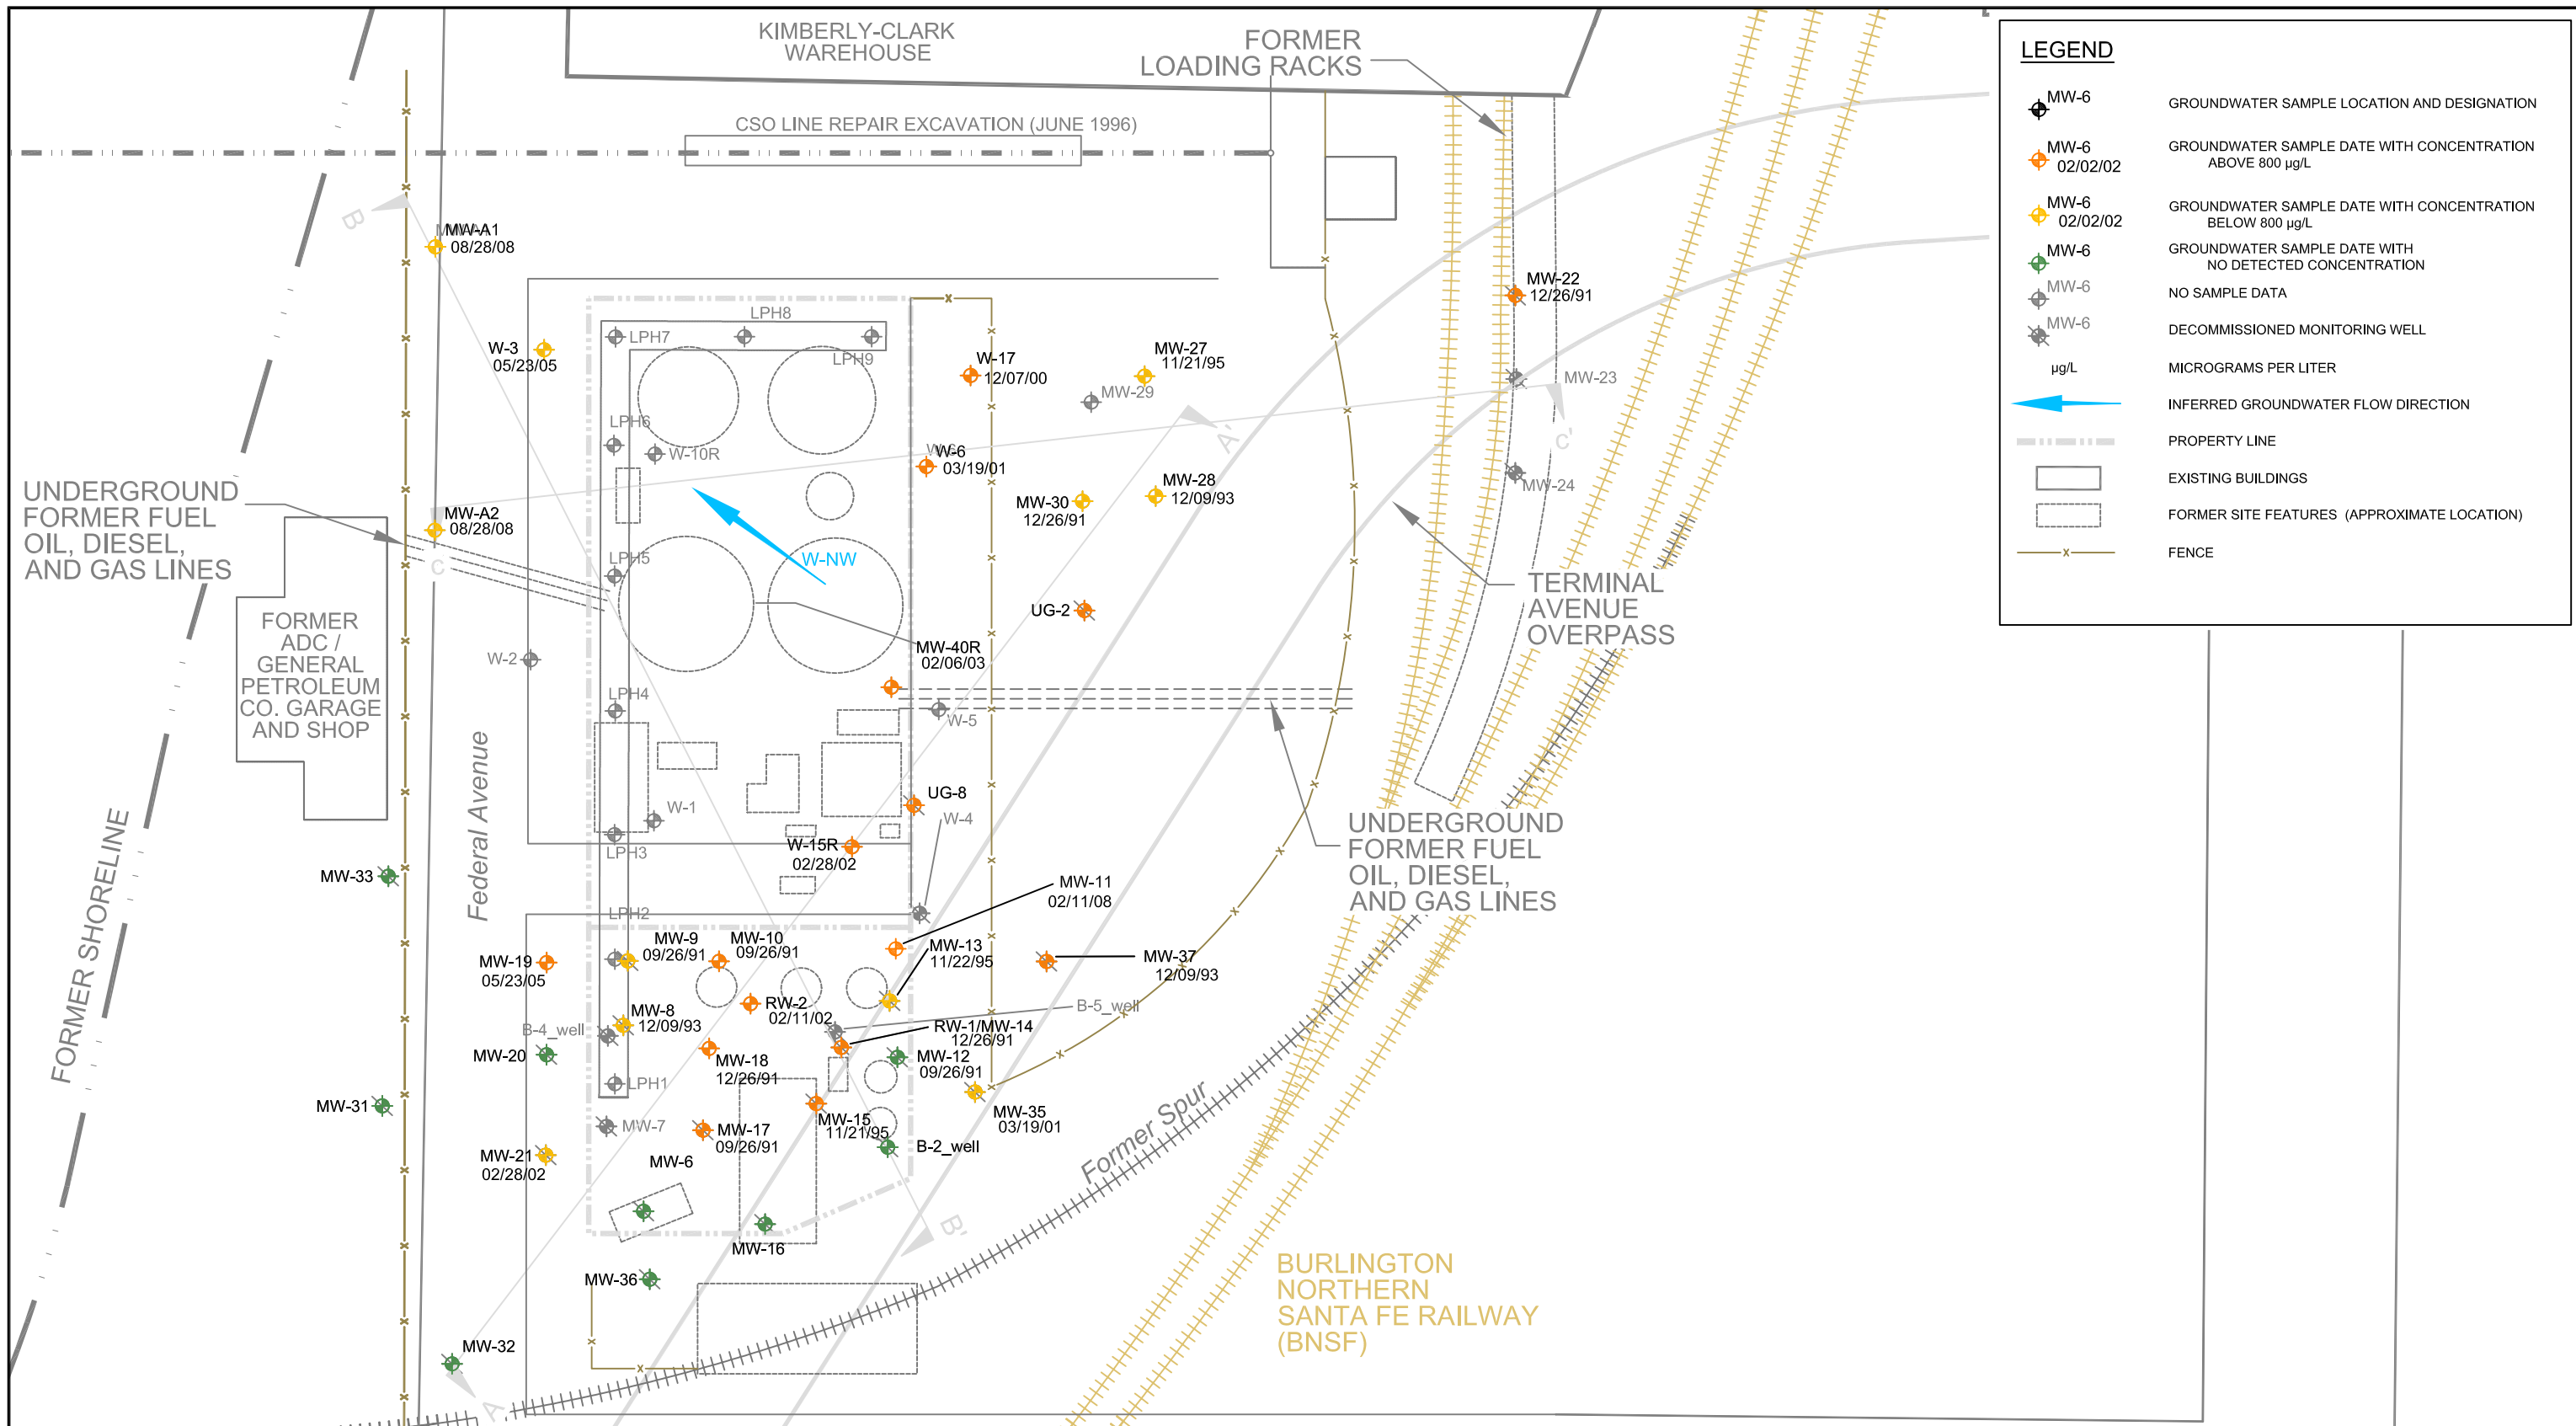


| LEGEND | |
|--------|---|
| | GROUNDWATER SAMPLE LOCATION AND DESIGNATION |
| | GROUNDWATER SAMPLE DATE WITH CONCENTRATION ABOVE 800 µg/L |
| | GROUNDWATER SAMPLE DATE WITH CONCENTRATION BELOW 800 µg/L |
| | GROUNDWATER SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| | NO SAMPLE DATA |
| | DECOMMISSIONED MONITORING WELL |
| | MICROGRAMS PER LITER |
| | INFERRED GROUNDWATER FLOW DIRECTION |
| | PROPERTY LINE |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |

| | | | | | |
|---|-------------|---|---|--|--|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc. 0 60 120 SCALE IN FEET | CLIENT LOGO | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | DWN BY: JRS / BRJ CHK'D BY: AIS/MS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C |
| | | | TITLE HISTORICAL DISTRIBUTION OF TPH-G IN GROUNDWATER MAXIMUM DETECTED VALUE | REV. NO.: 1 FIGURE No. 45 | |

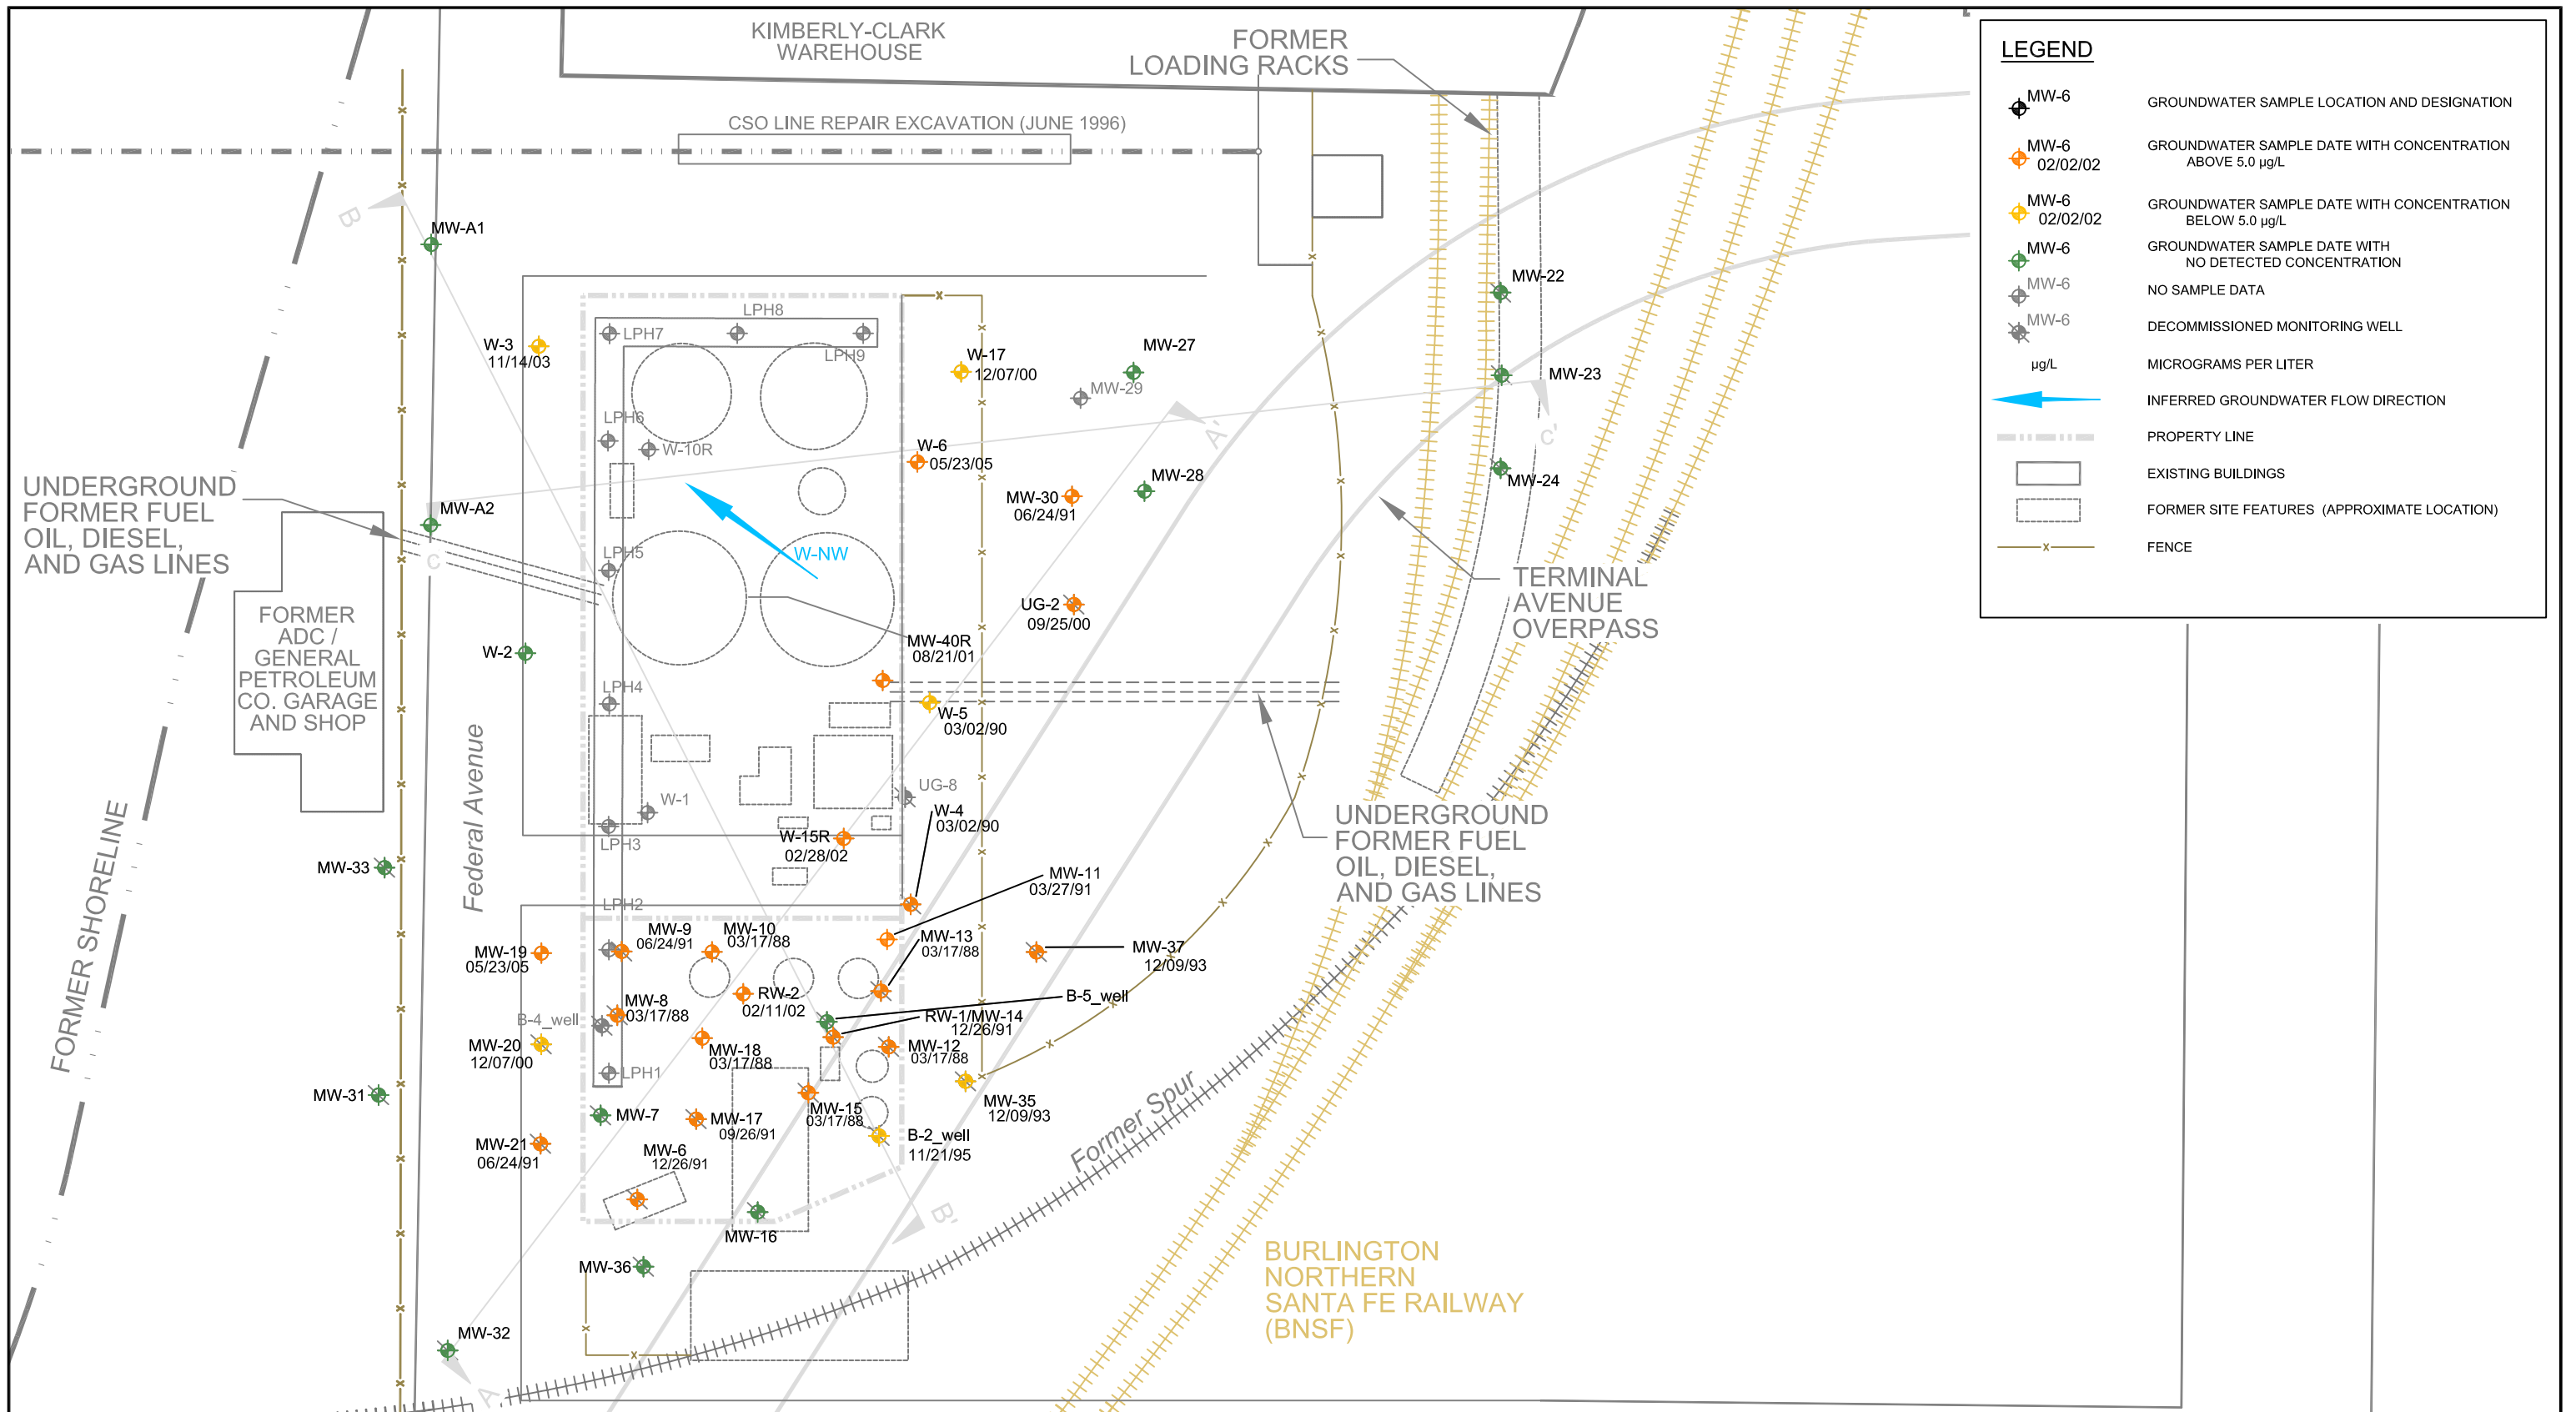


SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

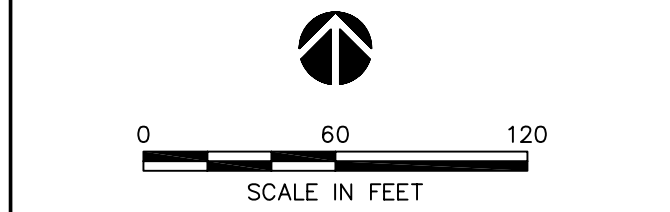

CLIENT LOGO


CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY
 AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201



DWN BY: JRS / BRJ
 CHK'D BY: AIS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'

PROJECT
**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**
 TITLE
**HISTORICAL DISTRIBUTION OF
 BENZENE IN GROUNDWATER
 MAXIMUM DETECTED VALUE**

DATE:
 AUGUST 2009
 PROJECT NO:
 9-915-15716-C
 REV. NO.:
 1
 FIGURE No.
 46

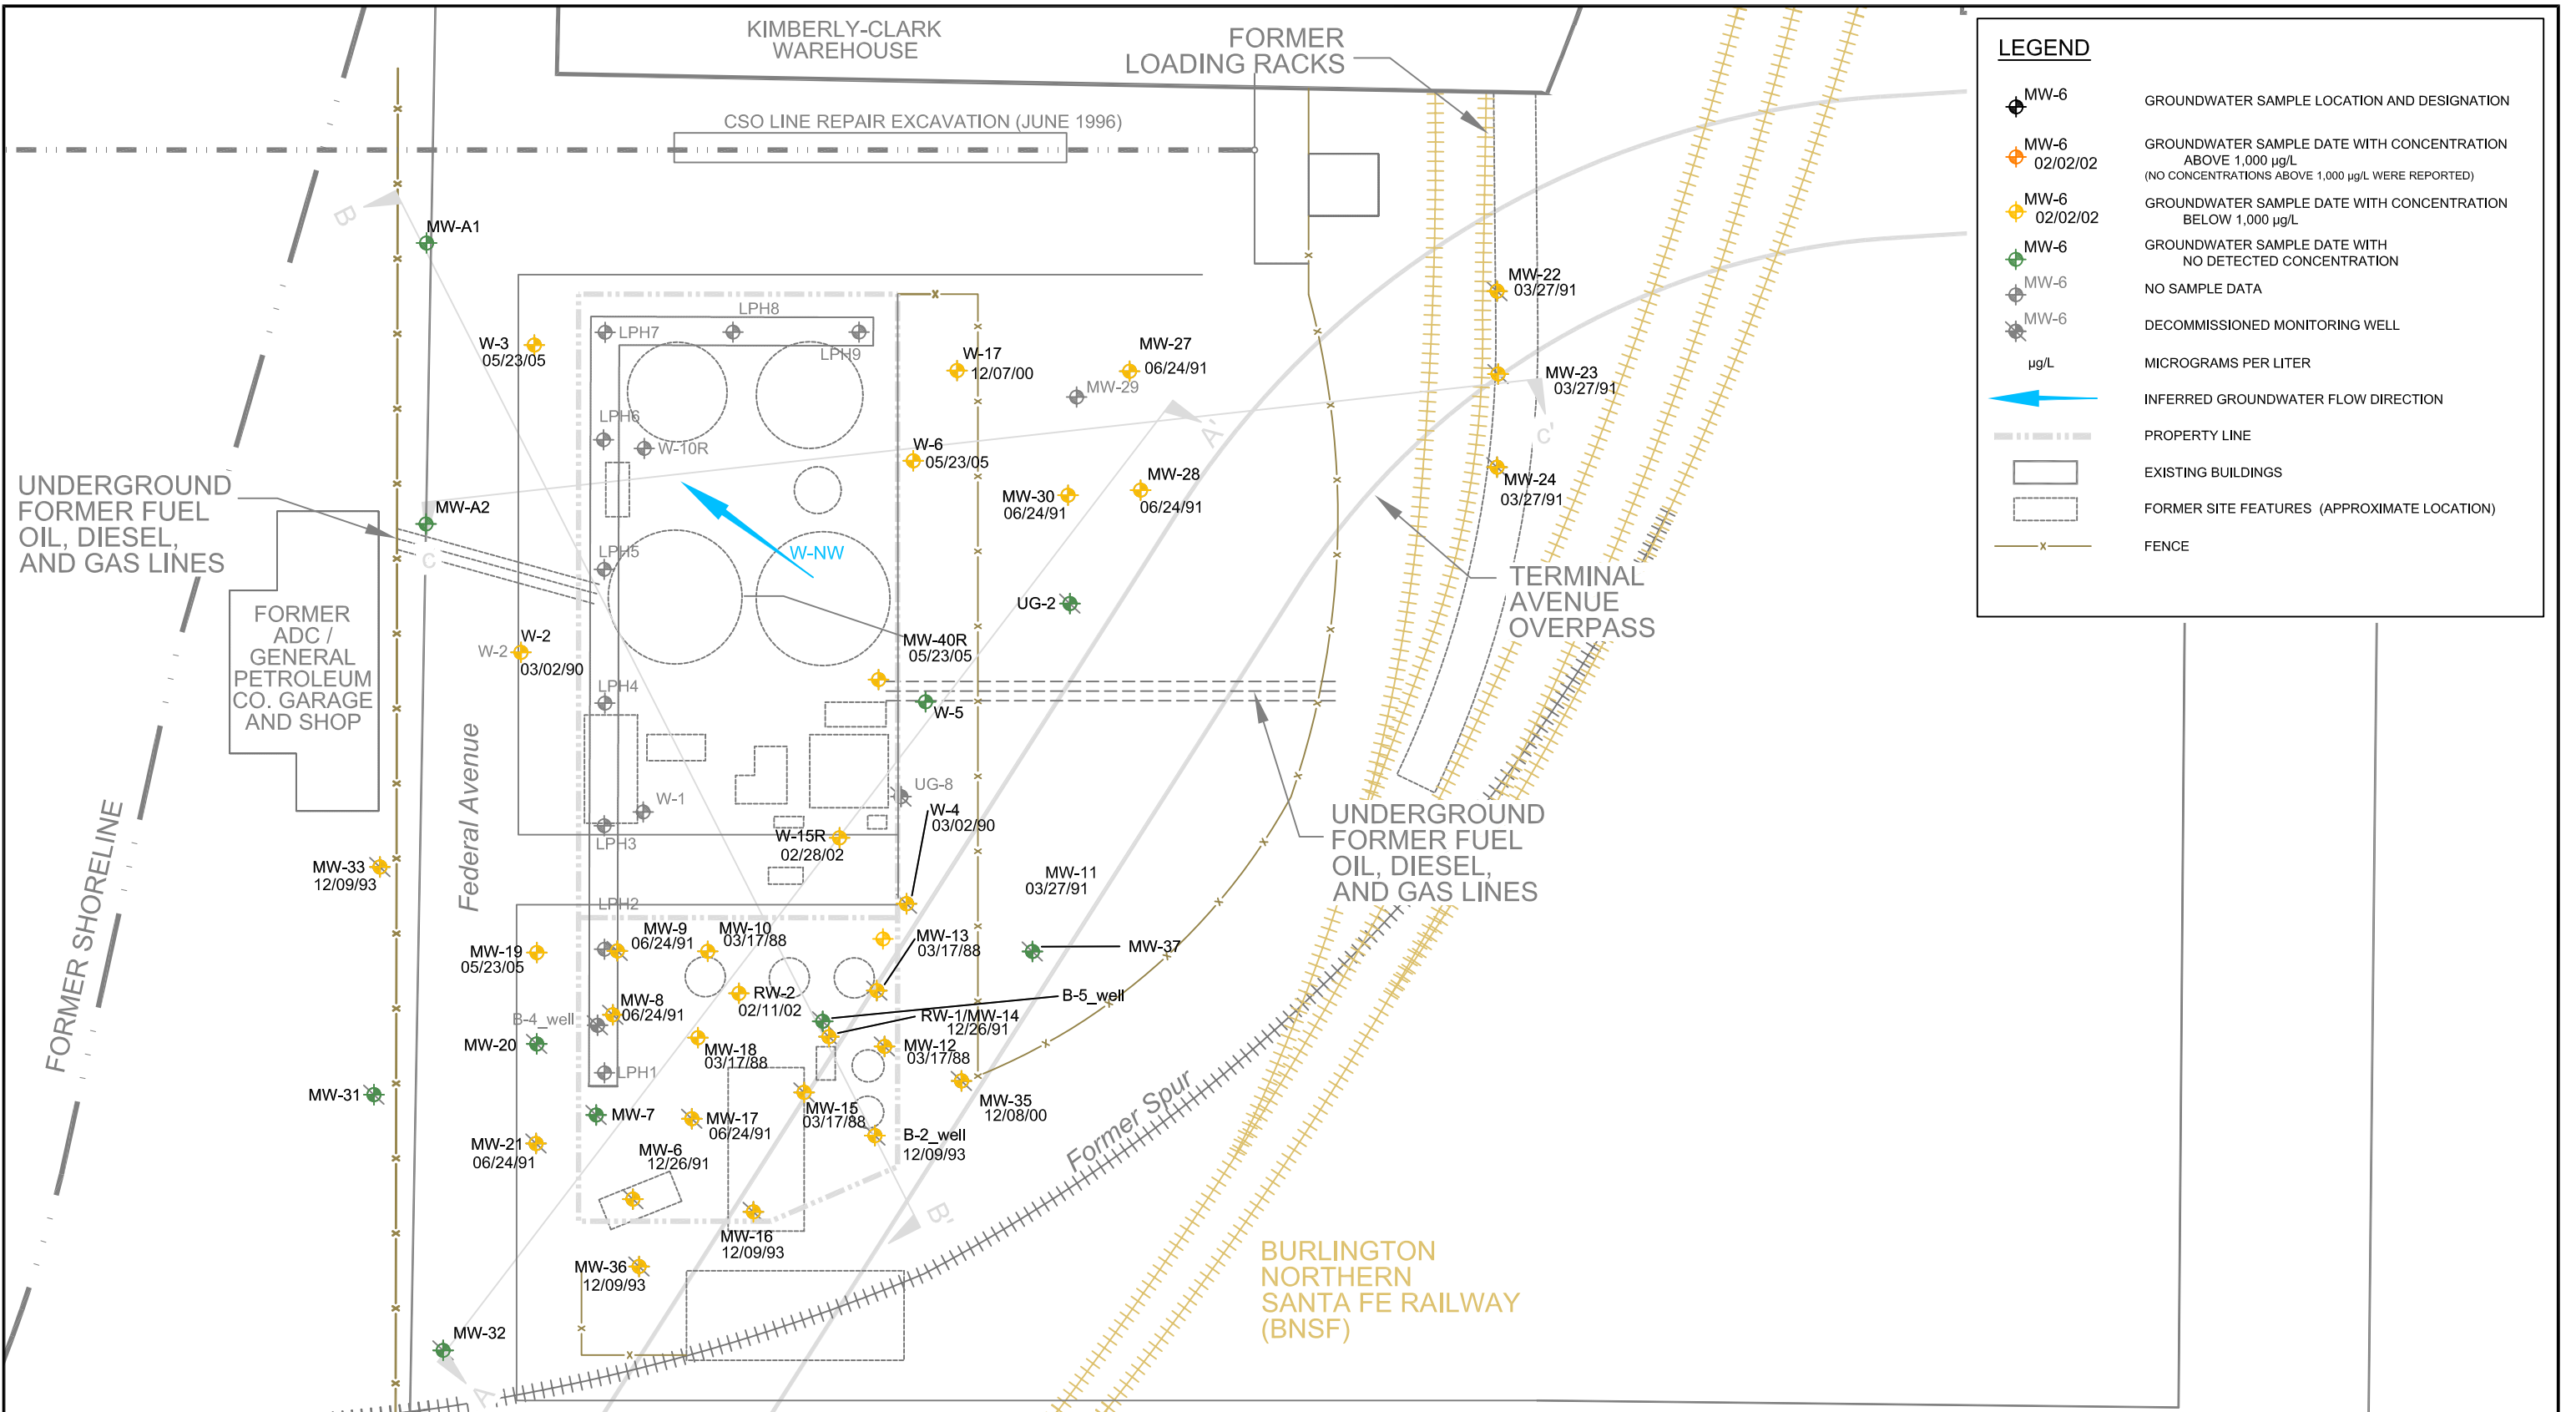

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental

11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ

CHK'D BY: AIS/MS

DATUM: NONE

PROJECTION: NONE

SCALE: 1" = 60'

PROJECT

EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728

TITLE


HISTORICAL DISTRIBUTION OF TOLUENE IN GROUNDWATER MAXIMUM DETECTED VALUE

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.: 1

FIGURE No. 47

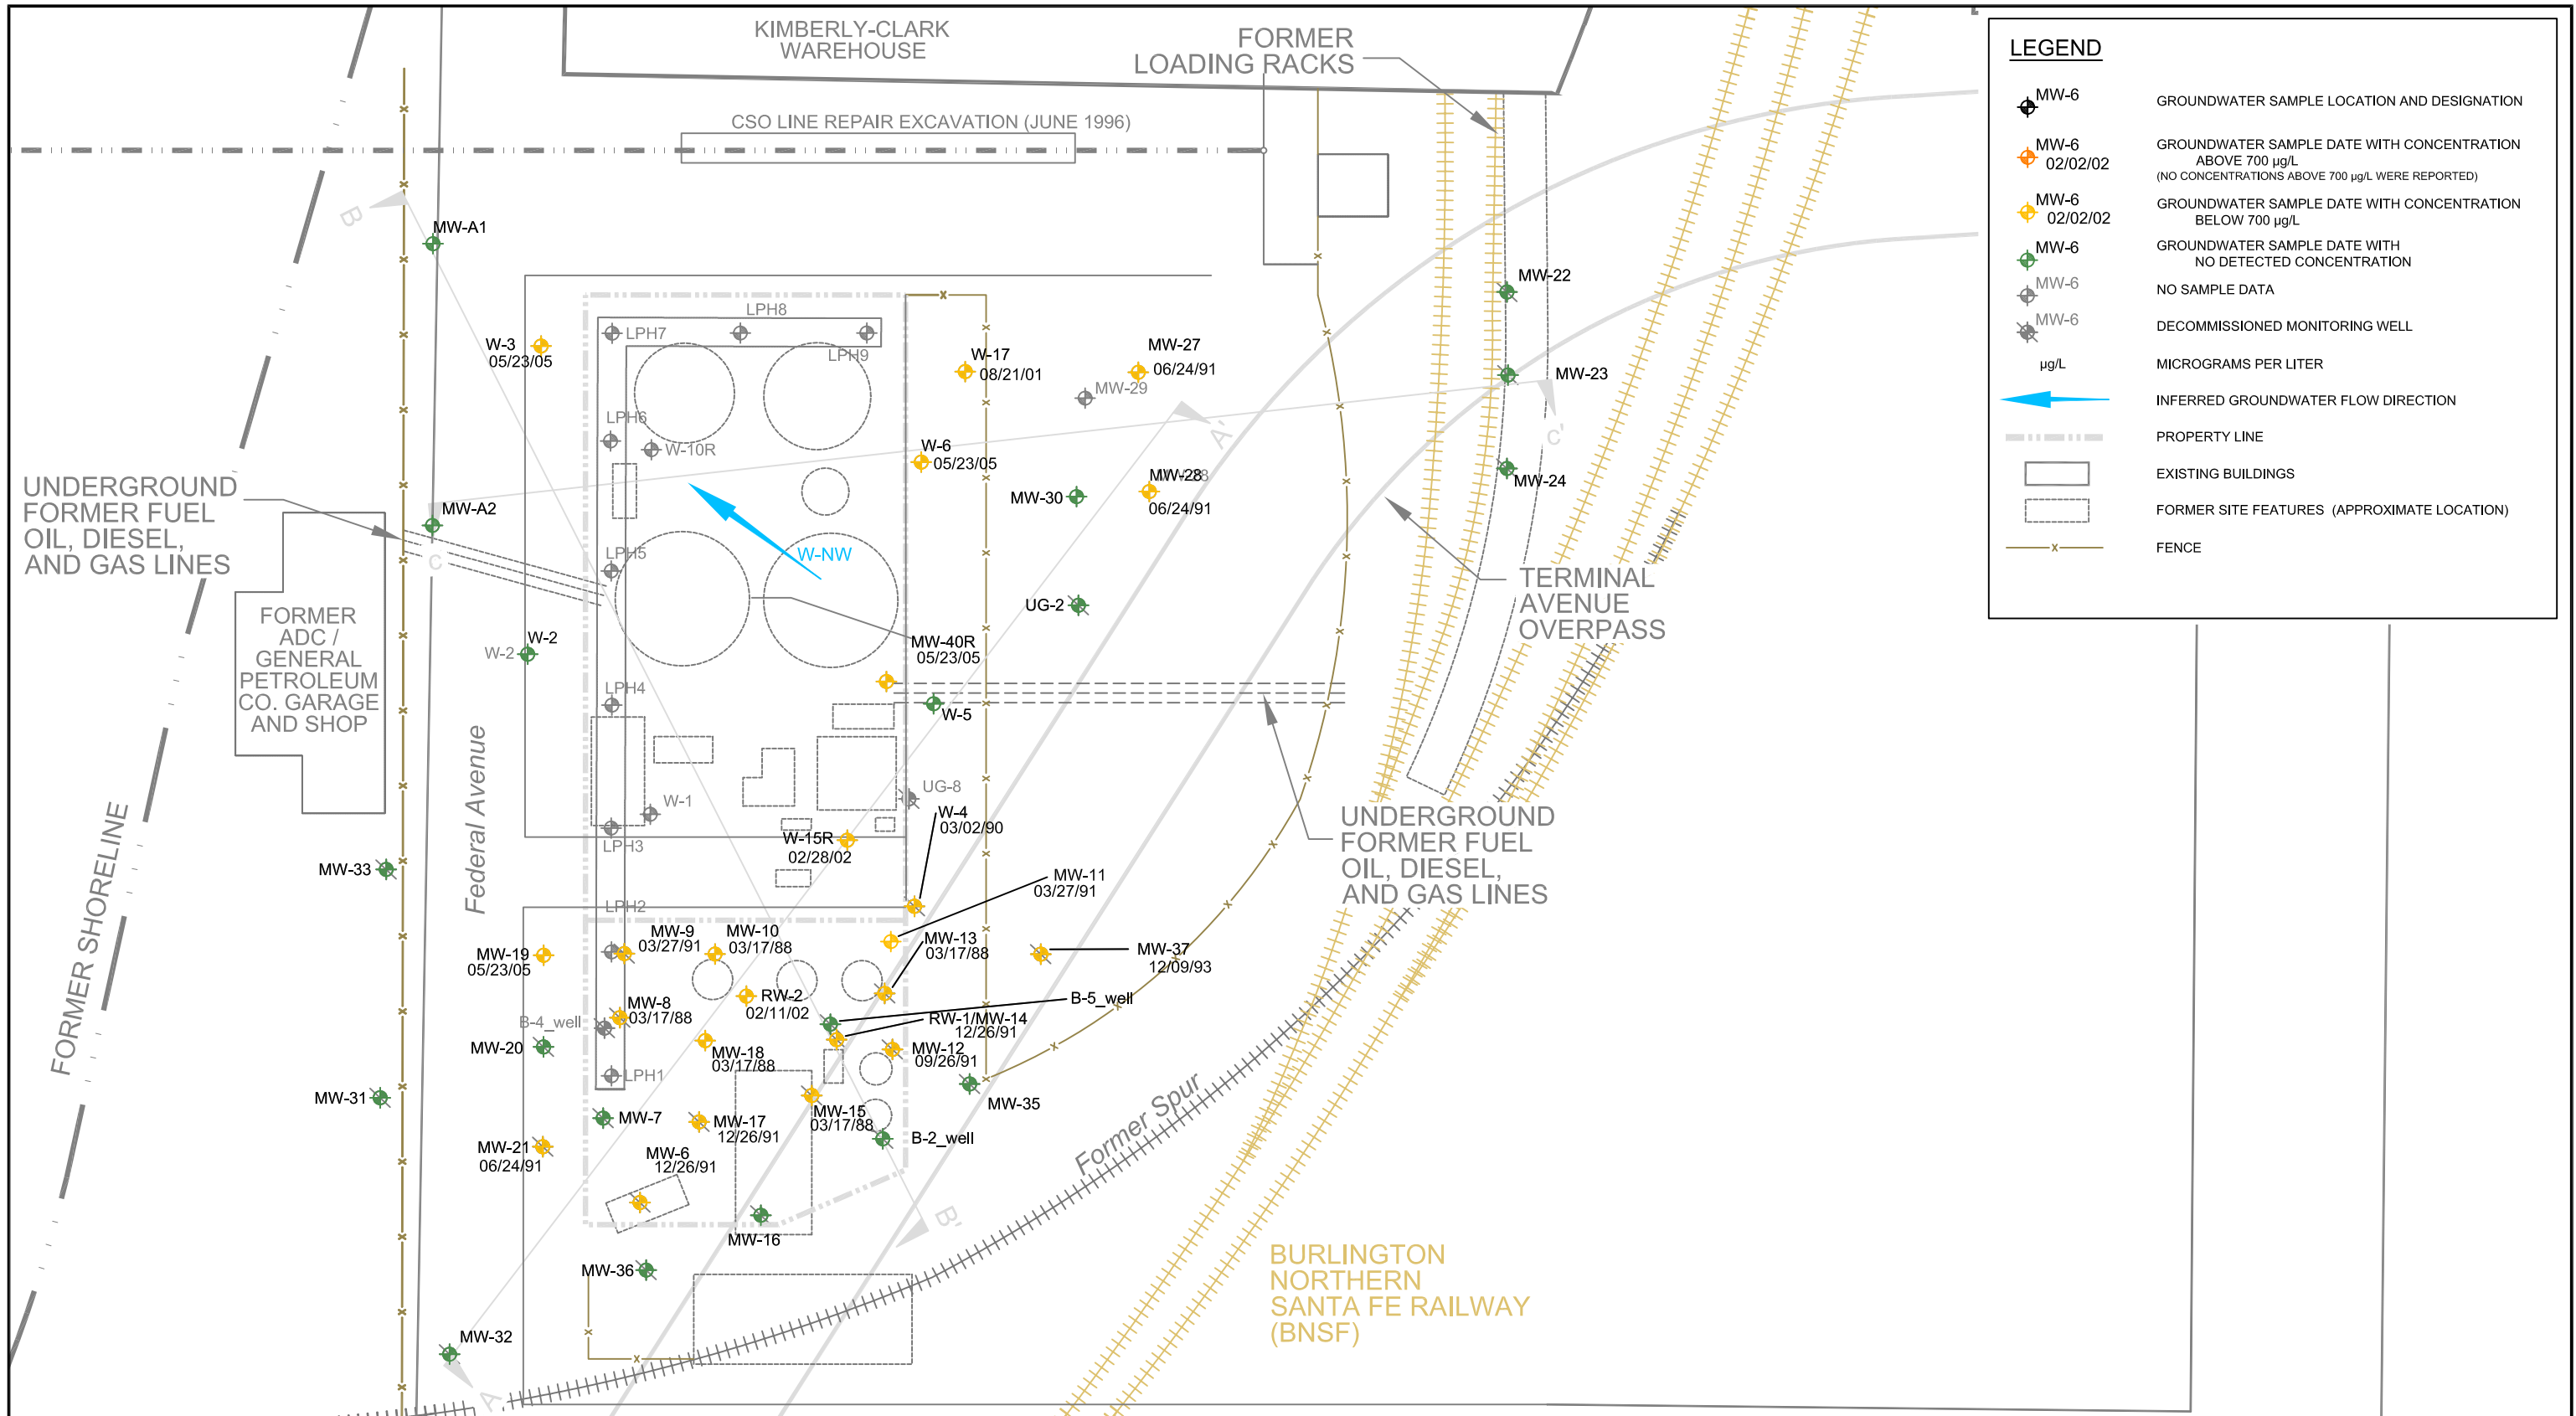

| LEGEND | |
|--------|--|
| | GROUNDWATER SAMPLE LOCATION AND DESIGNATION |
| | GROUNDWATER SAMPLE DATE WITH CONCENTRATION ABOVE 700 µg/L (NO CONCENTRATIONS ABOVE 700 µg/L WERE REPORTED) |
| | GROUNDWATER SAMPLE DATE WITH CONCENTRATION BELOW 700 µg/L |
| | GROUNDWATER SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| | NO SAMPLE DATA |
| | DECOMMISSIONED MONITORING WELL |
| | MICROGRAMS PER LITER |
| | INFERRED GROUNDWATER FLOW DIRECTION |
| | PROPERTY LINE |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

| | |
|-------------|-----------|
| DWN BY: | JRS / BRJ |
| CHK'D BY: | AIS/MS |
| DATUM: | NONE |
| PROJECTION: | NONE |
| SCALE: | 1" = 60' |


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE

**HISTORICAL DISTRIBUTION OF
 ETHYLBENZENE IN GROUNDWATER
 MAXIMUM DETECTED VALUE**

| | |
|--------------|---------------|
| DATE: | AUGUST 2009 |
| PROJECT NO.: | 9-915-15716-C |
| REV. NO.: | 1 |
| FIGURE No. | 48 |

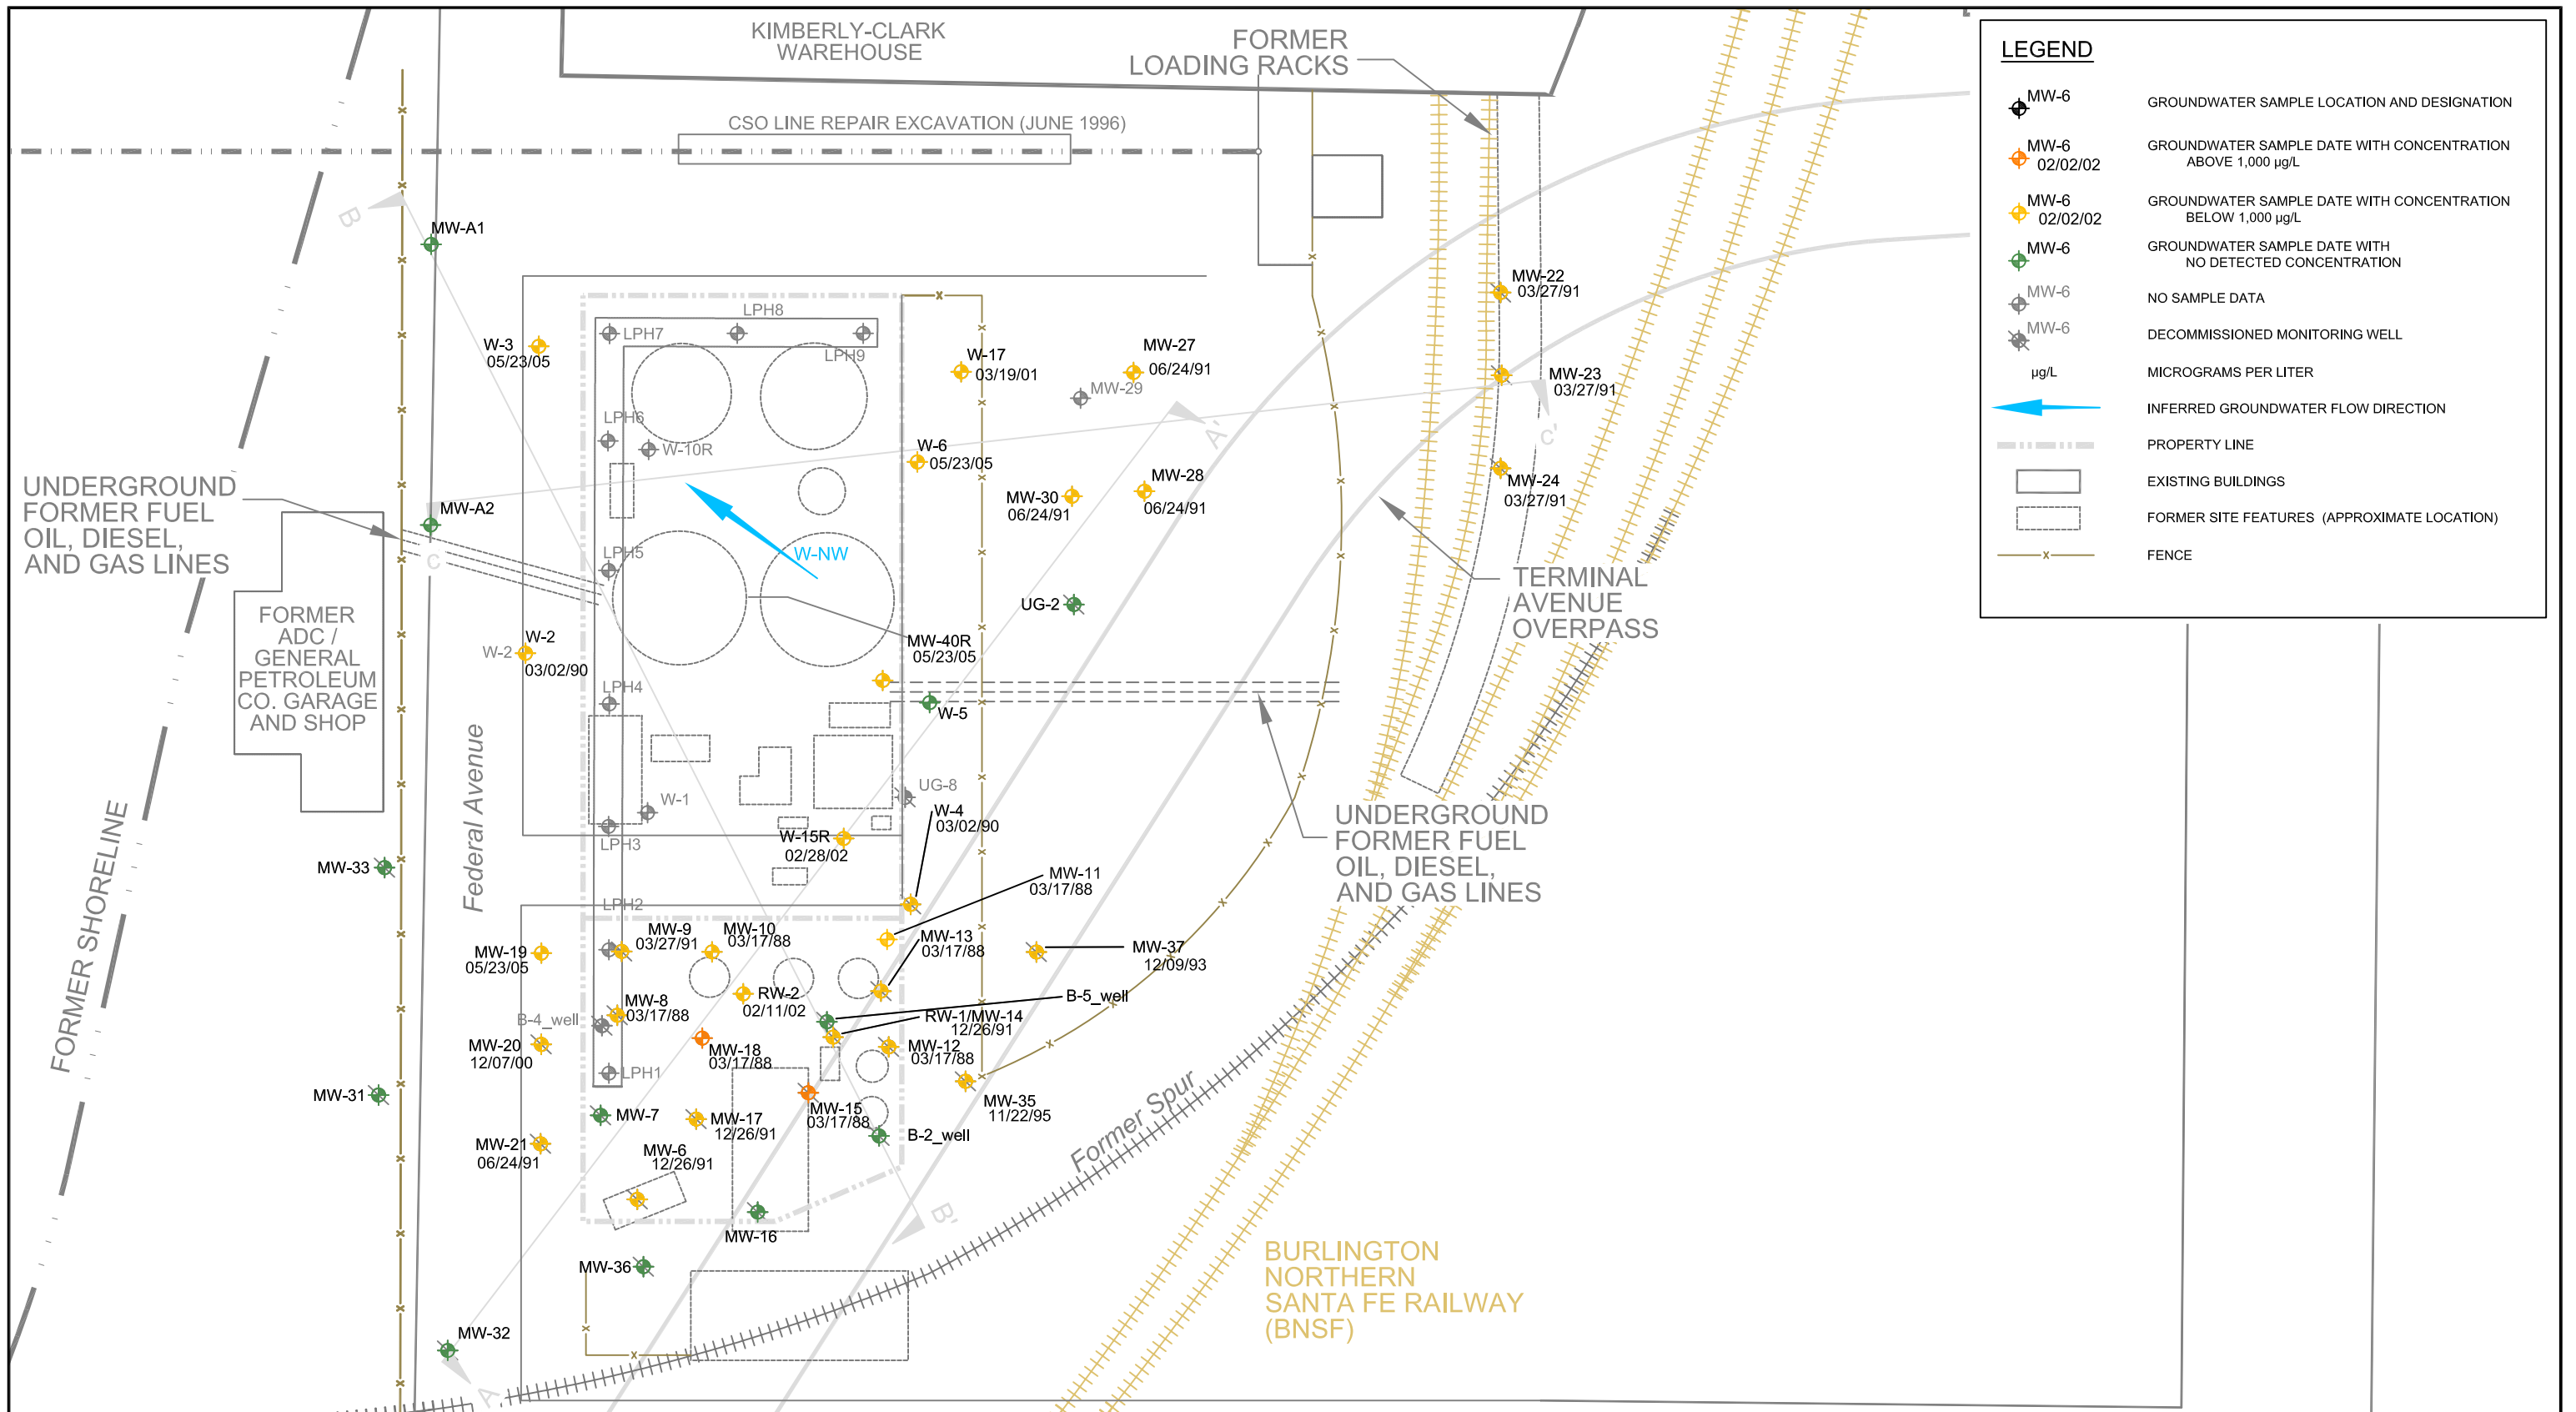

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

0 60 120
SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
CHK'D BY: AIS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728**

TITLE

**HISTORICAL DISTRIBUTION OF
TOTAL XYLENE IN GROUNDWATER
MAXIMUM DETECTED VALUE**

DATE: AUGUST 2009
PROJECT NO: 9-915-15716-C
REV. NO.: 1
FIGURE No. 49

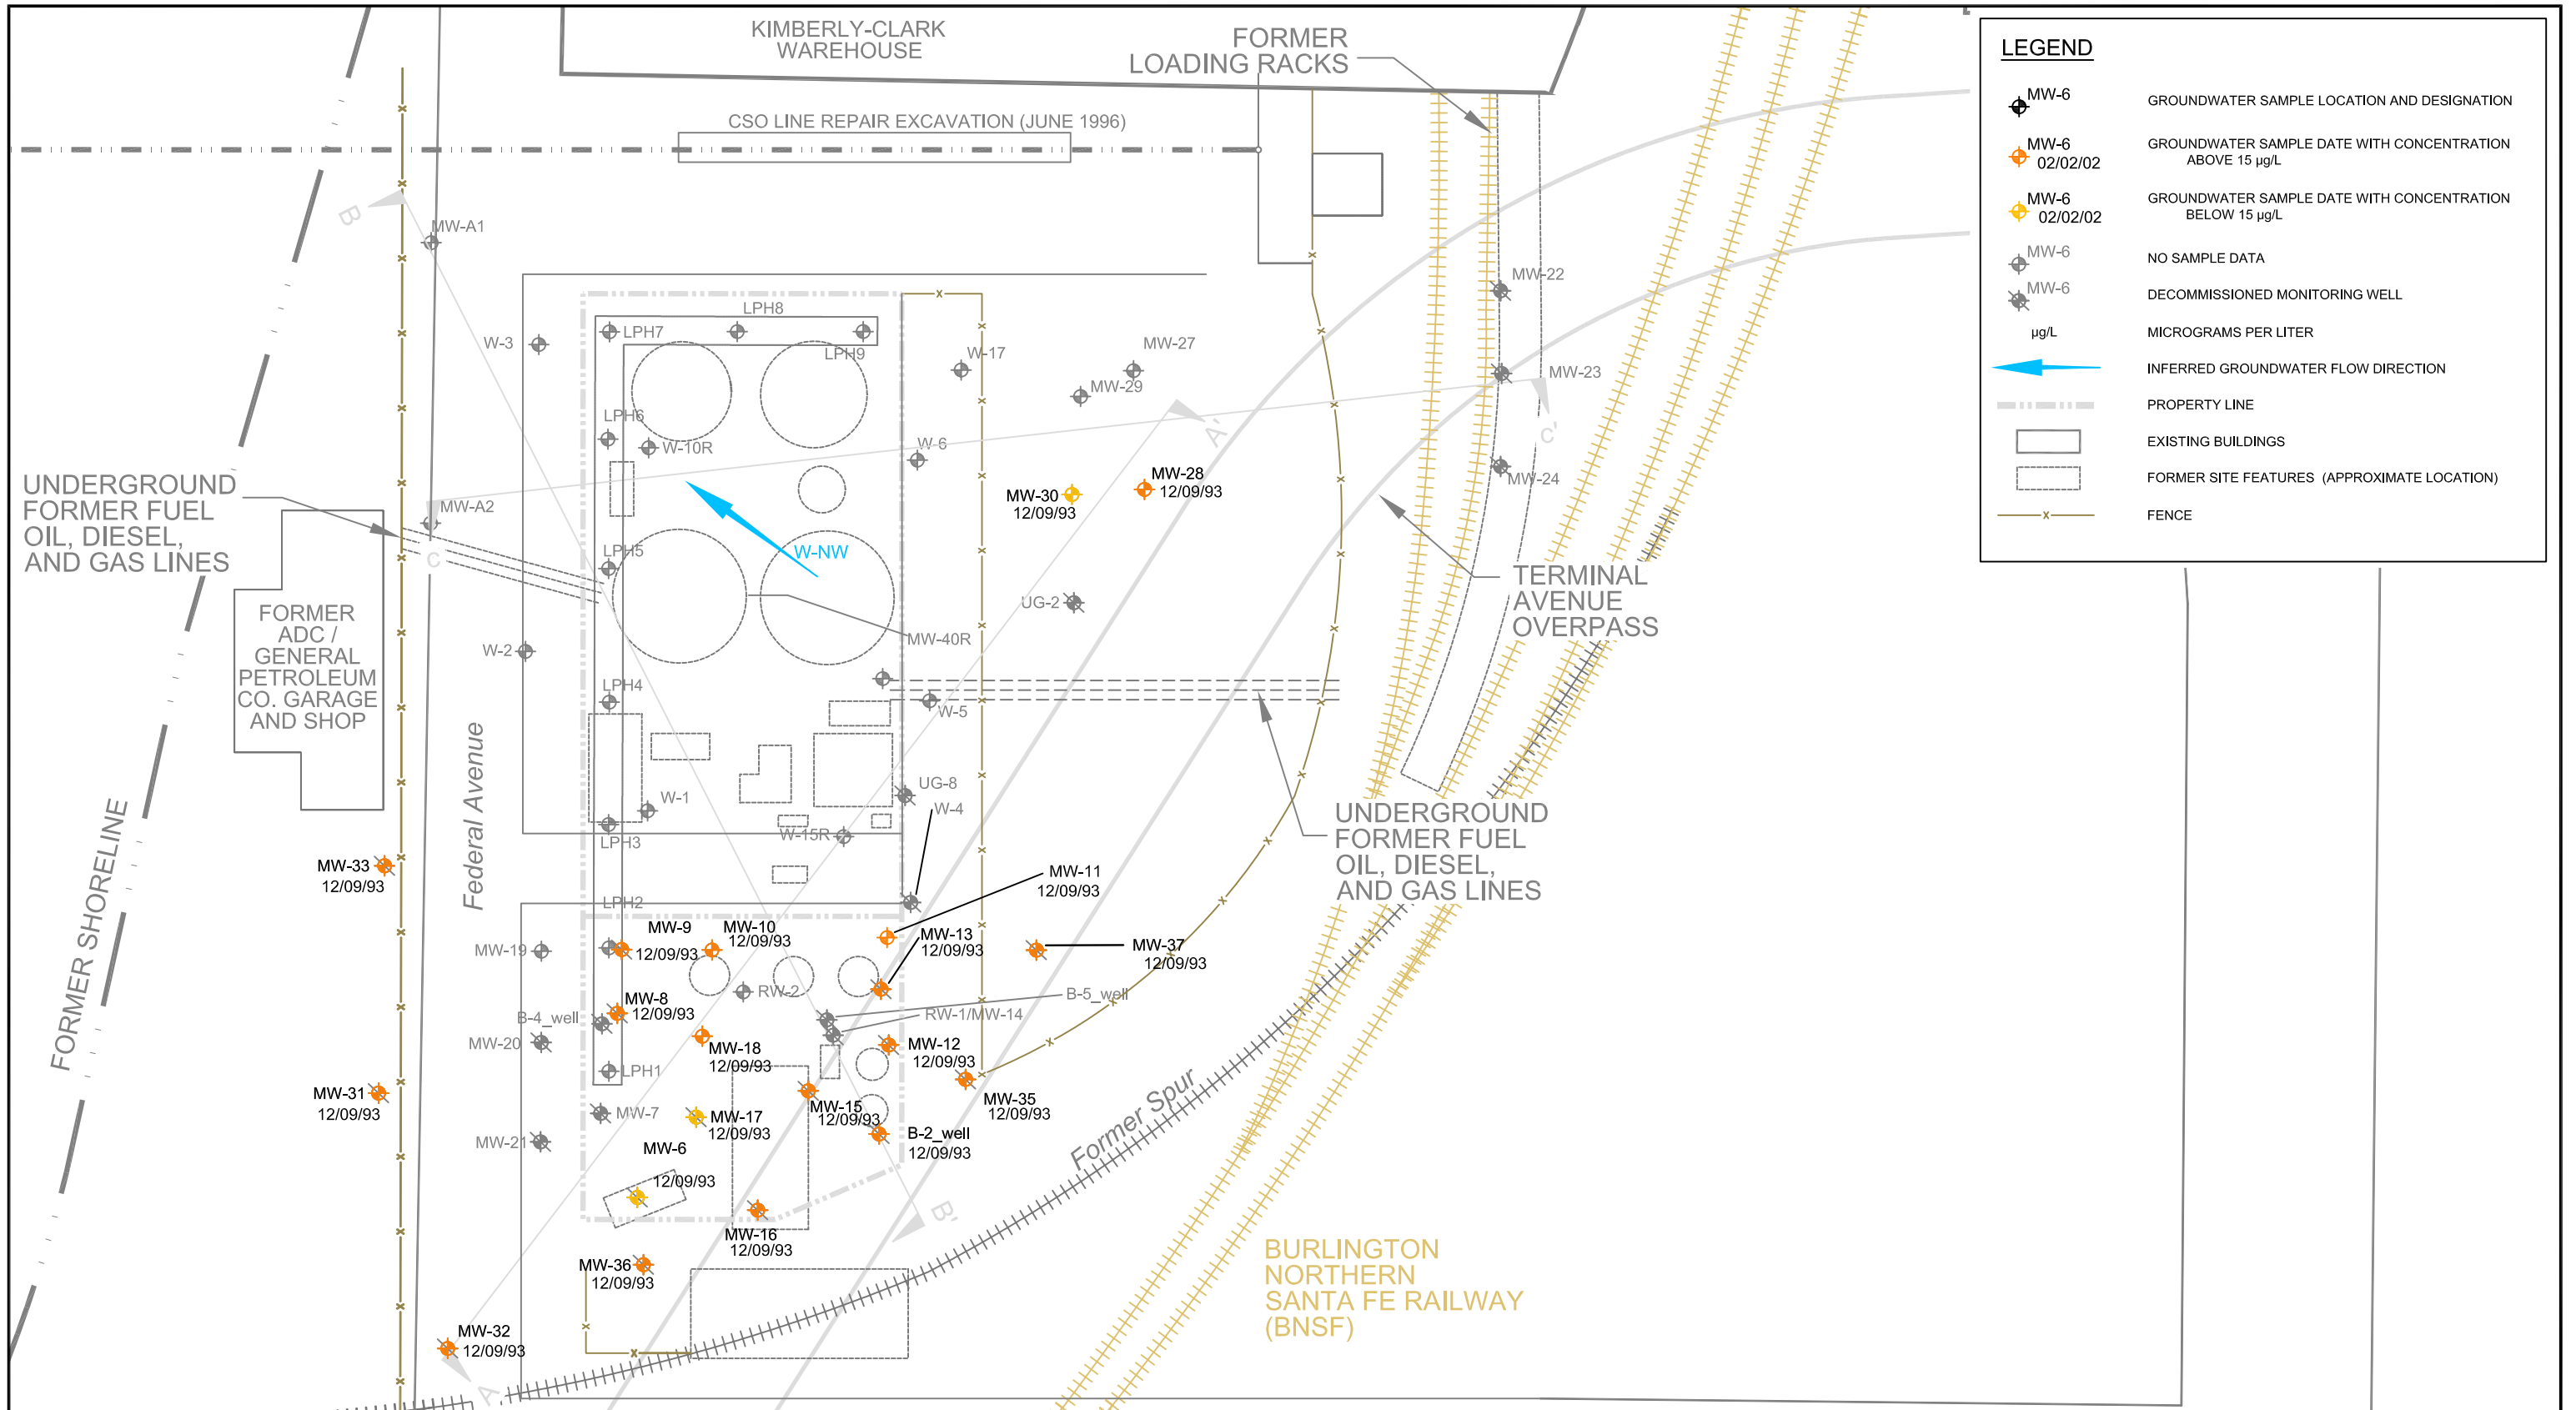

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

0 60 120
SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
CHK'D BY: AIS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728**

TITLE

**HISTORICAL DISTRIBUTION OF
TOTAL LEAD IN GROUNDWATER
MAXIMUM DETECTED VALUE**

DATE: AUGUST 2009
PROJECT NO: 9-915-15716-C
REV. NO.: 1
FIGURE No. 50

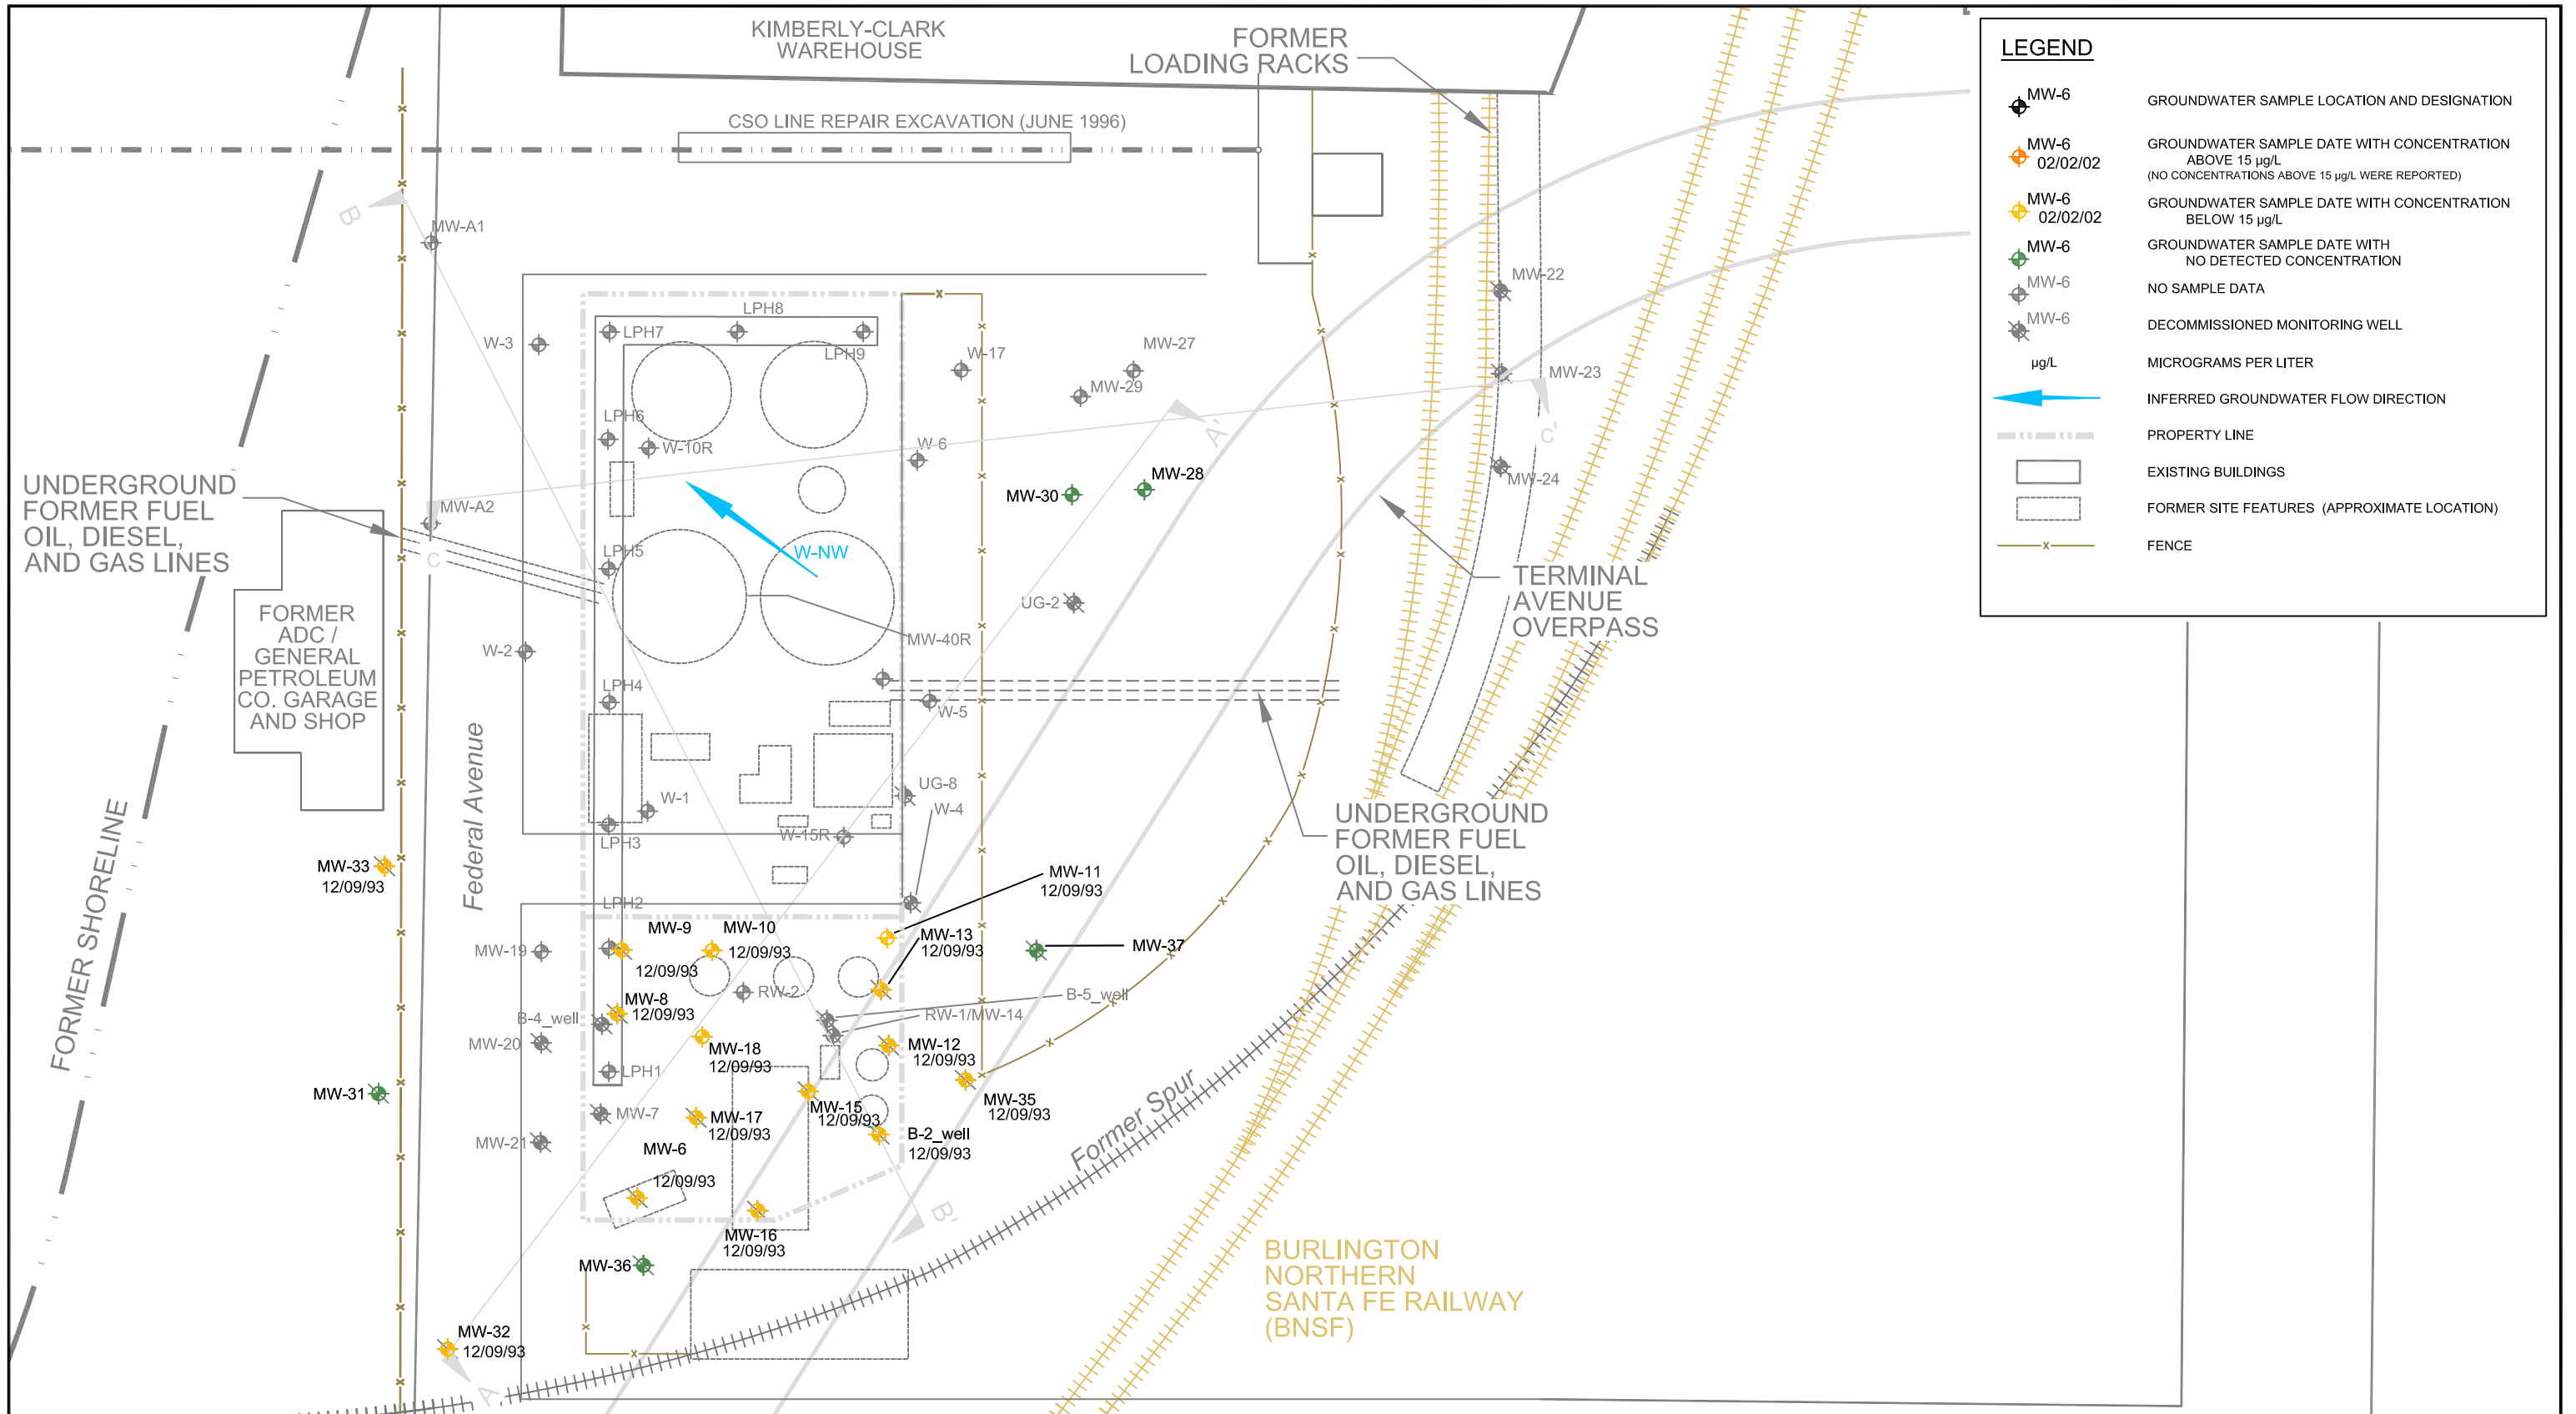

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental

11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201



DWN BY: JRS / BRJ
CHK'D BY: AIS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: 1" = 60'

PROJECT

**EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728**

TITLE


**HISTORICAL DISTRIBUTION OF
DISSOLVED LEAD IN GROUNDWATER
MAXIMUM DETECTED VALUE**


DATE: AUGUST 2009

PROJECT NO:
9-915-15716-C


REV. NO.: 1

FIGURE No.
51



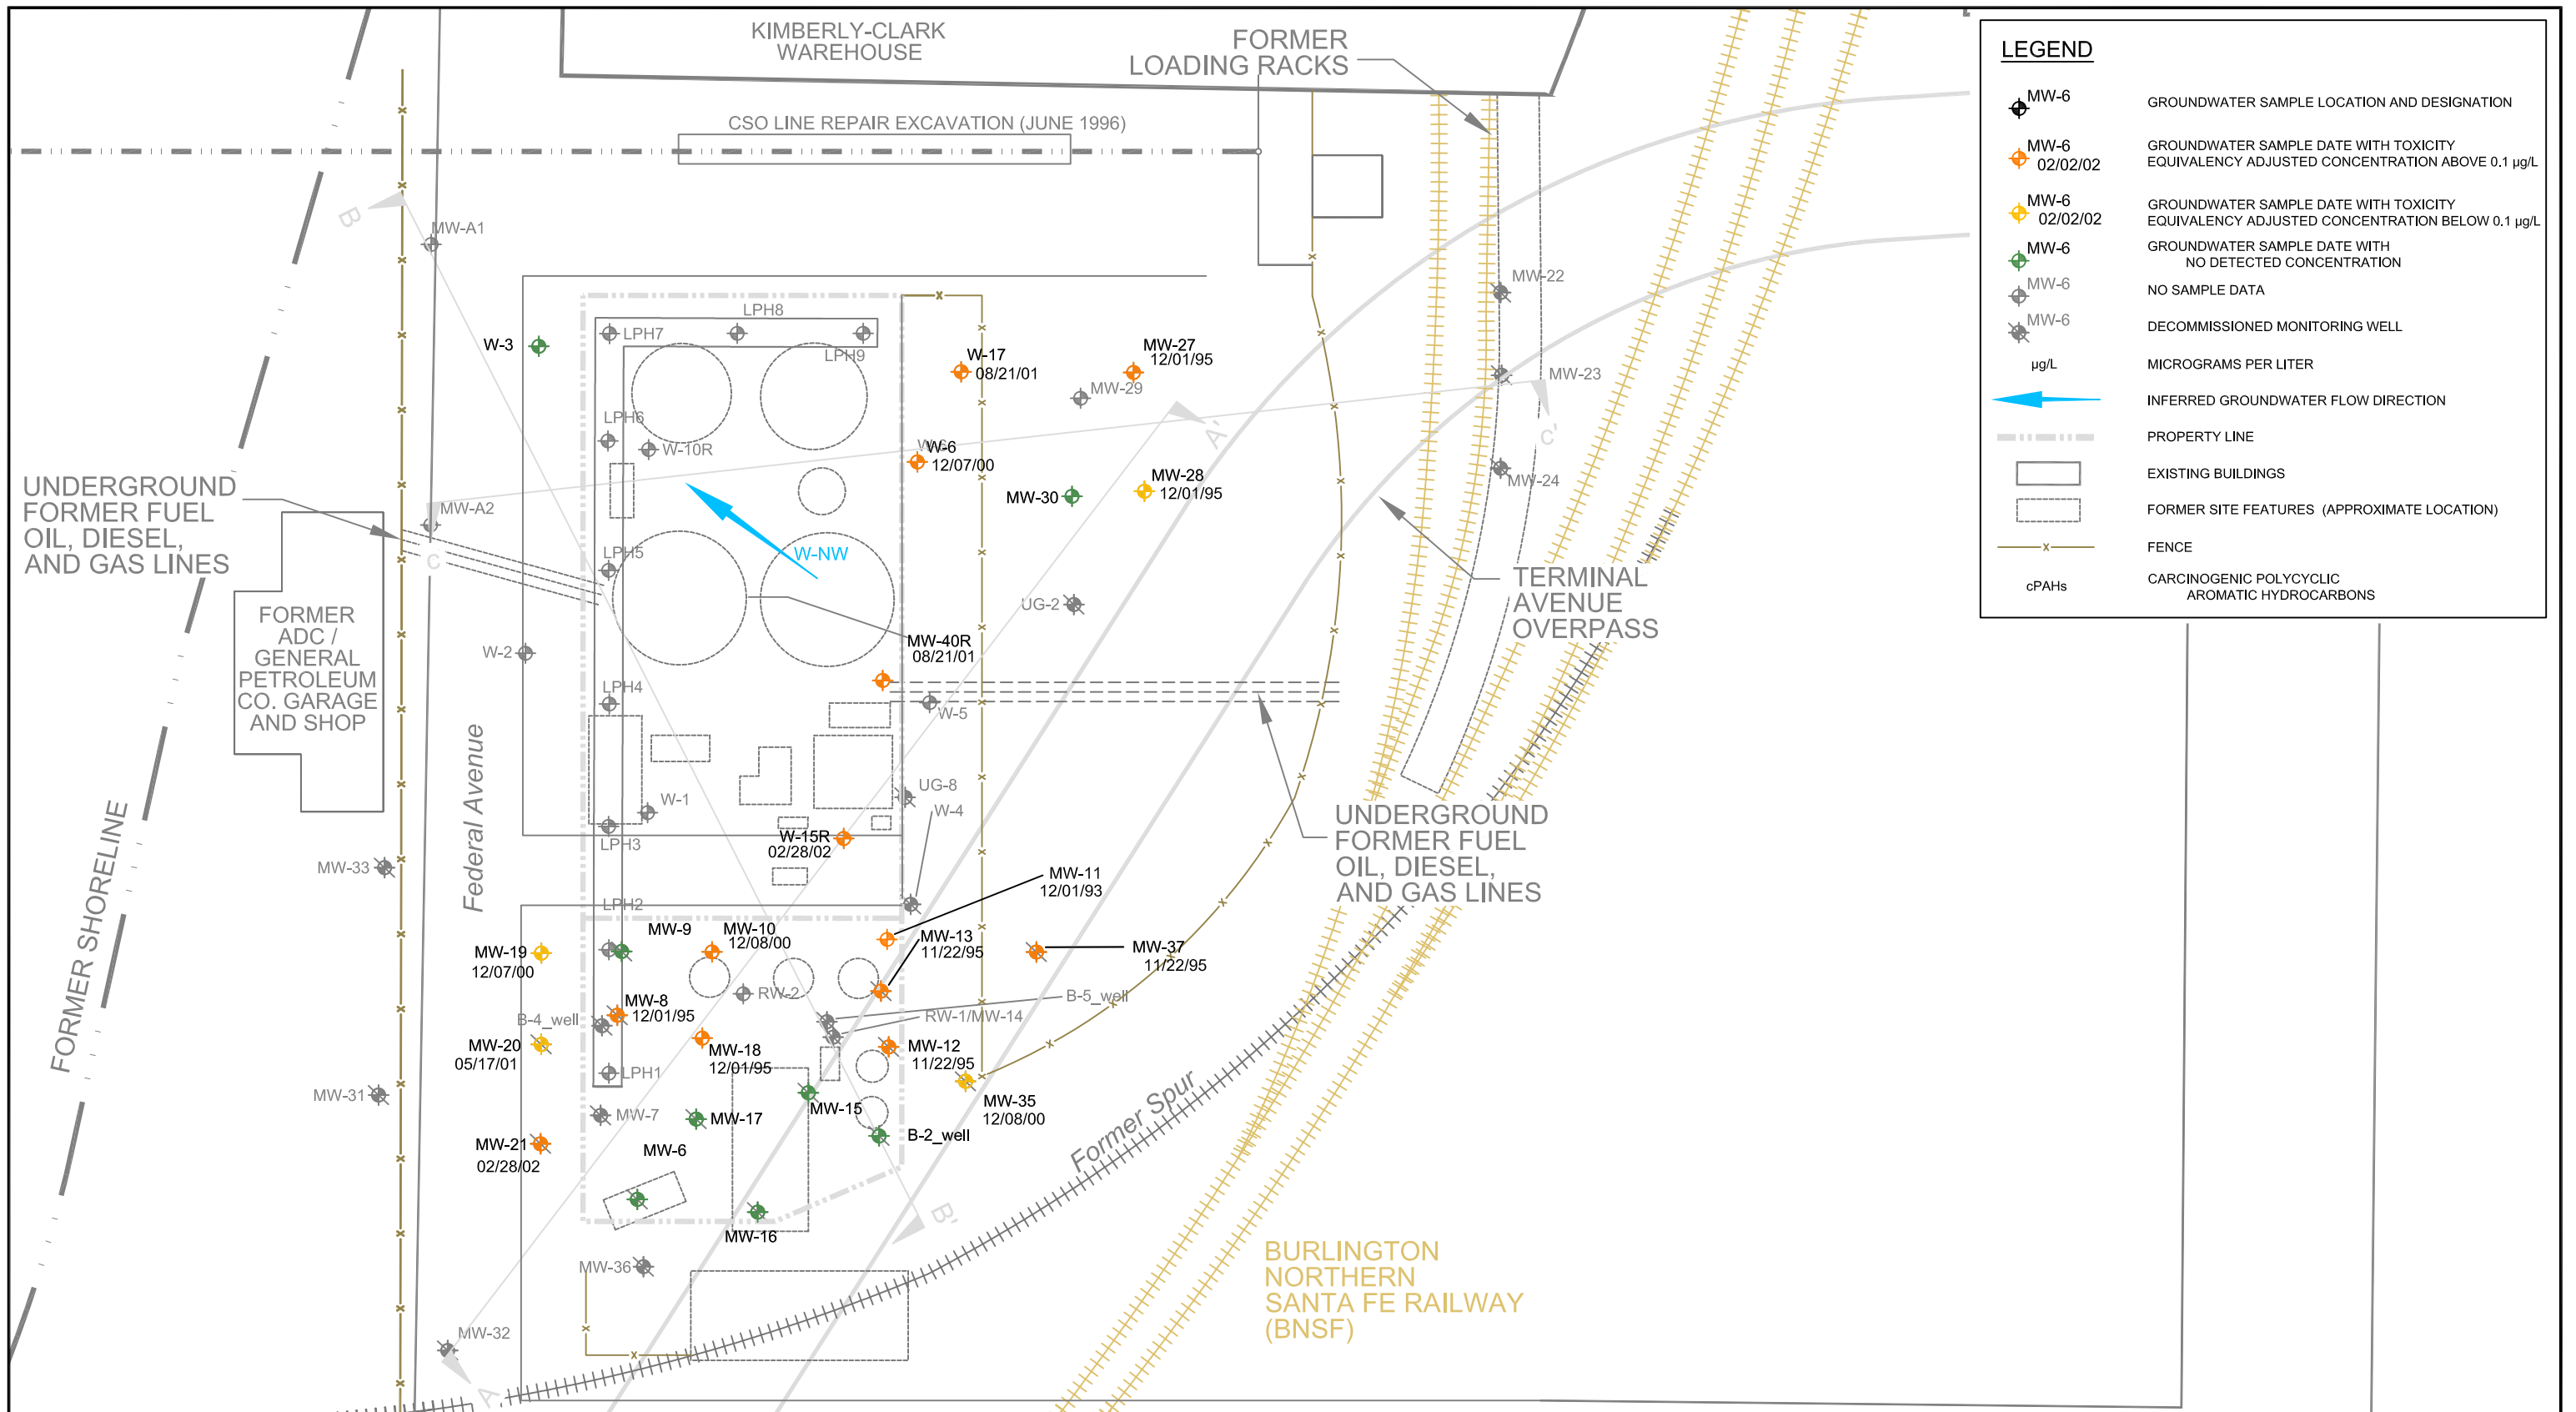

| | | | | | |
|---|-------------|---|--|--|--|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc. 0 60 120 SCALE IN FEET | CLIENT LOGO | CLIENT: | DWN BY: JRS / BRJ CHK'D BY: AIS/MS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C |
| | | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | TITLE: HISTORICAL DISTRIBUTION OF TOXICITY EQUIVALENCY ADJUSTED TOTAL cPAHs IN GROUNDWATER, MAXIMUM DETECTED VALUE | REV. NO.: 1 FIGURE No. 52 | |

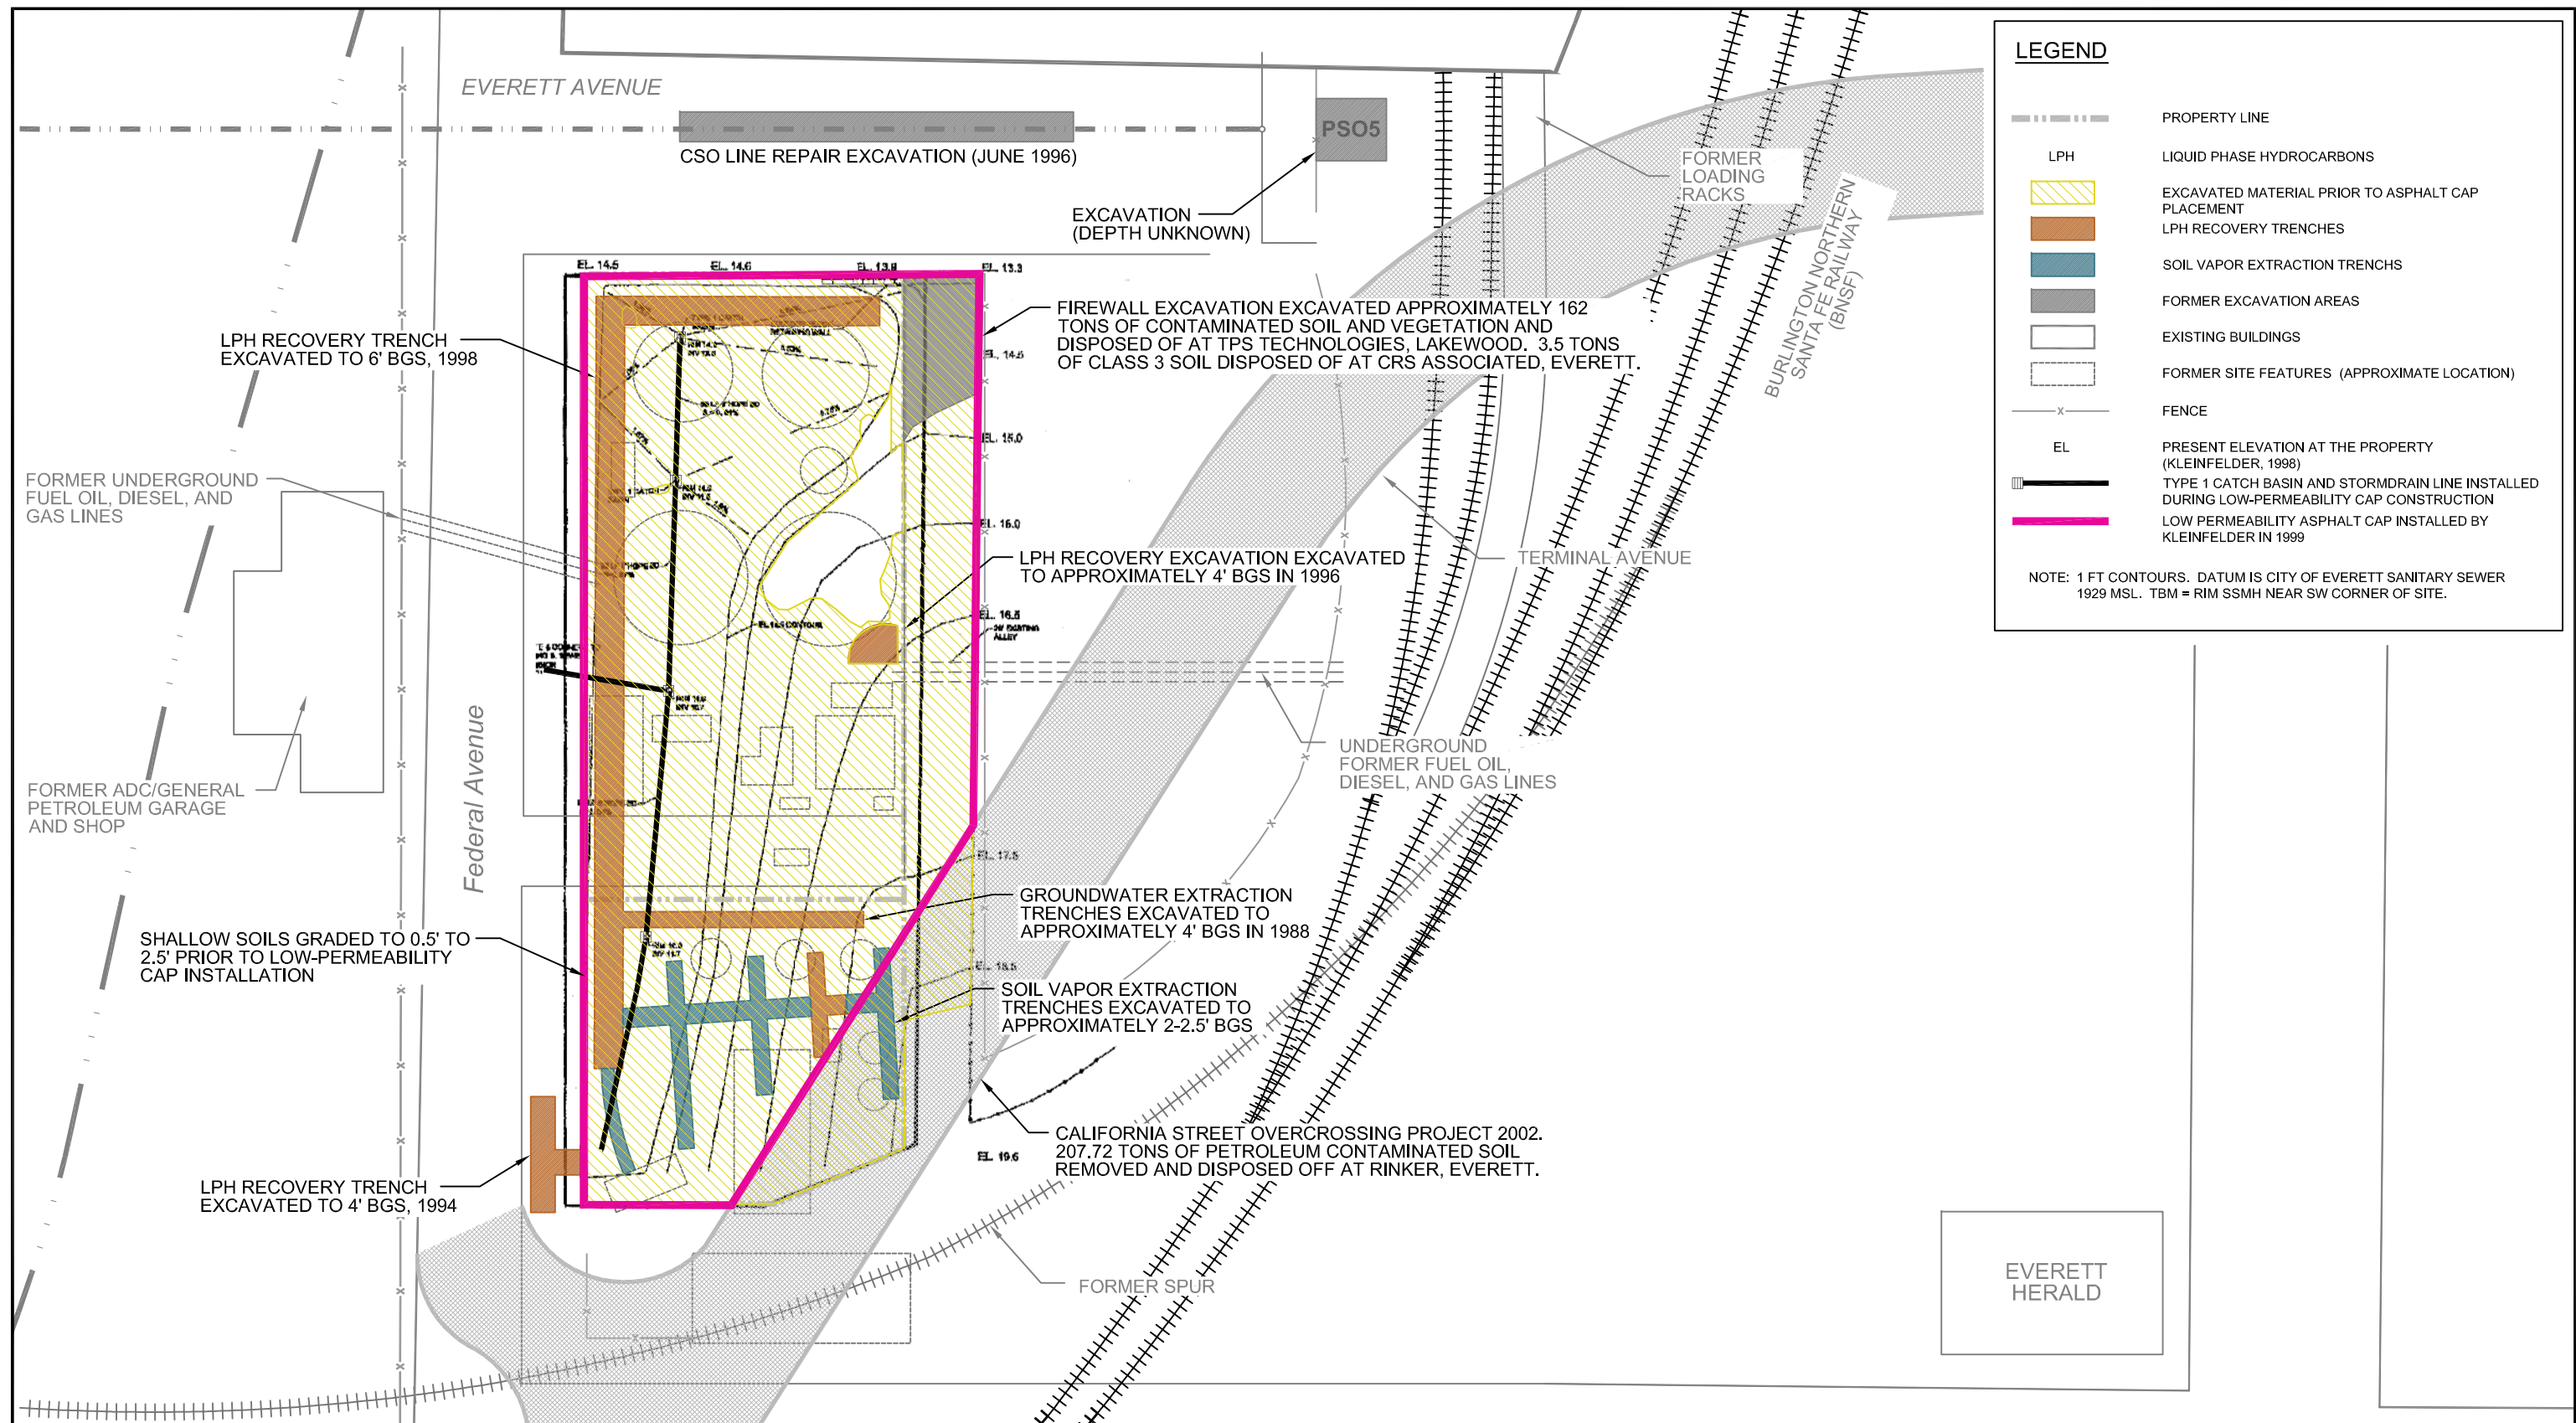

LEGEND

- PROPERTY LINE
- LPH LIQUID PHASE HYDROCARBONS
- EXCAVATED MATERIAL PRIOR TO ASPHALT CAP PLACEMENT
- LPH RECOVERY TRENCHES
- SOIL VAPOR EXTRACTION TRENCHES
- FORMER EXCAVATION AREAS
- EXISTING BUILDINGS
- FORMER SITE FEATURES (APPROXIMATE LOCATION)
- FENCE
- EL PRESENT ELEVATION AT THE PROPERTY (KLEINFELDER, 1998)
- TYPE 1 CATCH BASIN AND STORMDRAIN LINE INSTALLED DURING LOW-PERMEABILITY CAP CONSTRUCTION
- LOW PERMEABILITY ASPHALT CAP INSTALLED BY KLEINFELDER IN 1999

NOTE: 1 FT CONTOURS. DATUM IS CITY OF EVERETT SANITARY SEWER 1929 MSL. TBM = RIM SSMH NEAR SW CORNER OF SITE.

EVERETT HERALD

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

0 60 120
SCALE IN FEET

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY


AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
CHK'D BY: AS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: 1" = 60'

PROJECT: EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE: HISTORICAL EXCAVATION LOCATIONS

DATE: AUGUST 2009
PROJECT NO.: 9-915-15716-C
REV. NO.: 1
FIGURE No. 53

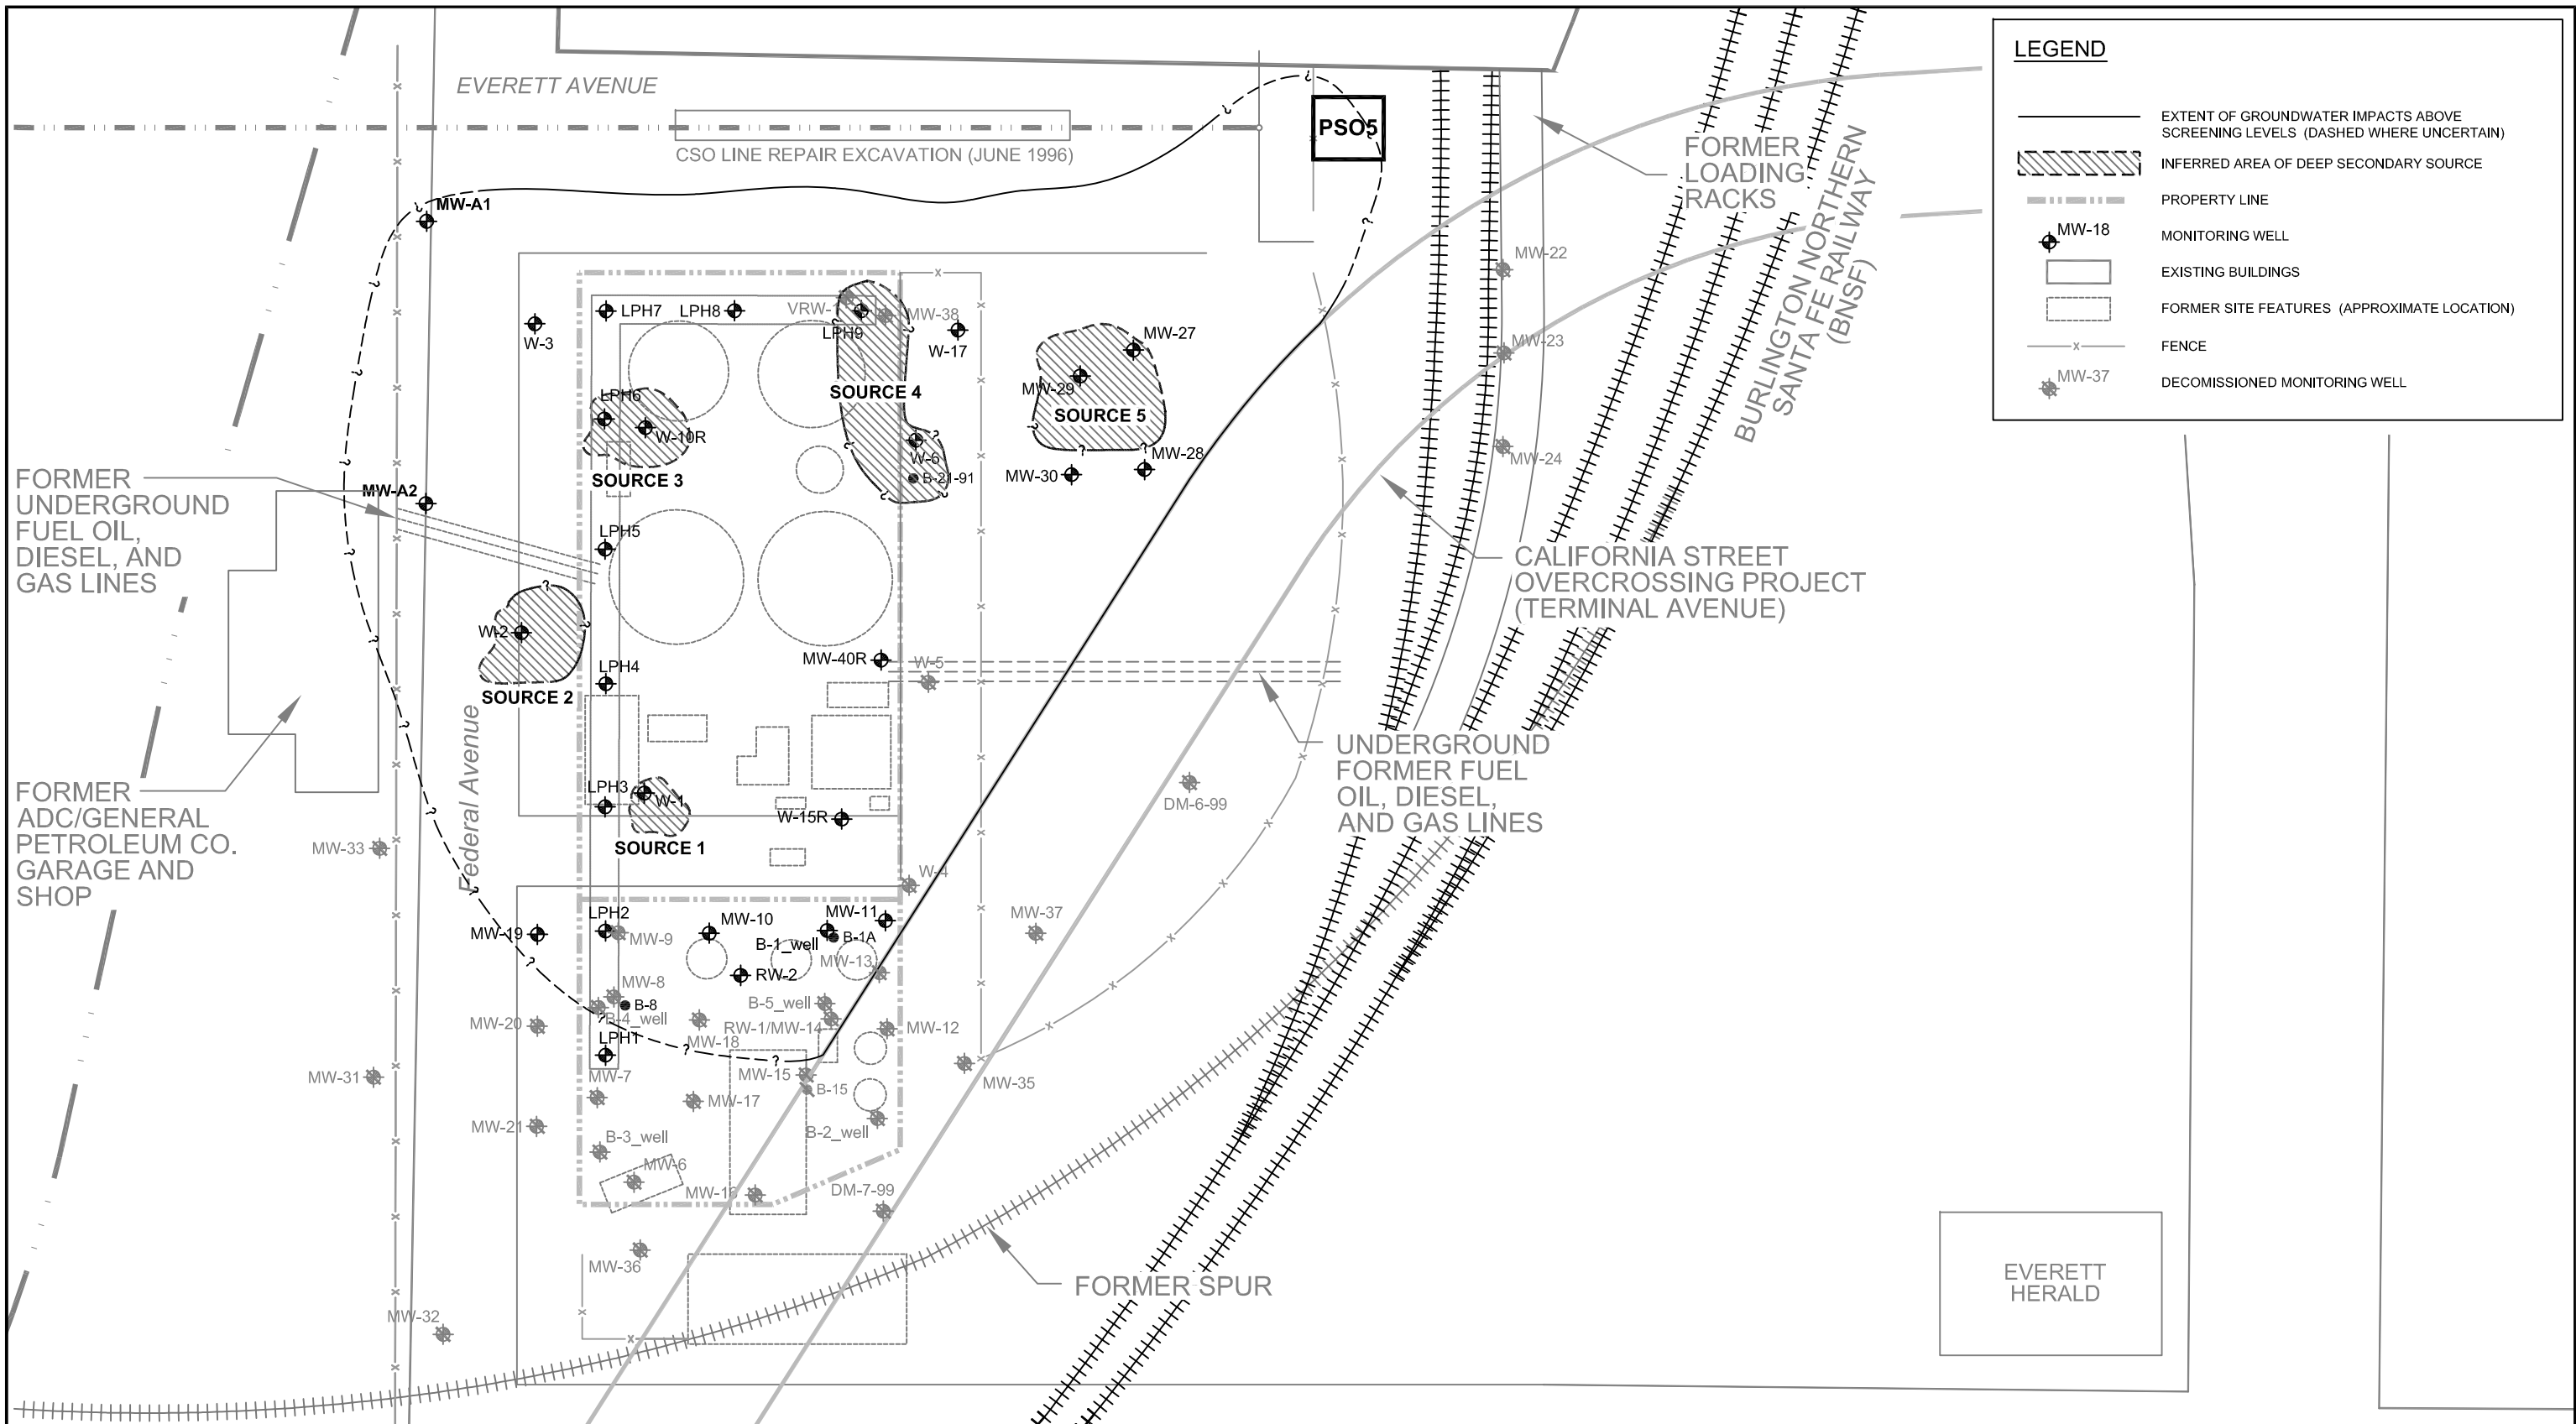

| LEGEND | |
|--------|---|
| | EXTENT OF GROUNDWATER IMPACTS ABOVE SCREENING LEVELS (DASHED WHERE UNCERTAIN) |
| | INFERRED AREA OF DEEP SECONDARY SOURCE |
| | PROPERTY LINE |
| | MONITORING WELL |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |
| | DECOMMISSIONED MONITORING WELL |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
CHK'D BY: AS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: 1" = 60'

PROJECT
**EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728**

TITLE
**AREA OF IMPACT
AND SECONDARY SOURCE AREAS**

DATE: AUGUST 2009
PROJECT NO: 9-915-15716-C
REV. NO.: 1
FIGURE No. 54

0 60 120
SCALE IN FEET



SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:
EXXONMOBIL
AMERICAN DISTRIBUTING CO.

AMEC Earth & Environmental
 11810 North Creek Parkway N
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS
 CHK'D BY: AS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: AS SHOWN

PROJECT
EXXONMOBIL/ADC PROPERTY
ECOLOGY ID 2728

TITLE
PROPOSED DATA GAP INVESTIGATIONS
EXPLORATION PLAN

DATE:
FEBRUARY 2010

PROJECT NO.:
 9-915-15716-C

REV. NO.:

FIGURE No.
55

APPENDIX A

Sampling and Analysis Plan



SAMPLING AND ANALYSIS PLAN
ExxonMobil / ADC Property, Ecology Site ID 2728
2717/2731 Federal Avenue
Everett, Washington

Submitted to:

ExxonMobil Environmental Services
East Providence Terminal
1001 Wampanoag Trail
Riverside, Rhode Island 02915

and

American Distributing Company
13618 45th Avenue NE
Marysville, Washington 98271

Submitted by:

AMEC Earth & Environmental, Inc.
11810 North Creek Parkway North
Bothell, Washington 98011

February 26, 2010

AMEC Project No. 8-915-15716-C

TABLE OF CONTENTS

| | | <u>Page</u> |
|------|--|-------------|
| 1.0 | INTRODUCTION | 1 |
| 2.0 | OBJECTIVES | 1 |
| 3.0 | PROJECT ORGANIZATION AND RESPONSIBILITIES | 2 |
| 4.0 | DATA QUALITY OBJECTIVES | 3 |
| 5.0 | PRE- FIELD ACTIVITIES | 5 |
| 5.1 | Field Health and Safety Procedures | 5 |
| 6.0 | FIELD PROCEDURES | 6 |
| 6.1 | Utility Survey | 6 |
| 6.2 | Calibration of Field Equipment | 6 |
| 6.3 | Soil Borings | 7 |
| 6.4 | Soil Sample Collection | 7 |
| 6.5 | Sample Containers, Preservation and Storage | 8 |
| 6.6 | Sample Labeling..... | 8 |
| 6.7 | Soil Sample Analyses..... | 9 |
| 6.8 | Soil Geotechnical Analyses..... | 9 |
| 6.9 | Monitoring Well Installation and Development | 10 |
| 6.10 | Surveying of Monitoring Wells..... | 11 |
| 6.11 | Groundwater Level Measurements | 11 |
| 6.12 | Groundwater Sample Collection..... | 11 |
| 6.13 | Groundwater Sample Analyses..... | 12 |
| 6.14 | Equipment Decontamination | 13 |
| 6.15 | Investigation Derived Waste Management..... | 13 |
| 6.16 | Aquifer Testing | 13 |
| 6.17 | Tidal Study | 15 |
| 6.18 | Historic or Cultural Resources..... | 16 |
| 7.0 | DOCUMENTATION | 16 |
| 7.1 | Field Logbook..... | 16 |
| 7.2 | Labeling..... | 17 |
| 7.3 | Sample Chain of Custody..... | 17 |
| 8.0 | QUALITY CONTROL | 18 |
| 8.1 | Field Quality Control Samples..... | 18 |
| 8.2 | Laboratory Quality Control Samples..... | 19 |
| 8.3 | Field Variances..... | 19 |
| 8.4 | Data Management..... | 19 |
| 9.0 | REFERENCES | 19 |

LIST OF TABLES

| | |
|---------|---|
| Table 1 | DQO Objectives |
| Table 2 | Indicator Hazardous Substances |
| Table 3 | Proposed Soil and Groundwater Samples |
| Table 4 | Sample Containers, Preservation and Storage |
| Table 5 | Geotechnical Analyses |
| Table 6 | Natural Attenuation Parameters |
| Table 7 | Tidal Study Well Specifications |

LIST OF FIGURES

| | |
|----------|--|
| Figure 1 | Site Location Map |
| Figure 2 | Proposed Data Gap Investigation Exploration Plan |

LIST OF ATTACHMENTS

| | |
|---------------|--------------------------------------|
| Attachment A1 | Site-Specific Health and Safety Plan |
| Attachment A2 | Field Documentation Forms |

ACRONYMS AND ABBREVIATIONS

| | |
|------------|--|
| ADC | American Distributing Company |
| AMEC | AMEC Earth & Environmental, Inc. |
| bgs | below ground surface |
| BTEX | benzene, toluene, ethylbenzene, and xylenes |
| COC | chain-of-custodies |
| CSS | Colorado silica sand |
| DAHP | Washington State Department of Archaeology and Historic Preservation |
| DQIs | data quality indicators |
| DQOs | data quality objectives |
| Ecology | Washington State Department of Ecology |
| EDB | ethylene dibromide |
| EDC | 1,2-dichloroethane |
| EPA | U.S. Environmental Protection Agency |
| EPH | extractable petroleum hydrocarbons |
| ExxonMobil | ExxonMobil Oil Corporation |
| FFS | Focused Feasibility Study |
| HASP | Health and Safety Plan |
| HSA | hollow stem auger |
| IDW | investigation derived waste |
| mg/kg | milligram per kilograms |
| mg/L | milligram/liter |
| MDLs | method detection limits |
| MS/MSD | matrix spike/matrix spike duplicate |
| mV | millivolt |
| NTUs | nephelometric turbidity units |
| PAHs | polycyclic aromatic hydrocarbons |
| PID | photoionization detector |
| PPE | personal protective equipment |
| ppm | parts per million |
| PVC | polyvinyl chloride |
| Property | ExxonMobil/ADC Property |
| QA | quality assurance |
| QC | quality control |
| RPD | relative percent difference |
| SAP | Sampling and Analysis Plan |
| SD | standard deviation |
| TPH-D | total petroleum hydrocarbons–diesel |
| TPH-O | total petroleum hydrocarbons–oil |
| TPH-G | total petroleum hydrocarbons–gasoline |
| VOCs | volatile organic compounds |
| VPH | volatile petroleum hydrocarbons |
| WAC | Washington Administrative Code |
| WP | Work Plan |

1.0 INTRODUCTION

AMEC Earth & Environmental, Inc. (AMEC), has prepared this Sampling and Analysis Plan (SAP) as part of the Focused Feasibility Study (FFS) Work Plan (WP) on behalf of ExxonMobil Oil Corporation (ExxonMobil) and the American Distributing Company (ADC) for the ExxonMobil/ADC Property (the Property) located at 2717 and 2731 Federal Avenue in Everett, Washington (Figure 1). This SAP outlines supplemental field investigations that will be conducted at and near the Property to fill remaining data gaps and obtain the information required to complete the FFS for the Exxon Mobil/ADC Site (Washington State Department of Ecology [Ecology] Ecology Facility ID 2728). This SAP addresses the specific field sampling activities, chemical analyses, and quality assurance (QA) procedures that will be conducted during additional investigations at the Property.

2.0 OBJECTIVES

The objective of the soil and groundwater investigation is to collect additional data needed to define the nature and extent of contamination, support decisions regarding future environmental cleanup, and fill existing data gaps to provide the information necessary to complete the FFS. The soil and groundwater investigation will include the following activities.

1. Install five new groundwater monitoring wells (MW-A3 through MW-A7) to the maximum depth of 15 feet bgs to define the western, northwestern, and northeastern limits of the dissolved-phase plume and to identify potential contamination associated with the former ADC Garage and Shop. Soil samples will be collected from each soil boring for laboratory analysis to ensure that additional petroleum hydrocarbon sources are not contributing to the existing plume (Figure 2).
2. Advance seven deep soil borings around the perimeter of the Property (AB-1 through AB-6) and off-Property to the northeast (MW-A7) to a maximum depth of 35 feet below ground surface (bgs) to determine if a silt layer is present beneath the fill and collect samples for geotechnical analysis. Deep boring MW-A7 will be backfilled to a depth of 13 feet bgs and converted to a shallow monitoring well screened from 3 to 13 feet bgs.
3. Four of the six deep soil borings (AB-1, AB-2, AB-5, and AB-6) will be advanced around the perimeter of the Property to assist in evaluating the lateral extent of the secondary source areas 1, 2, and 4 (Section 7.2 in FFS WP). Soil samples from borings AB-1 and AB-5 will be collected continuously from approximately 0.5 to 5 feet bgs. Shallow samples (above water table) with obvious signs of petroleum-hydrocarbon contamination will be analyzed for TPH-D and TPH-O.

4. Advance seven shallow soil borings (AP-1 through AP-7) to a maximum depth of 15 feet bgs. Six soil borings will be drilled east portion of the Property (near former General Petroleum Corporation's spur fuel loading racks) to define the lateral and vertical extent of soil contamination in the vicinity of MW-29. The seventh boring (AP-1) will be drilled in the area of the former ADC Garage and Shop to determine if any hydrocarbons are present in soils beneath the shop floor. A grab groundwater sample will be collected from AP-1.
5. Perform four quarters of groundwater sampling in all new monitoring wells and in five existing wells for natural attenuation parameters. Groundwater sampling for chemistry parameters will be conducted to be representative of separate wet and dry seasons. During two of the four quarterly sampling events, the groundwater sampling program will include general chemistry water quality parameters (i.e., dissolved oxygen, total organic carbon, alkalinity), in addition to the standard suite of laboratory analytical methods in select monitoring wells.
6. Conduct aquifer testing in two monitoring wells to determine the hydraulic conductivity of off-Property aquifer materials. The aquifer testing will consist of slug tests conducted in newly constructed monitoring wells MW-A5 and MW-A6.
7. Undertake a comprehensive tidal influence study incorporating a temporary stilling well in Puget Sound as well as newly installed and existing groundwater monitoring wells.

3.0 PROJECT ORGANIZATION AND RESPONSIBILITIES

AMEC Earth & Environmental, Inc. (AMEC) is the environmental consultant for this project.

The project is organized as follows:

ExxonMobil and ADC are the owners of the Site.

- Gary Dupuy (phone number 206-342-1777) and Meg Strong (phone number 425-368-0966) are the client managers for the project
- Leah Vigoren (phone number 206-838-8470) is the project manager and is responsible for project management. Technical and administrative elements are included in her project management responsibilities.
- Anastasia Speransky (phone number 206-838-1776) is the task manager for the project and quality assurance manager for this project, which includes data quality objectives, and quality assurance/quality control (QA/QC) objectives.
- Heather Vick (phone number 206-838-8463) is the project hydrogeologist. She is responsible for hydrogeological field activities as well as health and safety.
- Test America, Inc., in Tacoma, Washington, is responsible for managing analyses of the samples collected. The laboratory is also responsible for sample preparation and ensuring that the QA/QC results from the laboratory are valid.

4.0 DATA QUALITY OBJECTIVES

Data Quality Objectives (DQOs) is a quality management tool developed by the U.S. Environmental Protection Agency (EPA) that is used to facilitate the planning of data collection activities. The DQO process provides a systematic procedure for defining criteria in the data collection design. The primary reference for the formal DQO process is EPA's guidance document (EPA 1994). The DQO process consists of the following seven key steps.

1. State the problem.
2. Identify the decision.
3. Identify the inputs to the decision.
4. Define the boundaries of the study.
5. Develop a decision rule.
6. Specify tolerable limits on decision errors.
7. Optimize the design for obtaining data.

DQOs are qualitative and quantitative statements, developed using the DQO process, that are intended to clarify study objectives, define an appropriate type of data, and specify tolerable levels of potential decision errors that will be used as the basis for establishing the quality and quantity of data needed to support decisions.

Table 1 provides the DQOs for the work described in this SAP. Table 2 provides a list of the indicator hazardous substances and their MTCA cleanup criteria.

Data Quality Indicators (DQI) (accuracy, precision, completeness, representativeness, comparability, and method detection limits) refer to quality control criteria established for various aspects of data gathering, sampling, or analysis activity. In defining DQIs specifically for the project, the level of uncertainty associated with each measurement is determined.

Accuracy is the degree of agreement of a measurement with a known or true value. To determine accuracy, a laboratory or field value is compared to a known or true concentration. Accuracy is determined by such quality control (QC) indicators as: matrix spikes (MS), surrogate spikes, laboratory control samples (blind spikes) and performance samples. The frequency of analysis of laboratory control samples will be as follows: Method NWTPH-Gx:1 every 20 samples; Method NWTPH-Dx:1 every 10 samples; Method NWTPH-VPH: 1 every 20 samples; Method NWTPH EPH: 1 every 20 samples; Method 8260B: 1 every 12 hours and Method 8270: 1 every 20 samples.

Precision is the degree of mutual agreement between or among independent measurements of a similar property (usually reported as a standard deviation [SD] or relative percent difference [RPD]). This indicator relates to the analysis of duplicate laboratory or field samples. An RPD of $\leq 50\%$ for water and $\leq 50\%$ for soil, depending upon the chemical being analyzed, is generally

acceptable. Typically field precision is assessed by field duplicates and laboratory precision is assessed using laboratory duplicates, matrix spike duplicates, or laboratory control sample duplicates).

Completeness is expressed as percent of valid usable data actually obtained compared to the amount that was expected. Due to a variety of circumstances, sometimes either not all samples scheduled to be collected can be collected or else the data from samples cannot be used (for example, samples lost, bottles broken, instrument failures, laboratory errors, etc.). The minimum percent of completed analyses defined in this section depends on how much information is needed for decision making. Generally, completeness percent goals increase when the fewer the number of samples are collected per event or the more critical the data are for decision making. Goals in the 90 to 95% range are typical.

Representativeness is the expression of the degree to which data accurately and precisely represent a characteristic of an environmental condition or a population. It relates both to the area of interest and to the method of taking the individual sample. The idea of representativeness should be incorporated into discussions of sampling design. Representativeness is best assured by a comprehensive statistical sampling design, but it is recognized that this is usually outside the scope of most one-time events. Most one-time event SAP's focus on issues related to judgmental sampling and why certain areas are included or not included and the steps being taken to avoid either false positives or false negatives.

Comparability expresses the confidence with which one data set can be compared to another. The use of methods from EPA or "Standard Methods" or from some other recognized sources allows the data to be compared facilitating evaluation of trends or changes in a site, a river, groundwater, etc. Comparability also refers to the reporting of data in comparable units so direct comparisons are simplified (e.g., this avoids comparison of milligram/liter (mg/L) for nitrate reported as nitrogen to mg/L of nitrate reported as nitrate, or parts per million (ppm) vs. mg/L discussions).

Detection Limit(s) [usually expressed as method detection limits (MDLs) or Quantitation Limit(s)] for all analytes or compounds of interest for all analyses requested is presented on Table 1. These limits should be related to any decisions that will be made as a result of the data collection effort. A critical element to be addressed is how these limits relate to any regulatory or action levels that may apply.

Data Review and Management

Data management will commence during the field investigation. Each soil and groundwater sample collected will be recorded in a bound field book which will include a description of the location, depth, matrix, sample ID, and date and time of collection. Once data has returned from the laboratory, the electronic deliverables will be reviewed to ensure the receipt of all requested analytes and again cross-checked with chain-of-custodies (COCs). Data will be tabulated in electronic spreadsheets and again checked to ensure proper entry before use in reporting.

Assessment Oversight

The project manager will ensure that sample methods and documentation are being practiced. Quality assurance (QA) systems will be emplaced at regular intervals during the data management process as described above. Finally, a peer review process by a senior technical staff will be conducted on the final reporting.

Corrective Actions

Corrective actions, if necessary, shall be completed. If acceptance criteria were not met and a corrective action was not successful or corrective action was not performed, data will be flagged appropriately. Requirements and procedures for documenting the need for corrective actions are described in this section.

Items requiring corrective action in the laboratory shall be documented by the use of a corrective action report. The QA coordinator or any other laboratory member can initiate the corrective action report request in the event QC results exceed acceptability limits, or upon identification of some other laboratory problem. Corrective actions can include reanalysis of the sample or samples affected, resampling and analysis, or a change in procedures, depending upon the severity of the problem.

5.0 PRE- FIELD ACTIVITIES

AMEC will arrange to clear the existing utilities in the project area prior to initiation of field activities. AMEC will contract a private utility locating service in addition to contacting the underground utilities location center (Call Before You Dig). Prior to field activities, AMEC will complete the following activities.

1. Prepare a site-specific Health and Safety Plan (HASP) (Attachment A1).
2. Mark the proposed boring and monitoring well locations.
3. Acquire appropriate permits for drilling and installing monitoring wells.

5.1 Field Health and Safety Procedures

Field personnel will adhere to the health and safety procedures detailed in the *Site-Specific Health and Safety Plan*. Potential hazards that may be encountered include heat stress, slips, trips, falls, and exposure to insects.

The hospital closest to the Site is Providence Hospital. An emergency contact list and a map illustrating the emergency route to Providence Hospital is located in the *Health and Safety Plan*.

It is anticipated that all fieldwork will be performed using Level D modified personal protective equipment (PPE), which includes safety glasses, steel-toed boots, and nitrile and/or leather gloves. At a minimum, each on-Site worker will be required to wear safety footwear (steel-toed boots), hard hat, hearing protection, eye protection, and a high visibility safety vest. PPE will be

upgraded whenever there is a potential for direct contact with contaminated soil or groundwater. Changes in the required PPE will be based on changed work conditions and field observations. PPE upgrades may consist of the following:

- Nitrile gloves (surgical-type);
- Tyvek Coveralls – if a splash transfer is considered likely;
- Additional PPE upgrades that may be required, depending on breathing zone levels of petroleum hydrocarbons detected.

Eating, drinking, chewing gum or tobacco, smoking, or any practice that involves hand-to mouth contact increases the probability of contaminant ingestion and is prohibited in any area where the possibility of contamination exists.

Potential physical hazards that may be encountered include heat stress, slips, trips, and falls.

The AMEC field team will have current certifications for first aid, and a cell phone will be available at all times while personnel are in the field. All emergency response services will be reached by calling 911, from a land line if available.

6.0 FIELD PROCEDURES

This section presents the field investigation procedures for the soil and groundwater sampling effort. The field investigation will consist of drilling soil borings, installing monitoring wells, and collecting soil and groundwater samples. The proposed soil boring and monitoring well locations are illustrated on Figure 1. The proposed soil boring locations are listed in Table 3.

6.1 Utility Survey

AMEC will identify all aboveground and overhead power lines. Proposed boring locations that are within 25 feet of an overhead power line will be moved until clearance is achieved. AMEC will also oversee a geophysical survey conducted by a private utility locator to identify subsurface utilities within 25 feet of the proposed soil boring locations. The presence of below-grade utilities will be identified, and their inferred locations will be marked on the ground surface at the site. In addition, subsurface activity locations may be reviewed with the owner or the representative of the owner, if available at the time.

6.2 Calibration of Field Equipment

Field instrument calibration will occur daily at the beginning of field activities. Calibration results and times will be recorded in the field notes. Field equipment requiring calibration includes the photoionization detector (PID) and the Horiba U-22 (or equivalent) water quality meter.

Calibration instructions for the PID and water quality meter are included with the equipment manuals enclosed in the equipment cases. In general, the PID will be used to screen soil for the presence of lighter end petroleum hydrocarbons, such as gasoline and benzene. A Horiba U-22

water quality meter will be used to measure water quality parameters, such as dissolved oxygen, temperature, oxidation-reduction potential, and turbidity. The Horiba U-22 (or equivalent) will be calibrated daily in accordance with the manufacturer's instructions. A record of the daily calibration will be entered in the field log book.

6.3 Soil Borings

Proposed soil borings are listed in Table 3. Seven shallow soil borings (AP-1 through AP-7) will be advanced to a maximum depth of 15 feet bgs using direct-push technology drilling. These borings will be advanced in the vicinity of MW-29 and the former ADC Garage and Shop. Soil samples will be collected continuously from the surface to the total maximum depth of the borings. A soil sample will be collected at the soil/groundwater interface in each soil boring location. An additional sample will be collected based on odor, staining, PID readings, or sheen. If no soil samples exhibit any of these characteristics, the soil sample will be collected from the bottom of the boring to delineate the vertical extent of contamination. A grab groundwater sample will be collected from AP-1 using a temporary screen.

Seven deep soil borings (AB-1 through AB-6 and MW-A7) will be advanced around the western and northern perimeter of the Property to a maximum depth of 35 feet bgs to determine the lithologic conditions underlying that portion of the Site. The borings will be completed at a depth of 35 feet bgs since any proposed slurry wall can be completed as a hanging wall if there is no silt confining layer to key the wall into. The borings will be advanced using a hollow-stem auger (HSA) rig. A soil sample will be collected at the soil/groundwater interface in each soil boring location. An additional sample will be collected based on odor, staining, PID readings, or sheen. If no soil samples exhibit any of these characteristics, the soil sample will be collected from the bottom of the boring to delineate the vertical extent of contamination.

Four soil borings (MW-A3, MW-A4, MW-A5, and MW-A6) will be advanced on the Port of Everett property and will be completed as shallow monitoring wells using a direct-push drill rig equipped with HSA. The wells will be used to determine the western extent of the dissolved plume. A deep soil boring (MW-A7) drilled to a depth of 35 feet will be backfilled to a depth such that MW-A7 will be installed as a shallow monitoring well which straddles the water table (13 feet bgs).

6.4 Soil Sample Collection

Soil samples will be collected from the proposed soil boring and proposed monitoring well locations shown on Figure 1. All soil boring and monitoring well locations are subject to change based on observed conditions in the field (aboveground and belowground utilities, existing equipment, etc.).

Soil samples from the proposed push-probe soil borings/monitoring wells will be collected continuously using a 4-foot stainless steel sampler with a disposable liner.

Soil samples from the five proposed deep soil borings will be collected continuously for lithologic characterization. AMEC will inspect all soil samples and screen the soil samples for volatile organic compounds (VOCs) using a PID.

Each soil sample will be examined and relevant sample information (e.g., depth of sample collection, date and time of sample acquisition, PID measurement, etc.) will be recorded. To prevent cross contamination, any equipment repeatedly in contact with the soil will be decontaminated before and after each individual sampling attempt.

AMEC will select at least two soil samples per soil boring for laboratory analyses. The sample will be selected at the discretion of AMEC on the basis of field observations including a sheen test. A soil sample will be collected for analysis at the soil/groundwater interface in each soil boring location. An additional sample will be collected based on odor, staining, PID readings or sheen. If no soil samples exhibit any of these characteristics, the soil sample will be collected from the bottom of the boring to delineate the vertical extent of contamination.

Samples will be selected from intervals exhibiting petroleum staining and/or elevated PID measurements, the capillary fringe, and/or within an artificial fill unit.

6.5 Sample Containers, Preservation and Storage

Soil and groundwater samples will be collected and placed into precleaned sample containers provided by the analytical laboratory in accordance with Table 4. Upon collection, sample containers will be sealed, labeled, chilled to 4°C in a cooler with ice, and maintained with AMEC's custody until delivery to the project analytical laboratory, Test America, Inc., in Tacoma, Washington.

6.6 Sample Labeling

Each sample container sent to the lab will have a unique sample identification label.

The following information will be included on the sample label:

- Project name and location;
- Project number;
- Sample identification number including sample collection depth;
- Sample depth;
- Date and time of collection;
- Analyses to be performed; and
- Initials of the sampler.

Each soil sample will be assigned a unique alphanumeric code that will be used to identify the source of the sample location. Soil samples will be identified by a label indicating the boring or

monitoring well number followed by a dash followed by the depth (feet) below the ground surface that the sample was collected.

6.7 Soil Sample Analyses

Selected soil samples will be submitted to the laboratory for the area-specific chemical analysis. The laboratory analysis will include one or more of the following:

- Total Petroleum Hydrocarbons as Gasoline (TPH-G) by Ecology Method Northwest Total Petroleum Hydrocarbon–Gasoline (NWTPH-G);
- TPH as Diesel and Oil (TPH-D and TPH-O) by Ecology Method NWTPH–Diesel Extended (NWTPH-Dx); TPH-Dx detections with chromatograms that will be run with a silica gel cleanup to remove any biogenic interference (typically from decaying plant matter);
- Benzene, toluene, ethylbenzene, and total xylenes (BTEX) and methyl tertiary butyl ether (MTBE) by U.S. Environmental Protection Agency (EPA) Method 8260B;
- Low-level polycyclic aromatic hydrocarbons (PAHs) by EPA method 8270D SIM;
- 1,2-Dichloroethane (EDC), ethylene dibromide (EDB), and n-hexane in select soil samples that exhibit contamination based on field screening;
- Extractable Petroleum Hydrocarbons (EPH) by Method NW-EPH;
- Volatile Petroleum Hydrocarbons (VPH) by Method NW-VPH.

Soil samples for TPH-G, VOC, and EPH/VPH analyses will be collected using a plastic syringe and placed into laboratory-supplied, preweighed volatile organic analyte vials in accordance with EPA soil sampling method 5035A. Soil samples for all other analyses will be placed in laboratory-supplied glass sample jars and securely fitted with Teflon-lined plastic lids. Particles greater than 2 centimeters in diameter will be removed from the samples and discarded with the drilling cuttings.

EPH and VPH analysis will be requested for soil samples with the highest concentrations of petroleum hydrocarbons and benzene.

Soil sample methods, required sample containers, preservation requirements, and holding times are provided in Table 4.

6.8 Soil Geotechnical Analyses

Two soil samples collected from the saturated zone of the perimeter borings will be analyzed for the following: total organic carbon, soil bulk density, porosity, volumetric water content, and permeability (Shelby tube). Samples of drill cuttings will be retained from each boring for use in slurry wall mix design, if necessary. Two 5-gallon buckets of drill cuttings from the 5- to 15-foot depth interval will be collected from each boring location. Shelby tube samples will be collected from fine-grained materials as undisturbed samples. The Shelby tube sampler will be pushed

into undisturbed soil following retrieval of a split-spoon sample that indicates that a fine-grained formation has been encountered. Data from this testing will be used to assist in the development of remedial alternatives. Geotechnical analytical methods are listed in Table 5.

6.9 Monitoring Well Installation and Development

One deep and four shallow monitoring wells (MW-A3, MW-A4, MW-A5, MW-A6, and MW-A7) will be installed using an HSA drill rig and equipment. Soil borings for the monitoring wells will be advanced using 8-inch inside diameter augers. Soil samples to be collected from the monitoring well borings are listed in Table 3. The monitoring wells will be installed in accordance with Washington Administrative Code (WAC) 173-160 Minimum Standards for Construction and Maintenance of Wells.

Each of the monitoring wells will be constructed using 2-inch-diameter, flush-threaded Schedule 40 polyvinyl chloride (PVC) with a 10-foot-long prepack slotted screen with 0.010-inch slots and a 12/20 Colorado silica sand (CSS) pack. A prepack screen is proposed in order to minimize turbidity that has been observed at other monitoring wells in the Site vicinity. The prepack screens also allow rapid construction, since the soil in the area has been observed to heave. The well screens will be installed to straddle the water table. Additional sand (10/20 CSS) will be placed in the annular space surrounding the prepack screens. The sand pack will extend to a height of at least 1 foot above the top of the screen. Placement of the well screen will be determined in the field based on drilling conditions. The wells will be completed with a grout seal to the ground surface. The surface completion will conform to State of Washington standards and will be an 8-inch-diameter, flush-mounted, traffic-rated well monument. Monuments on the Port of Everett property will be constructed of materials that have the same or similar specifications to an eight inch Sherwood monitoring well cover with an 18 inch sonotube concrete surround.

All monitoring wells will be fitted with water-tight locking well caps and locks that are keyed alike.

Following well installation, the monitoring wells will be developed by surging with a surge block, followed by removing water by pumping until the water is clear and free of suspended solids. A minimum of six well volumes will be removed from each newly installed monitoring well. If the well purges dry, well development will resume when the water in the well recharges to 80 percent of the original recorded volume. Well development will cease upon stabilization of temperature, pH, and specific conductivity and turbidity measurements and the removal of six well volumes or two cycles of purging dry, whichever occurs first. AMEC will record the volume of water removed and water quality parameters during well development. An objective of the well development will be to obtain a turbidity value of 5 nephelometric turbidity units (NTU) or as low as is practically possible. The monitoring well development water will be contained in 55-gallon drums and stored at the Property.

6.10 Surveying of Monitoring Wells

The horizontal locations and the elevations of the tops of inner and outer casings of the newly installed monitoring wells will be surveyed by a Washington licensed surveyor. Elevations will be established to the nearest 0.01 foot; locations to the nearest 0.1 foot. The monitoring wells will be surveyed to tie into the existing monitoring well network. Both horizontal and vertical controls used for the new well survey will be consistent with horizontal and vertical controls used previously for surveying monitoring wells

6.11 Groundwater Level Measurements

Groundwater surface elevations will be used to make an initial assessment of the groundwater potentiometric surface, surface gradient, and direction of groundwater flow. During each groundwater sampling event, two groundwater elevation surveys will be conducted. One survey will be conducted during the high tidal stage, and one survey will be conducted during the low tidal stage.

The groundwater elevation will be measured with a decontaminated electronic water level meter or oil/water interface probe with an accuracy of plus or minus 0.01 feet. The groundwater elevation measurement will be made from a reference point on the top of the PVC well casing (to be surveyed and marked by land surveyors).

The water level probe will be decontaminated between each use, and wells with known or suspected contamination will be measured last.

6.12 Groundwater Sample Collection

Groundwater samples will be collected from the newly installed monitoring wells after a minimum of 7 days following development. Existing monitoring wells that do not have a history of containing liquid petroleum hydrocarbons (LPH) will also be sampled. Existing monitoring wells (MW-11, MW 19, MW40R, MW-A1 and MW-A2) and newly installed monitoring wells (MW-A3 through MW-A7) will be sampled using low-flow groundwater sampling techniques (Puls and Barcelona 1996). The groundwater sampling procedure will consist of the following steps.

1. Open well cap and allow well to equilibrate for several minutes.
2. Place an interface probe into the well to determine if LPH is present and measure thickness, if present. The well will not be sampled if LPH is present.
3. Measure depth to water from established top of casing measuring point and record on groundwater sampling field data sheet. Determine the middle depth of the water column that is within the screened interval.
4. Using dedicated (cutter used only for this purpose and kept in a plastic bag) tubing cutter, cut a length of new, low-density polyethylene tubing to extend to the middle depth

of the water column in the well. Connect the end of the tubing to peristaltic pump using dedicated silicone or Masterflex™ tubing.

5. Connect additional tubing to pump discharge line and flow-through cell. Establish flow rate of less than 200 milliliters/minute.
6. Record readings every 3 to 5 minutes with Horiba U-22 or equivalent water quality meter of the following parameters: temperature, pH, specific conductance, dissolved oxygen, oxidation-reduction potential, and turbidity.
7. Also record every 3 to 5 minute measurements of flow rate and depth to water. If drawdown in well exceeds 0.30 feet, reduce flow rate.
8. Stabilization of water quality parameters is assumed when measured parameters are within the following ranges:
 - ± 10 percent pH (standard units)
 - ± 3 percent electrical conductivity (milli-Siemens per centimeter [mS/cm])
 - ± 10 percent oxidation-reduction potential (millivolt [mV])
 - ± 10 percent turbidity (Nephelometric Turbidity Units [NTUs])
 - ± 10 percent dissolved oxygen (milligram per liter [mg/L])
 - ± 10 percent temperature (degrees Centigrade)
9. After stabilization of water quality parameters is achieved, disconnect tubing from flow-through cell and begin sample collection directly from pump discharge tubing.
10. Reduce flow rate to minimal possible flow for collection of volatile organic compound fraction.

6.13 Groundwater Sample Analyses

Increased turbidity in groundwater samples is attributed to soil lithological characteristics, increased organic content and/or improper purging and sampling rates during groundwater sample collection. High concentrations of total metals such as lead occurring in groundwater samples is most likely due to increased organic content in the formation being sampled.

Select groundwater samples will be submitted to the laboratory for the area-specific chemical analysis. The laboratory analysis will include one or more of the following:

- TPH using Ecology methods NWTPH-G and NWTPH-Dx;
- BTEX and MTBE by U.S. EPA Method 8260B;
- EDC, EDB, and n-hexane by U.S. EPA 8260B Selected groundwater samples;

- Low-level PAHs by EPA method 8270D SIM;
- Dissolved lead by EPA Method 6020;
- Natural attenuation parameters (see Table 6).

6.14 Equipment Decontamination

Decontamination of sampling equipment will be performed to maintain data quality, to prevent cross contamination, and to prevent the potential introduction of contaminants into previously unimpacted areas. Reusable sampling equipment, including the drill rig, down-hole drilling equipment, and stainless-steel materials, will be decontaminated prior to each sampling event. General decontamination procedures for nondedicated soil sampling equipment and accessories are as follows.

- Physically remove soils using a nonphosphate detergent solution.
- Rinse with noncontaminated tap water.
- Rinse with deionized water.
- Rinse with Isopropyl alcohol.
- Air dry.

6.15 Investigation Derived Waste Management

Investigation Derived Waste (IDW) generated during the course of the field investigation will be labeled and securely stored on the Property in 55-gallon drums approved by the U.S. Department of Transportation. Drums will be stored at a designated location. The various waste streams will include the following:

- Potentially contaminated liquids, including fluids derived from purging, development of monitoring wells, and equipment decontamination water; and
- Potentially contaminated solids, principally soil cuttings

Each drum will be labeled with standardized IDW drum labels to indicate its contents, date of collection, location from which the IDW originated, and other pertinent information. In addition, all drums will also be labeled with indelible paint sticks or pens. AMEC will maintain an inventory of the drums. On completion of the project, the IDW will be disposed of at an appropriate off-site facility, following a review of the investigation analytical data.

6.16 Aquifer Testing

Aquifer testing will be performed to determine the horizontal hydraulic conductivity of water bearing materials at the Site. The hydraulic conductivity (K) is an important hydraulic parameter for estimating groundwater flow rates and other aquifer characteristics. Slug testing will be

performed to estimate K using monitoring wells MW-A5 and MW-A6, which are located west of the site.

A slug test involves the instantaneous injection or withdrawal of a volume or slug of water or solid cylinder of known volume. This is accomplished by displacing a known volume of water from a well and measuring the artificial fluctuation of the groundwater level in the well. Water level changes are usually measured with pressure transducers and recorded by an electronic data logger.

The following equipment will be used to perform the slug test:

- Tape measure (subdivided into tenths of feet)
- Pressure transducer and data logger
- Electronic water level indicator
- Stainless steel or copper slug of known volume
- Dedicated nylon twine for each well to be tested
- Watch or stopwatch with second hand
- Waterproof logbook and pen
- Laptop computer with data logger software preinstalled prior to field event;
- Supplies for decontaminating slug, includingalconox soap, scrub brush, deionized water, and tap water

The following procedure will be used for slug testing each monitoring well.

1. Open the monitoring well and allow several minutes for the well to equilibrate to atmospheric pressure.
2. Measure and record static water level in well. Be sure to allow time for equilibration with atmospheric pressure for wells with unvented caps. If a dedicated bailer or other sampling apparatus in place interferes with initial reading, minimize disturbance as much as possible, and allow time for re-equilibration. Wait and repeat measurement to confirm the well is at steady state.
3. Remove any equipment in the well that would interfere with placing the transducer or conducting the slug test.
4. Measure and record the total depth of the well to verify the well depth and verify that the well screen has not been partly silted in. Sediment in the well screen can affect the slug test results.
5. Place pressure transducer in well to appropriate depth (see depth limits for individual transducers, or manufacturers specifications). Use measuring tape to determine point on

cable to set in well. Do not place transducer so that its range will be exceeded, or so that the transducer cable interferes with movement of the slug.

6. Place slug in well, above the transducer. If desired, a falling head test can be run at this point. It is often found in highly permeable materials, however, that the time required for the slug to fall through the water column may be comparable to the recovery time, and these data may therefore not be usable.
7. When the water level has returned to static height, initialize the data logger.
8. Remove the slug. Use auto-start feature if available, or start data logger by hand.
9. Test may be terminated after recovery is complete, or after 10 to 15 minutes for wells with slow recovery. If possible, screen data in the field to ensure data quality prior to demobilization.
10. Plot data using laptop computer to assure slug test is representative. If data are ambiguous or insufficient, repeat test.

The slug test data will be analyzed using the Bouwer and Rice method (Bouwer 1976, 1989a, 1989b) to obtain estimates of K for each monitoring well tested.

6.17 Tidal Study

A tidal influence study will be conducted to determine if groundwater beneath the Site is affected by tides. Permission will be requested from the Port of Everett to install a temporary stilling well on their dock. The stilling well will be in position for the duration of the Tidal Study at the Site.

Pressure transducers and data loggers will be installed in the four new groundwater monitoring wells on the Port of Everett property (MW-A3, MW-A4, MW-A5, MW-A6) and in existing monitoring wells MW-A1, MW-A2, W-3, MW-11, W-17, W-18 MW-19, MW-28, and MW-40R to record groundwater levels in the zone that is potentially tidally influenced. Specifications of the wells are provided in Table 7. The wells were selected to provide upgradient, on-Site/middle of the site, and downgradient information and are also wells that do not have measured concentrations of free product that would clog the transducers. Monitoring well MW-40R may contain LPH and, if so, will not be used in the tidal influence study.

Elevation measurements will be recorded automatically every 6 minutes for a minimum period of 76 hours. Tidal measurements recorded at the stilling well, located approximately 540 yards to the west of the Site, will be compared to the transducer data.

The data collected from the automatic transducers will be stored in the data logger and downloaded to a computer at the end of the tidal study data collection period. An hour after installation of the in-well transducer, a computer will be linked up to check that it is accurately recording data. On completion, the downloaded data will be corrected for actual groundwater depth and correlated with data from the stilling well. Tidal time lag and tidal efficiencies will be calculated for each monitoring well location. In addition, the tidal study data will be analyzed to determine the mean hydraulic gradient at the site using the method described by Serfes (1991).

The data and the results of the study will be presented in a report to the Washington State Department of Ecology, including maps showing the mean hydraulic gradient at low and high tide and data implications with respect to tidal influence.

6.18 Historic or Cultural Resources

Buried cultural artifacts such as chipped or ground stone, historic refuse, buildings foundations, or human bone could be discovered during subsurface activities, although this is highly unlikely. Initial field activities will include the installation of soil borings and monitoring wells which will result in a minimal amount of site disturbance. As such, a professional archaeologist may not be needed on-site during these activities. Cultural Resource review and the need for any on-site archaeologist will be determined by Ecology in communication with the Department of Archaeology and Historic Preservation (DAHP) and the concerned tribal government.

If any excavations (e.g., test pits) are required for the investigation, a separate cultural resources assessment and work plan will be developed in communication with DAHP and the concerned tribal governments pursuant to RCW 27.44 (Indian graves and records) and 27.53 (Archaeological sites and resources) and a professional archaeologist may required to be on-site to oversee the activities.

If any archaeological resources are discovered during field activities, work will be stopped immediately and Ecology, the DAHP, the City of Everett Planning and Community Development Department, and the Tulalip Tribes Cultural Resources Department will be notified by the close of business. A professional archaeologist will arrange an on-site inspection and invite the parties to attend. The professional archaeologist shall document the discovery and provide a professionally documented site form and report to the above listed parties. In the event of an inadvertent discovery of human remains, work will be immediately halted in the discovery area, the remains will be covered and secured against further disturbance, and the Everett Police Department and Snohomish County Medical Examiner will be immediately contacted, along with DAHP and authorized Tribal representatives. A treatment plan by the professional archaeologist shall be developed in consultation with the above listed parties consistent with RCW 27.44 and RCW 27.53 and implemented according to WAC 25-48.

7.0 DOCUMENTATION

The integrity of data obtained from samples collected during the field investigation depends on proper sample management and handling. Proper sample management includes sample labeling, which includes assignment of a specific identification number and affixing proper identification and markings to the collected samples. Proper handling includes proper packing and transport of the sample containers.

7.1 Field Logbook

The field logbook serves as the primary record of field activities. Entries shall be made chronologically and in sufficient detail to allow the writer or a knowledgeable reviewer to

reconstruct the applicable events. The field logbook shall be bound with consecutively numbered and water repellent pages.

At a minimum, the following information will be recorded in either the field logbook or a separate sample log sheet during the collection of each sample:

- Sample location and description;
- Sampler's name(s);
- Date and time of sample collection;
- Type of sample (soil, groundwater, or surface water);
- Type of sampling equipment used;
- Field instrument readings and calibration; and
- Field observations and details related to analysis or integrity of samples (e.g., weather conditions, noticeable odors, colors, etc.).

7.2 Labeling

Each sample container sent to the lab will have a unique sample identification label. The following information will be included on the sample label:

- Project name and location;
- Project number;
- Sample identification number;
- Date and time of collection; and
- Initials of the sampler.

Each soil sample will be named by the location and depth of sample collection in feet. For example, a soil sample collected from soil boring AP-1 at a depth of 2 feet will have a sample designation as "AP1-2." Groundwater samples will be named by the monitoring well location and the date of sample collection. For example, a groundwater sample collected from MW-A2 on March 7, 2010, would be named "XOMADC-02072010-MWA2."

Duplicate samples will be sent to the laboratory blindly. However, the location of the sample will not be revealed to the laboratory. Instead, duplicate samples will be named sequentially as Dup-1 and Dup-2. The location of the duplicate sample collection will be recorded in the field notebook.

7.3 Sample Chain of Custody

COC forms will be completed at the end of each sampling day. The completed COC form(s) and samples will be kept in the possession of the field team until relinquishing the samples to the

laboratory or courier service. One copy of the completed COC form will be kept by the field team, and the original COC form will be stored in a resealable plastic bag and transported in the sample container with the laboratory samples. Custody seals will be placed along the seal of each sample container in order to prevent tampering with the samples. A copy of the COC form is included in Attachment A2.

8.0 DATA VALIDATION

Data validation is the procedure of reviewing data against a known set of criteria to verify data validity prior to its use. Data validation procedures have been developed by the US EPA to standardize the validation process for analytical results for both water-quality and soil-quality investigations and are documented as the *US EPA Contract Laboratory Program National Functional Guidelines for Superfund Organic Methods Data Review*, US EPA, Office of Solid Waste and Emergency Response, Washington, D.C., Publication 9240.1-48, US EPA-540/R-08-01 (US EPA 2008). The Functional Guidelines are intended to be used as a guide for evaluation of data generated under statements of work for organic and inorganic analyses associated with the US EPA Contract Laboratory Program (CLP). The Functional Guidelines also provide general data validation guidelines that can be applied to data generated by non-CLP analytical methods.

One hundred percent (100%) of the analytical data for soil and groundwater investigation samples will be validated using EPA Stage 4 data validation level. Stage 4 validation includes an examination of sample and QC raw data and instrument printouts to check for technical, calculation, analyte identification, analyte quantitation, and transcription or reduction errors. At a minimum 10% of reported results on summary forms should be confirmed by recalculation. The data validation staff will review field documents and laboratory data report packages, and if needed, apply data qualifiers to the data. The data reviewer will determine if the project data quality objectives have been met, and will calculate the data completeness for the project.

9.0 QUALITY CONTROL

This SAP has been prepared to provide instructions and guidance to ensure the sample chemical data collected in support of the site soil and groundwater sampling activities are scientifically valid. Indicator hazardous substances at the Site are listed in Table 2. The sections below outline methods and processes to meet these objectives.

9.1 Field Quality Control Samples

To evaluate quality control (QC), two types of QC samples will be collected (trip blank and blind field duplicate). One trip blank will be collected daily and the field duplicate samples will be collected at a frequency of 5 percent of the samples for each matrix (soil and groundwater).

Two trip blank vials provided by the laboratory will be placed into the cooler designated to store samples to be analyzed for VOCs to evaluate the potential for cross-contamination. The trip blanks will be analyzed for TPH using method NWTPH-Gx and for BTEX and MTBE using EPA Method 8260B. Field duplicates are replicate samples collected at the same location during the same sampling session (roughly at the same time). The field duplicate samples will be collected

in the same container types and handled and analyzed in the same manner, as all other soil and groundwater samples. The field duplicates will be analyzed for the same analytes as the primary sample.

9.2 Laboratory Quality Control Samples

Laboratory QC samples are analyzed as part of standard laboratory practice. The laboratory monitors the precision and accuracy of the results of its analytical procedures through analysis of QC samples. In part, laboratory QC samples consist of Matrix Spike/Matrix Spike Duplicate (MS/MSD) samples for organic analyses, and MS/MSD for inorganic analyses. The term "matrix" refers to use of the actual media collected in the field (e.g., routine soil and water samples). Laboratory QC samples are an aliquot (subset) of the field sample. They are not separate samples, but a special designation of an existing sample. The laboratory QC samples will be analyzed for the same analytes as the standard samples.

9.3 Field Variances

As conditions in the field may vary, it may become necessary to implement minor modifications to the sampling as presented in this plan. When appropriate, ExxonMobil, ADC, and Ecology will be notified and a verbal (followed by a written verification) approval will be obtained before implementing the changes. Modifications to the approved plan will be documented in the sampling project report.

9.4 Data Management

Data management will commence during the field investigation. Each soil and groundwater sample collected will be recorded on field logs, which will include a description of the location, depth, matrix, sample ID, and date and time of collection. All data submittals will be consistent with Ecology Policy 840 (dated March 31, 2008) Environmental Information Management (EIM) submittal requirement format. Once data have been provided by the laboratory, the electronic deliverables will be reviewed to ensure the receipt of all requested analytes and again cross-checked with COCs.

10.0 REFERENCES

- Bouwer, H. 1989. The Bouwer and Rice slug test-an update. *Ground Water*, vol. 27, no. 3, pp. 304-309.
- Bouwer, H. 1989a. Discussion of "The Bouwer and Rice slug test- an update. *Ground Water*, vol. 27, no. 5, p. 715.
- Bouwer, H. 1976. A slug test for determining hydraulic conductivity of unconfined aquifers with completely or partially penetrating wells. *Water Resources Research*, vol. 12, no. 3, pp. 423-428.

EPA (U.S. Environmental Protection Agency). 1994. Guidance of the Data Quality Objectives Process. EPA QA/G-4. EPA/600/R-96/055. EPA Office of Research and Development, Washington, D.C. September

Puls, R.W. and Barcelona, M.J. (1996). "Low-Flow (Minimal Drawdown) Groundwater Sampling Procedures," U.S. Environmental Protection Agency, EPA/540/S-95/504.

Serfes, M.E., 1991. "Determining the mean hydraulic gradient of ground water affected by tidal fluctuations", Ground Water, Vol 29, No. 4, pp. 549-555. July-August.

Washington State Department of Ecology (Ecology) (2001). Model Toxics Control Act Cleanup Regulation, Chapter 173-340 WAC. Publication No. 94-06.

Washington State Department of Ecology (Ecology) (2005). Guidance on Remediation of Petroleum-Contaminated Groundwater by Natural Attenuation. Version 1.0. Publication Number 05-09-091. Toxics Cleanup Program. July.

TABLES

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|--|-----------------------------|------|------|--------------|--------------|---------------|--------------|-----|-------------|-----|------------|
| | | | | | | | %R | RPD | %R | RPD | |
| SOIL | | | | | | | | | | | |
| NWTPH-Gx | | | | | | | | | | | |
| NWTPH-Gx | Gasoline Range Hydrocarbons | 0.5 | 5.00 | mg/kg dry wt | - | 50 | 10-145 | 50 | 80-120 | 50 | 8006-61-9 |
| NWTPH-Gx | a,a,a-Trifluorotoluene | | | Surrogate | 50-150 | - | - | - | - | - | 98-08-8 |
| NWTPH-Dx (w/o Acid/Silica Gel Clean-up) | | | | | | | | | | | |
| NWTPH-Dx | Diesel Range Hydrocarbons | 2.00 | 4.00 | mg/kg dry wt | - | 48 | 10-154 | 48 | 55-123 | 48 | 68476-34-6 |
| NWTPH-Dx | Lube Oil Range Hydrocarbons | 2.00 | 4.00 | mg/kg dry wt | - | 39 | 19-146 | 39 | 57-128 | 39 | NA |
| NWTPH-Dx | o-Terphenyl | | | Surrogate | 50-150 | - | - | - | - | - | 84-15-1 |
| Extractable Petroleum Hydrocarbons | | | | | | | | | | | |
| WA MTCA-EPH | C8-C10 Aliphatics | 1.90 | 5.00 | mg/kg dry wt | - | 25 | 50-150 | 25 | 50-150 | 25 | NA |
| WA MTCA-EPH | C10-C12 Aliphatics | 1.00 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C12-C16 Aliphatics | 1.40 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C16-C21 Aliphatics | 2.00 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C21-C34 Aliphatics | 3.20 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C8-C10 Aromatics | 2.50 | 5.00 | mg/kg dry wt | - | 25 | 50-150 | 25 | 50-150 | 25 | NA |
| WA MTCA-EPH | C10-C12 Aromatics | 0.60 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C12-C16 Aromatics | 1.70 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C16-C21 Aromatics | 3.10 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C21-C34 Aromatics | 4.40 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C-35 | | | Surrogate | 60-140 | - | - | - | - | - | 94-36-0 |
| WA MTCA-EPH | o-Terphenyl | | | Surrogate | 60-140 | - | - | - | - | - | 84-15-1 |
| WA MTCA-EPH | 2-Fluorobiphenyl | | | Surrogate | 60-140 | - | - | - | - | - | 321-60-8 |
| WA MTCA-EPH | 2-Bromonaphthalene | | | Surrogate | 60-140 | - | - | - | - | - | 580-13-2 |
| WA MTCA-EPH | 1-Chlorooctadecane | | | Surrogate | 60-140 | - | - | - | - | - | 3386-33-2 |
| Volatile Petroleum Hydrocarbons | | | | | | | | | | | |
| WA MTCA-VPH | C5-C6 Aliphatics | 2.00 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C6-C8 Aliphatics | 0.90 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C8-C10 Aliphatics | 2.25 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C10-C12 Aliphatics | 3.65 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C8-C10 Aromatics | 2.40 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C10-C12 Aromatics | 0.30 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C12-C13 Aromatics | 0.50 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | 2,5-Dibromotoluene (FID) | | | Surrogate | 70-130 | - | - | - | - | - | 615-59-8 |
| WA MTCA-VPH | 2,5-Dibromotoluene (PID) | | | Surrogate | 70-130 | - | - | - | - | - | 615-59-8 |

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|---|-----------------------------|--------|---------|--------------|--------------|---------------|--------------|-----|-------------|-----|-----------|
| | | | | | | | %R | RPD | %R | RPD | |
| SOIL (continued) | | | | | | | | | | | |
| Volatile Organic Compounds (Selected List) | | | | | | | | | | | |
| EPA 8260B | Benzene | 0.67 | 2.00 | µg/kg dry wt | - | 50 | 42-141 | 50 | 78-126 | 50 | 71-43-2 |
| EPA 8260B | 1,2-Dibromomethane (EDB) | 0.52 | 2.00 | µg/kg dry wt | - | 45 | 30-155 | 45 | 30-155 | 45 | 106-93-4 |
| EPA 8260B | 1,2-Dichloroethane (EDC) | 0.67 | 2.00 | µg/kg dry wt | - | 50 | 32-155 | 50 | 70-139 | 50 | 107-06-2 |
| EPA 8260B | Ethylbenzene | 0.67 | 2.00 | µg/kg dry wt | - | 50 | 21-165 | 50 | 79-130 | 50 | 100-41-4 |
| EPA 8260B | n-Hexane | 0.45 | 10.000 | µg/kg dry wt | - | 48 | 10-180 | 48 | 55-136 | 48 | 110-54-3 |
| EPA 8260B | Toluene | 0.400 | 2.00 | µg/kg dry wt | - | 50 | 45-145 | 50 | 76-126 | 50 | 108-88-3 |
| EPA 8260B | Total Xylenes | 1.30 | 5.00 | µg/kg dry wt | - | 50 | 31-159 | 50 | 80-130 | 50 | 1330-20-7 |
| Polynuclear Aromatic Hydrocarbons by GC/MS-SIM | | | | | | | | | | | |
| EPA 8270C-SIM | Acenaphthene | 0.0003 | 0.00333 | mg/kg dry wt | - | 32 | 42-120 | 32 | 44-120 | 40 | 83-32-9 |
| EPA 8270C-SIM | Acenaphthylene | 0.0004 | 0.00333 | mg/kg dry wt | - | 34 | 39-127 | 34 | 46-127 | 34 | 208-96-8 |
| EPA 8270C-SIM | Anthracene | 0.0007 | 0.00333 | mg/kg dry wt | - | 31 | 39-139 | 31 | 49-139 | 40 | 120-12-7 |
| EPA 8270C-SIM | Benzo(a)anthracene | 0.0003 | 0.00333 | mg/kg dry wt | - | 43 | 31-132 | 43 | 53-132 | 43 | 56-55-3 |
| EPA 8270C-SIM | Benzo(a)pyrene | 0.0004 | 0.00333 | mg/kg dry wt | - | 41 | 22-125 | 41 | 57-125 | 41 | 50-32-8 |
| EPA 8270C-SIM | Benzo(b)fluoranthene | 0.0016 | 0.00333 | mg/kg dry wt | - | 50 | 10-147 | 50 | 36-140 | 50 | 205-99-2 |
| EPA 8270C-SIM | Benzo(k)fluoranthene | 0.0003 | 0.00333 | mg/kg dry wt | - | 38 | 23-140 | 38 | 49-140 | 38 | 207-08-9 |
| EPA 8270C-SIM | Benzo(ghi)perylene | 0.0003 | 0.00333 | mg/kg dry wt | - | 50 | 10-151 | 50 | 54-139 | 50 | 191-24-2 |
| EPA 8270C-SIM | Chrysene | 0.0006 | 0.00333 | mg/kg dry wt | - | 40 | 20-139 | 40 | 47-139 | 40 | 218-01-9 |
| EPA 8270C-SIM | Dibenz(a,h)anthracene | 0.0004 | 0.00333 | mg/kg dry wt | - | 50 | 18-150 | 50 | 58-141 | 50 | 53-70-3 |
| EPA 8270C-SIM | Fluoranthene | 0.0004 | 0.00333 | mg/kg dry wt | - | 47 | 29-135 | 47 | 34-135 | 47 | 206-44-0 |
| EPA 8270C-SIM | Fluorene | 0.0005 | 0.00333 | mg/kg dry wt | - | 38 | 38-129 | 38 | 47-129 | 38 | 86-73-7 |
| EPA 8270C-SIM | Indeno(1,2,3-cd)pyrene | 0.0003 | 0.00333 | mg/kg dry wt | - | 46 | 13-146 | 46 | 53-142 | 46 | 193-39-5 |
| EPA 8270C-SIM | 1-Methylnaphthalene | 0.0004 | 0.00333 | mg/kg dry wt | - | 35 | 20-120 | 35 | 41-120 | 35 | 90-12-0 |
| EPA 8270C-SIM | 2-Methylnaphthalene | 0.0004 | 0.00333 | mg/kg dry wt | - | 38 | 28-124 | 38 | 48-121 | 38 | 91-57-6 |
| EPA 8270C-SIM | Naphthalene | 0.0007 | 0.00333 | mg/kg dry wt | - | 36 | 10-135 | 36 | 42-120 | 36 | 91-20-3 |
| EPA 8270C-SIM | Phenanthrene | 0.0004 | 0.00333 | mg/kg dry wt | - | 46 | 33-134 | 46 | 52-134 | 46 | 85-01-8 |
| EPA 8270C-SIM | Pyrene | 0.0003 | 0.00333 | mg/kg dry wt | - | 50 | 26-153 | 50 | 56-144 | 50 | 129-00-0 |
| EPA 8270C-SIM | Nitrobenzene-d5 | | | Surrogate | 17-120 | | | | | | 4165-60-0 |
| EPA 8270C-SIM | 2-Fluorobiphenyl | | | Surrogate | 14-120 | | | | | | 321-60-8 |
| EPA 8270C-SIM | p-Terphenyl-d14 | | | Surrogate | 18-120 | - | - | - | - | - | 1718-51-0 |
| GROUNDWATER | | | | | | | | | | | |
| NWTPH-Gx | | | | | | | | | | | |
| NWTPH-Gx | Gasoline Range Hydrocarbons | 40.0 | 100.0 | µg/L | - | 37 | 58-139 | 37 | 65-129 | 37 | 8006-61-9 |
| NWTPH-Gx | a,a,a-Trifluorotoluene | | | Surrogate | 50-150 | - | - | - | - | - | 98-08-8 |

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|--|-----------------------------|------|------|-----------|--------------|---------------|--------------|-----|-------------|-----|------------|
| | | | | | | | %R | RPD | %R | RPD | |
| GROUNDWATER (continued) | | | | | | | | | | | |
| NWTPH-Dx (w/o Acid/Silica Gel Clean-up) | | | | | | | | | | | |
| NWTPH-Dx | Diesel Range Hydrocarbons | 28.0 | 50.0 | mg/L | - | 41 | 10-134 | 41 | 50-123 | 41 | 68476-34-6 |
| NWTPH-Dx | Lube Oil Range Hydrocarbons | 28.0 | 50.0 | mg/L | - | 32 | 18-147 | 32 | 49-117 | 32 | NA |
| NWTPH-Dx | o-Terphenyl | | | Surrogate | 27-150 | - | - | - | - | - | 84-15-1 |
| Extractable Petroleum Hydrocarbons | | | | | | | | | | | |
| WA MTCA-EPH | C8-C10 Aliphatics | 3.0 | 20.0 | µg/L | - | 25 | 50-150 | 25 | 50-150 | 25 | NA |
| WA MTCA-EPH | C10-C12 Aliphatics | 2.0 | 10.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C12-C16 Aliphatics | 9.0 | 30.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C16-C21 Aliphatics | 12.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C21-C34 Aliphatics | 19.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C8-C10 Aromatics | 25.0 | 50.0 | µg/L | - | 25 | 50-150 | 25 | 50-150 | 25 | NA |
| WA MTCA-EPH | C10-C12 Aromatics | 1.0 | 10.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C12-C16 Aromatics | 3.0 | 40.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C16-C21 Aromatics | 4.0 | 30.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C21-C34 Aromatics | 7.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C-35 | | | Surrogate | 60-140 | | | | | | 94-36-0 |
| WA MTCA-EPH | o-Terphenyl | | | Surrogate | 60-140 | - | - | - | - | - | 84-15-1 |
| WA MTCA-EPH | 2-Fluorobiphenyl | | | Surrogate | 60-140 | | | | | | 321-60-8 |
| WA MTCA-EPH | 2-Bromonaphthalene | | | Surrogate | 60-140 | | | | | | 580-13-2 |
| WA MTCA-EPH | 1-Chlorooctadecane | | | Surrogate | 60-140 | - | - | - | - | - | 3386-33-2 |
| Volatile Petroleum Hydrocarbons | | | | | | | | | | | |
| WA MTCA-VPH | C5-C6 Aliphatics | 1.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C6-C8 Aliphatics | 1.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C8-C10 Aliphatics | 3.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C10-C12 Aliphatics | 0.90 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C8-C10 Aromatics | 2.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C10-C12 Aromatics | 0.30 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C12-C13 Aromatics | 0.30 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | 2,5-Dibromotoluene (FID) | | | Surrogate | 70-130 | - | - | - | - | - | 615-59-8 |
| WA MTCA-VPH | 2,5-Dibromotoluene (PID) | | | Surrogate | 70-130 | - | - | - | - | - | 615-59-8 |

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|---|--------------------------|-------|-------|-----------|--------------|---------------|--------------|-----|-------------|-----|-----------|
| | | | | | | | %R | RPD | %R | RPD | |
| GROUNDWATER (continued) | | | | | | | | | | | |
| Volatile Organic Compounds(Selected List) | | | | | | | | | | | |
| EPA 8260B | Benzene | 0.410 | 1.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | 71-43-2 |
| EPA 8260B | 1,2-Dibromethane (EDB) | 0.460 | 1.0 | µg/L | - | 10 | 70-152 | 10 | 80-135 | 10 | 106-93-4 |
| EPA 8260B | 1,2-Dichloroethane (EDC) | 0.350 | 1.0 | µg/L | - | 25 | 72-137 | 25 | 70-134 | 25 | 107-06-2 |
| EPA 8260B | Ethylbenzene | 0.350 | 1.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | 100-41-4 |
| EPA 8260B | n-Hexane | 0.230 | 2.0 | µg/L | - | 13 | 39-167 | 13 | 70-130 | 13 | 110-54-3 |
| EPA 8260B | Toluene | 0.350 | 1.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | 108-88-3 |
| EPA 8260B | Total Xylenes | 0.730 | 3.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | 1330-20-7 |
| Polynuclear Aromatic Compounds by GC/MS with High Volume Injection | | | | | | | | | | | |
| EPA 8270C-HVI | Acenaphthene | 0.029 | 0.100 | µg/L | - | 35 | 25-140 | 35 | 43-122 | 35 | 83-32-9 |
| EPA 8270C-HVI | Acenaphthylene | 0.031 | 0.100 | µg/L | - | 31 | 36-135 | 31 | 43-129 | 31 | 208-96-8 |
| EPA 8270C-HVI | Anthracene | 0.076 | 0.100 | µg/L | - | 38 | 20-145 | 38 | 50-125 | 38 | 120-12-7 |
| EPA 8270C-HVI | Benzo(a)anthracene | 0.018 | 0.100 | µg/L | - | 50 | 10-129 | 50 | 50-135 | 50 | 56-55-3 |
| EPA 8270C-HVI | Benzo(a)pyrene | 0.014 | 0.100 | µg/L | - | 50 | 10-136 | 50 | 46-136 | 50 | 50-32-8 |
| EPA 8270C-HVI | Benzo(b)fluoranthene | 0.044 | 0.100 | µg/L | - | 50 | 10-147 | 50 | 37-147 | 50 | 205-99-2 |
| EPA 8270C-HVI | Benzo(k)fluoranthene | 0.027 | 0.100 | µg/L | - | 50 | 10-135 | 50 | 47-135 | 50 | 207-08-9 |
| EPA 8270C-HVI | Benzo(ghi)perylene | 0.018 | 0.100 | µg/L | - | 50 | 10-145 | 50 | 30-145 | 50 | 191-24-2 |
| EPA 8270C-HVI | Chrysene | 0.020 | 0.100 | µg/L | - | 50 | 10-138 | 50 | 47-138 | 50 | 218-01-9 |
| EPA 8270C-HVI | Dibenz(a,h)anthracene | 0.018 | 0.100 | µg/L | - | 50 | 10-144 | 50 | 36-144 | 50 | 53-70-3 |
| EPA 8270C-HVI | Fluoranthene | 0.018 | 0.100 | µg/L | - | 40 | 28-143 | 40 | 51-139 | 40 | 206-44-0 |
| EPA 8270C-HVI | Fluorene | 0.035 | 0.100 | µg/L | - | 39 | 28-144 | 39 | 47-128 | 39 | 86-73-7 |
| EPA 8270C-HVI | Indeno(1,2,3-cd)pyrene | 0.023 | 0.100 | µg/L | - | 50 | 10-142 | 50 | 32-142 | 50 | 193-39-5 |
| EPA 8270C-HVI | 1-Methylnaphthalene | 0.030 | 0.100 | µg/L | - | 27 | 37-126 | 27 | 37-126 | 27 | 90-12-0 |
| EPA 8270C-HVI | 2-Methylnaphthalene | 0.028 | 0.100 | µg/L | - | 29 | 29-127 | 29 | 41-121 | 29 | 91-57-6 |
| EPA 8270C-HVI | Naphthalene | 0.028 | 0.100 | µg/L | - | 32 | 24-120 | 32 | 38-120 | 32 | 91-20-3 |
| EPA 8270C-HVI | Pentachlorophenol | 0.460 | 1.00 | µg/L | - | 32 | 34-163 | 32 | 34-147 | 32 | 87-86-5 |
| EPA 8270C-HVI | Phenanthrene | 0.051 | 0.100 | µg/L | - | 47 | 31-142 | 47 | 45-133 | 47 | 85-01-8 |
| EPA 8270C-HVI | Pyrene | 0.024 | 0.100 | µg/L | - | 37 | 10-158 | 37 | 50-146 | 37 | 129-00-0 |
| EPA 8270C-HVI | Nitrobenzene-d5 | | | Surrogate | | 27-120 | - | - | - | - | 4165-60-0 |
| EPA 8270C-HVI | 2-Fluorobiphenyl | | | Surrogate | | 29-120 | - | - | - | - | 321-60-8 |
| EPA 8270C-HVI | p-Terphenyl-d14 | | | Surrogate | | 13-120 | - | - | - | - | 1718-51-0 |

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|---|----------------------------|------|------|-------|-----------------|------------------|--------------|-----|-------------|-----|------------|
| | | | | | | | %R | RPD | %R | RPD | |
| GROUNDWATER (continued) | | | | | | | | | | | |
| Dissolved Metals by EPA 6000/7000 Series Methods | | | | | | | | | | | |
| EPA 6020 - Diss | Lead; dissolved | 0.10 | 2.00 | mg/L | - | 20 | 75-125 | 20 | 80-120 | 20 | 7439-92-1 |
| Natural Attenuation Parameters | | | | | | | | | | | |
| EPA 300.0 | Sulfate | 0.11 | 1.00 | mg/L | - | 20 | 80-120 | 20 | 90-110 | 20 | 14808-79-8 |
| EPA 300.0 | Nitrate | 0.01 | 0.10 | mg/L | - | 20 | 80-120 | 20 | 90-110 | 20 | 14797-55-8 |
| EPA 6020 | Manganese (total; soluble) | 0.60 | 5.00 | mg/L | - | 20 | 75-125 | 20 | 80-120 | 20 | 7439-96-5 |
| RSK-175 | Methane | 10.0 | 26.0 | µg/L | 70-120 | 33 | 46-142 | 33 | 80-120 | 33 | 74-82-8 |
| EPA 310.1 | Alkalinity | 5.00 | 10.0 | mg/L | - | 20 | 80-120 | 20 | 90-110 | 20 | - |

Notes:

¹Titration method; no method detection limit

CAS = chemical Abstracts Service

FID = flame ionization detector

MDL = method detection limit

µg/L = micrograms per liter

µg/kg = microgram per kilograms

mg/kg = milligram per kilograms

mg/L = milligram per liter

MRL = method reporting limit

PID = photoionization detector

%R = percent Recovery

RPD = relative percent difference

VPH = volatile petroleum hydrocarbons

Table 2 Indicator Hazardous Substances

| Method | Analyte | MDL | MRL | Unit | MTCA Method A | | MTCA Method B | |
|--|-----------------------------|---------|---------|--------------|---------------------|---------------------|---------------|-----------------|
| | | | | | Unrestricted | Industrial | Carcinogenic | Noncarcinogenic |
| Petroleum Hydrocarbons by NWTPH-Gx and NWTPH-Dx in Soil | | | | | | | | |
| NWTPH-Gx | Gasoline Range Hydrocarbons | 1.40 | 5.00 | mg/kg dry wt | 30/100 ¹ | 30/100 ¹ | NR | NR |
| NWTPH-Dx | Diesel Range Hydrocarbons | 2.00 | 10.0 | mg/kg dry wt | 2,000 | 2,000 | NR | NR |
| NWTPH-Dx | Lube Oil Range Hydrocarbons | 4.00 | 25.0 | mg/kg dry wt | 2,000 | 2,000 | NR | NR |
| Volatile Organic Compounds per EPA Method 8260B in Soil | | | | | | | | |
| EPA 8260B | Benzene | 0.0004 | 0.0015 | µg/kg dry wt | 0.03 | 0.03 | 18 | 320 |
| EPA 8260B | Toluene | 0.0004 | 0.0015 | µg/kg dry wt | 7 | 7 | NR | 6,400 |
| EPA 8260B | Ethylbenzene | 0.0004 | 0.004 | µg/kg dry wt | 6 | 6 | NR | 800 |
| EPA 8260B | Total Xylenes | 0.0015 | 0.01 | µg/kg dry wt | | | | |
| EPA 8260B | Methyl tert-butyl ether | 0.0006 | 0.001 | µg/kg dry wt | | | | |
| EPA 8260B | 1,2-Dichloroethane (EDC) | 0.0006 | 0.00125 | µg/kg dry wt | NoD | NoD | 11 | 1,600 |
| EPA 8260B | 1,2-Dibromoethane (EDB) | 0.0006 | 0.005 | µg/kg dry wt | | | | |
| EPA 8260B | n-Hexane | 0.0008 | 0.005 | µg/kg dry wt | | | | |
| Polynuclear Aromatic Hydrocarbons by GC/MS-SIM in Soil | | | | | | | | |
| EPA 8270C-SIM | Acenaphthene | 0.00170 | 0.0100 | mg/kg dry wt | NoD | NoD | NR | 4,800 |
| EPA 8270C-SIM | Acenaphthylene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Anthracene | 0.00170 | 0.0100 | mg/kg dry wt | NoD | NoD | NR | 24,000 |
| EPA 8270C-SIM | Benzo(a)anthracene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | NR | NR |
| EPA 8270C-SIM | Benzo(a)pyrene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | 0.14 | NR |
| EPA 8270C-SIM | Benzo(b)fluoranthene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | Benzo(k)fluoranthene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | Benzo(b & k)fluoranthene | 0.00330 | 0.0200 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Benzo(ghi)perylene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Chrysene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | Dibenz(a,h)anthracene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | Fluoranthene | 0.00170 | 0.0100 | mg/kg dry wt | NoD | NoD | NR | 3,200 |
| EPA 8270C-SIM | Fluorene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Indeno(1,2,3-cd)pyrene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | 1-Methylnaphthalene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | 2-Methylnaphthalene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Naphthalene | 0.00170 | 0.0100 | mg/kg dry wt | 5 | 5 | NR | 1,600 |
| EPA 8270C-SIM | Pentachlorophenol | 0.0023 | 0.01 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Phenanthrene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Pyrene | 0.00170 | 0.0100 | mg/kg dry wt | NoD | NoD | NR | 24,000 |

Table 2 Indicator Hazardous Substances

| Method | Analyte | MDL | MRL | Unit | MTCA Method A | MTCA Method B | |
|--|-----------------------------|---------|--------|------|-----------------------|---------------|-----------------|
| | | | | | Unrestricted | Carcinogenic | Noncarcinogenic |
| Petroleum Hydrocarbons by NWTPH-Gx and NWTPH-Dx in Water | | | | | | | |
| NWTPH-Gx | Gasoline Range Hydrocarbons | 38.0 | 50.0 | µg/L | 800/1000 ¹ | NR | NR |
| NWTPH-Dx | Diesel Range Hydrocarbons | 2.00 | 10.0 | µg/L | 500 | NR | NR |
| NWTPH-Dx | Lube Oil Range Hydrocarbons | 4.00 | 25.0 | µg/L | 500 | NR | NR |
| Volatile Organic Compounds by EPA Method 8260B in Water | | | | | | | |
| EPA 8260B | Benzene | 0.0470 | 0.200 | µg/L | 5 | 0.8 | 32 |
| EPA 8260B | Toluene | 0.0210 | 0.200 | µg/L | 1,000 | NR | 640 |
| EPA 8260B | Ethylbenzene | 0.0660 | 0.200 | µg/L | 700 | NR | 800 |
| EPA 8260B | Total Xylenes | 0.247 | 0.750 | µg/L | 1,000 | NR | 1,600 |
| EPA 8260B | Methyl tert-butyl ether | 0.0930 | 1.00 | µg/L | 20 | 24 | 6,900 |
| EPA 8260B | 1,2-Dichloroethane (EDC) | 0.0420 | 0.200 | µg/L | 5 | 0.48 | 160 |
| EPA 8011 | 1,2-Dibromoethane (EDB) | 0.600 | 5.00 | µg/L | 0.01 | 0.00051 | NR |
| EPA 8260B | n-Hexane | 0.129 | 1.00 | µg/L | NoD | NR | 480 |
| Polynuclear Aromatic Compounds by GC/MS with High Volume Injection in Water | | | | | | | |
| EPA 8270C-HVI | Acenaphthene | 0.00600 | 0.100 | µg/L | NoD | NR | 160 |
| EPA 8270C-HVI | Acenaphthylene | 0.00700 | 0.100 | µg/L | | | |
| EPA 8270C-HVI | Anthracene | 0.00900 | 0.100 | µg/L | NoD | NR | 4,800 |
| EPA 8270C-HVI | Benzo(a)anthracene | 0.00500 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Benzo(a)pyrene | 0.00600 | 0.0100 | µg/L | 0.1 | 0.012 | NR |
| EPA 8270C-HVI | Benzo(b)fluoranthene | 0.00600 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Benzo(k)fluoranthene | 0.00600 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Benzo(ghi)perylene | 0.00700 | 0.100 | µg/L | | | |
| EPA 8270C-HVI | Chrysene | 0.00600 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Dibenz(a,h)anthracene | 0.00500 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Fluoranthene | 0.00900 | 0.100 | µg/L | NoD | NR | 640 |
| EPA 8270C-HVI | Fluorene | 0.00800 | 0.100 | µg/L | NoD | NR | 640 |
| EPA 8270C-HVI | Indeno(1,2,3-cd)pyrene | 0.00600 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | 1-Methylnaphthalene | 0.00600 | 0.100 | µg/L | NR | NR | NR |
| EPA 8270C-HVI | 2-Methylnaphthalene | 0.00800 | 0.100 | µg/L | NR | NR | 32 |
| EPA 8270C-HVI | Naphthalene | 0.00600 | 0.100 | µg/L | 160 | NR | 160 |
| EPA 8270C-SIM | Pentachlorophenol | 0.0068 | 0.01 | µg/L | NoD | 0.73 | 480 |
| EPA 8270C-HVI | Phenanthrene | 0.00800 | 0.100 | µg/L | NR | NR | NR |
| EPA 8270C-HVI | Pyrene | 0.00700 | 0.100 | µg/L | NoD | NR | 480 |

Table 2 Indicator Hazardous Substances

| Method | Analyte | MDL | MRL | Unit | MTCA Method A | MTCA Method B | |
|--|----------------|----------|---------|------|---------------|---------------|-----------------|
| | | | | | Unrestricted | Carcinogenic | Noncarcinogenic |
| Dissolved Metals by EPA 6000/7000 Series Methods in Water | | | | | | | |
| EPA 6020 - Diss | Dissolved Lead | 0.000900 | 0.00100 | mg/L | 15 | NR | NR |

Notes:

1. TPH gasoline with benzene present/TPH gasoline without benzene present

MTCA = Model Toxics Control Act

NoD = No data

NR = Not researched

µg/kg = microgram per kilogram

µg/L = microgram per liter

mg/kg = milligram per kilogram

mg/L = milligram per liter

Tef = Toxic equivalency factor

Table 3 Soil and Groundwater Sampling Locations

| Sample Location | Soil Sample Label | Drilling Method | Maximum Depth (feet) | No. of Soil Samples | Screen Elevation ¹ | No. of Groundwater Samples |
|---|-----------------------|-----------------|----------------------|---------------------|-------------------------------|----------------------------|
| Soil Borings | | | | | | |
| AP-1 | AP-1-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-2 | AP-2-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-3 | AP-3-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-4 | AP-4-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-5 | AP-5-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-6 | AP-6-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-7 | AP-7-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| Duplicate soil sample ² | DUP-S-1 | | | 1 | | |
| AB-1 | AB-1-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-2 | AB-2-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-3 | AB-3-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-4 | AB-4-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-5 | AB-5-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-6 | AB-6-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-7 | AB-7-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| MW-A7 | MW-A7-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| Duplicate soil sample ² | DUP-S-2 | | | 1 | | |
| Monitoring Wells | | | | | | |
| MW-A3 | MW-A3-(depth in feet) | HSA | 15 | 2 | 0 to 10 | 4 |
| MW-A4 | MW-A4-(depth in feet) | HSA | 15 | 2 | 0 to 10 | 4 |
| MW-A5 | MW-A5-(depth in feet) | HSA | 15 | 2 | 0 to 10 | 4 |
| MW-A6 | MW-A6-(depth in feet) | HSA | 15 | 2 | 0 to 10 | 4 |
| MW-A7 | (3) | HSA | 15 | (3) | 0 to 10 | 4 |
| Duplicate groundwater sample ⁴ | DUP-GW-1 | | | | | 4 |
| Total Samples | | | | 40 | | 24 |

Notes:

1. Approximate elevation in feet above mean sea level.
2. Duplicate samples will be collected from intervals exhibiting evidence of potential contamination, such as staining or odor.
3. Soil samples for this boring are listed under soil borings.
4. A duplicate groundwater sample will be collected each quarter.

HSA = hollow-stem auger
N/A = not applicable

Table 4 Sample Containers, Preservation and Storage

| Analysis | Method | Sample Container | Number of Containers | Preservation and Storage | Holding Times |
|---|------------------------|--|----------------------|--------------------------|-----------------------|
| Soil | | | | | |
| Hydrocarbon Identification | NWTPH-HCID | 8 oz. CWM jar with PTFE lid | 1 | 4° C | 14 days |
| Gasoline Range Organics | NWTPH-Gx | VOA vial w/MeOH | 1 | 10 mL MeOH | 14 days |
| Diesel Range Organics ¹ | NWTPH-Dx | 8 oz. CWM jar ² with PTFE lid | 1 | 4° C | 14 days |
| EPH | MTCA-NW EPH | 8 oz. CWM jar ² with PTFE lid | 1 | HCl pH<2; 4° C | 14 days |
| VPH | MTCA-NW VPH | 8 oz. CWM jar ² with PTFE lid | 1 | HCl pH<2; 4° C | 14 days |
| Volatile Organic Compounds ^{3,4} | EPA 8260B | VOA vial w/stir bar ⁵ | 2 | Freeze within 48 hrs | 14 days |
| Polycyclic Aromatic Hydrocarbons | EPA 8270D | 8 oz. CWM jar ² with PTFE lid | 1 | 4° C | 14 days |
| Water | | | | | |
| Gasoline Range Organics | NWTPH-Gx | VOA vial w/MeOH | 3 | HCl pH<2, 4° C | 14 days |
| Diesel Range Organics | NWTPH-Dx | 500-mL amber bottle | 2 | HCl pH<2, 4° C | 14 days |
| Volatile Organic Compounds ^{3,4} | EPA 8260B ⁶ | VOA vial | 3 | HCl pH<2, 4° C | 14 days |
| Polycyclic Aromatic Hydrocarbons | EPA 8270D | 1-Liter Amber | 2 | None | 7 days |
| Dissolved Lead ⁷ | EPA 6020 | 500-mL polyethylene | 1 | None | 180 days ⁸ |

Notes:

1. Silica gel cleanup will be performed on samples where the chromatograph indicates a possible biogenic influence.
2. Sample fraction would come from the same 8 oz jar that was collected for NWTPH-HCID.
3. Includes benzene, toluene, ethylbenzene, total xylenes, and methyl tertiary-butyl ether.
4. Includes 1,2-dichloroethane, 1,2-dibromoethane, and n-hexane for selected samples that appear to be contaminated based on field screening.
5. Sample volume = 5 ounces
6. 1,2-Dibromoethane will be analyzed using EPA Method 8011.
7. Sample to be filtered in the lab.
8. Sample must be filtered within 48 hours of collection for this holding time to apply.

CWM jar = Clear, wide-mouth glass jar

EPH = Extractable petroleum hydrocarbons

HCl = Hydrochloric acid

MeOH = Methanol

PTFE = teflon

VOA = volatile organic analysis

VPH = Volatile petroleum hydrocarbons

Table 5 Geotechnical Analyses

| Geotechnical Parameter | Analytical Method | Sample Container and Volume | Number of Containers | Preservation and Storage | Holding Time |
|-------------------------------|--------------------------|------------------------------------|-----------------------------|---------------------------------|---------------------|
| Fraction organic carbon | Organic content burn | 5-gallon bucket | 2 | None | 180 days |
| Soil bulk density | Unit weight/volume | 5-gallon bucket | 2 | None | 180 days |
| Total soil porosity | (1) | 5-gallon bucket | 2 | None | 180 days |
| Volumetric water content | (2) | 5-gallon bucket | 2 | None | 180 days |
| Permeability | | Shelby tube | 1 | Seal ends and store upright | 180 days |
| Volumetric air content | | 5-gallon bucket | 2 | None | 180 days |

Notes:

1. Calculated w/ bulk density and particle density.
2. Calculated w/ gravimetric water content.

Table 6 Natural Attenuation Parameter Sampling Containers, Preservation, and Storage

| Natural Attenuation Parameter Analysis ¹ | Method | Sample Container | Number of Containers | Preservation and Storage | Holding Time |
|---|----------------|--------------------------------------|----------------------|--------------------------|--------------|
| Dissolved oxygen (DO) | Field-measured | N/A | N/A | N/A | N/A |
| Oxidation-reduction potential (ORP) | Field-measured | N/A | N/A | N/A | N/A |
| pH | Field-measured | N/A | N/A | N/A | N/A |
| Specific conductance | Field-measured | N/A | N/A | N/A | N/A |
| Temperature | Field-measured | N/A | N/A | N/A | N/A |
| Sulfate | EPA 300.0 | 500 mL unpreserved polyethylene | 1 | none | 28 days |
| Nitrate | EPA 300.0 | 500 mL unpreserved polyethylene | 1 | none | 2 days |
| Ferrous iron (soluble) | Field-measured | N/A | N/A | N/A | N/A |
| Manganese (soluble) | EPA 6020 | 500 mL HNO ₃ polyethylene | 1 | HNO ₃ | 180 days |
| Methane | RSK175 | 40 mL HCl Vials | 3 | HCl | 14 days |
| Alkalinity | EPA 310.1 | 500 mL unpreserved polyethylene | 1 | none | 14 days |

Notes

¹Ecology, 2005

HCl = hydrochloric acid

HNO₃ = nitric acid

NA = not applicable

VOAs = volatile organic analysis

Table 7 Tidal Study Well Specifications


| Well No. | Date Installed | Well Depth (feet) | Screened Interval (feet) | TOC Elevation ¹ | Depth to Water ² | Groundwater Elevation ³ | Summary of Lithology |
|----------|----------------|--------------------|--------------------------|----------------------------|-----------------------------|------------------------------------|---|
| W-3 | Feb-90 | 22.9 ⁴ | 3 to 23 | 13.27 | 5.88 | 7.39 | sand; H ₂ S odor |
| W-6 | Feb-90 | 6.5 ⁴ | | 14.95 | 2.83 | 12.12 | sand; organic clay; H ₂ S odor |
| MW-11 | Mar-88 | 18.72 ⁴ | NS in log | 16.28 | 2.71 | 13.57 | sand (fill); peat |
| MW-19 | Mar-91 | 5.26 ⁴ | NS in log | 12.79 | 2.76 | 10.03 | sand |
| MW-28 | June-91 | 12.18 ⁴ | 2.5 to 11.5 | 13.86 | 1.25 | 12.61 | silty sand; peat |
| MW-40R | No log | 12.51 ⁴ | No log | 15.56 | 3.35 | 12.21 | No log |
| MW-A1 | Feb-08 | 15.5 | 5.5 to 15.5 | 14.07 | 7.18 ⁵ | 6.89 | sand & gravel (fill) |
| MW-A2 | Feb-08 | 15.5 | 5.5 to 15.5 | 12.56 | 5.82 ⁵ | 6.74 | sand & silt (fill) |
| MW-A3 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |
| MW-A4 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |
| MW-A5 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |
| MW-A6 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |
| MW-A7 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |

Notes:

1. TOC elevation is in feet above mean sea level.
2. Depth to water in feet below ground surface measured prior to installation of pressure transducer on February 21, 2008.
3. Groundwater elevation is in feet above mean sea level measured prior to installation of pressure transducer on February 21, 2008.
4. Total depth of well measured on February 21, 2008.
5. Depth to water measured on February 24, 2009.
6. Screened interval depth is approximate as wells have not been installed.

H₂S = hydrogen sulfide
 NS = Not specified
 TBI = To be installed
 TBD = To be determined

FIGURES

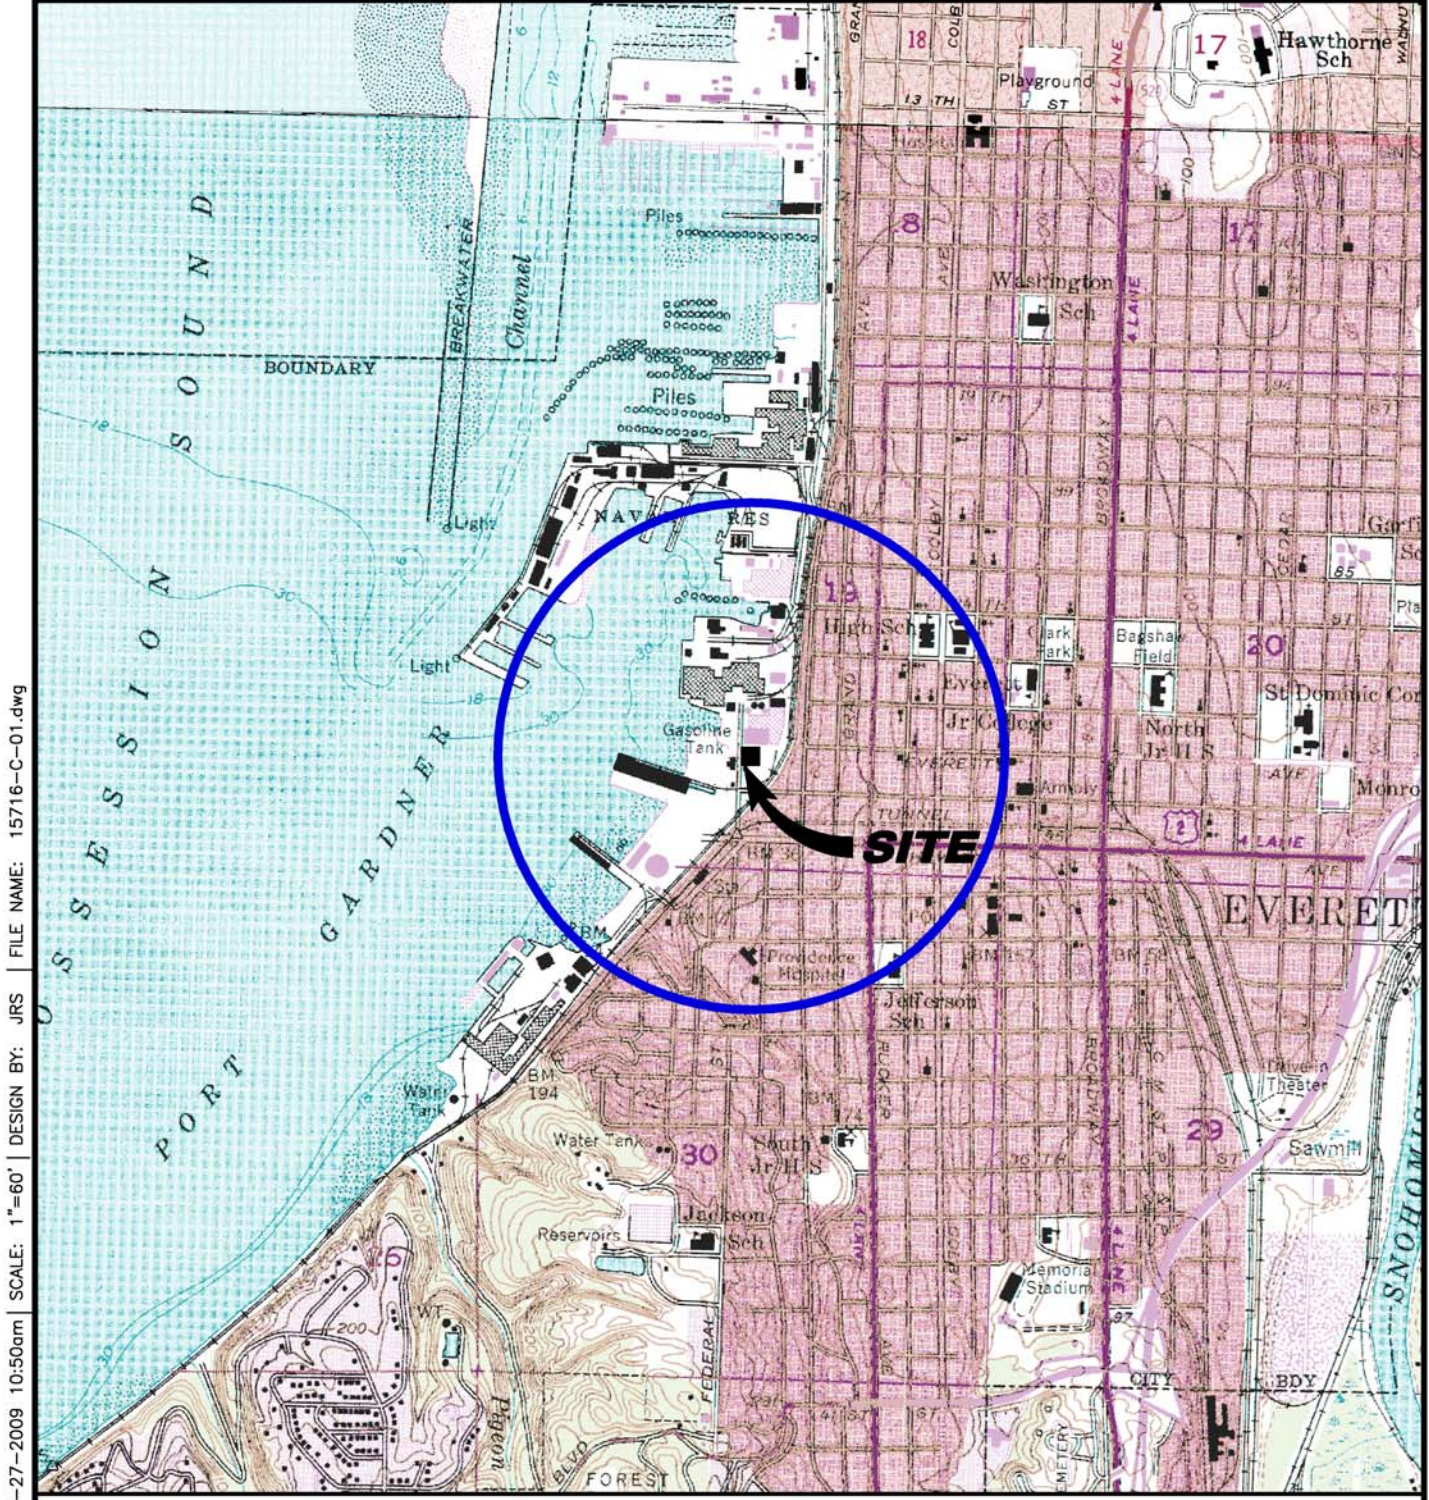


JOB NO.: 9-915-15716-C | DWG DATE: 3-27-2009 10:50am | SCALE: 1"=60' | DESIGN BY: JRS | FILE NAME: 15716-C-01.dwg

EXPLANATION



1/2-MILE RADIUS CIRCLE



SCALE: 1:24,000

SOURCE: USGS Quad Topo of Everett and Marysville, Photorevised 1973.

amec
AMEC EARTH & ENVIRONMENTAL, INC.
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

SITE LOCATION MAP

EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728
2717/2731 FEDERAL AVENUE
EVERETT, WASHINGTON

FIGURE

1



SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:
**EXXONMOBIL
AMERICAN DISTRIBUTING CO.**

DWN BY: JRS
CHK'D BY: AS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: AS SHOWN

PROJECT
**EXXONMOBIL/ADC PROPERTY
ECOLOGY ID 2728**

DATE:
FEBRUARY 2010
PROJECT NO.:
9-915-15716-C

AMEC Earth & Environmental
11810 North Creek Parkway N
Bothell, WA, U.S.A. 98011-8201



TITLE
**PROPOSED DATA GAP INVESTIGATIONS
EXPLORATION PLAN**

REV. NO.:
FIGURE No.
2

ATTACHMENT A1

Site-Specific Health and Safety Plan

SITE SPECIFIC HEALTH AND SAFETY PLAN

Project Name: ExxonMobil/ADC Property, Ecology Site ID 2728
Project Location: 2717/2731 Federal Avenue, Everett, Washington
Project Number: 9-91-51571-6C

THIS SITE SPECIFIC HEALTH AND SAFETY PLAN APPLIES ONLY TO AMEC PERSONNEL.

All site personnel must have completed the 8-hour ExxonMobil LPS Training prior to undertaking any field work at the site.

A PRE-ENTRY BRIEFING MUST BE HELD PRIOR TO INITIATING ANY SITE ACTIVITY AND AT OTHER TIMES AS NECESSARY TO ENSURE EMPLOYEES ARE APPRISED OF THE SITE HEALTH AND SAFETY PLAN.

SAFETY PERSONNEL:

Health and Safety Coordinators: Leah Vigoren and Anastasia Speransky
Project Engineers: Leah Vigoren and Stephen Dailey
Project Managers: Meg Strong and Gary Dupuy
Site Safety Coordinator (SSC): Leah Vigoren
Client Contact: Joe Abel: ExxonMobil Environmental Services (EMES)

EMERGENCY CONTACTS:

Hospital / Emergency Room: **Providence Medical Center** **425-258-7555**

Map showing shortest route to Hospital is attached to this document.

Fire: 911
Police: 911
Poison Control Center: 1-800-222-1222
Emergency Water Shut-off: Everett 1-425-257-8821
Electric Utility: Snohomish County PUD 1-877-783-1000
Washington State Patrol: 911

Health and Safety Coordinator: Leah Vigoren (Cell Phone: 206-351-9449) 206-342-1760 (w)
Project Manager: Meg Strong (Cell Phone: 425-864-2096) 425-368-0966 (w)

AMEC Earth & Environmental, Inc.
11810North Creek Parkway
Bothell, Washington
USA 98011
(425) 368-1000 Phone
(425) 368-1001 Facsimile

SITE HISTORY

The approximate 1-acre site was purchased by ExxonMobil's historic predecessors in 1922, and was utilized as a petroleum bulk storage distribution facility between 1922 and 1974. In 1974, the then Mobile Company sold two thirds of the site (northern portion) to A.P. Miller (Miller), for use by the American Distributing Company (ADC). In 1987, Mobile discontinued petroleum storage and dispensing operations on their portion of the site and removed all storage tanks and ancillary equipment. In 1990, petroleum distribution was discontinued on the ADC parcel, and some improvements and tanks were removed from the parcel. Since then, the site has been turned into a parking lot and is leased to the Kimberly Clark facility located to the north of the site. Activities that have occurred on the site since this time have been environmental investigations and remedial activities to address petroleum impacts to soil and groundwater.

In 1985, site characterization activities were initiated to define the nature and extent of petroleum impacts beneath the site. Between 1988 and 1996, a variety of Interim Remedial Action Measures (IRAMs) were implemented to address the free product. In 1998, a Remedial Investigation/Focused Feasibility Study (RI/FFS) was performed in coordination of the Washington State Department of Ecology (Ecology) under the Consent Order. Remedial Action Objectives (RAOs) were developed for the site based on the RI data and baseline human health risk assessment. The remedy selected to achieve RAOs included the following.

- 1) Construction of an interceptor trench along the down gradient margins of the site (entire western and northern boundaries) to mitigate the off-site migration of the light non-aqueous phase liquid (LNAPL) present on the shallow water table.
- 2) Placement of low-permeability cap across the entire site surface
- 3) Ongoing removal and disposal of recovered LNAPL from site monitoring wells and interceptor trench; and
- 4) Quarterly groundwater monitoring.

ORGANIZATIONAL STRUCTURE

Project Manager(s):

Gary Dupuy (phone number 206-342-1777) and Meg Strong (phone number 425-368-0966) are the client managers for the project. Responsibilities include remaining in contact with regulatory agencies such as the Department of Ecology, overseeing the Project and ensuring client satisfaction from commencement to closeout.

Site Safety and Health Supervisor:

Leah Vigoren (phone number 206-838-8470) and Anastasia Speransky (phone number 206-838-1776) are the acting Health and Safety Coordinators (HSCs). Primarily the duties of the HSC entail coordination with the Project manager for preparation of site health and safety plans, assessment of chemical hazards and selection of safety / monitoring equipment.

The HSC will also take on the duties of the Site Safety Coordinator. The SSC has the responsibility of implementing the Site Health and Safety Plan while at the Site. The SSC / HSC will be involved with the Project Manager in preparation of the Site Health and Safety Plan. If the plan is not being implemented or if unanticipated situations arise, the SSC / HSC may stop all proceedings and see that all personnel depart the site. The SSC / HSC will have charge of all instruments and see to their proper use and function.

Project Engineer:

Stephen Dailey (phone number 206-342-1775) is the project engineer and is responsible for developing the site conceptual model and providing engineering input to the FFS.

Field Technicians:

Joseph C. Petrick, and Danah Palik are the Field Technicians whose responsibilities include obtaining groundwater samples and other data, as required, from monitoring wells. Keeping field records (I.e. Daily Field Logs) describing field activities, observations and site events. Supplying daily reports and reporting all incidents to the Project Engineer.

Subcontractor

Transport and disposal company (Clear Harbors: AWSL Subcontractor) is responsible for removing all waste from the jobsite and transferring it to a certified facility for disposal.

Drilling company "Cascade Drilling, Inc." is responsible for the advancement of soil borings and the installation of monitoring wells on the site.

ON SITE TASKS

AMEC to remove light non-aqueous phase liquid (LNAPL) monthly and continue the quarterly groundwater monitoring program at the site. Groundwater samples will be collected and analyzed for diesel and heavy oil range organics using Method Northwest Total Petroleum Hydrocarbons Diesel Extended (NWTPH: NWTPH-D, which includes NWTPH-oil (O) with Silica Gel clean-up), gasoline range organic compounds using Method NWTPH-gasoline Extended (Gx), and benzene, toluene, ethyl benzene, and total xylenes (BTEX) using U.S. Environmental Protection Agency (EPA) Method 8260B.

During monthly O&M events LNAPL is collected by AMEC personnel and stored in two 55-gallon drums within a secured shed on the project site. To mitigate spill hazards, and possible drum failure, these drums are placed on a secondary containment platform which would collect any spilled free liquids. When the drums are full a certified waste transporter and disposal company (ASWL Subcontractor) is contacted to transport the drums for disposal.

AMEC will oversee the advancement of 18 soil borings and the installation of 5 new monitoring wells on the site. Cascade Drilling of Woodinville Washington will conduct the drilling on the site and provide all equipment and personnel necessary. This work will require utility clearances prior to the initiation of drilling. Drilling involves the use of heavy equipment which will require safety precautions during set up and operation. Drilling and sampling at the site brings potentially-contaminated subsurface materials to the surface where Cascade drilling personnel or AMEC personnel overseeing the drilling may be exposed. Soil samples will be collected from each soil boring; a total of 2 samples per boring will be submitted for analyses including NWTPH-Dx, NWTPH-Gx, and BTEX by 8260B. After monitoring well installation, the 5 new wells will be sampled as part of AMEC's ongoing quarterly groundwater monitoring program at the site.

AMEC will be conducting a tidal influence study in which a stilling well will need to be installed on a portion of the Everett pier. The stilling well will need to extend into the water such that the lower portion of it is always submerged. The tidal influence study will consist of programming and installing pressure transducers and data loggers in approximately 12 monitoring wells which will measure water level fluctuations which will be analyzed for the presence and extent of tidal influence.

SAFETY & HEALTH HAZARDS ANALYSIS

a) Physical Hazards

Physical hazards that may be encountered during site activities include noise, manual lifting, powerful moving parts and weather related hazards (cold, heat stress, wind). Hard hats, safety glasses, hearing protection and steel-toed boots will be required for all personnel working in the vicinity of heavy equipment.

Identified hazards may be mitigated by using safe work practices at all times. The SSC has total responsibility for ensuring that all AMEC personnel on-site perform work tasks in a safe and sensible manner. If at any time the SSC determines that safe work practices are not followed, the tasks will be suspended and corrective actions will be taken.

Because of the potential of explosion hazard presented during groundwater monitoring (i.e., W-2) **SMOKING WILL NOT BE ALLOWED WITHIN 50 FEET OF THE WORK ZONE.**

The following are all additional site related hazards:

- 1) **Traffic**
 - a. Cones will be set out around the work area and safety reflective vests will be worn.
- 2) **Personnel or property damage from vehicle movement.**
 - a. When moving vehicles the following precautions must be taken
 - b. Equipment must be stowed and secured
 - c. A spotter must be used due to the presence of blind spots in the driver's field of vision.
 - d. The spotter must identify any surface obstruction / anomalies
 - e. Audible warning signals and hand signals must be used.
 - f. Operator must yield to pedestrians.
- 3) **Personal injury from handling heavy objects.**
 - a. Use proper lifting techniques; keeping back straight and lift with arms and legs; keep load near body; avoid reaching.
 - b. Do not attempting to lift anything that weighs more than 60 pounds.
 - c. Use mechanical equipment such as a cart to carry / lift large, heavy or awkward loads.
- 4) **Slips, trips and falls.**
 - a. Scan area prior to start of work.
 - b. Group all equipment and waste in one designated area.
 - c. Return tools not in use to storage.
- 5) **Pinch points on drum and well covers.**
 - a. Personnel will wear leather gloves when working with well and drum covers.
- 6) **Broken Glassware**
 - a. Personnel will use bubble wrap and blue ice when transporting samples in glass containers.
 - b. Personnel will not overtighten caps on glass bottles.

b) Chemical Hazards

Chemical hazards that could possibly be encountered include Gasoline, BTEX, hydrogen sulfide (H₂S), and methane (CH₄). The Permissible Exposure Limit (PEL) for Gasoline, BTEX, and hydrogen sulfide, and the Threshold Limit Value (TLV) for methane are listed in the attached table. The nature of this project precludes continuous exposure to any potential contaminant.

Per past anecdotal evidence, monitoring well (MW) 30 occasionally has contained small amounts of hydrogen sulfide gas. In addition, during installation, well (W) 2 contained methane gas exceeding the lower explosive limit (LEL). AMEC will conduct initial air monitoring using a multi-gas combustible gas

indicator (CGI) upon opening wells for sampling. Ensure that the atmosphere is less than 10% LEL, contains between 19.5% and 23.5% oxygen, less than 10 parts per million (ppm) H₂S and less than 10 ppm carbon monoxide prior to proceeding with sampling. Each well will be continuously monitored during sampling. The CGI will alarm if atmospheric concentrations exceed the levels required for entry. (Subsequent air monitoring for the year following installation indicates that no hazardous amounts of CH₄ have been detected in or nearby W2 since installation.

- 1) **Personal Injury from chemical contact / exposure / inhalation.**
 - a. Inspect drums before handling to ensure they are not leaking or bulging, or show any signs of loss of integrity.
 - b. AMEC personnel will place themselves upwind when opening monitoring wells.
- 2) **Personal injury from vapor ignition.**
 - a. AMEC personnel will use metal buckets when collecting and moving product.

c) Biological Hazards

The project site is a flat graded parking lot which eliminates most biological hazards. Current biological hazards are limited to the possibility of insects and / or rodents residing within the monitoring wells. AMEC personnel will take caution when opening the wells and will be wearing leather gloves to mitigate this hazard.

TRAINING

All AMEC personnel will review the site specific Health and Safety plan before accessing the site. Personnel onsite will also have current 40-Hour Hazardous Waste Operations and Emergency Response (HAZWOPER) Certification.

Certificates of HAZWOPER completion will be maintained at the Kirkland office and will be available to regulatory personnel upon request. All Personnel shall carry current 40-hour HAZWOPER training cards or appropriate paperwork while working onsite. The SSC / HSC shall be first aid and CPR trained.

In addition all site personnel must have completed the **8 hour ExxonMobil LPS Training** prior to undertaking any field work.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

AMEC will wear Level D PPE which consists of steel-toed, chemical resistant rubber boots, inner glove of PVC or latex, outer gloves of Nitrile or equivalent, safety glasses, Tyvek coveralls, and a hard hat. During construction activities, minimal PPE hearing protection will consist of soft foam ear-bud style plugs.

MEDICAL SURVEILLANCE

Evidence of a current physical examination in the form of a letter from an examining physician will be maintained at the Bothell office and will be available to regulatory personnel upon request.

Air Monitoring

AMEC will conduct initial air monitoring using a photoionization detector (PID) upon opening wells for sampling. PID utilizes ultraviolet light to ionize gas molecules and is commonly employed in the detection of volatile organic compounds (VOCs). AMEC will ensure that the concentrations of VOCs are less than 5 parts per million (ppm) in breathing zone prior to proceeding with sampling. Each well will be continuously monitored during sampling. The

PID will alarm if VOC concentrations exceed the levels required for breathing. AMEC will calibrate the PID both pre and post site visits using Isobutylene calibration gas with compatible regulator.

Air monitoring will be conducted during drilling and soil sampling activities.

Decontamination

Disposable PPE will be stored in a secured 55-gallon drum onsite. Monthly, a certified waste transporter and disposal company (ASWL Subcontractor) is contacted to transport the drum for disposal.

Water depth meters will be decon'd between depth recordings of individual monitoring wells using a clean metal bucket with distilled water and 1/10 parts cleaning solution.

Site Control

AMEC personnel will be provided with a site map and be required to review the Health and Safety plan prior to entry into the site. A copy of this HASP shall be on hand at all times with emergency contact numbers and directions to the nearest medical facilities easily accessible. When necessary (e.g. quarterly sampling), cones, caution tape or a suitable alternative will be used to deny public access to the work area. Cones will also be used to define an exclusion zone redirecting motorists and pedestrians away from the work area.

In all emergencies AMEC is to document the action taken and notify the HSC, Project Manager and client official of the event and subsequent response.

In the Event of an Injury

If an injury is life-threatening, follow steps 1 through 8 below. If the injury is not life threatening, perform necessary first aid and consider the need for decontamination prior to transport. The SSC shall be first aid and CPR trained.

- 1) Perform first aid necessary to determine victim(s) medical status
- 2) Call emergency transport.
- 3) Give specific directions to location of emergency
- 4) Give phone from which you are calling;
- 5) Tell emergency services what happened. Inform that victim(s) may be wearing contaminated clothing.
- 6) Inform emergency services how many persons need help.
- 7) Inform emergency services what is being done for the victim(s)
- 8) Stay on telephone until told to hang up.

Transport to hospital, if possible.

Work Permits

Copies of the permits will be available onsite during drilling activities. Cascade Drilling will obtain start cards required for drilling from the Washington State Department of Ecology.

Security


No unauthorized persons will be allowed in the work zone. Unauthorized persons are those without appropriate training, without proof of medical surveillance, and those with no business on the site.

EMERGENCY MEDICAL ROUTE DIRECTIONS

2717 Federal Avenue, Everett, WA 98201

1. Head south on Federal Avenue towards Terminal Avenue.
2. Turn left at Terminal Avenue.
3. Continue on Everett Avenue/WA-529.
4. Turn left on Grand Avenue.
5. Turn right at 14th Street.
6. Turn left at Colby Avenue.

1321 Colby Avenue, Everett, WA 98201

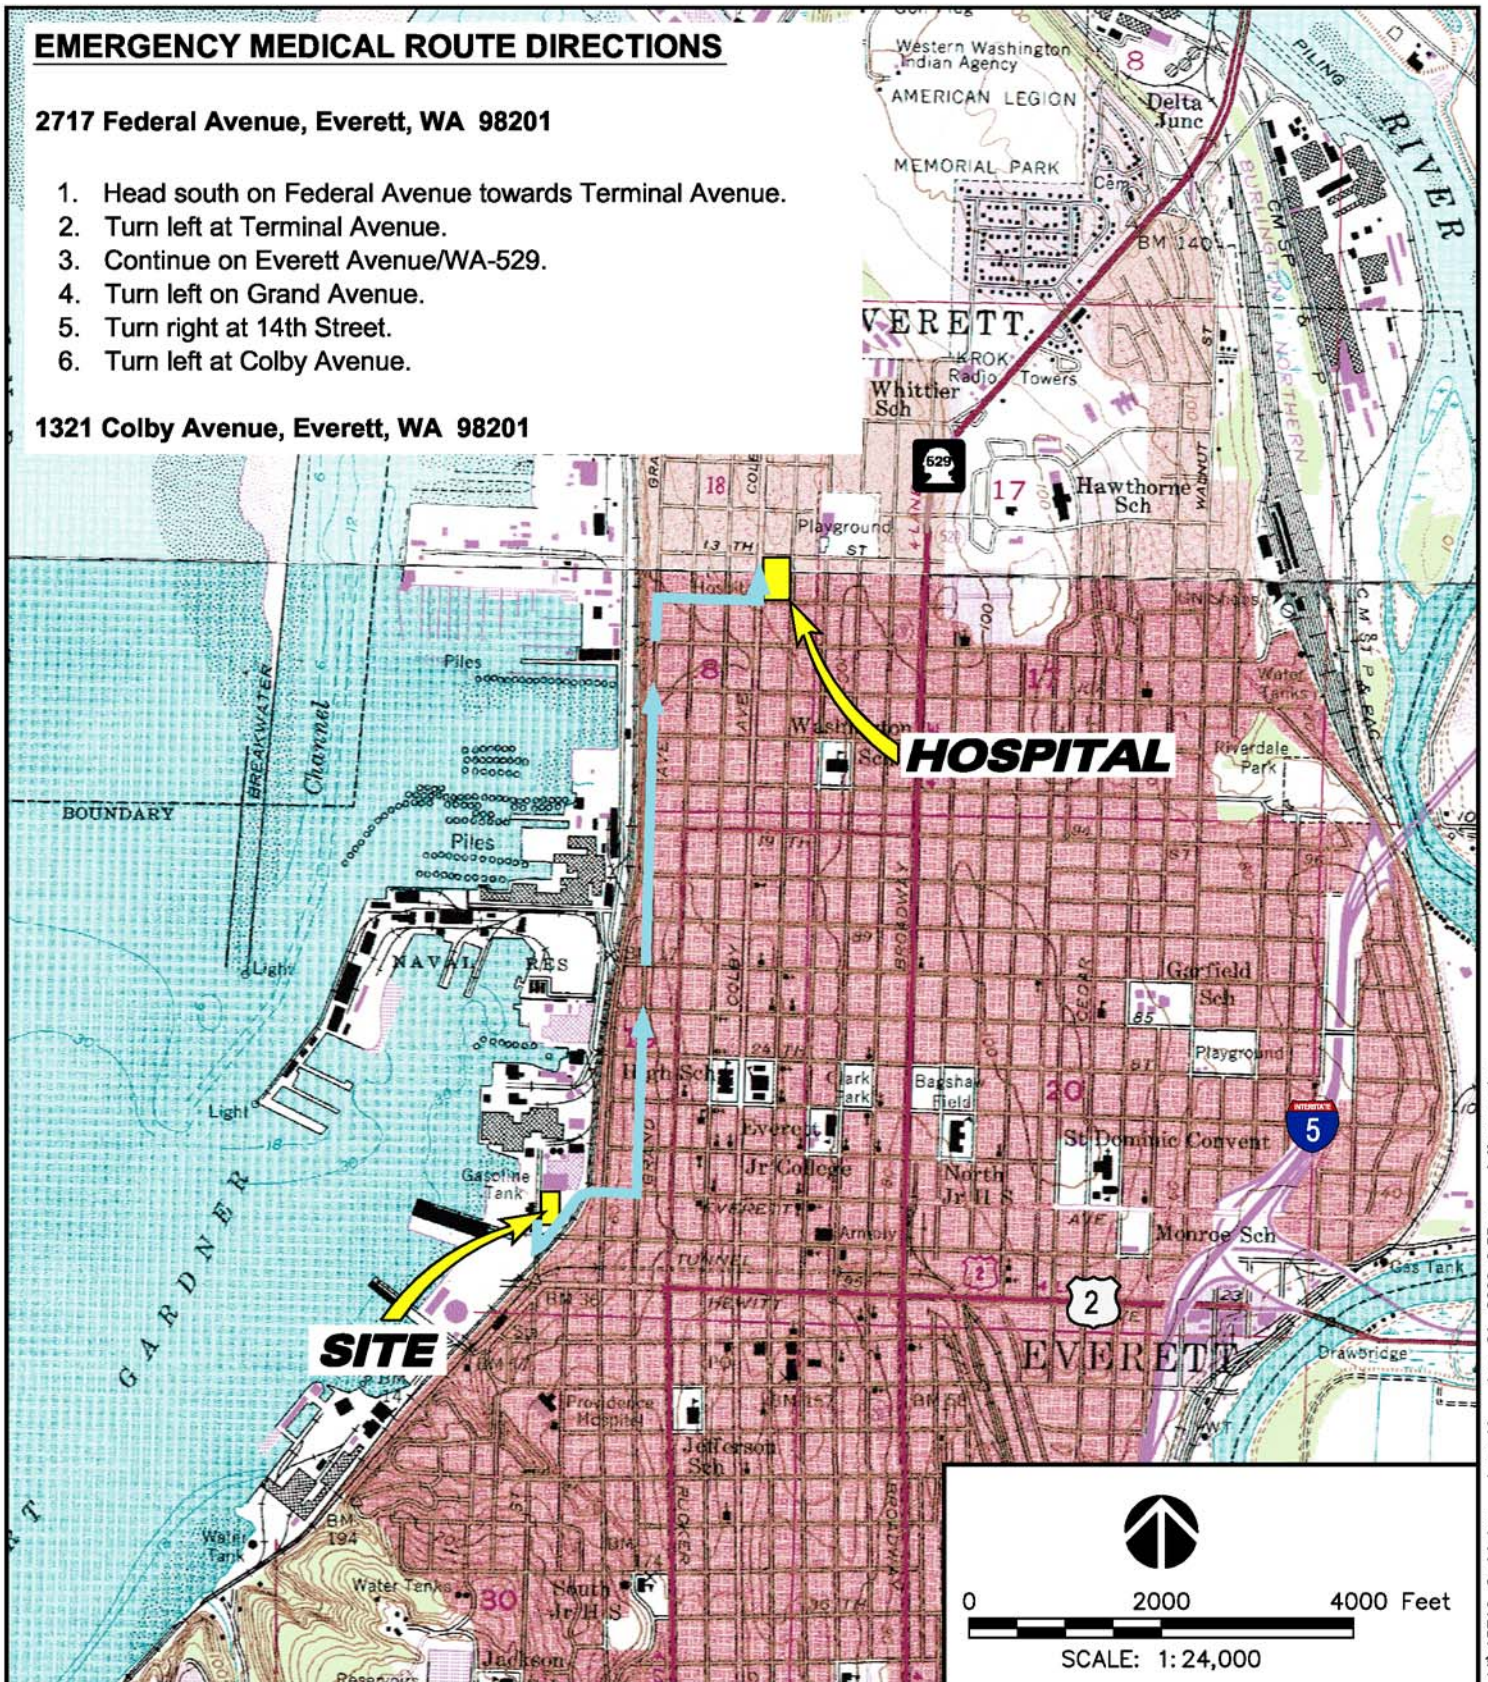

AMEC Earth & Environmental

11335 N.E. 122nd Way, Suite 100
Kirkland, WA, U.S.A. 98034-6918



CLIENT LOGO

CLIENT

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**

PROJECT: EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728

DWN BY:

JRS

DATUM:

NAD83

DATE: JUNE 2009

TITLE

EMERGENCY MEDICAL ROUTE

CHK'D BY:

AS

REV. NO.:

PROJECT NO:
9-915-15716-C

PROJECTION:
WA STATE PLANE

SCALE:
AS SHOWN

FIGURE No.

1

ATTACHMENT A2

Field Documentation Forms

**AMEC Earth & Environmental, Inc.**11810 North Creek Parkway N
Bothell, Washington 98011Tel (425) 368-1000
Fax (425) 368-1001**DAILY FIELD REPORT**

| | | | |
|---|---------------------------------------|------------------------------------|------------------|
| PROJECT NAME Mobil/ADC Everett Facility | | PROJECT NO. 9915-15716-0 | FIELD REPORT NO. |
| ADDRESS 2717/2731 Federal Avenue | | DATE | PAGE OF |
| CITY OR COUNTY Everett, WA | PERMIT NO. | ARRIVAL TIME | DEPARTURE TIME |
| CLIENT ExxonMobil | AMEC PROJECT MANAGER/PHONE NO. | | |
| GENERAL CONTRACTOR | AMEC FIELD REPRESENTATIVE/ MOBILE NO. | | |
| SUBCONTRACTOR | WEATHER | | |
| TYPE OF WORK PERFORMED | | | |
| EQUIPMENT USED | | | |

COMMENTS

| |
|--|
| |
|--|



LOW-FLOW GROUNDWATER SAMPLING LOG

WELL NO: _____ LOCATION: _____ PROJECT NO: _____
 DATE: _____ TIME: _____ CLIMATIC CONDITIONS: _____
 OVA/PID READING WHEN WELL OPENED: _____ DEPTH TO PRODUCT (TOC): _____
 STATIC WATER LEVEL (TOC): _____ TOTAL DEPTH OF WELL (TOC): _____

METHOD OF REMOVAL: _____ PUMPING RATE: _____

| WELL | DTW | Time | Gallons Removed | Temp. (C°) | pH | Sp. Cond. (mS/cm) | Turbidity (NTU) | DO (mg/L) | REDOX (mv) |
|-------|-------|-------|--------------------|---------------|-------|----------------------|--------------------|--------------|---------------|
| PURGE | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| DATA | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |

SAMPLE WITHDRAWAL METHOD: _____ SAMPLED BY: _____
 SAMPLE NUMBER(S) AND TIME: _____

NOTES: _____

LAB ANALYSIS PARAMETERS AND PRESERVATIVES: _____

NUMBER AND TYPES OF SAMPLE CONTAINERS USED: _____

DECON. PROCEDURES: _____

SAMPLES DELIVERED TO: _____ TRANSPORTER: _____
 DATE: _____ TIME: _____


CAPACITY OF CASING (GALLONS/LINEAR FOOT)
 2" - 0.16 • 4" - 0.65 • 6" - 1.47 • 8" - 2.61 • 10" - 4.08 • 12" - 5.57

| | | |
|--------------------------|----------------------|------------------|
| PROJECT NAME | PROJECT NO. <u>1</u> | WELL NO. |
| RES FIELD REPRESENTATIVE | DATE BEGUN | DATE COMPLETED |
| DRILLING CONTRACTOR | INSTALLATION TIME | BIOLOGY I.D. NO. |

WELL CONSTRUCTION DIAGRAM

SOIL TYPE: _____
 SLOPE: _____
 DEPTH: _____

| | |
|--|--|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

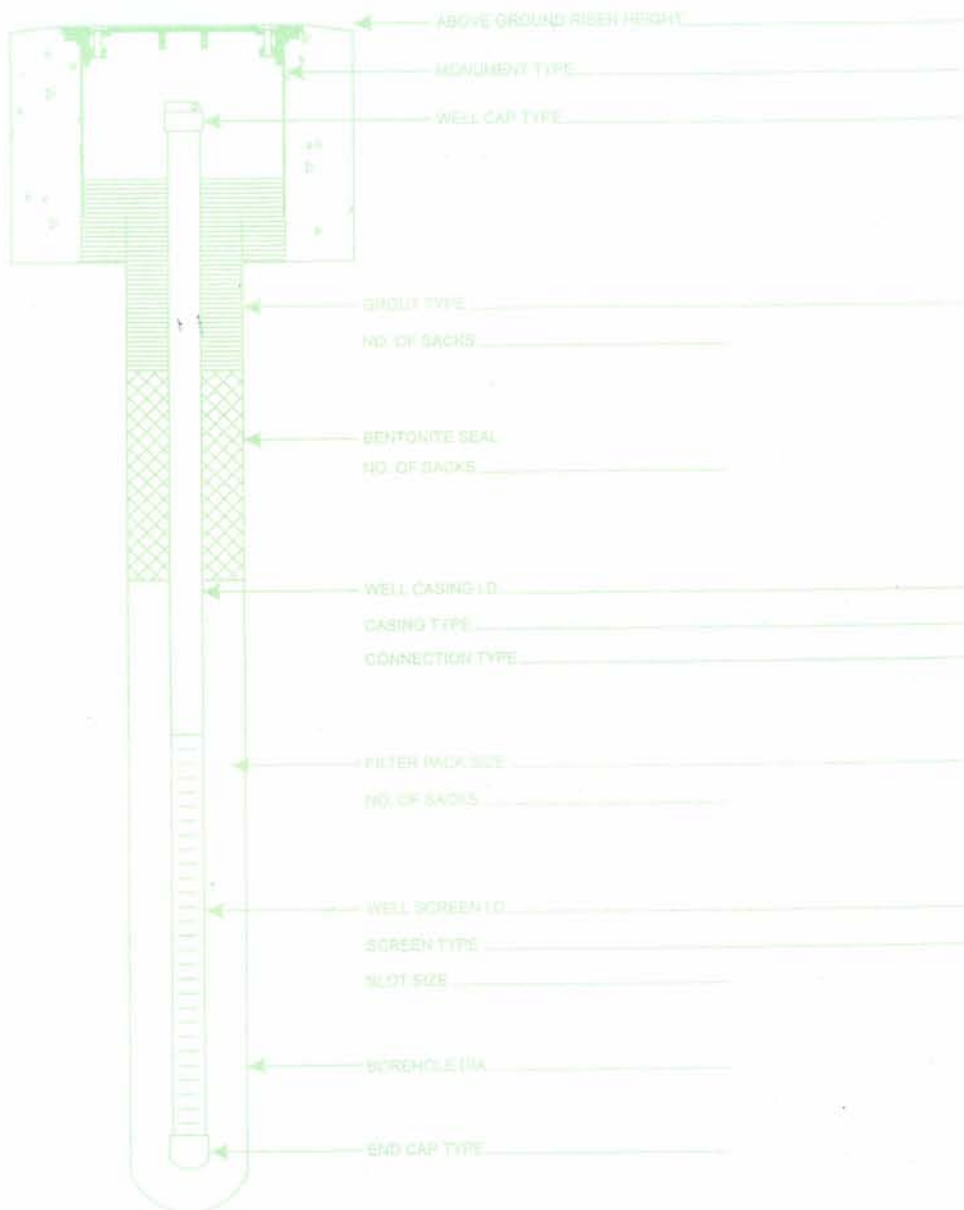

COMMENTS

| |
|--|
| |
| |
| |
| |
| |
| |
| |



| | | |
|-----------------------------|---------------|-------------------|
| WELL DEVELOPMENT LOG | PROJECT _____ | WELL NO. _____ |
| | JOB NO. _____ | DATE _____ |
| | | PREPARED BY _____ |

| | | |
|--|--|--|
| METHOD OVERPUMPAGE _____ BAILER _____ SURGE _____ BLOCK _____ AIR LIFT _____ OTHER _____ | INITIAL WATER LEVEL _____ FINAL WATER LEVEL _____ CAPACITY OF CASING (GALLONS/LINEAR FOOT) 2" = 0.16 4" = 0.65 6" = 1.47 | REMARKS: VOLUME BETWEEN CASING AND HOLE (GALLONS/LINEAR FOOT) (ASSUMING 40% POROSITY) 2" CASING AND 6" HOLE - 0.52 2" CASING AND 8" HOLE - 0.98 4" CASING AND 10" HOLE = 1.37 4" CASING AND 12" HOLE - 2.09 |
|--|--|--|

| | | |
|---|--|---|
| HOLE DIAMETER $d_h =$ _____ WELL CASING INSIDE DIAMETER $d_wID =$ _____ OUTSIDE DIAMETER $d_wOD =$ _____ DEPTH TO: WATER LEVEL $H =$ _____ BASE OF SEAL $S =$ _____ BASE OF WELL $TD =$ _____ EST. FILTER PACK POROSITY $P =$ _____ | | WELL VOLUME CALCULATION: $\text{CASING VOLUME} = V_c = \pi \left(\frac{d_wID}{2} \right)^2 (TD - H) = 3.14 \left(\frac{\quad}{2} \right)^2 (\quad - \quad) = \quad$ $\text{FILTER PACK PORE VOLUME} = V_f = \pi \left[\left(\frac{d_h}{2} \right)^2 - \left(\frac{d_wOD}{2} \right)^2 \right] \{ TD - (S \text{ or } H *)(P) \} = \quad$ (*if $S > H$, use S ; if $S < H$, use H) $= 3.14 \left[\left(\frac{\quad}{2} \right)^2 - \left(\frac{\quad}{2} \right)^2 \right] \{ \quad - \quad \} (\quad) = \quad$ TOTAL WELL VOLUME = $V_T = V_c + V_f = \quad + \quad = \quad \text{ft.}^3 \times 7.48 = \quad \text{gal.}$ |
|---|--|---|

| DEVELOPMENT LOG: | | | | | CUMULATIVE WATER REMOVED GALLONS | WATER QUALITY | | | | | COMMENTS |
|------------------|-------------------|--------|-----------------|-----------------------|---|---------------|------|--------------------|-------|-------|----------|
| DTW | TIME BEGIN/END | METHOD | ELAPSED TIME | FLOW RATE (gpm) | | pH | TEMP | CONDUCT- TIVITY | D.O.* | REDOX | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

* = Dissolved Oxygen

APPENDIX B

Historical Maps and Documentation

INSURANCE MAPS of **NEW YORK** WASHINGTON Published in 1902 by the **SANBORN MAP COMPANY** 11 Broadway, New York

Scale of 1 inch to 10 miles

COPYRIGHT, 1902, by the SANBORN MAP COMPANY


THE LIBRARY OF
 THE CONGRESS
 FEB 1 1902
 DISTRICT OF COLUMBIA
 1616
 COPY A

| | | | | | | | | | | | | |
|-------------|----------------|---------------|------------|---------------|---------------|---------------|--------------|---------------|----------------|---------------|------------------------|----|
| 115-2877 24 | Brett Ave., | 3500-3510 *41 | Hoyt Ave., | 2700-2838 *10 | Pacific Ave., | 1000-1224 *38 | Summit Ave., | 5000-5058 *40 | Twenty-second, | 1200-1421 33 | Bell-Yelton Mill Co., | 51 |
| 00-2833 43 | " | 3501-3523 *35 | " | 2701-2838 *19 | " | 1001-1123 *3 | " | 5210-5235 *39 | " | 1500-1731 23 | Blackman, C.A., & Co., | 46 |
| 00-2950 2 | " | 3601-3615 *39 | " | 2800-3033 *9 | " | 1201-1424 *4 | " | 5301-5337 *40 | " | 1801-1808 *28 | Shoemaker, | 51 |
| 27-2838 28 | " | 3612-3610 *45 | " | 3001-3035 *16 | " | 1400-1424 *4 | " | 5500-5531 *38 | " | 1801-1809 *22 | Carpenter Bros., | 28 |
| | St., at Lowel, | | " | 3100-3214 *4 | " | 1600-1724 *17 | " | 5700-5835 *41 | " | 1810-2109 28 | Shingler Mill, | 28 |
| | | | " | 3101-3233 *11 | " | 1801-1723 *16 | " | | " | 2700-2723 *54 | Casadio Steam Laundry, | 28 |
| | | | " | | " | | " | | " | | | |


INDEX

4

5
AV.

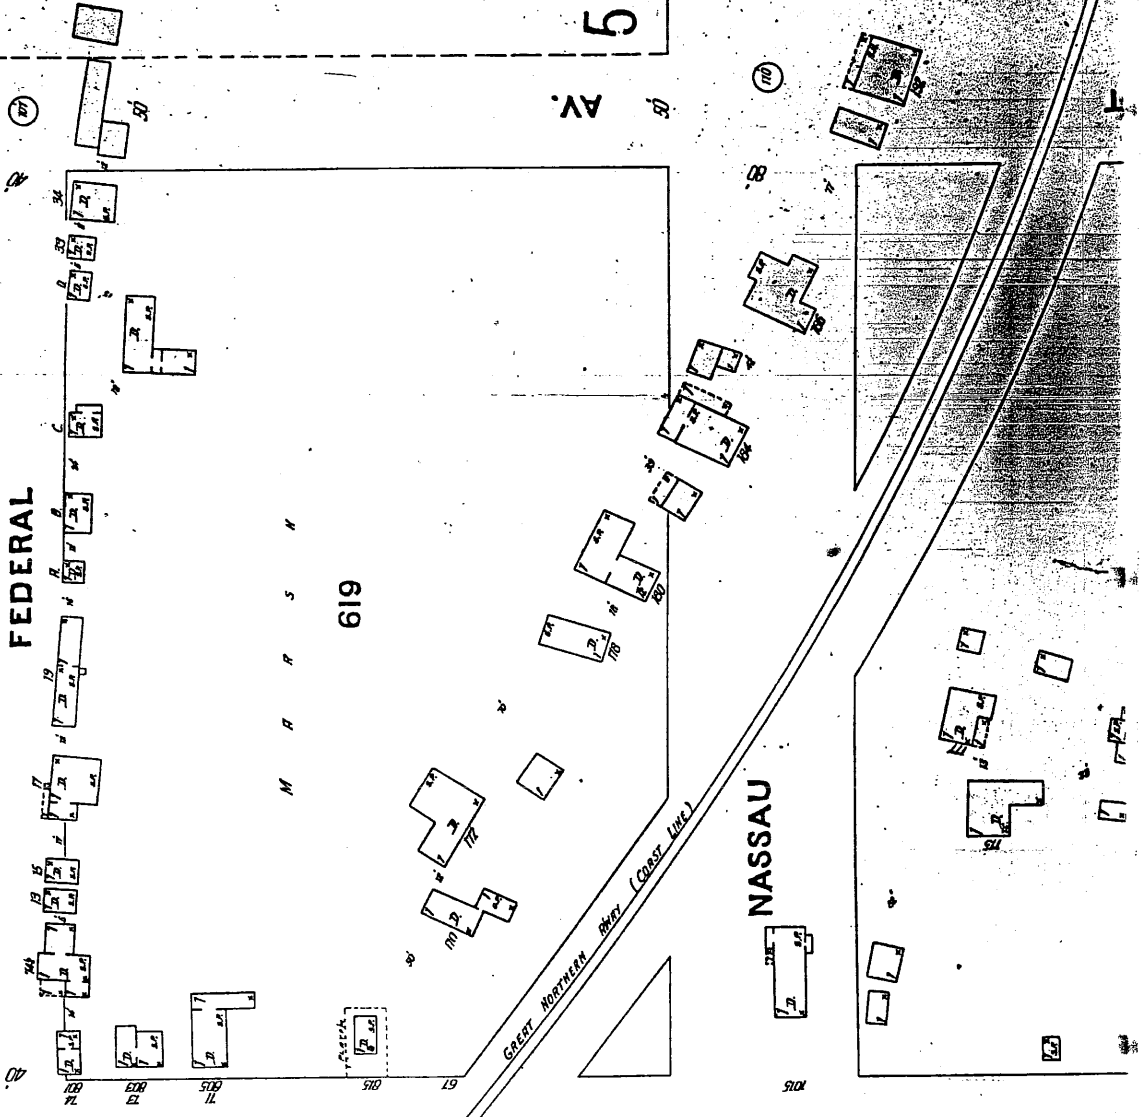

2

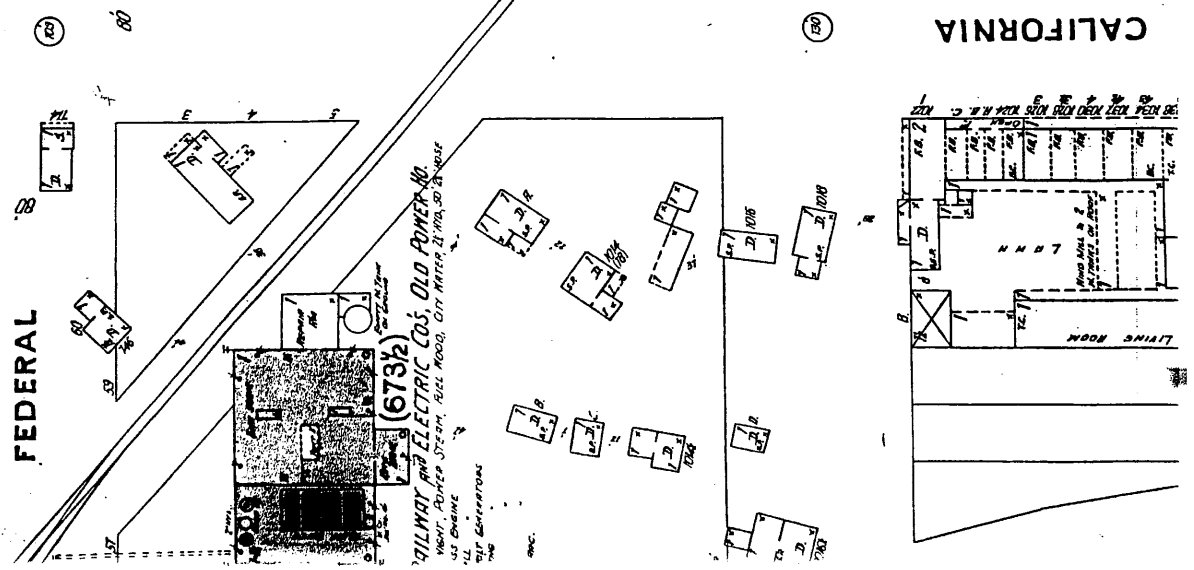

CALIFORNIA

FEDERAL

NASSAU

GREAT NORTHERN RAILWAY (COAST LINE)

619

INSURANCE

JUN 10 1914

MAPS OF

REPORT

INCLUDING

LOWELL

WASHINGTON


PUBLISHED BY THE

Sanborn Map Company

11 BROADWAY, NEW YORK

1914

Copyright 1914 by the Sanborn Map Company

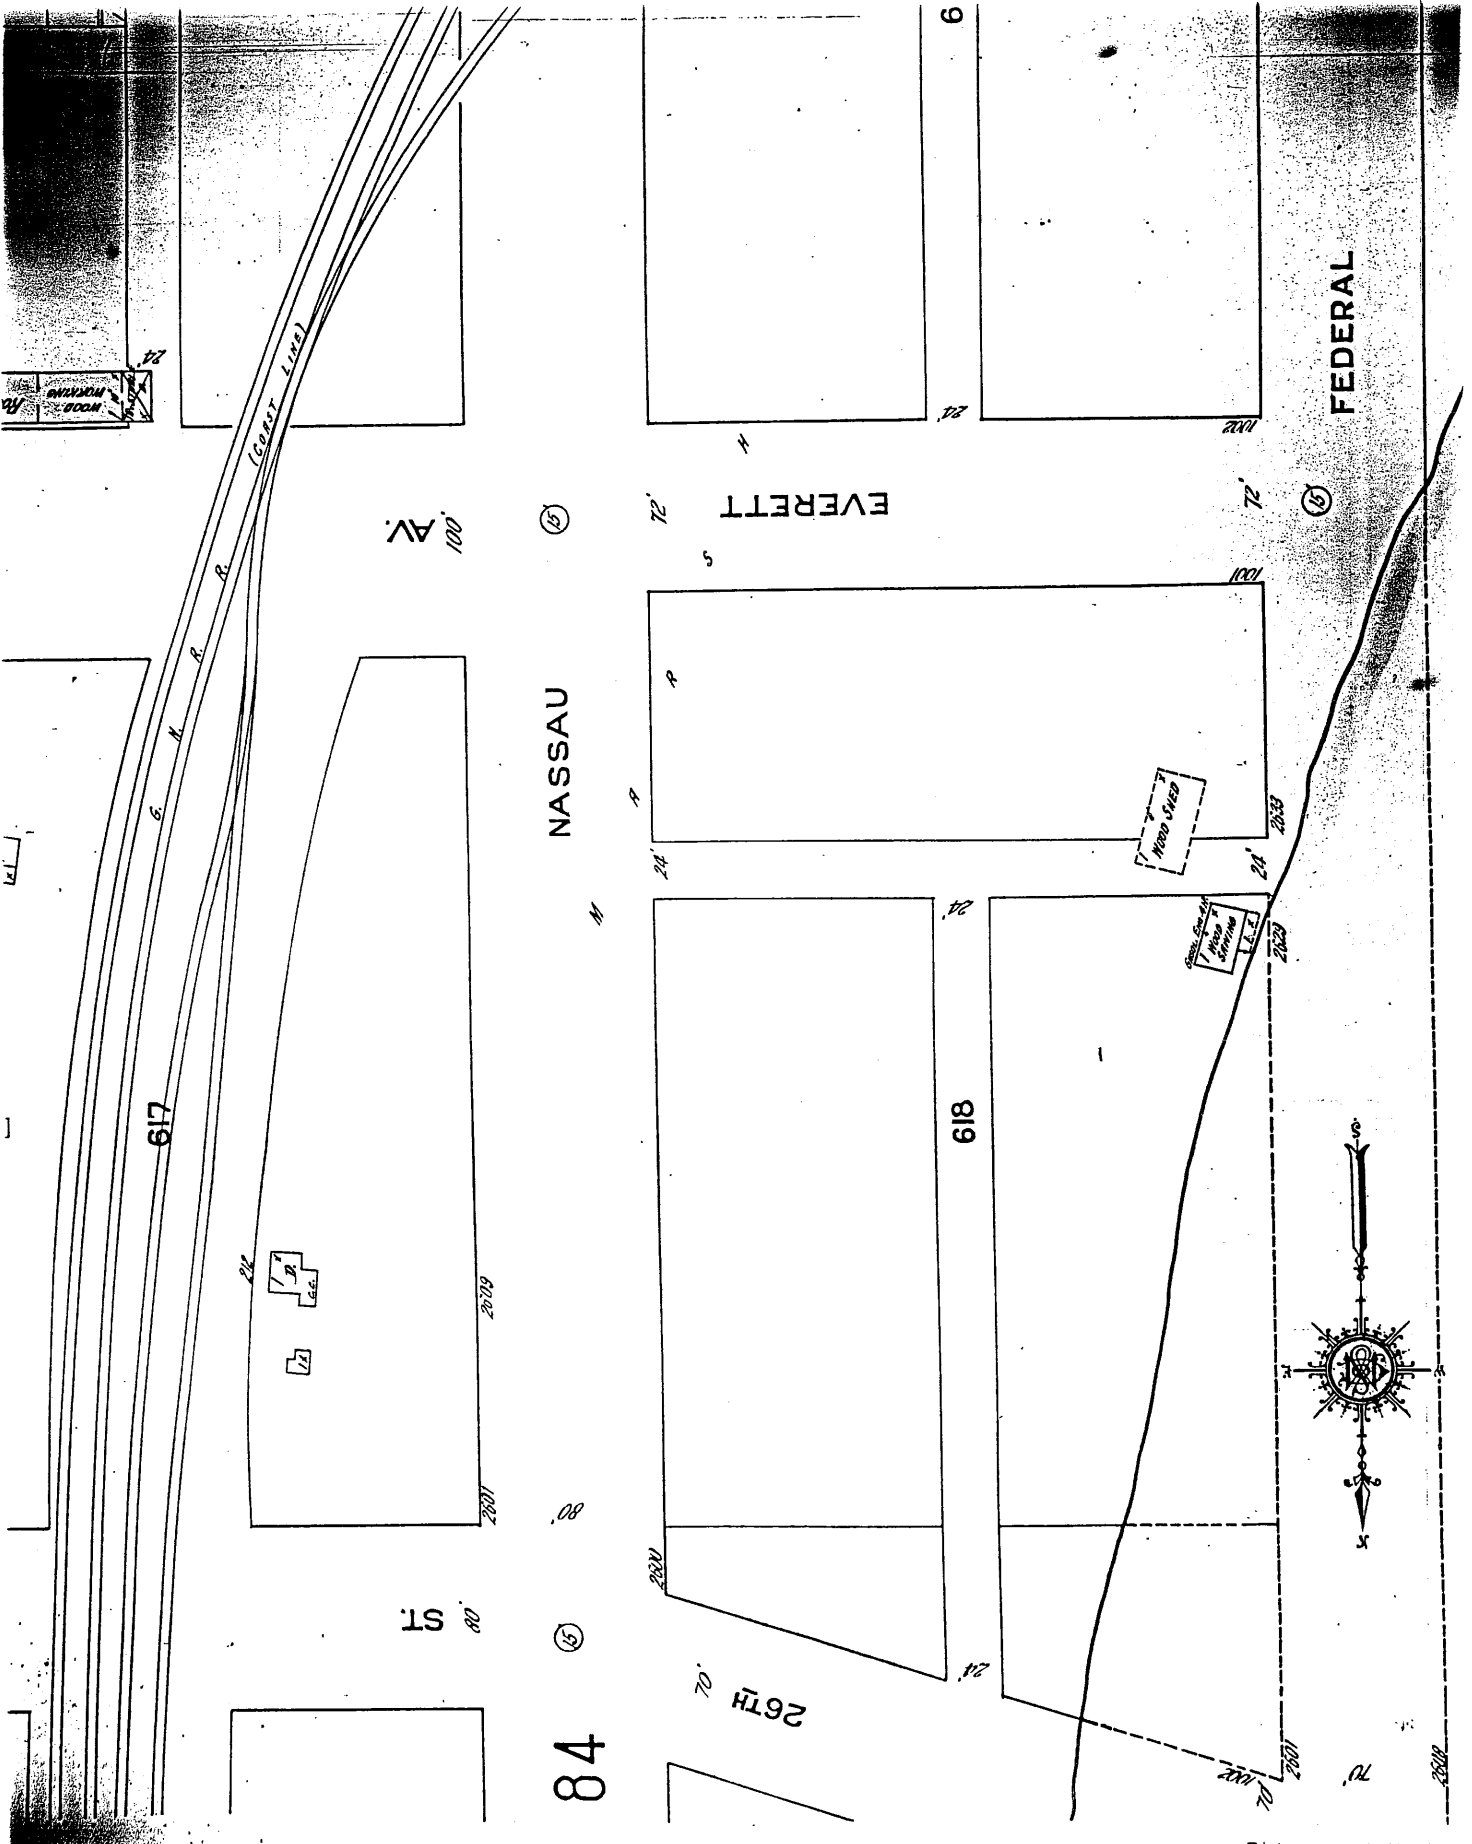

FEDERAL

EVERETT

NASSAU


100' AV.

617

618

84

26TH ST.



14'



American Oil
Drilling Company Site

FEDERAL ST

Edge of road along beach 90 to 91

2' Section for Exp. Dist. only

14

13

12

11

10

9

8

7

6

5

4

3

2

1

Swamp Elev. 87-


EVERETT AVE

NASSAU ST

3' Section for Exp. Dist. only



3'00"

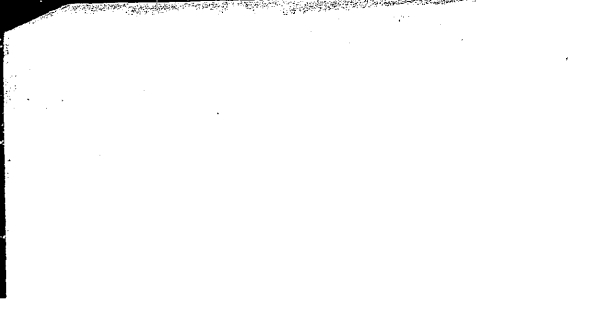

The regular Administrative Session of the City Council was held August 16, 1915, at 10:30 A.M. with Mayor Clay in the Chair and Commissioners Clay, Kelly and Salter present at roll call.

On motion minutes approved as of record.

Moved by Kelly, seconded by Salter, that bills of A. C. Chilson for \$6.00 and H. J. Linden for \$11.65 for services as registration clerks be allowed and ordered paid.

Carried unanimously

Moved by Kelly, seconded by Salter that the City Attorney be instructed to prepare an ordinance covering the installation of oil tanks north of the G. N. Dock.

Carried unanimously

Moved by Kelly, seconded by Clay that the City Attorney be instructed to prepare an ordinance regulating the speed of Street Railway cars to conform to the speed allowed autos.

Carried unanimously

On motion Council adjourned at 11:00 A. M.

Louis Lee
City Clerk

EXHIBIT

D

ORDINANCE NO. 1674

An ordinance granting to the Standard Oil Company, a corporation, a permit to locate, erect, operate and maintain a warehouse or tankage, or both, and other necessary buildings, on a certain tract of land in the city of Everett described as follows: Lot 1, block 619, Plat of Everett, at the corner of Everett Avenue and Federal Street, for the storage and distribution of petroleum and its products, and other kinds of merchandise, by said company, and declaring an emergency.

THE CITY OF EVERETT DOES ORDAIN:

Section 1: That the Standard Oil Company, a corporation, be and it is hereby granted permission to locate, erect, operate and maintain a warehouse or tankage, or both, and other necessary buildings, upon that certain tract of land in the city of Everett described as follows: Lot 1, block 619, Plat of Everett, at the corner of Everett Avenue and Federal Street, for the storage and distribution of petroleum and its products, and other kinds of merchandise handled by said company, said warehouse, tankage and buildings to be constructed in accordance with the plans and specifications therefor filed by said company with the city clerk of the city of Everett and now on file in the office of said clerk.

Section 2: WHEREAS, it is desirous to begin the construction of said warehouse, tankage and buildings immediately, an emergency is declared to exist, and this ordinance shall take effect upon its passage and publication.

W. H. Lay
Mayor.

Passed AUG 24 1915

Attest Louis Lill
City Clerk.

EXHIBIT E



Published AUG 26 1915



GREAT NORTHERN RAILWAY
 PESHASTIN - EVERETT SECTION
 EVERETT SECTION
EVERETT NO. 5
 EVERETT JCT. TO 26 TH ST.
 SNOHOMISH CO., WASH.
 SEC'S 19 & 30, T. 29 N., R. 5 E.

SCALE 1 IN. = 100 FT. NOV. 1930

Superseded map is 1634-6-1

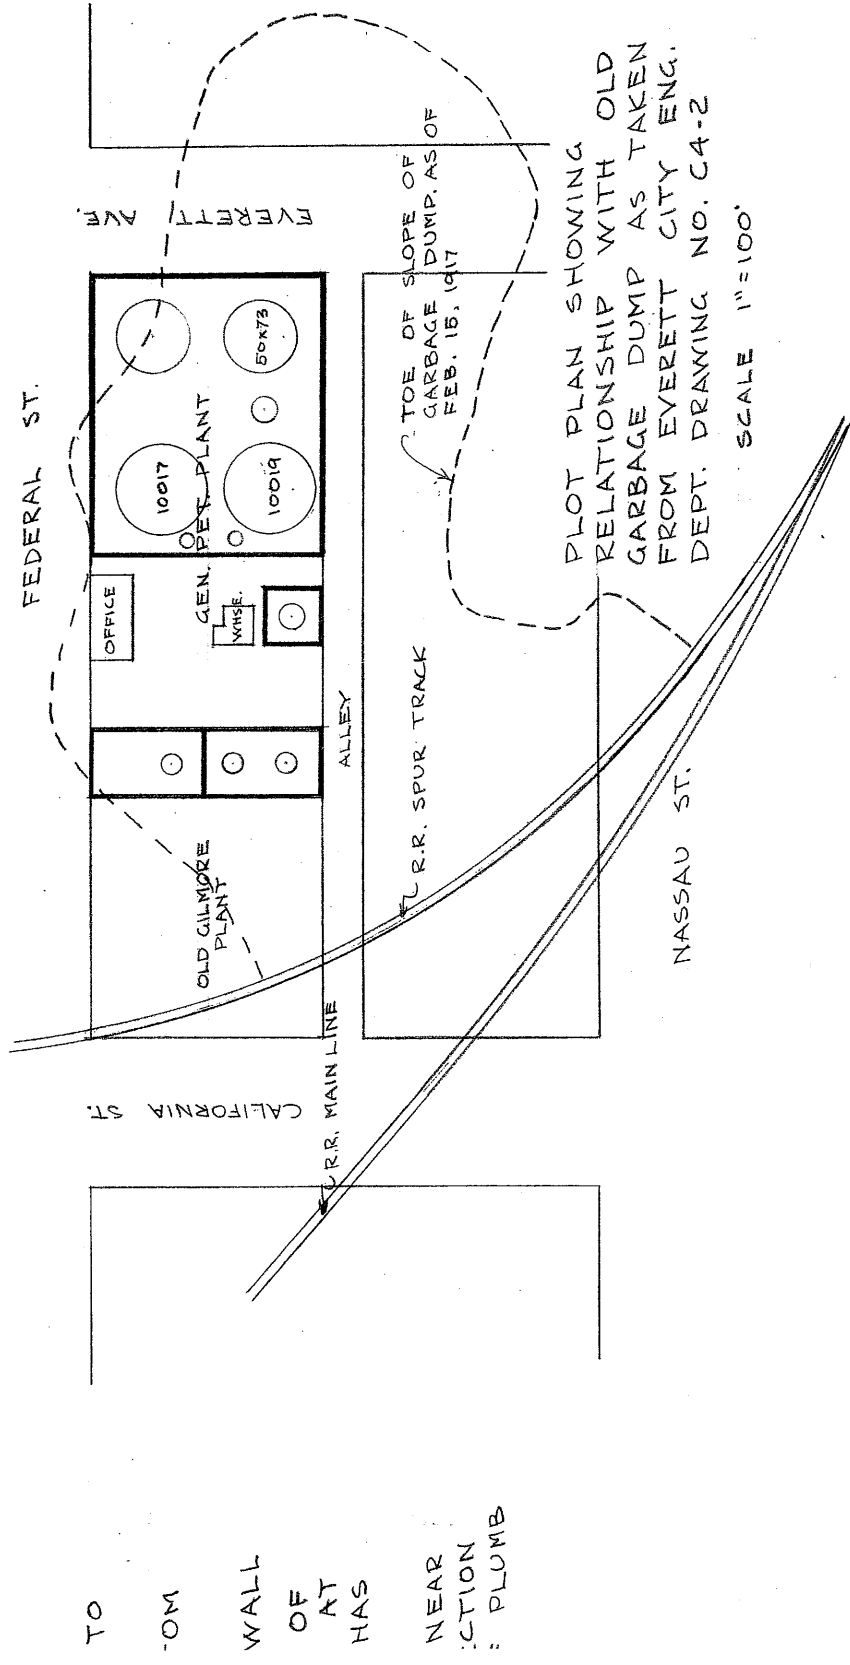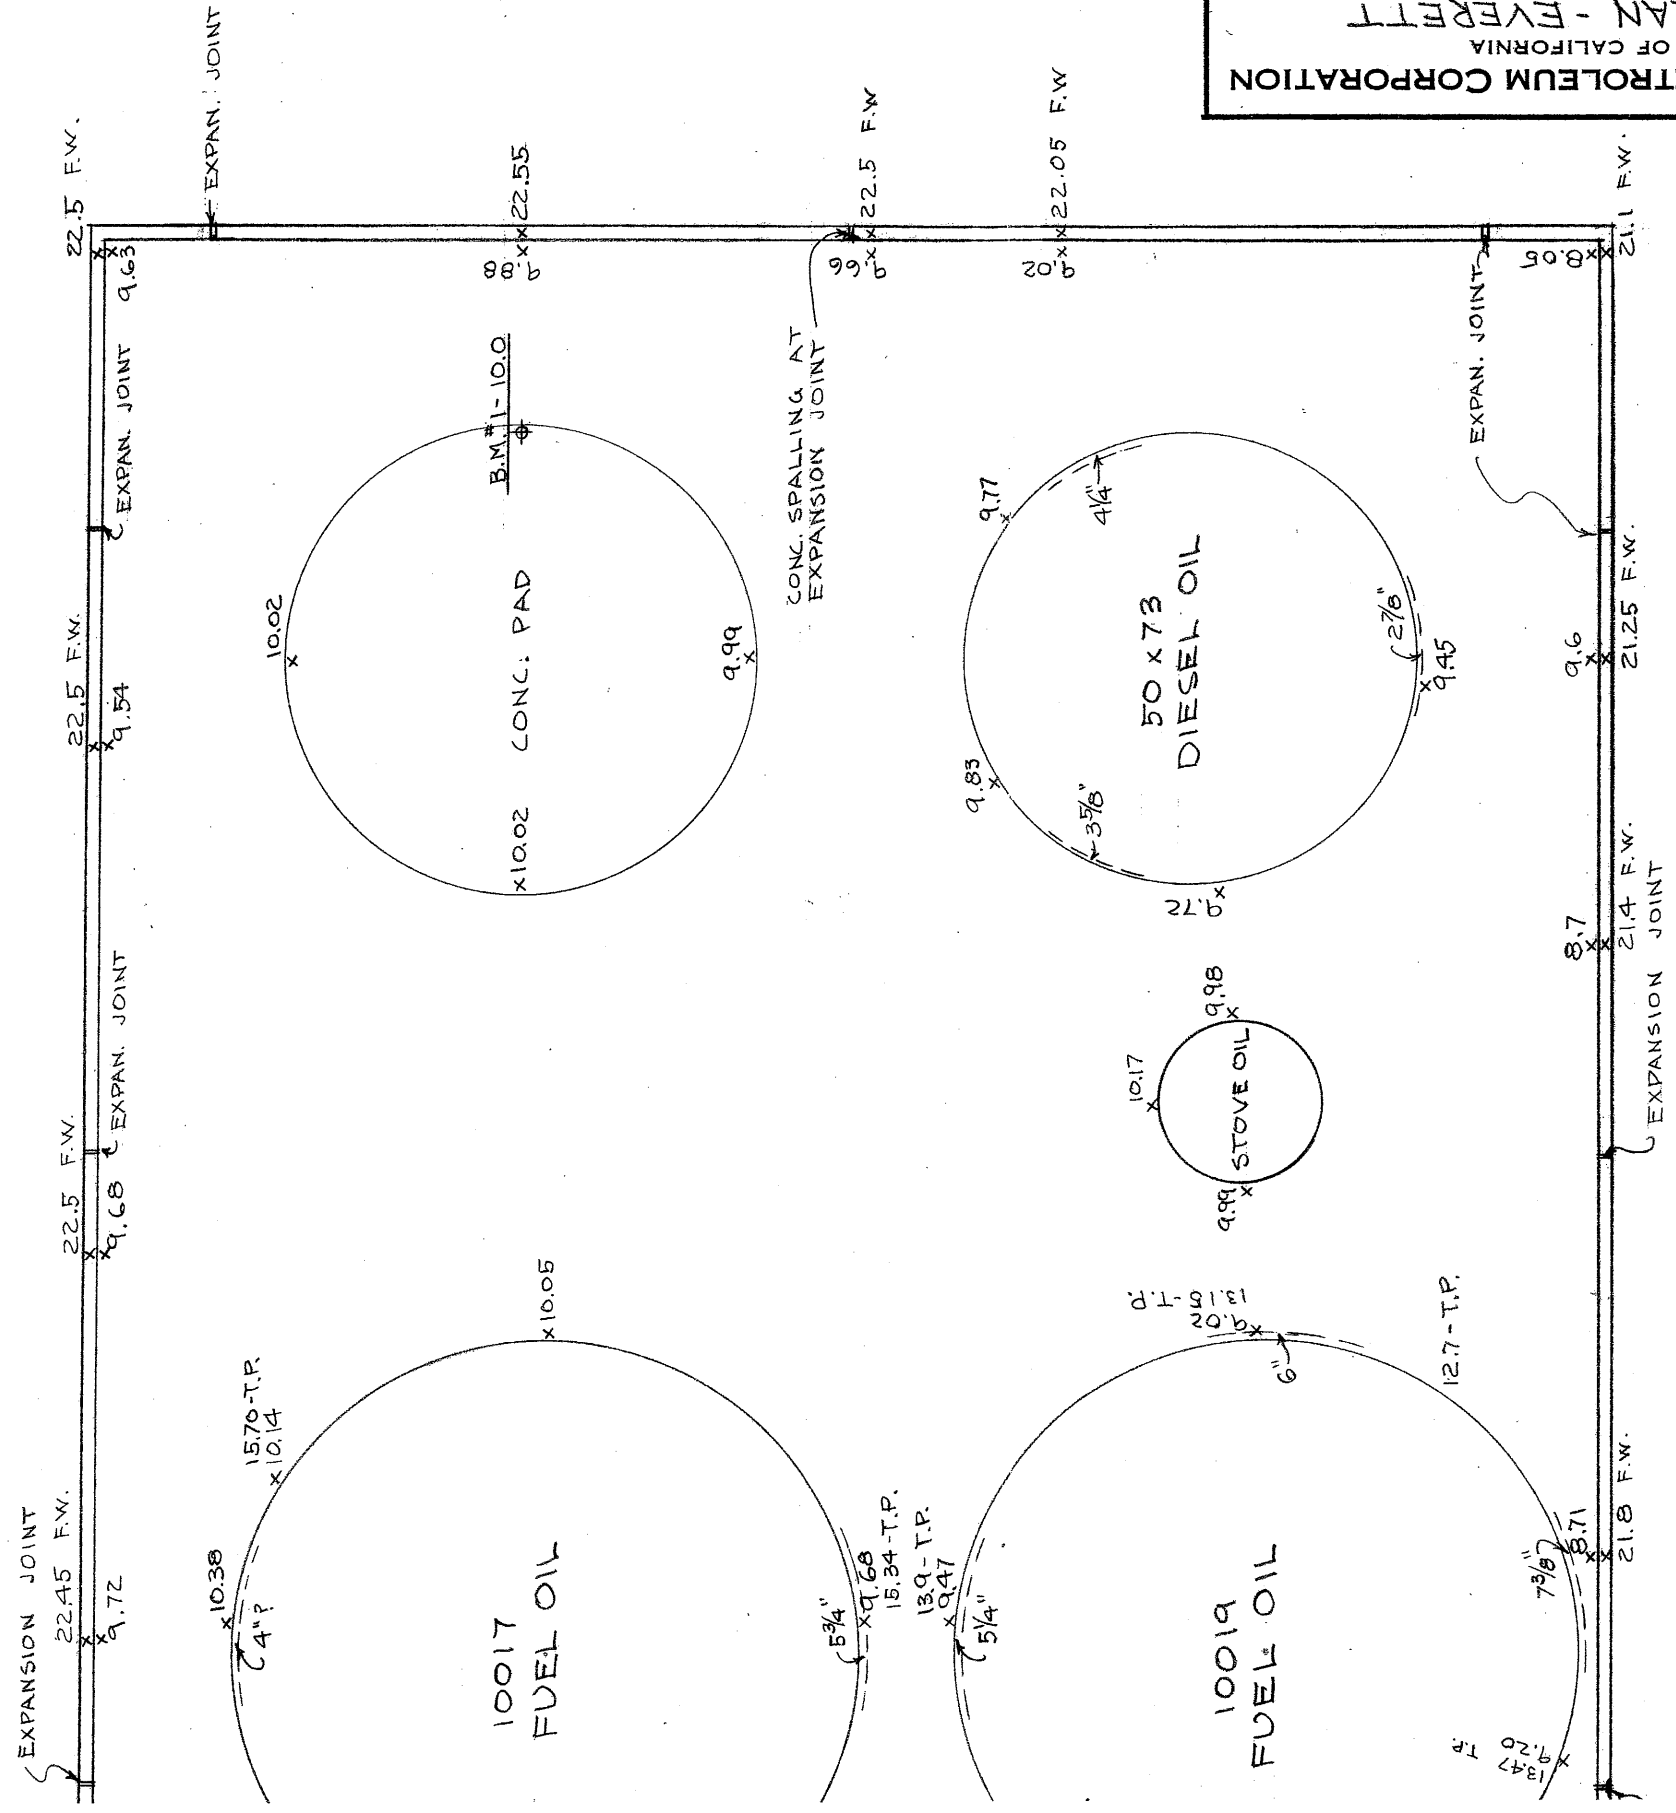

| IND | DESCRIPTION | BY | DATE | APPROVED |
|-----|-------------|----|------|----------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |

DWG. NO. 2M-371

SCALE 1/4" = 1.0"

DRAWN J.D.D.

DATE 4-8-46

CHECKED


APPROVED

GENERAL PETROLEUM CORPORATION
OF CALIFORNIA
PLOT PLAN - EVERETT
PLANT - SHOWING YARD
& TANK ELEVATIONS
WASHINGTON DIVISION
SEATTLE, WASH.

GEN. DET. EVERETT CITY DATUM
ELEV.


| | | |
|------------|---|--------|
| B.M. 10.00 | = | 108.92 |
| 7.74 | = | 106.66 |
| 4.24 | = | 103.16 |
| -6.24 | = | 92.68 |
| -10.24 | = | 88.68 |

EXTREME HIGH WATER
MEAN HIGH WATER
MEAN LOWER LOW WATER
EXTREME LOW WATER

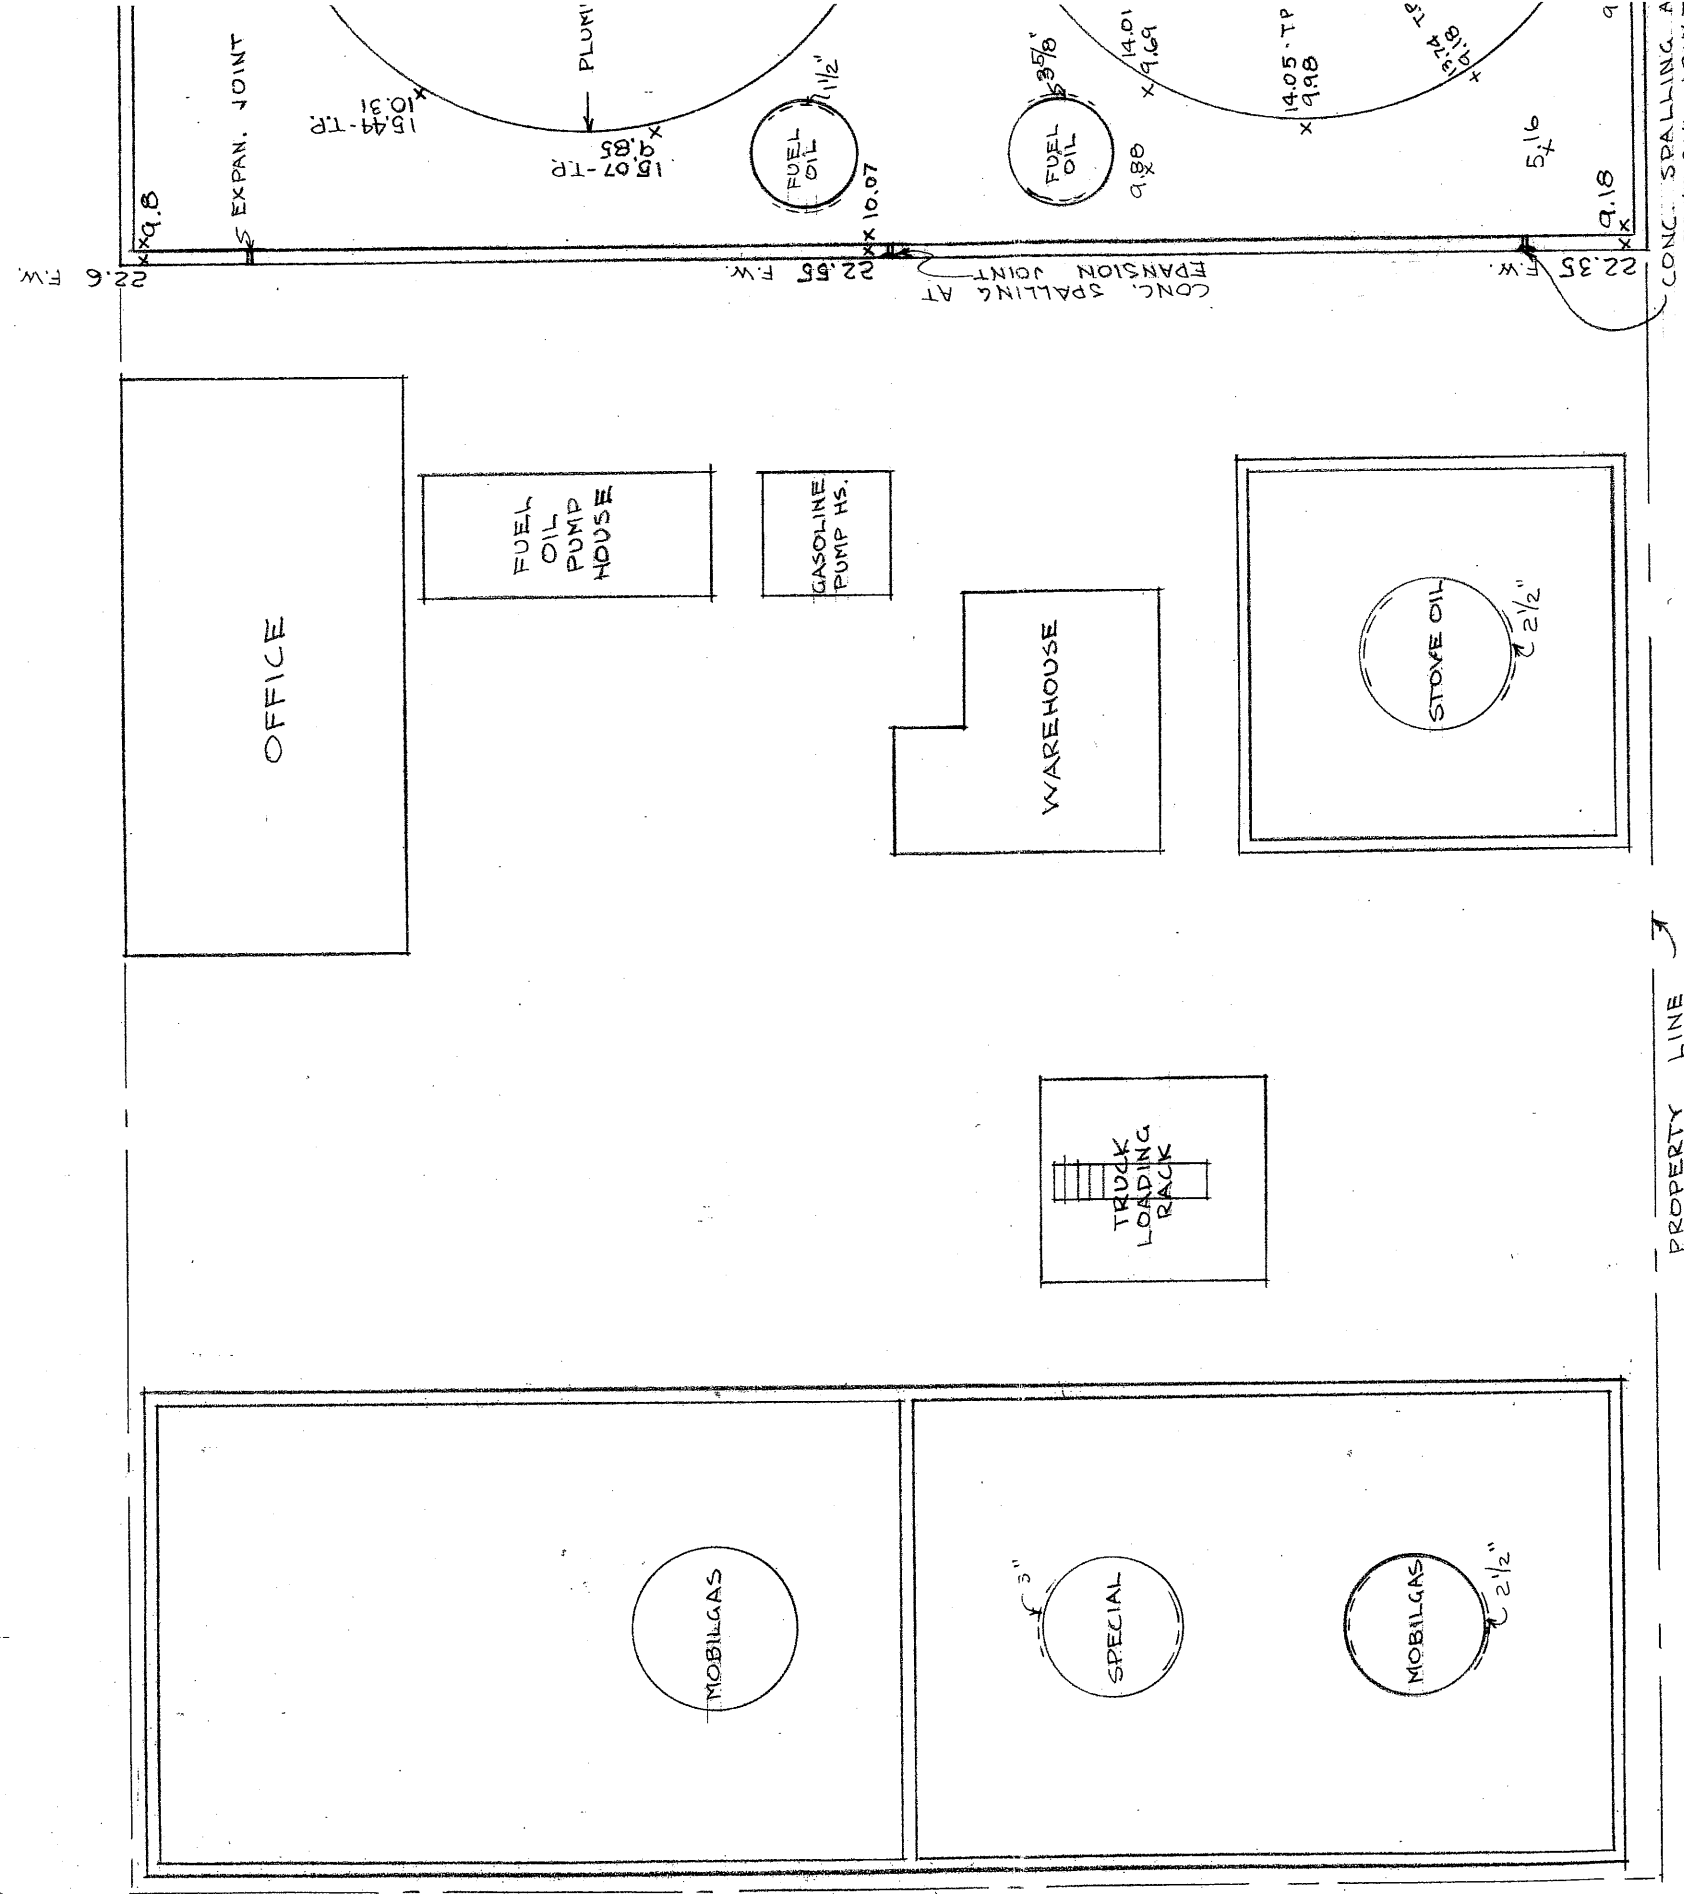

NOTES

ELEVATIONS EXCEPT AS INDICATED BELOW ARE
YARD GROUND LEVELS
T.P. INDICATES ELEVATION AT TOP OF
5' PLATE COURSE
F.W. INDICATES ELEVATION AT TOP OF F
ELEVATIONS SHOWN AROUND OUTSIDE EDGE
TANKS ARE TO TOP OF CONC. PAD EXCEPT
TANK NO. 10019 WHERE ORIGINAL RING PAD
SUNK AND BEEN COVERED WITH DIRT
DOTTED LINES AND DIMENSIONS IN INCHES
OUTSIDE EDGE OF TANKS INDICATE THE D
AND DISTANCE IN WHICH THEY ARE OUT

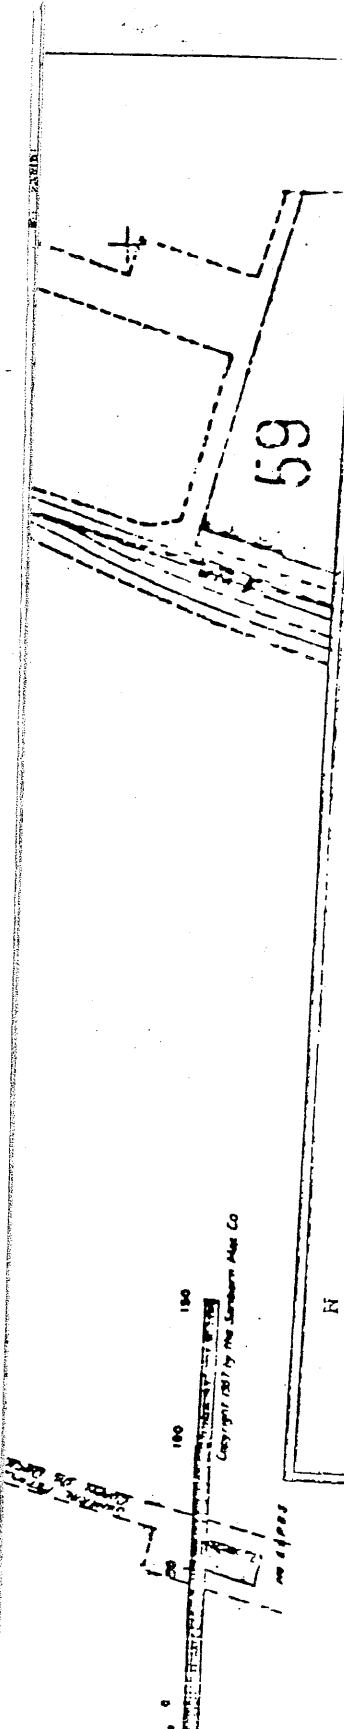

100 150
 Copyright 1957 by The Sanborn Map Co


EDR Sanborn, Inc.

This SanbornTM map is a carbon copy produced by EDR Sanborn, Inc. from its archives. Information on this map is derived from Sanborn field surveys conducted in:


© 1957
 Year

RAC

EDR Sanborn, Inc. Research Associates



Reproduction in whole or in part of any EDR SanbornTM publication from EDR Sanborn, Inc.

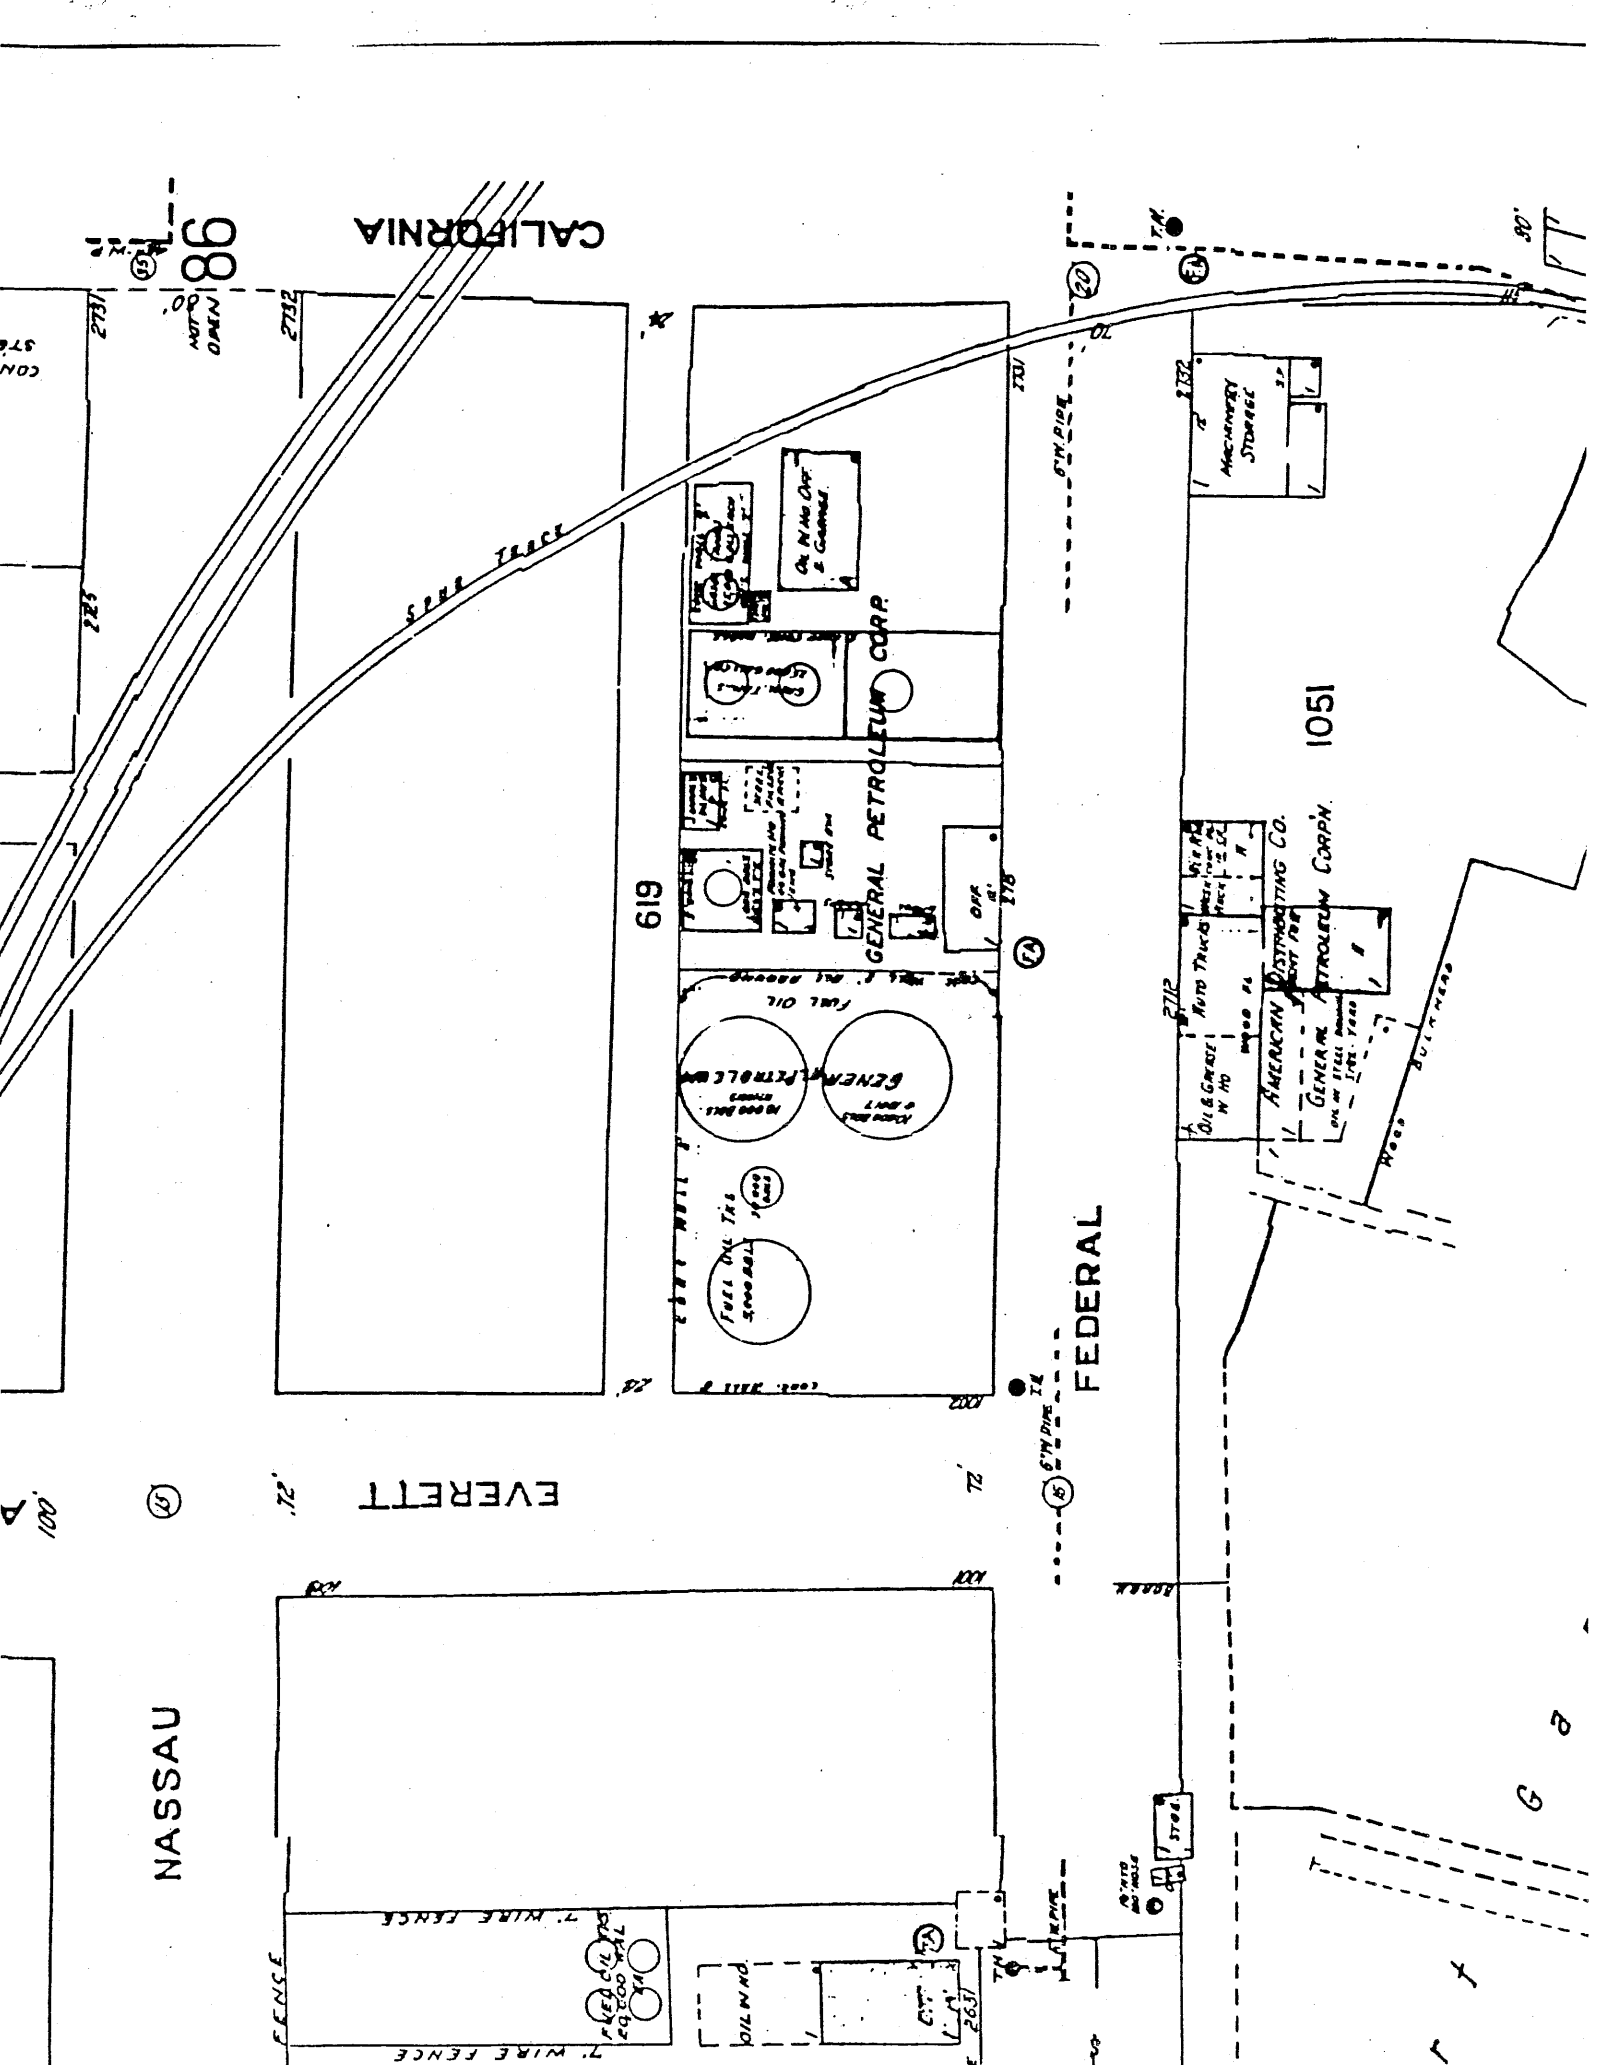

CON 574
 1812
 582
 2712
 86
 AUTO
 DAMN

SPUR TRACK

619
 GENERAL PETROLEUM CORP.
 On N. No. 100' & Channel

FUEL OIL
 GENERAL PETROLEUM CORP.
 FUEL OIL THIS STORAGE

7' WIRE FENCE

2712
 2712
 2712
 2712

619
 GENERAL PETROLEUM CORP.

619
 GENERAL PETROLEUM CORP.

EVERETT
 7' WIRE FENCE

NASSAU
 7' WIRE FENCE

2712
 2712
 2712
 2712

619
 GENERAL PETROLEUM CORP.

619
 GENERAL PETROLEUM CORP.

FEDERAL
 6" W. PIPE

ROAD


2712
 2712
 2712
 2712

1051
 MACHINERY STORAGE

AMERICAN DISTRICT CO.
 GENERAL PETROLEUM CORP.
 ON 100' ST. 100'


ROAD

7' WIRE FENCE

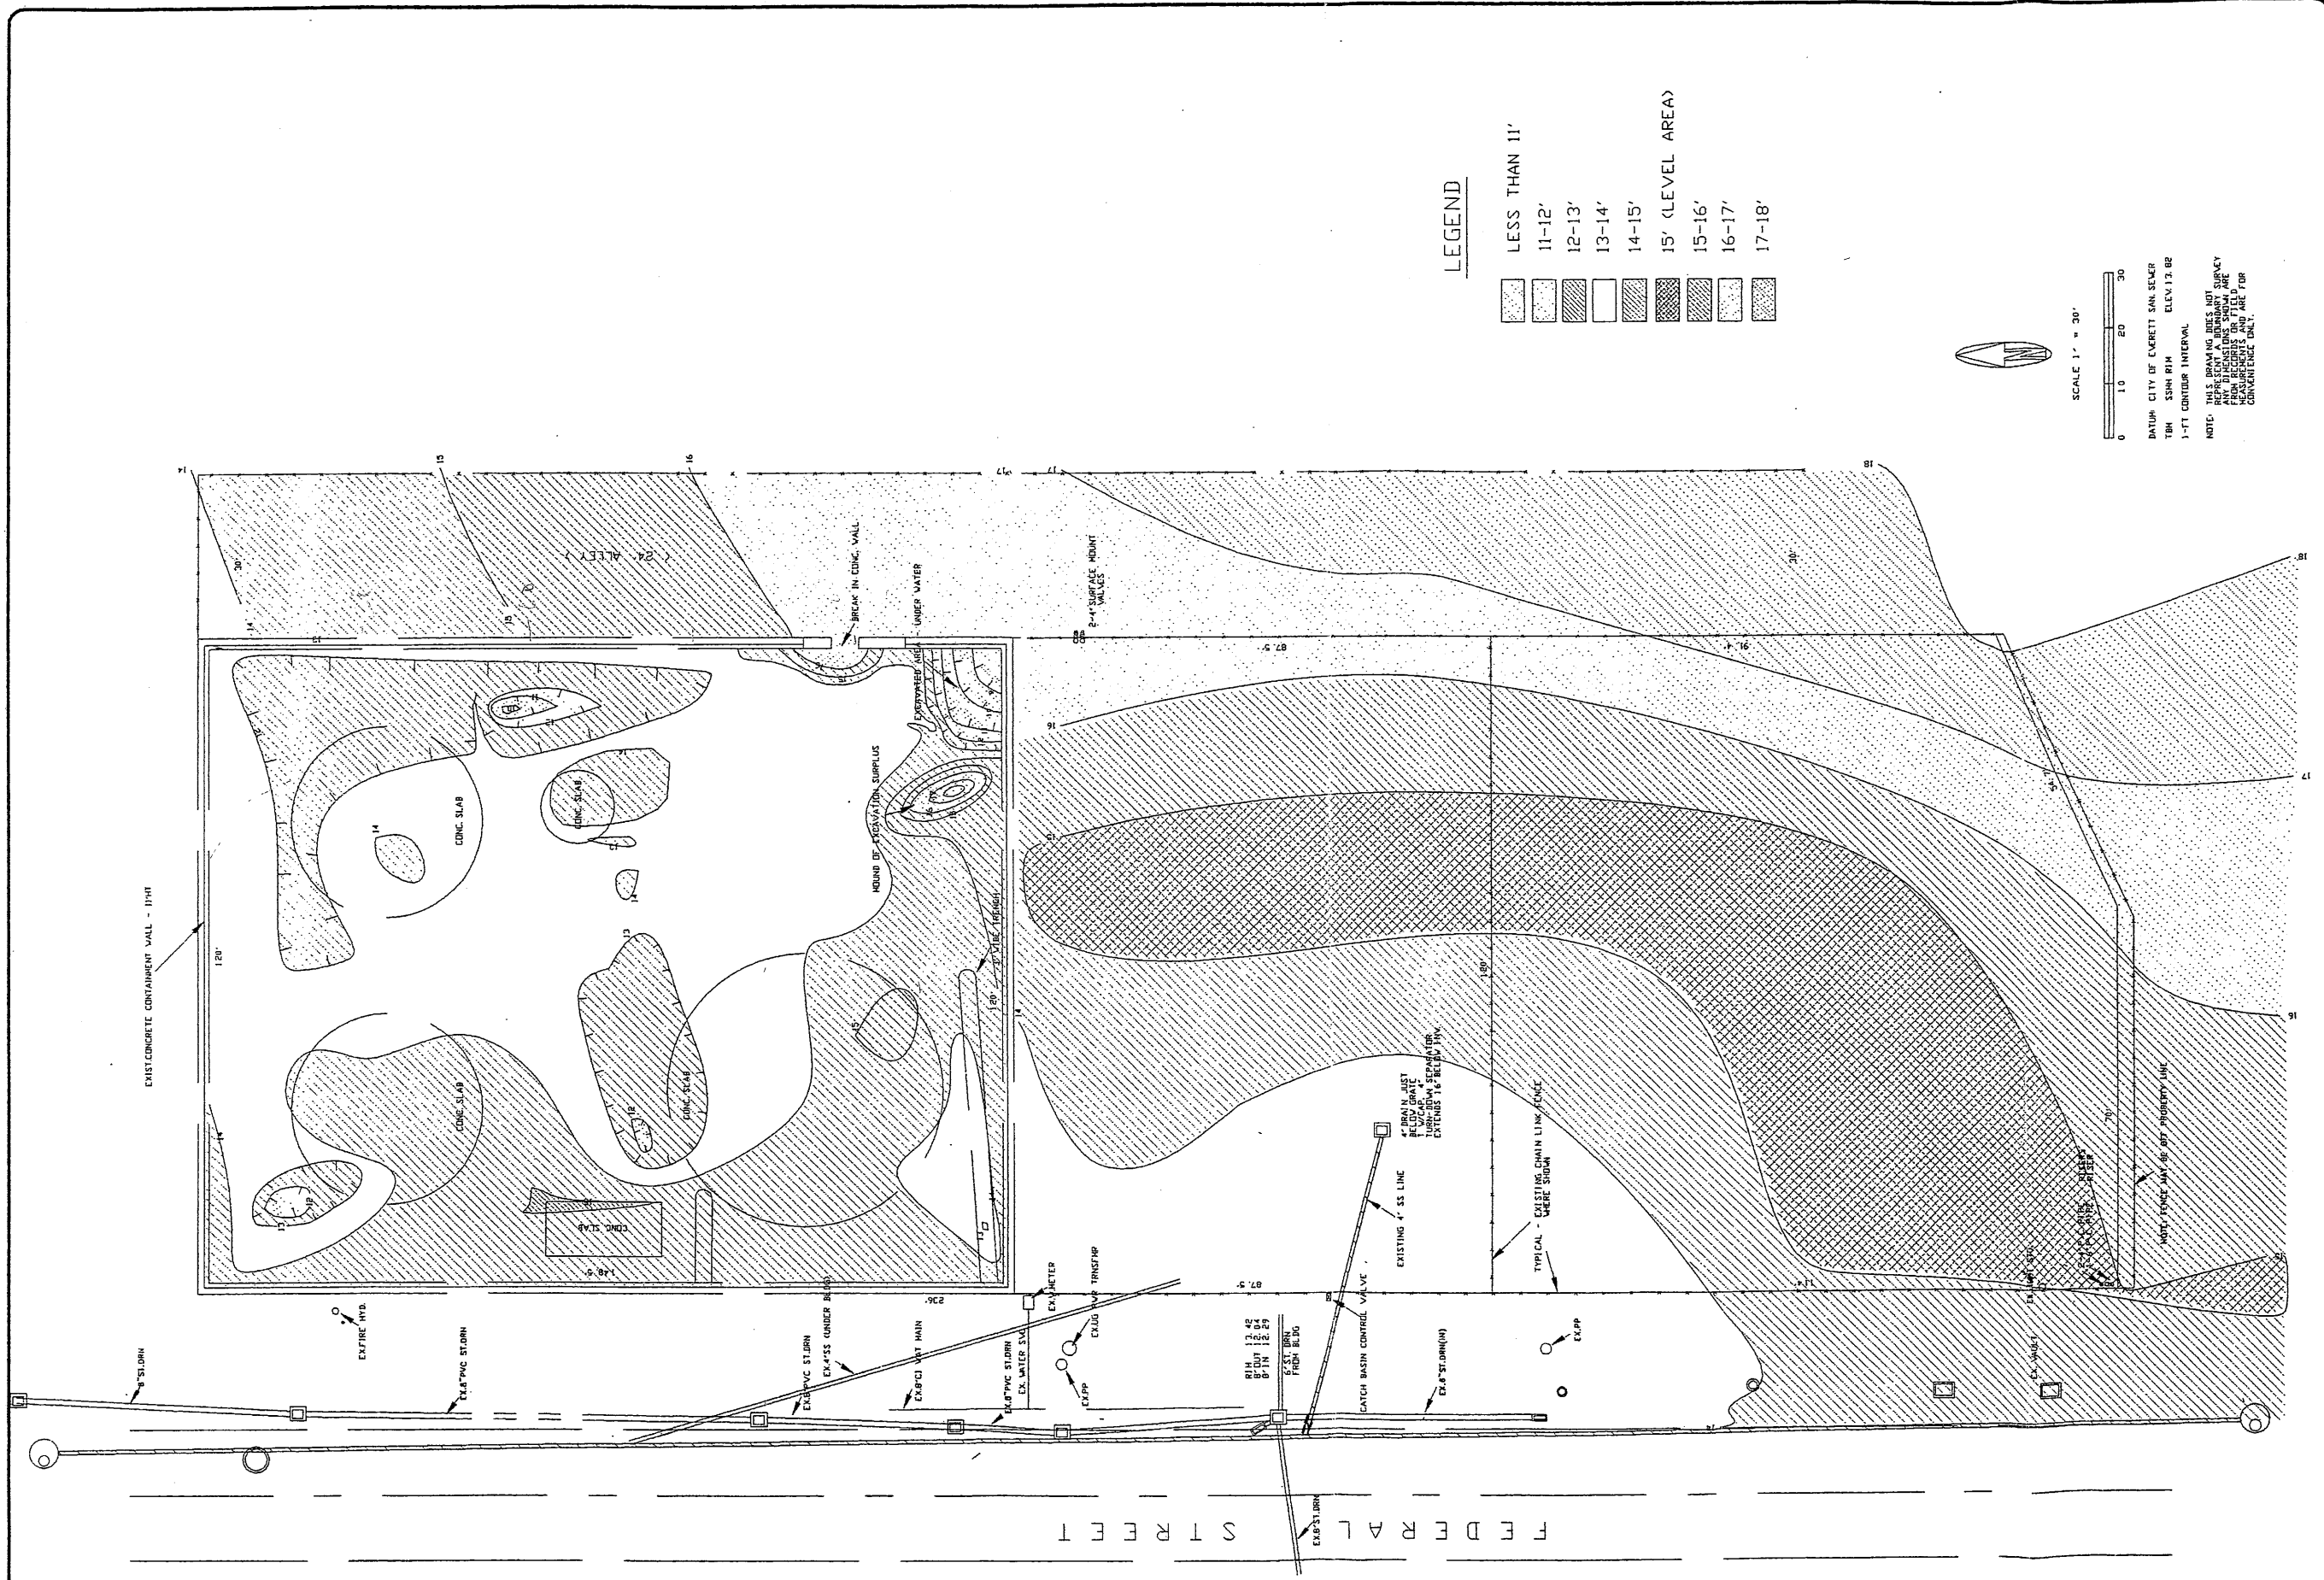

LEGEND

- LESS THAN 11'
- 11-12'
- 12-13'
- 13-14'
- 14-15'
- 15' (LEVEL AREA)
- 15-16'
- 16-17'
- 17-18'



SCALE 1" = 30'
 DATUM: CITY OF EVERETT SAN SEWER
 TBM SSIM RIM ELEV. 12.82
 1'-FT CONTOUR INTERVAL

NOTE: THIS DRAWING DOES NOT REPRESENT A BOUNDARY SURVEY AND IS NOT TO BE USED FOR MEASUREMENTS AND ARE FOR CONVEYANCE ONLY.



Mobil Oil
 ADC/Miller Property
 2701-2717 Federal Avenue
 Everett, Washington
 Project: 60-1914-08
 11/11/98

**EXISTING TOPOGRAPHIC
 CONTOURS**

FIGURE
 11



PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT

December 27, 2006
6-914-15716-0

ExxonMobil–Global Remediation
4580 Klahanie Drive SE PMB 507
Issaquah, Washington 98029

Attention: Mr. Tim Strawn

**Subject: Forensic Evaluation of Petroleum
Hydrocarbons ExxonMobil and ADC/Miller
Parcel**
2717/2731 Federal Avenue
Everett, Washington

Dear Mr. Strawn:

AMEC Earth & Environmental, Inc. (AMEC) has prepared this letter in response to the request from ExxonMobil to review forensic data from NewFields Environmental Practice, LLC (NewFields) for the former Mobil Oil/American Distribution Corporation (ADC) Terminal at 2717/2713 Federal Avenue, Everett, Washington (the Site).

AMEC chemists reviewed the report titled *Chemical Characterization of NAPL Samples Former Mobil Oil Terminal (46-108), Everett, Washington* (NAPL Report), prepared by NewFields dated May 31, 2006, along with data supplied by NewFields from chemical analysis performed by Alpha Analytical Woods Hole Laboratory of Woods Hole, Massachusetts (AWHL). A copy of the New Fields report and AWHL data are attached as Exhibit 1. The NAPL Report presents an evaluation of data generated by AWHL for three light nonaqueous phase liquid (LNAPL) samples, designated MW-29, W-1, and W-2. Sample MW-29 and sample W-1 were collected from monitoring wells at the Site, while sample W-2 was collected from an off-site location. A map of the Site, showing the location of the groundwater monitoring wells is attached to this letter as Exhibit 2.

This review was performed by AMEC on behalf of ExxonMobil in order to evaluate whether findings presented in the NAPL Report were consistent with the analytical data from AWHL, and to identify whether the analytical data was suggestive of the possible presence of off-site sources of the petroleum hydrocarbons in LNAPL samples collected.

Based on examination of the data included with the NAPL Report, AMEC concludes that LNAPL samples collected from on-site wells MW-29 and W-1 are similar to each other, but different from LNAPL collected from off-site well W-2, and that the presence of LNAPL in W-2 is not a result of transport of petroleum hydrocarbons from the on-site wells, MW-29 and W-1, to the off-site well, W-2.

**PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT**

The remainder of this letter will present specific details of AMEC's evaluation of the NAPL Report. The associated data, as related to the visual examination of bulk composition using chromatograms from whole oil analysis LNAPL samples, and a discussion of the specific diagnostic ratios of biomarkers and sulfur-bearing compounds taken from the detailed chemical analyses performed by AWHL for Newfields (as shown in the NAPL Report) will also be presented.

Evaluation of Bulk Composition of LNAPLs from On-site and Off-site Wells

Based on AMEC's inspection of whole oil chromatograms from samples MW-29, W-1 and W-2, as presented in the Newfields Report (see Page 3 of Exhibit 1), the following conclusions about bulk composition of LNAPL from the three samples can be drawn:

- The two on-site LNAPL samples (MW-29 and W-1) appear to be predominantly mixtures of degraded diesel mixed with degraded gasoline and small amounts of residual-range hydrocarbons. The diesel-range chromatograms for the on-site samples exhibit a non-typical diesel pattern, which is likely the result of gasoline present in LNAPL and enhanced solubilization of organic materials from the surrounding soil caused by the gasoline, as opposed to straight diesel.
- LNAPL from the off-site sample (W-2) appears to consist predominantly of highly degraded diesel with only a trace amount of gasoline. Based on visual examination of the whole oil chromatograms, the diesel in sample W-2 appears much more degraded than the diesel in the on-site samples, and is likely from a much older release.
- NAPL samples from MW-29, W-1, and W-2 all contain residual-range hydrocarbons. No quantitative results for gasoline, diesel, or residual-range petroleum hydrocarbons were included in the NAPL report, but based on visual examination of the whole oil chromatograms, relative concentrations of residual-range hydrocarbons appear to be higher in the on-site samples (MW-29, and W-1) than the off-site sample (W-2), possibly due to enhanced solubilization of asphalt or other high molecular weight petroleum hydrocarbons from soil or fill due to the presence of gasoline.
- In the professional opinion of AMEC, based on the visual inspection of the two Total Petroleum Hydrocarbon (TPH) chromatograms for MW-29 and W-1, LNAPL collected from MW-29 appears less degraded than LNAPL collected from W-1. LNAPL collected from MW-29 also appears to have a higher abundance of gasoline-range compounds relative to diesel-range compounds than LNAPL collected from MW-1. As stated above, both on-site LNAPL samples appear to be less degraded than LNAPL collected from off-site well W-2.

**PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT**

Examination of Diagnostic Ratios Related to Sulfur Content, and Select Biomarkers

The most direct evidence that LNAPL samples collected from on-site wells MW-29 and W-1 are similar to each other, but different from LNAPL collected from off-site well W-2, involves comparison of relative sulfur concentrations in LNAPLs from the three wells using diagnostic ratios of the concentrations of dibenzothiopenes (sulfur-containing polycyclic aromatic hydrocarbons [PAH] analogs) to phenanthrenes (sulfur-free PAHs). In the NAPL Report, ratios of C₂-substituted dibenzothiopenes to the sum of C₂-substituted dibenzothiopenes and C₂-substituted phenanthrenes were plotted against ratios of C₃-substituted dibenzothiopenes to the sum of C₃-substituted dibenzothiopenes and C₃-substituted phenanthrenes in order to allow comparison of relative sulfur abundances between the three LNAPL samples. The resulting plots (see Exhibit 1, page 6, Figure 3) demonstrate that LNAPL samples collected from MW-29 and W-1 had sulfur abundances similar to each other, but distinct from, and lower than, the sulfur abundance for LNAPL collected from W-2. Based on this analysis, LNAPLs in MW-29 and W-1 are derived from a petroleum source that has a lower sulfur concentration than the petroleum source from which LNAPL in W-2 is derived.

Alkylcyclohexanes are a family of petroleum constituents that are resistant to degradation, and that have been used as forensic markers in multiple investigations involving diesel fuels, as their concentration in diesel fuels is typically greater than the concentrations of many other biomarker families. Inspection of the m/z 83 ion chromatograms (see pages 33–36 of Exhibit 1), which corresponds to the molecular weight of the base ion for alkylcyclohexane compounds, also reinforces the assertion that LNAPL samples collected from MW-29 and W-1 are similar to each other, but distinct from LNAPL collected at W-2. The chromatographic traces from MW-29 and W-1 exhibited unresolved chromatographic envelopes (UCEs) with similar retention times, but slightly differing peak patterns. The peak pattern for LNAPL collected from MW-29 exhibits higher relative contributions by early-eluting peaks than the peak pattern from LNAPL collected at W-1, and although enhancement of lower molecular weight alkylcyclohexanes can sometimes be related to degradation of higher molecular weight alkylcyclohexanes (a sign of a more highly degraded material), the pattern of peaks in this case does not support that assertion, but is strongly indicative of a less degraded sample. The m/z 83 ion chromatogram for the LNAPL sample collected from W-2, on the other hand, shows nearly universal decreases in peak height for all the alkylcyclohexanes compared to the matching peaks for sample MW-29 and W-1, again indicating that the diesel component of LNAPL in W-2 originated from an older release.

Retene is a naturally-occurring PAH often associated with coniferous resins or other higher plant matter. The retene concentration detected in the LNAPL collected from W-1 is more than two-fold higher than the retene concentration in LNAPL collected from MW-29, and more than four-fold higher than the retene concentration in LNAPL collected from W-2 (570 mg/kg in W-1 versus 230 mg/kg in MW-29 and 130 mg/kg in W-2). It is also inconsistent with the retene concentrations in these two samples. Considering the known disposal of wood waste on the Site, the anomalous retene concentration may be a result of solubilization of retene from wood waste by the mixture of

**PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT**

diesel fuel and gasoline, but it could also indicate that the diesel fuel contained in sample W-1 is derived from a source distinctly different from the diesel in LNAPL from MW-29.

Finally, as stated above, the gasoline and diesel in LNAPL collected from MW-29 appears less degraded than the gasoline and diesel in LNAPL collected from W-1. In addition, MW-29 is located at a distance from W-1 and near the upgradient side of the property. It is possible that the gasoline in LNAPL, collected from MW-29, originates from an off-site source.

In conclusion, based on examination of information provided in the NAPL Report, AMEC concludes that:

- 1) LNAPLs from MW-29 and W-1 are derived from sources with lower sulfur concentrations than the source from which LNAPL in W-2 is derived.
- 2) LNAPLs from MW-29 and W-1 consist predominantly of a mixture of weathered diesel and weathered gasoline, while LNAPL from W-2 consists predominantly of diesel fuel with small amounts of gasoline.
- 3) LNAPLs from all three locations contain small amounts of residual range petroleum hydrocarbons, which are likely related to solubilization of asphalt or other high molecular weight petroleum hydrocarbons from soil or fill at the site.
- 4) LNAPL in W-2 is more highly weathered, and therefore, likely older than LNAPLs in MW-29 and W-1.
- 5) LNAPL in W-1 contains two-fold higher levels of retene than LNAPL in MW-29, which may indicate different sources or may be the result of the presence of higher plant matter in the soil in the area in which W-1 is located.
- 6) LNAPL in W-1 contains anomalously high levels of decalins and C1-naphthalenes compared to LNAPL in MW-29, which suggests influence of a distinct source or release.
- 7) Diesel in LNAPL from MW-29 appears to be less highly weathered than the diesel in LNAPL from W-1, and LNAPL from MW-29 also contains more gasoline than LNAPL from W-1.

Chromatographic patterns, relative sulfur abundances, and PAH analyses all point to similarities between LNAPL collected from MW-29 and LNAPL collected from W-1, and differences between these LNAPLs and LNAPL collected from W-2. Samples MW-29 and W-1 appear to consist primarily of degraded mixtures of gasoline and diesel with a small residual-range component, while LNAPL collected from W-2 appears to be degraded diesel with trace amounts of gasoline-range and residual-range compounds. The diesel-range analytes in MW-29 and W-1 are similar enough to indicate a common original source, but are different enough to exclude a common release. The diesel-range analytes detected in W-2 are different from both MW-29 and W-1. AMEC was unable to evaluate the gasoline component of LNAPL samples because of a lack of additional analyses of gasoline-range organics.



PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT

ExxonMobil-Global Remediation
December 27, 2006

6-914-15716-0
Page 5

Based on these conclusions and the location of MW-29, distant from W-1 and near the upgradient property boundary, the origin of at least some portion of LNAPL in MW-29 from a source distinct from W-1 cannot be ruled out. If viable third-party sources can be identified in the vicinity of W-1 or W-29, AMEC recommends that Exxon-Mobil/ADC may wish to consider the acquisition of new LNAPL samples from wells at the Site, and analysis of a forensic suite that includes analyses that will yield more information related to the gasoline-range component of LNAPL.

If you have any questions or require further information, please do not hesitate to contact us.

Sincerely,

AMEC Earth & Environmental, Inc.

Sean Gormley, EAC, CHMM Chemist
sea.gormley@amec.com
Senior Associate/Environmental Chemist

Meg Strong
meg.strong@amec.com
L.G. Senior Technical Manager

cc: William Joyce, Salter Joyce Ziker PLLC
Diana Martin, Bingham McCutchen, LLP

FRIEDMAN & BRUYA, INC.

ENVIRONMENTAL CHEMISTS

Andrew John Friedman
James E. Bruys, Ph.D.
(206) 285-5282

3012 16th Avenue West
Seattle, WA 98119-2029
FAX: (206) 283-5044

November 27, 1995

Tim Peter, Project Leader
AGRA Earth & Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, WA 98034-6918

Dear Mr. Peter:

Enclosed are the results from the testing of material submitted on November 22, 1995 from your 11-04658-07 project.

Samples MW-30 and MW-29 contained a heavy fuel oil such as Bunker C, or alternatively, a weathered crude oil. The two samples were very similar, and could easily be from the same source. Sample B-1 contained a heavily weathered Diesel fuel or heating oil. B-1 did not contain the high boiling fraction seen MW-29 and MW-30.

Sample Manhole appeared to contain the water soluble fraction of a middle or heavy petroleum distillate. The GC/FID trace showed patterns of C₃-benzenes, naphthalene, methylnaphthalenes, and dimethylnaphthalenes. These components tend to be the more water soluble fraction of middle and heavy distillates. A small amount of whole product may also be present, but the water soluble compounds dominate the GC/FID trace.

MW-29, MW-30 and B-1 may have all been sources to Manhole. It is also possible that Manhole has an entirely different source, origin unknown.

We appreciate this opportunity to be of service to you and hope you will call if you should have any questions.

Sincerely,

FRIEDMAN & BRUYA, INC.

Beth Albertson

Beth Albertson
Chemist

keh

Enclosures

FAX: 621-3914
AEE127R.D00

Date of Report: November 27, 1995

Date Received: November 22, 1995

Project: 11-04558-07

Date Samples Extracted: November 24, 1995

**RESULTS FROM THE ANALYSIS OF PRODUCT SAMPLES
FOR FINGERPRINT CHARACTERIZATION
BY CAPILLARY GAS CHROMATOGRAPHY
USING A FLAME IONIZATION DETECTOR (FID)
AND ELECTRON CAPTURE DETECTOR (ECD)**

Sample ID

B-1

GC Characterization

The GC trace using the flame ionization detector (FID) showed the presence of medium boiling compounds. The patterns displayed by these peaks are indicative of diesel fuel or heating oil.

The medium boiling compounds appeared as a pattern of peaks eluting from $n\text{-C}_6$ to $n\text{-C}_{24}$ showing a maximum near $n\text{-C}_{17}$. The material appears to have undergone chemical/biological degradation due to the presence of a broad unresolved hump of peaks and to the loss of the n -alkane peaks.

The large peak seen near 25 minutes on the GC/FID trace is pentacosane, added as a quality assurance check for this GC analysis. There is a second internal standard peak seen on the GC/ECD trace at about 26 minutes which is dibutyl chlorodate.

MW-30

The GC trace using the flame ionization detector (FID) showed the presence of low, medium and high boiling compounds. The patterns displayed by these peaks are indicative of a heavy fuel oil such as Bunker C or a crude oil.

The low, medium and high boiling compounds appeared as a ragged pattern of peaks eluting from $n\text{-C}_6$ to $n\text{-C}_{34}$ showing a maximum near $n\text{-C}_{17}$. A lack of a dominant pattern of n -alkanes was seen. n -Alkanes are preferentially consumed by microorganisms, and a lack of n -alkanes may be correlated to biological weathering.

The large peak seen near 25 minutes on the GC/FID trace is pentacosane, added as a quality assurance check for this GC analysis. There is a second internal standard peak seen on the GC/ECD trace at about 26 minutes which is dibutyl chlorodate.

FRIEDMAN & BRUYA, INC.

ENVIRONMENTAL CHEMISTS

Date of Report: November 27, 1995
Date Received: November 22, 1995
Project: 11-04558-07
Date Samples Extracted: November 24, 1995

RESULTS FROM THE ANALYSIS OF PRODUCT SAMPLES
FOR FINGERPRINT CHARACTERIZATION
BY CAPILLARY GAS CHROMATOGRAPHY
USING A FLAME IONIZATION DETECTOR (FID)
AND ELECTRON CAPTURE DETECTOR (ECD)

Sample ID

MW-29

GC Characterization

The GC trace using the flame ionization detector (FID) showed the presence of low, medium and high boiling compounds. The patterns displayed by these peaks are indicative of a heavy fuel oil such as Bunker C or a crude oil.

The low, medium and high boiling compounds appeared as a ragged pattern of peaks eluting from *n*-C₆ to *n*-C₃₄ showing a maximum near *n*-C₁₇. A lack of a dominant pattern of *n*-alkanes was seen. *n*-Alkanes are preferentially consumed by microorganisms, and a lack of *n*-alkanes may be correlated to biological weathering. The material present is very similar, though not identical, to the product in MW-30.

The large peak seen near 25 minutes on the GC/FID trace is pentacosane, added as a quality assurance check for this GC analysis. There is a second internal standard peak seen on the GC/ECD trace at about 26 minutes which is dibutyl chlorodate.

Date of Report: November 27, 1995
Date Received: November 22, 1995
Project: 11-04558-07
Date Samples Extracted: November 24, 1995

**RESULTS FROM THE ANALYSIS OF WATER SAMPLES
FOR FINGERPRINT CHARACTERIZATION
BY CAPILLARY GAS CHROMATOGRAPHY
USING A FLAME IONIZATION DETECTOR (FID)
AND ELECTRON CAPTURE DETECTOR (ECD)**

Sample ID

Manhole

GC Characterization

The GC trace using the flame ionization detector (FID) showed the presence of medium boiling compounds. The patterns displayed by these peaks are indicative of the water soluble fraction of a petroleum product.

The medium boiling compounds appeared as a ragged pattern of peaks eluting from *n*-C₆ to *n*-C₂₃ on the GC/FID trace. An irregular pattern of *n*-alkanes is seen from *n*-C₁₁ to *n*-C₁₉. *n*-Alkanes have poor solubility in water. It is possible that small amounts of whole product are mixed into the water phase. The major peaks seen between eight and fourteen minutes are likely to be alkylated benzenes, naphthalene, and alkylated naphthalenes. These compounds typically dominate the water soluble fraction of diesels and heavy heating oils. The material present was seen in low concentration, making product identification tentative. The detection limit for this analysis is 200, 400 and 800 ppb (µg/L) for gasoline, diesel and motor oil, respectively.

The large peak seen near 25 minutes on the GC/FID trace is pentacosane, added as a quality assurance check for this GC analysis. There is a second internal standard peak seen on the GC/ECD trace at about 26 minutes which is dibutyl chlorodate.

NRW-1

The GC trace using the flame ionization detector (FID) and the GC electron capture detector (ECD) trace showed an absence of volatile and semi-volatile compounds. The detection limit for this analysis is 500, 1,000, and 2,000 ppb (µg/L) for gasoline, diesel and motor oil, respectively.

AGRA Earth & Environmental
 11336 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-G
 First Sample #: B511431-02

Sampled: Nov 21, 1996
 Received: Nov 22, 1996
 Analyzed: Nov 26-27, 1996
 Reported: Nov 27, 1996

TOTAL PETROLEUM HYDROCARBONS-GASOLINE RANGE

| Sample Number | Sample Description | Sample Result µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-------------------------|
| B511431-02 | MW-31 | N.D. | 80 |
| B511431-03 | MW-33 | N.D. | 80 |
| B511431-04 | MW-36 | N.D. | 80 |
| B511431-05 | MW-32 | N.D. | 84 |
| B511431-06 | MW-8 | N.D. | 85 |
| B511431-07 | MW-16 | N.D. | 86 |
| B511431-08 | B-2 | N.D. | 88 |
| B511431-09 | MW-18 | 4,800 | S-2 |
| B511431-10 | MW-17 | N.D. | 82 |
| B511431-11 | MW-18 | 4,000 G-1 | 8-2 |

Reporting Limit:


50

4-Bromofluorobenzene surrogate recovery control limits are 50 - 150 %.
 Volatile Total Petroleum Hydrocarbons are quantitated as Gasoline Range Organics (toluene - dodecane).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.

Please Note:

S-2 = The Surrogate Recovery for this sample cannot be accurately quantified due to interference from coeluting organic compounds present in the sample.


 Stowell
 Project Manager

AGRA Earth & Environmental
 11936 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-G
 First Sample #: B511431-12

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS-GASOLINE RANGE

| Sample Number | Sample Description | Sample Result µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-------------------------|
| B511431-12 | MW-8 | 110 | 105 |
| B511431-13 | MW-9 | N.D. | 88 |
| B511431-14 | MW-27 | 160 G-1 | 92 |
| B511431-15 | MW-28 | N.D. | 85 |
| B511431-16 | MW-10 11/22/95 | 1,300 | S-2 |
| B611431-17 | MW-11 11/22/95 | 790 | S-2 |
| B511431-18 | MW-12 11/22/95 | N.D. | 83 |
| B511431-18 | MW-15 11/22/95 | 120 | 95 |
| B511431-20 | MW-35 11/22/95 | N.D. | 77 |
| B511431-21 | MW-37 | N.D. | 70 |

Reporting Limit: 50

4-Bromofluorobenzene surrogate recovery control limits are 50 - 150 %.
 Volatile Total Petroleum Hydrocarbons are quantitated as Gasoline Range Organics (toluene - dodecane).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.

Please Note:
 S-2 - The Surrogate Recovery for this sample cannot be accurately quantified due to interference from coeluting organic compounds present in the sample.


 Shannon Stowell
 Project Manager

511431.AGR <4>

AGRA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Method Blank
 Analysis Method: WTPH-G
 First Sample #: BLK112695

Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS-GASOLINE RANGE


| Sample Number | Sample Description | Sample Result µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-------------------------|
| BLK112695 | Method Blank | N.D. | 78 |

Reporting Limit:

50

4-Bromofluorobenzene surrogate recovery control limits are 50 - 150 %.
 Volatile Total Petroleum Hydrocarbons are quantitated as Gasoline Range Organics (toluene - dodecane).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

GRA Earth & Environmental
 1335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-G
 Units: µg/L (ppb)

Analyst: B. Christlieb
 F. Shino

Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

HYDROCARBON QUALITY CONTROL DATA REPORT

ACCURACY ASSESSMENT Laboratory Control Sample

Gasoline

| | |
|------------------------|-----|
| Spike Conc. Added: | 100 |
| Spike Result: | 95 |
| % Recovery: | 95 |
| Upper Control Limit %: | 132 |
| Lower Control Limit %: | 58 |

PRECISION ASSESSMENT Sample Duplicate


Gasoline Range
 Organics

| | | |
|------------------------|--|------------|
| Sample Number: | B511431-10 | B511431-18 |
| Original Result: | N.D. | N.D. |
| Duplicate Result: | N.D. | N.D. |
| Relative % Difference: | Relative Percent Difference values are not reported at sample concentration levels less than 10 times the Detection Limit. | |
| Maximum APD: | 50 | 50 |

NORTH CREEK ANALYTICAL Inc.

$$\% \text{ Recovery} = \frac{\text{Spike Result}}{\text{Spike Concentration Added}} \times 100$$

$$\text{Relative \% Difference} = \frac{\text{Original Result} - \text{Duplicate Result}}{(\text{Original Result} + \text{Duplicate Result}) / 2} \times 100$$


 Shannon Stowell
 Project Manager

B11431 AGR <6>

AGFA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: EPA 8020
 First Sample #: B511431-02

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995


BTEX DISTINCTION

| Sample Number | Sample Description | Benzene µg/L (ppb) | Toluene µg/L (ppb) | Ethyl Benzene µg/L (ppb) | Xylenes µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------|--------------------------|--------------------------------|--------------------------|-------------------------|
| B511431-02 | MW-31 | N.D. | N.D. | N.D. | N.D. | 76 |
| B511431-03 | MW-33 | N.D. | N.D. | N.D. | N.D. | 74 |
| B511431-04 | MW-36 | N.D. | N.D. | N.D. | N.D. | 73 |
| B511431-05 | MW-32 | N.D. | N.D. | N.D. | N.D. | 78 |
| B511431-06 | MW-6 | N.D. | N.D. | N.D. | N.D. | 78 |
| B511431-07 | MW-15 | N.D. | N.D. | N.D. | N.D. | 80 |
| B511431-08 | B-2 | 0.78 | N.D. | N.D. | N.D. | 80 |
| B511431-09 | MW-16 | 640 | 9.8 | 28 | 140 | 127 |
| B511431-10 | MW-17 | 66 | 0.83 | N.D. | N.D. | 78 |
| B511431-11 | MW-18 | 170 | N.D. (R.L. = 2.0) | 5.8 | 3.7 | 105 |

| | | | | |
|--------------------------|------|------|------|-----|
| Reporting Limits: | 0.50 | 0.50 | 0.50 | 1.0 |
|--------------------------|------|------|------|-----|

4-Bromofluorobenzene surrogate recovery control limits are 59 - 144 %.
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

AGRA Earth & Environmental
 11395 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Pater

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: EPA 8020
 First Sample #: B511431-12

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

BTEX DISTINCTION

| Sample Number | Sample Description | Benzene µg/L (ppb) | Toluene µg/L (ppb) | Ethyl Benzene µg/L (ppb) | Xylenes µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------|--------------------------|--------------------------------|--------------------------|-------------------------|
| B511431-12 | MW-8 | 7.7 | N.D. | N.D. | N.D. | 88 |
| B511431-13 | MW-9 | 1.3 | N.D. | N.D. | N.D. | 79 |
| B511431-14 | MW-27 | N.D. | N.D. | N.D. | N.D. | 83 |
| B511431-15 | MW-28 | N.D. | N.D. | N.D. | N.D. | 79 |
| B511431-16 | MW-10 11/22/95 | 1.3 | N.D. | N.D. | 2.0 | 5-2 |
| B511431-17 | MW-11 11/22/95 | 36 | 0.80 | 1.8 | 1.6 | 109 |
| B511431-18 | MW-12 11/22/95 | 9.2 | N.D. | N.D. | 1.0 | 77 |
| B511431-19 | MW-13 11/22/95 | 5.2 | N.D. | N.D. | N.D. | 88 |
| B511431-20 | MW-35 11/22/95 | 2.7 | N.D. | N.D. | 1.7 | 74 |
| B511431-21 | MW-37 | 0.50 | N.D. | N.D. | N.D. | 89 |

| | | | | |
|--------------------------|------|------|------|-----|
| Reporting Limits: | 0.50 | 0.50 | 0.50 | 1.0 |
|--------------------------|------|------|------|-----|

4-Bromofluorobenzene surrogate recovery control limits are 50 - 142%.
 Analytes reported as N.D. were not detected above the stated Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

Please Note:
 5-2 - The Surrogate Recovery for this sample cannot be accurately quantified due to interference from co-eluting organics present in the sample.

AGRA Earth & Environmental
 11336 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: EPA 8020
 Units: µg/L (ppb)
 QC Sample #: B511431-02

Analyst: B. Christlieb
 F. Shino
 Analyzed: Nov 26, 1995
 Reported: Nov 27, 1995

MATRIX SPIKE QUALITY CONTROL DATA REPORT

| ANALYTE | Ethyl Benzene | | | |
|-----------------------------|---------------|---------|---------------|---------|
| | Benzene | Toluene | Ethyl Benzene | Xylenes |
| Sample Result: | N.D. | N.O. | N.D. | N.D. |
| Spike Conc. Added: | 10.0 | 10.0 | 10.0 | 30.0 |
| Spike Result: | 9.7 | 9.5 | 9.9 | 31.4 |
| Spike % Recovery: | 97% | 95% | 99% | 105% |
| Spike Dup. Result: | 9.4 | 9.83 | 9.6 | 30.5 |
| Spike Duplicate % Recovery: | 94% | 98% | 96% | 102% |
| Upper Control Limit %: | 115 | 110 | 122 | 122 |
| Lower Control Limit %: | 82 | 81 | 85 | 85 |
| Relative % Difference: | 3.1% | 1.4% | 3.1% | 2.9% |
| Maximum RPD: | 16 | 16 | 16 | 17 |

NORTH C


 Shannon
 Project Manag.

$$\text{Relative \% Difference} = \frac{\text{Spike Result} - \text{Sample Result}}{\text{Spike Conc. Added}} \times 100$$

$$\text{Relative \% Difference} = \frac{\text{Spike Result} - \text{Spike Dup. Result}}{(\text{Spike Result} + \text{Spike Dup. Result}) / 2} \times 100$$

AGRA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-D Extended
 First Sample #: B511431-02

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Extracted: Nov 22-26, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS - DIESEL RANGE EXTENDED

| Sample Number | Sample Description | Diesel Result mg/L (ppm) | Heavy Oil Result mg/L (ppm) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-----------------------------------|-------------------------|
| B511431-02 | MW-31 | 0.47 | N.D. | 79 |
| B511431-03 | MW-33 | 0.79 | N.D. | 81 |
| B511431-04 | MW-36 | 0.71 | N.D. | 76 |
| B511431-05 | MW-32 | 0.40 | N.D. | 78 |
| B511431-06 | MW-8 | 0.80 | 1.4 | 72 |
| B511431-07 | MW-16 | 0.77 | 1.2 | 74 |
| B511431-08 | B-2 | 4.4 | 3.9 | 80 |
| B511431-09 | MW-15 D-1 | 1.7 | 1.7 | 83 |
| B511431-10 | MW-17 | 0.49 | 0.97 | 81 |
| B511431-11 | MW-18 | 1.6 | 4.4 | 111 |

Reporting Limit:

0.25

0.75

2-Fluorobiphenyl surrogate recovery control limits are 50 - 150%.
 Extractable Hydrocarbons are quantitated as Diesel Range Organics (C12 - C24) and Heavy Oil Range Organics (>C24).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.

Shannon Stowell
 Project Manager

AGRA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-D Extended
 First Sample #: B511431-12

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Extracted: Nov 22-26, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS - DIESEL RANGE EXTENDED

| Sample Number | Sample Description | Diesel Result mg/L (ppm) | Heavy Oil Result mg/L (ppm) | Surrogate Recovery % |
|---------------|--------------------|--------------------------|-----------------------------|----------------------|
| B511431-12 | MW-8 | 3.3 | 3.1 | 91 |
| B511431-13 | MW-9 | 3.3 | 3.3 | 90 |
| B511431-14 | MW-27 | 4.7 | 4.4 | 98 |
| B511431-15 | MW-28 | 3.4 | 3.7 | 94 |
| B511431-16 | MW-10 11/22/95 | 4.2 | 6.0 | 84 |
| B511431-17 | MW-11 11/22/95 | 2.4 | 1.2 | 93 |
| B511431-18 | MW-12 11/22/95 | 2.1 | 3.6 | 84 |
| B511431-19 | MW-13 11/22/95 | 6.7 | 3.1 | 98 |
| B511431-20 | MW-38 11/22/95 | 0.33 | 1.1 | 93 |
| B511431-21 | MW-37 | 1.6 | 2.4 | 84 |

Reporting Limit:

0.25

0.75

2-Fluorobiphenyl surrogate recovery control limits are 80 - 150%.
 Extractable Hydrocarbons are quantitated as Diesel Range Organics (C12 - C24) and Heavy Oil Range Organics (>C24).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

511431.AGR <12>

IRA Earth & Environmental
 335 NE 122nd Way, #100
 Portland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Method Blank
 Analysis Method: WTPH-D Extended
 First Sample #: BLK112295

Sampled: Nov 22, 1995
 Received: Nov 22, 1995
 Extracted: Nov 22-26, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS - DIESEL RANGE EXTENDED

| Sample Number | Sample Description | Diesel Result mg/L (ppm) | Heavy Oil Result mg/L (ppm) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-----------------------------------|-------------------------|
| BLK112295 | Method Blank | N.D. | N.D. | 84 |
| BLK112695 | Method Blank | N.D. | N.D. | 85 |

Reporting Limit:

0.25

0.75

2-Fluorobiphenyl surrogate recovery control limits are 50 - 150%.
 Extractable Hydrocarbons are quantitated as Diesel Range Organics (C12 - C24) and Heavy Oil Range Organics (>C24).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

AGRA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-D
 Units: mg/L (ppm)

Analyst: T. Fitzgibbon
 Extracted: Nov 22, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

HYDROCARBON QUALITY CONTROL DATA REPORT

ACCURACY ASSESSMENT Laboratory Control Sample

Diesel

Spike Conc. Added: 2.04
 Spike Result: 1.91
 % Recovery: 94
 Upper Control Limit %: 107
 Lower Control Limit %: 69

PRECISION ASSESSMENT

Sample Duplicate

| Diesel Range Organics | Diesel Range Organics |
|-----------------------|-----------------------|
| B511431-09 | B511398-02 |
| Original Result: 1.7 | 1.9 |
| Duplicate Result: 1.4 | 2.2 |
| Maximum RPD: 44 | 44 |

Relative % Difference: Relative Percent Difference values are not reported at sample concentration levels less than 10 times the Reporting Limit.

Maximum RPD: 44

NORTH CREEK ANALYTICAL Inc.

% Recovery:

$$\frac{\text{Spike Result}}{\text{Spike Concentration Added}} \times 100$$

Relative % Difference:

$$\frac{\text{Original Result} - \text{Duplicate Result}}{(\text{Original Result} + \text{Duplicate Result}) / 2} \times 100$$

Shannon Stowell
 Project Manager

IGRA Earth & Environmental
 1335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-D
 Units: mg/L (ppm)

Analyst: T. Fitzgibbon
 Extracted: Nov 26, 1995
 Analyzed: Nov 28-27, 1995
 Reported: Nov 27, 1995

HYDROCARBON QUALITY CONTROL DATA REPORT

ACCURACY ASSESSMENT Laboratory Control Sample

Diesel

Spike Conc. Added: 2.04

Spike Result: 1.61

% Recovery: 79

Upper Control Limit %: 107

Lower Control Limit %: 69

PRECISION ASSESSMENT

Sample Duplicate

Diesel Range
 Organics

Sample Number: B511431-19

Original Result: 6.7

Duplicate Result: 5.7

Relative % Difference: 16

Maximum RPD: 44

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

% Recovery: $\frac{\text{Spike Result}}{\text{Spike Concentration Added}} \times 100$

Relative % Difference: $\frac{\text{Original Result} - \text{Duplicate Result}}{(\text{Original Result} + \text{Duplicate Result}) / 2} \times 100$

HYDROCARBON ANALYSIS FOOTNOTES


2/94, Rev. 3

VOLATILE HYDROCARBONS - GASOLINE RANGE ORGANICS

- G 1 This sample appears to contain extractable diesel range organics.
- G 2 The chromatogram for this sample does not resemble a typical gasoline pattern. Please refer to the sample chromatogram.
- G 3 The total hydrocarbon result on this sample is primarily due to an individual compound(s) eluting in the volatile hydrocarbon range. Identification and quantitation by EPA 8010, 8021 or 8240 is recommended.
- G 4 This sample contains compound(s) not identified as Benzene, Toluene, Ethyl benzene or Xylene.
- G 5 This sample appears to contain or be saturated with gasoline product.

EXTRACTABLE HYDROCARBONS - DIESEL RANGE ORGANICS

- D 1 This sample appears to contain volatile gasoline range organics.
- D 2 The hydrocarbons present in this sample resemble heavy, non-resolvable oil range organics. Quantitation by TPH-Diesel Extended or TPH 418.1 is recommended.
- D 3 The hydrocarbon concentration result in this sample is partially due to an individual peak(s) eluting in the diesel / motor oil carbon range.
- D 4 The hydrocarbons present in this sample are a complex mixture of diesel range and heavy oil range organics.
- D 5 The hydrocarbon result shown is an estimated (greater than) value due to the high concentration. Reanalysis is being performed to yield a quantitative result. An amended report will follow.
- D 6 The sample chromatographic pattern does not resemble the fuel standard used for quantitation. A fuel fingerprint is advised.
- D 7 This sample appears to contain or be saturated with diesel product.

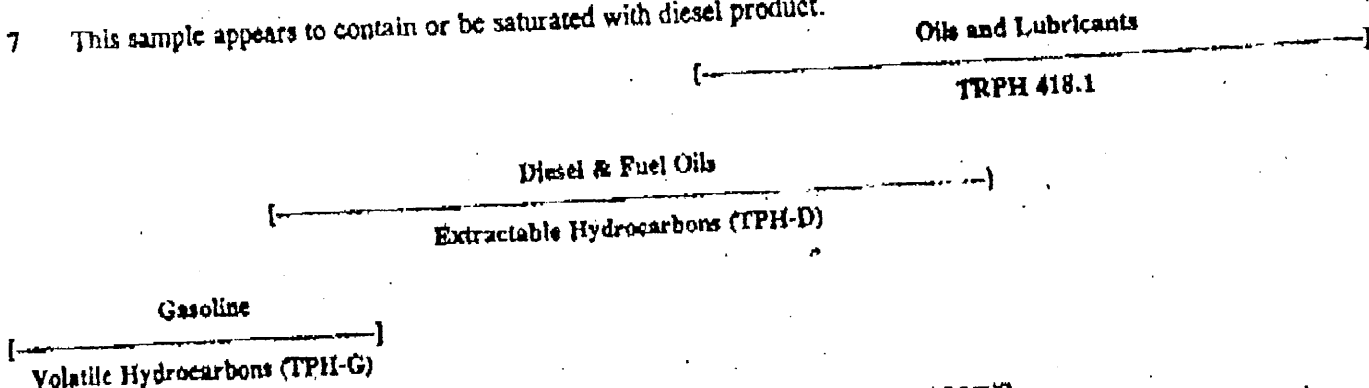


HYDROCARBON BOILING POINT RANGE

LOW LOW TO MEDIUM MEDIUM MEDIUM TO HIGH VERY HIGH

CARBON RANGE:

6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31+

OIL SAMPLE ANALYSIS REPORT
MARINE SAFETY OFFICE PUGET SOUND
CASE NUMBER MC95015622
MARINE SAFETY LABORATORY
CASE NUMBER 96-013

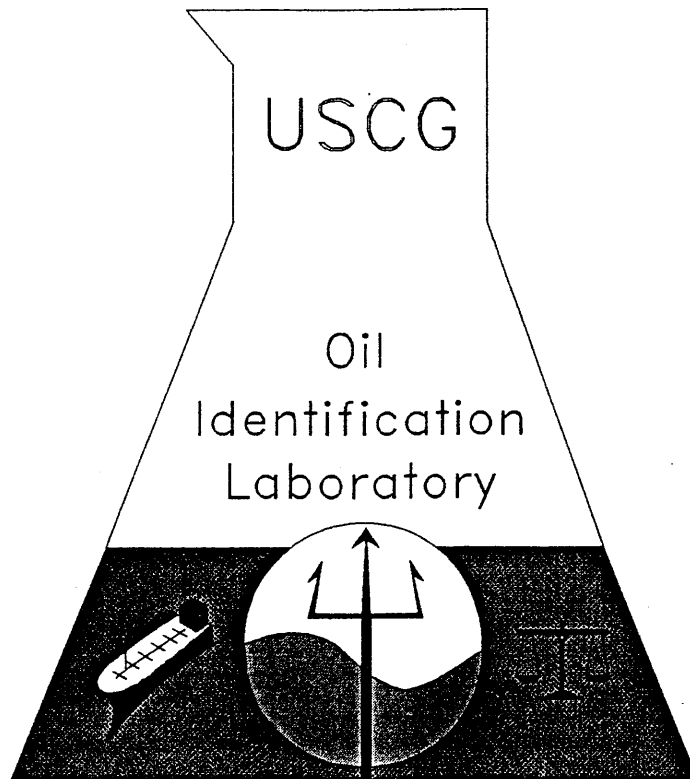

U.S. Department
of Transportation

United States
Coast Guard



Commanding Officer
U. S. Coast Guard
Marine Safety
Laboratories

1082 Shennecossett Road
Groton, CT 06340-6094
Phone: (860) 441-2645
Fax: (860) 441-2641

16400

OCT 18 1995

From: Commanding Officer, Marine Safety Laboratories
To: Commanding Officer, Marine Safety Office Puget Sound

Subj: OIL SAMPLE ANALYSIS REPORT, MSO PUGET SOUND CASE# MC95015622
MSL CASE #96-013

1. The laboratory analysis of this case has been completed and our report is forwarded. The technical data supporting the report (spectrograms and chromatograms) have been archived at our facility and are available upon request. We will maintain the oil samples in refrigerated storage pending final case disposition.

2. Questions concerning this report or the analytical methods used should be directed to the Supervisor of Analysis, Dr. Hendrick.

Margaret Hendrick

M. S. HENDRICK
By direction

Encl: (1) MSL Report 96-013
(2) OIS Addendum

UNITED STATES COAST GUARD
OIL IDENTIFICATION LABORATORY

OIL SPILL IDENTIFICATION REPORT

LABORATORY CASE NUMBER: 96-013

REQUESTOR: MSO PUGET SOUND
UNIT CASE NUMBER: MC95015622
RECEIVED: 16OCT95 VIA: U.S. MAIL

NUMBER OF SAMPLES: TEN (10)
LAB NO. OF SPILLS: 1,2,5,6 AND 7
LAB NO. OF SUSPECTS: 3,4,8,9 AND 10

ANALYSIS METHODS:

GAS CHROMATOGRAPHY (GC)
GAS CHROMATOGRAPHY/MASS SPECTROMETRY (GC/MS)

RESULTS:

1. Samples 1,2,5,6 and 7 were specified to have been representative of spilled oil. Analysis indicates:

a. Samples 1,2,5 and 6 are similar and contain a severely biodegraded and evaporatively weathered heavy fuel oil mixed with lubricating oil.

b. Sample 7 contains only traces of a severely biodegraded heavy fuel oil mixed with lubricating oil. The characteristics of sample 7 are similar to those expected for a severely weathered version of samples 1,2,5 and 6.

2. Suspected source sample 8 is observed to contain a heavy fuel oil with characteristics similar to those of the heavy fuel oil component of the spilled oil. Most differences are consistent with biodegradative and evaporative weathering of the spilled oil; However, this sample contains no lubricating oil.

3. Suspected source samples 3 and 4 are observed to contain biodegraded light fuel oil with characteristics different from those of the spilled oil.

4. Suspected source samples 9 and 10 are observed to contain mixtures of fuel oil and lubricating oil with characteristics different from those of the spilled oil.

CONCLUSIONS:

1. Spill samples 1,2,5,6 and 7 represent different portions of the same spilled oil.

2. The heavy fuel oil in suspected source sample 8 and the spill samples 1,2,5,6 and 7 may be derived from a common source. Biodegradation, as noted in the spilled oil samples, is characteristic of oil that has been retained in a contaminated

CONTINUATION OF OIL SPILL IDENTIFICATION REPORT 96-013

environment for an extended period of time. Not all differences noted are consistent with biodegradative weathering of the spilled oil. It should be noted that lubricating oil contamination is very common in sewers. For this reason, the area in proximity to the location from which sample 8 was collected should be investigated further as the most likely source of the spilled oil.

3. None of suspected source samples 3,4,9 or 10 are derived from a common source of the spill samples 1,2,5 and 6.

Martha Hendrick

SUPERVISOR OF ANALYSIS M. S. HENDRICK, Ph.D. DATE: 18OCT95
Chemist

11/89

UNITED STATES COAST GUARD
OIL IDENTIFICATION LABORATORY

SAMPLE CHECK-IN LOG, COIL CASE NUMBER: 96-013

REQUESTOR: MSO PUGET SOUND UNIT CASE# MC95015622

| | | METHOD OF DELIVERY | | DATE RECEIVED |
|---------|-----------------|--------------------|-------|---------------|
| US MAIL | | MESSENGER | OTHER | |
| NUMBER | DATE MAILED O/A | | | |
| N/A | 11 OCT 95 | | | 16 OCT 95 |

Samples were observed to be: broken NO, tampered with NO, leaking NO, or subject to contamination NO. For these and other unusual conditions, place an asterisk (*) next to the sample(s) in question and describe condition of sample(s) in remarks below.

| LAB NO. | SAMPLE DESCRIPTION | SPILL | SUSPECT |
|-----------|---|-------|---------|
| 96-013-1 | [1] OIL FROM PIPE OF SEWER OUTFALL AT BREAK WALL 02 OCT 95 0845 | XXXXX | |
| 96-013-2 | [2] SAMPLE OF FUEL IN THE WATER 02 OCT 95 0850 | XXXXX | |
| 96-013-3 | [3] POSSIBLE SOURCE FROM HOLE IN GROUND AT AMERICAN DISTRIBUTING 02 OCT 95 1010 | | XXXXX |
| 96-013-4 | [4] POSSIBLE SOURCE AMERICAN DISTRIBUTING HOLE IN GROUND 02 OCT 95 1012 | | XXXXX |
| 96-013-5 | [5] DRAIN LINE IN YARD DOCK. BY FENCE LINE IN LOG YARD 05 OCT 95 1155 | XXXXX | |
| 96-013-6 | [6] SEWER OUTFALL IN YARD DOCK BY FENCE LINE IN LOG YARD 05 OCT 95 1200 | XXXXX | |
| 96-013-7 | [7] SEWER OUTFALL UNDER LOG ROLE IN LOG YARD 02 OCT 95 1615 | XXXXX | |
| 96-013-8 | [8] POSSIBLE SOURCE OF BLACK OIL IN PIPE IN IN GARAGE OLD ENGINE ROOM 05 OCT 95 1210 | | XXXXX |
| 96-013-9 | [9] BILGE SIDE OF TANK AT DUNLAP TOWING 05 OCT 95 1233 | | XXXXX |
| 96-013-10 | [10] BILGE TANK OF POSSIBLE SOURCE OF TANK DUNLAP TOWING 05 OCT 95 1233 | | XXXXX |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

REMARKS:

Samples checked-in by: [Signature] Date: 16 OCT 95

Sample Custodian: [Signature] Date: 16 OCT 95

Supervisor of Analysis: Martha Hendrick Date: 17 Oct 95

11 OCT 95
Date

From: COMMANDING OFFICER, MARINE SAFETY OFFICE PUGET SOUND
To: Commanding Officer, Marine Safety Laboratories

Subj: REQUEST FOR OIL SAMPLE ANALYSIS

1. Request analysis of the samples listed on attached Chain of Custody Record to assist in our investigation of spill case
FPN 13-6001 MC95015622
(Federal Project Number and Marine Casualty "MC" number)

2. Questions concerning this case should be directed to
Bmt CHRIS P. SCARBERRY COMMERCIAL# 206-217-6232

3. The spill samples were collected from SEWER OUTFALL FACILITY
SEWER DRAIN AND BAY
(river, outfall, shore, etc)

4. Estimated number of gallons spilled 50; Estimated cost of cleanup \$3,000.

5. Wind conditions: ___ mild breeze; ___ Very Windy; Calm.

6. Air Temperature: ___ below 32F; 32 to 60F; ___ 60 to 85F
___ 85 to 95F; ___ over 95F.

7. Sky conditions: Overcast; ___ Bright Sun; ___ Rain;
Other (specify) _____

8. Spill involves seepage of oil through the soil: ___ Yes No.
If Yes, estimated distance to the nearest possible suspected source:


9. List any possible non-petroleum contamination sources in the area NONE

10. Are all samples involved in this case being sent to the laboratory? YES If not, explain _____

11. Have all possible suspect sources been sampled, If NO, include a detailed explanation of possible sources not sampled. Provide any additional information about the samples or overall situation which may be helpful to lab personnel: _____

12. Specify prosecution type: Class 1; ___ Class 2; ___ DOJ.

(SIGNATURE)



UNITED STATES COAST GUARD
CHAIN OF CUSTODY RECORD

COMMANDING OFFICER

(UNIT AND ADDRESS)

U.S. COAST GUARD
MARINE SAFETY OFFICE
PUGET SOUND
1519 ALASKAN WAY SOUTH
SEATTLE, WA. 98134-1192

| SPILL | SOURCE | SAMPLE NO. | DESCRIPTION OF SAMPLES FOR CASE# <u>MC95015622</u> |
|-------|--------|------------|--|
| XXX | | 1 | OIL FROM PIPE OF SEWER OUTFALL AT BREAKWALL |
| XXX | | 2 | SAMPLE OF FUEL IN THE WATER |
| | XXX | 3 | POSSIBLE SOURCE FROM HOLE IN GROUND AT AMERICAN DIS |
| | XXY | 4 | POSSIBLE SOURCE FROM AMERICAN DISTRIBUTING HOLE IN GRA |
| XXX | | 5 | DRAIN LINE IN YARD DOCK BY FENCE LINE. LOG YARD |
| XXX | | 6 | SEWER OUTFALL IN YARD DOCK BY FENCE LINE. LOG YARD |
| XXX | | 7 | SEWER OUTFALL UNDER LOG RAIL IN LOG YARD |
| XXX | | 8 | POSSIBLE SOURCE OF BLACK OIL IN GARAGE OF OLD EMERSON |
| | XXX | 9 | BILGE-SIDE OF TANK Dunlap Towing OIL SIDE |
| | XXX | 10 | BILGE TANK OF Dunlap Towing Bilge Side |

| PERSON ASSUMING RESPONSIBILITY FOR SAMPLES | | | | | TIME/DATE |
|--|--|-------------------|---|-------------------|------------------------------|
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-10 | <i>[Signature]</i> Bm2 G.R. Scanberry | 0806LT 1495 | <i>[Signature]</i> MST3 LANSURE | 02 OCT 95 1700 | STORAGE |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-10 | <i>[Signature]</i> MST3 DON LANSURE | 11 OCT 95 1430 | <i>[Signature]</i> Bm2 G.P. Scanberry | 11 OCT 95 1430 | Ship to Coil |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-10 | <i>[Signature]</i> Bm2 Scanberry | 11 OCT 95 1433 | <i>[Signature]</i> TROYER HAMMER MST3 ATMSL | 16 OCT 95 0730 | |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |

**MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY**

SAMPLE PREPARATION SHEET

COIL CASE NUMBER: 96-013

DATE PREPARED: 16 OCT 95

Oil samples were obtained using preparation techniques listed below. The samples were then placed into a vial and identified with the COIL case number and sample number along with the corresponding preparation code(s).

Oil samples eliminated by IR screening method: _____

The Quality Control sample is a duplicate of sample: 96-013-8

| SAMPLE NUMBERS (sequential portion only) | PREPARATION CODE | RATIO |
|--|------------------|-------|
| 1,2,3,4,8,9,10,OC | 2 | |
| 5,6,7 | 4,7 | |
| | | |
| | | |
| | | |
| | | |

PREPARATION CODES

1. Portion of neat sample taken from sample jar (clean fuel oils).
2. Portion of sample taken from sample jar, anhydrous $MgSO_4$ added, then centrifuged.
3. Portion of sample taken from sample jar, diluted with cyclohexane, anhydrous $MgSO_4$ added, then centrifuged.
4. Entire sample extracted with cyclohexane, anhydrous $MgSO_4$ added, then centrifuged.
5. Entire sample extracted with two separate 10 ml portions of cyclohexane, anhydrous $MgSO_4$ added to the combined cyclohexane solution, then centrifuged.
6. Cyclohexane Solution: ratio of oil to cyclohexane is known and shown in "ratio" column.
7. Cyclohexane Solution of unknown concentration.
8. Solvent evaporated with heat and a stream of N_2 . Sample of unknown concentration.
9. Others: _____

Preparer's Signature: Bruce Altman Date: 16 OCT 95

UNITED STATES COAST GUARD
MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY

QUALITY CONTROL SHEET

COIL CASE NUMBER: 96-013 DATE PREPARED: 16 OCT 95

1. A Quality Control (QC) sample was analyzed along with the other samples in this case.

X The Quality Control (QC) is a duplicate of sample 96-013-8
Due to limited sample quantity in all samples involved in the case, reference oil _____ from the COIL Library was used for the Quality Control (QC) and it's duplicate sample.
Infrared Spectroscopy used for screening samples before final sample preparation. No QC sample available during IR screening.

2. ANALYTICAL METHODS.

INFRARED SPECTROSCOPY

GAS CHROMATOGRAPHY

FLUORESCENCE SPECTROSCOPY

GAS CHROMATOGRAPHY/MASS SPECTROMETRY

| SAT | N/A |
|-----|-----|
| | X |
| X | |
| | X |
| X | |

3. The data and conclusions for the QC and it's duplicate were identical:

Yes X No _____

COMMENTS:

SUPERVISOR OF ANALYSIS:

Margaret Hendrick

DATE: 18 OCT 95

UNITED STATES COAST GUARD
MARINE SAFETY LABORATORY

OIL SPILL IDENTIFICATION ANALYSES
COST RECOVERY DOCUMENTATION

LABORATORY CASE NUMBER: 96-013

REQUESTOR: MARINE SAFETY OFFICE PUGET SOUND

UNIT CASE NUMBER: MC95015622


NUMBER OF SAMPLES: 10

NUMBER OF ANALYSES: 18

COST PER ANALYSIS: \$97.00

TOTAL COSTS: \$1746.00

This documentation is provided for purposes of Phase IV - Documentation and Cost Recovery under the National Oil and Hazardous Substances Pollution Contingency Plan(40 CFR Part 300).



MARTHA S. HENDRICK DATE: 18OCT95
Chemist

OIL SPILL IDENTIFICATION SYSTEM (OIS)**RELEVANCE TO SPILL SOURCE DETERMINATION**

Petroleum is a complex mixture of thousands of different organic compounds formed from a variety of organic materials that are chemically converted under differing geological conditions over long periods of time. The infinitely variable nature of these factors results in distinct chemical differences between oils formed under dissimilar conditions and/or environments. While oil from one crude oil field is readily distinguishable from another, differences in the makeup of oils from the same crude oil field can sometimes be observed as well. Refined oils are fractions usually derived by distillation of crude oil. Two refined oils of the same type differ because of dissimilarities in the characteristics of their crude oil feed stocks as well as variations in refinery processes and any subsequent contact with other oils mixed in during transfer operation from residues in tanks, ships, pipes, hoses etc... Thus, all petroleum oils, to some extent have chemical compositions that differ from each other.

The characteristic properties of an oil can be explored by a variety of analytical methods. The results of analysis by any of these methods can be presented in graph form. In general, when the graphical data for two oils produced by a particular method are compared, the differences between the graphs reflect differences between the oils.

The OIS System, developed during the mid-1970s at the Coast Guard Research and Development Center, is based on a multi-method approach to "fingerprinting" oils. In 1978, the Central Oil Identification Laboratory (COIL) was established as the operating facility to implement the OIS. In 1988, COIL was renamed the Marine Safety Laboratories (MSL), though the acronym COIL is still widely used. OIS is designed to determine the unique, intrinsic chemical properties of oils via analytical techniques and establish whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. Since 1978, MSL/COIL has analyzed over 39,000 samples, involving more than 5,700 spill cases, in support of oil pollution investigations.

DATA PRODUCTION AND INTERPRETATION

Oil sample preparation, testing and storage are conducted in accordance with American Society for Testing and Materials (ASTM) consensus standards. MSL/COIL currently utilizes three primary analytical techniques: Gas Chromatography (GC) (ASTM D-3328), Fluorescence Spectroscopy (FL) (ASTM D 3650), Infrared Spectroscopy (IR) (ASTM D-3414), and Gas Chromatography-Mass Spectrometry (GC-MS) (ASTM D-5739) that is used as a complementary analytical method. A rigorous laboratory quality assurance program monitors both instrument performance and sample preparation to ensure that data are accurate and reproducible.

All samples in a given case are initially analyzed by one method to determine the class of petroleum product. Samples can be excluded from further analysis based on results from the initial analysis. Further analyses are performed on samples which are potential matches to the source of the oil.

The Supervisor of Analysis interprets the data from all test methods performed and draws conclusions concerning whether or not certain spilled oil and suspected source samples were derived from the same chemical source. Data interpretation in oil spill source identification is non-trivial and fundamentally different from typical chemical analyses because the chemical properties of spilled oil are altered when oil is introduced into the environment. From the moment oil enters the environment, evaporation, dissolution, photochemical oxidation, biodegradation and other forces begin to alter the oil's characteristics or "fingerprint". These combined processes are termed weathering and can significantly complicate data interpretation. Contamination of the spilled oil with other oils or substances is another complicating factor. The experienced oil spill analyst is familiar with the complexities of the weathering processes and is able to distinguish real differences between two oils from those apparent differences resulting from weathering alterations. Interferences from contaminants can usually be recognized as such and discounted when weighing the test results. However, at times, severe weathering and/or contamination can mask many of the inherent differences between oils of a similar type.

REPORTING

The typical MSL/COIL OIS Report consists of four parts: case identifying information, a listing of analysis techniques performed, the results section and the conclusions section. The results section describes the types of petroleum observed in the samples provided, and comments on chemical similarities or dissimilarities between spill samples and/or between spill and suspected source samples. In all cases the Supervisor of Analysis bases the written results on interpretations from the aggregate of all data generated.

The conclusions section establishes whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. There are two outcomes most frequently found in the conclusions section of the typical MSL/COIL OIS Report: "derived from a common source" and "not derived from a common source". However, to maintain the high degree of reliability for both "common source" and "not a common source" determinations, it is necessary to exclude some comparisons from these categories. Oil spill cases vary widely in possible explanations for why a determination could not be made. Instead of using only a statement of "inconclusive", the comments will concisely explain the reason for the outcome for each individual case. For example, some sources are highly inhomogeneous, and a sample of such a spill may not reflect the composition of the product remaining in such a source. The spill may contain very little oil, or it may be excessively weathered or contaminated. Of important note, MSL/COIL conclusions address chemical comparisons and not physical aspects of evidence. Additionally, chemical evidence provided in a MSL/COIL conclusion that is other than "common source" might still be used by the investigating officer, when combined with physical evidence to establish a preponderance of the evidence argument against an alleged responsible party.

MSL/COIL OIS Reports are submitted to Marine Safety Offices (MSO's) for inclusion, as chemical evidence, in Marine Violation/Casualty Reports. The outcomes in the conclusions section of the OIS Report define the nature of the chemical evidence provided. MSO personnel are advised to combine the chemical evidence provided in the MSL/COIL OIS Reports with physical and circumstantial evidence developed during the investigation when writing Marine Violation Reports. Inquiries challenging the technical content of MSL/COIL OIS Reports by representatives of the alleged responsible party should be handled at the Hearing Officer level. Explicit guidance describing the communications process between the Hearing Officer and the MSL/COIL Supervisor of Analysis on technical issues involving chemical evidence is given in Commandant (G-LMI) memorandum 16460 dated 26 January 1981.

PERSONNEL QUALIFICATIONS

MSL/COIL laboratory technicians performing sample preparation and testing are graduates of the Coast Guard Marine Science Technician School. Each MSL/COIL technician has successfully completed a comprehensive training program at the MSL/COIL facility. Additionally, many have received supplemental training at leading civilian institutions in their specialty area.

The Supervisor of Analysis monitors all aspects of the analysis, certifies and interprets the test results, and prepares the final MSL/COIL report. This individual is a professionally trained chemist experienced in oil spill source identification. Individuals currently qualified to perform this function are:

Lieutenant Commander Kristy L. Plourde, U.S. Coast Guard
Commanding Officer
B.S. Physical Sciences, 1983, US Coast Guard Academy
M.S. Chemistry, 1989, University of Connecticut

Dr. Martha Hendrick
Chemist
B.A. Chemistry, 1969, Rhodes College
M.A. Education, 1974, Stanford University
Ph.D. Analytical Chemistry, 1985, University of Connecticut
Chair, ASTM Subcommittee D19.31, Waterborne Oils


REFERENCES

A more technical description of the OIS is contained in Report CG-D-52-77 "Oil Spill Identification System", Final Report, June 1977, USCG R&D Center. This document is available through the National Technical Information Service, Springfield, VA 22161.

For information concerning the ASTM standards used in Oil Spill Identification, consult "Oil in the Environment", Martha S. Hendrick, Ph.D., ASTM Standardization News, April 1991.

For additional information regarding the applicability of the Coast Guard's OIS, see "Chemical Identification of Oil Spill Sources", Allen P. Bentz, Ph.D., The Forum, Volume XIII, Number 2, Winter 1978. Dr. Bentz is a research scientist at the Coast Guard Research and Development Center and a recognized expert in the field of oil spill source identification. He has been closely involved with most of the development work leading to the present state-of-the-art.

OIL SAMPLE ANALYSIS REPORT
MARINE SAFETY OFFICE PUGET SOUND
CASE NUMBER MC95015622
MARINE SAFETY LABORATORY
CASE NUMBER 96-097

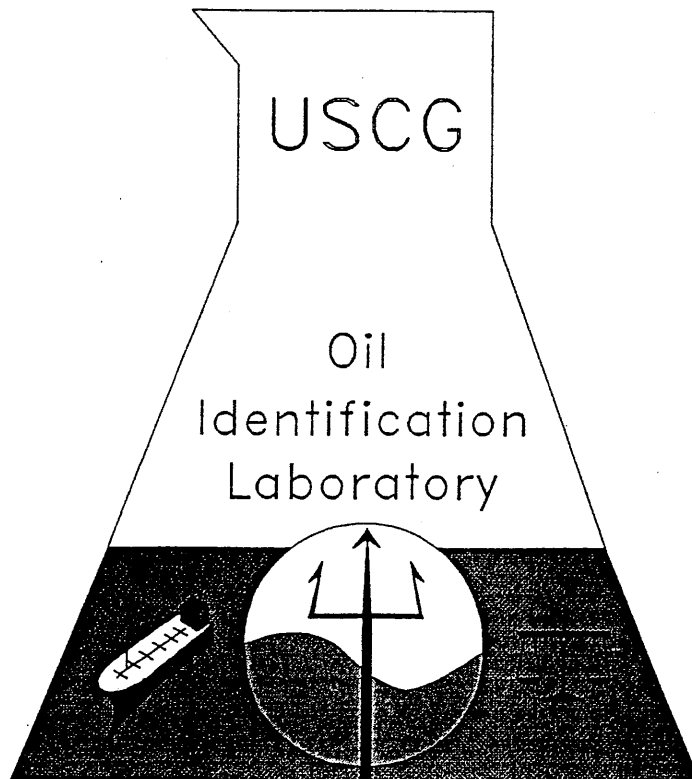

U.S. Department
of Transportation

United States
Coast Guard



Commanding Officer
U. S. Coast Guard
Marine Safety
Laboratories

1082 Shennecossett Road
Groton, CT 06340-6094
Phone: (860) 441-2645
Fax: (860) 441-2641

16400

DEC 20 1995

From: Commanding Officer, Marine Safety Laboratories
To: Commanding Officer, Marine Safety Office Puget Sound
Subj: OIL SAMPLE ANALYSIS REPORT, MSO PUGET SOUND CASE# MC95015622
MSL CASE #96-097

1. The laboratory analysis of this case has been completed and our report is forwarded. The technical data supporting the report (spectrograms and chromatograms) have been archived at our facility and are available upon request. We will maintain the oil samples in refrigerated storage pending final case disposition.

2. Questions concerning this report or the analytical methods used should be directed to the Supervisor of Analysis, Dr. Hendrick.

Manthel Hendrick

M. S. HENDRICK
By direction

Encl: (1) MSL Report 96-097
(2) OIS Addendum

UNITED STATES COAST GUARD MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY

OIL SPILL IDENTIFICATION REPORT

LABORATORY CASE NUMBER: 96-097

REQUESTOR: MSO PUGET SOUND

UNIT CASE NUMBER: MC95015622

RECEIVED: 14DEC95 VIA: CERTIFIED MAIL (# P 902 422 199)

NUMBER OF SAMPLES: FIVE (05)

LAB NO. OF SPILLS: 3 AND 4

LAB NO. OF SUSPECTS: 1,2 AND 5

ANALYSIS METHODS:

GAS CHROMATOGRAPHY (GC)

GAS CHROMATOGRAPHY/MASS SPECTROMETRY (GC/MS)

SPECIAL INSTRUCTIONS:

1. Compare the samples submitted with spill samples from COIL Case 96-013.

RESULTS:

1. Samples 96-097-3 and 4 were specified to have been representative of spilled oil. Analysis indicates they do not contain a detectable quantity of petroleum oil.

2. Samples 96-013-1,2,5,6 and 7 were specified to have been representative of previously spilled oil. Analysis indicates:

a. Samples 96-013-1,2,5 and 6 are similar and contain a severely biodegraded and evaporatively weathered heavy fuel oil mixed with lubricating oil.

b. Sample 96-013-7 contains only traces of a severely biodegraded heavy fuel oil mixed with lubricating oil. The characteristics of sample 96-013-7 are similar to those expected for a severely weathered version of samples 96-013-1,2,5 and 6.

3. Suspected source sample 96-097-2 is observed to contain a severely biodegraded and evaporatively weathered heavy fuel oil mixed with lubricating oil. The characteristics are similar to those of the heavy fuel oil component of the spilled oil. However, this sample contains significantly less lubricating oil than the spill samples.

4. Suspected source sample 96-097-5 is observed to contain a heavy fuel oil with characteristics different from those of the spilled oil.

5. Suspected source sample 96-097-1 is observed to contain only traces of petroleum oil. Results are of no value for comparison purposes.

*where
was
taken from #7*

CONTINUATION OF OIL SPILL IDENTIFICATION REPORT 96-097

CONCLUSIONS:

1. Comparison of spill samples 96-097-3 and 4 is inconclusive because they do not contain a sufficient quantity of petroleum oil for comparison purposes.
2. Suspected source sample 96-097-2 and the spill samples 96-013-1, 2, 5, 6 and 7 are closely related and appear to be derived from common sources of petroleum oil. Sample 96-097-2 appears to represent another portion of spilled oil, rather than the origin of the spill. The difference in the proportion of lubricating oil indicates that more than one source is probably responsible for the problem. Biodegradation, as noted in these oil samples, is characteristic of oil that has been retained in a contaminated environment for an extended period of time. The source from which sample 96-013-8 (previously discussed in case 96-013) was collected is a likely source of the fuel oil portion of the spilled oil.
3. Suspected source sample 96-096-5 is not derived from a common source of the spilled oil. *Slot tail.*
4. Comparison of suspected source sample 96-097-1 is inconclusive because they do not contain a sufficient quantity of petroleum oil for comparison purposes.

Mantel as Hendrick

SUPERVISOR OF ANALYSIS M. S. HENDRICK, Ph.D. DATE: 20DEC95
Chemist

U. S. COAST GUARD
MARINE SAFETY LABORATORIES

MSL CASE #: 96-097 REQUESTOR MSO PUGET SOUND UNIT CASE MC95015622
 METHOD OF DELIVERY: CERTIFIED MAIL TRACKING #: P 902 422 199 FPN: 13-6001
 DATE MAILED: 07-Dec-95 DATE RECEIVED: 14-Dec-95 SAMPLES TAMPERED WITH? No
 SAMPLES BROKEN? No SAMPLES LEAKING? No NETS? No CRIMINAL? No

| MSL # | DESCRIPTION | DATE/TIME TAKEN | SPILL/SOURCE |
|----------|---|-----------------|--------------|
| 96-097-1 | 1 WELL ON RIGHT SIDE OF ROAD NEAR FENCE LINE MOBIL WELL | 06 DEC 95 1200 | SOURCE |
| 96-097-2 | 2 BACK NE WELL INSIDE CONTAINMENT AREA OF AMERICAN DISTRIBUTING | 06 DEC 95 1225 | SOURCE |
| 96-097-3 | 3 FROM WATER OUTLET AT DUNLAP TOWING | 06 DEC 95 1340 | SPILL |
| 96-097-4 | 4 SAMPLE OF OUTFALL AT DUNLAP TOWING | 06 DEC 95 1345 | SPILL |
| 96-097-5 | 5 NO 3 TANK SCOTT PAPER IN CONTAINMENT YARD #6 FUEL | 06 DEC 95 1315 | SOURCE |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

REMARKS: COMPARE TO CASE 96-013

Samples checked in by: James P. Grigg Date: 15 DEC 95
 Sample Custodian: [Signature] Date: 15 DEC 95
 Supervisor of analysis: Manthos Hendrick Date: 18 Dec 95

12-7-95
Date

From: Commanding Officer, MARINE SAFETY OFFICE PUGET SOUND
To: Commanding Officer, Marine Safety Laboratories

Subj: REQUEST FOR OIL SAMPLE ANALYSIS

1. Request analysis of the 5 samples listed on attached Chain of Custody Record to assist in our investigation of spill case
FPS 13-6001 MC95015622
(Federal Project Number and Marine Casualty "MC" number)

2. Questions concerning this case should be directed to
BMT2 CHRIS P. SCARBORRY COMMERCIAL# 206-217-6232.

3. The spill samples were collected from SEWER OUTFALL, MOBILE
WELL, AMERICAN DISTRIBUTING WELL, FUEL TANK
(river, outfall, shore, etc)

4. Estimated number of gallons spilled 50; Estimated cost of cleanup 35,000.

5. Wind conditions: ___ mild breeze; ___ Very Windy; X Calm.

6. Air Temperature: ___ below 32F; X 32 to 60F; ___ 60 to 85F
___ 85 to 95F; ___ over 95F.

7. Sky conditions: X Overcast; ___ Bright Sun; ___ Rain;
Other (specify) _____.

8. Spill involves seepage of oil through the soil: X Yes ___ No.
If Yes, estimated distance to the nearest possible suspected source:

300 YARDS

9. List any possible non-petroleum contamination sources in the area NONE

10. Are all samples involved in this case being sent to the laboratory? YES If not, explain _____.

11. Have all possible suspect sources been sampled, YES If NO, include a detailed explanation of possible sources not sampled. Provide any additional information about the samples or overall situation which may be helpful to lab personnel: _____.

PLEASE SAMPLE SEPARATE THEN COMPARE TO CASE
96-013

12. Specify prosecution type: X Class 1; ___ Class 2; ___ DOJ.

(SIGNATURE)
MST3 Don LaSore, Don LAISORE

**UNITED STATES COAST GUARD
CHAIN OF CUSTODY RECORD**

| | |
|--------------------|--|
| (UNIT AND ADDRESS) | COMMANDING OFFICER U.S. COAST GUARD MARINE SAFETY OFFICE PUGET SOUND 1519 ALASKAN WAY SOUTH SEATTLE, WA. 98134-1192 |
|--------------------|--|

| SPILL | SOURCE | SAMPLE NO. | DESCRIPTION OF SAMPLES FOR CASE# <u>MC95015622</u> |
|-------|--------|------------|---|
| | XXV | 1 | WELL ON RIGHT SIDE OF ROAD NEAR FENCE LINE mobile well |
| | XXX | 2 | BACK WE WELL INSIDE CONTAINMENT AREA OF AMERICAN DISTRIBUTING |
| XXX | | 3 | FROM WATER OUTLET AT DUNLAP TOWING |
| XXX | | 4 | FROM WATER OUTLET AT DUNLAP TOWING |
| | XXX | 5 | FROM CONTAINER YARD AT SCOTT PAPER #3 TANK CONTAINING #6 FUEL OIL |

| PERSON ASSUMING RESPONSIBILITY FOR SAMPLES | | | | | TIME/DATE |
|--|---|-----------------|---|----------------------|------------------------------|
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-5 | <i>Chris P. Sealy</i> Bm2 C.P. SCARBORRY | 12-6-95 1654 | <i>Don</i> DON LAISURE, USCG | 12-6-95 1654 | STORAGE |
| 1-5 | <i>Don</i> DON LAISURE, USCG | 12-7-95 0700 | CHRIS, P. SCARBORRY Bm2 Chris P. Sealy | 12-7-95 0700 | SHIP TO COIL |
| 1-5 | <i>Chris P. Sealy</i> Bm2 CHRIS P. SCARBORRY | 12-7-95 0704 | <i>David Paperrier</i> | 14 DEC 95 0930 | |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |

SAMPLE PREPARATION SHEET

COIL CASE NUMBER: 96-097

DATE PREPARED: 15 DEC 95

Oil samples were obtained using preparation techniques listed below. The samples were then placed into a vial and identified with the COIL case number and sample number along with the corresponding preparation code(s)

Oil samples eliminated by IR screening method: _____

The Quality Control sample is a duplicate of sample: 96-097-2

| SAMPLE NUMBERS (sequential portion only) | PREPARATION CODE | RATIO |
|--|------------------|-------|
| 1, 3, 4 | 5, 7 | |
| 2, QC | 2 | |
| 5 | 3, 7 | |
| | | |
| | | |
| | | |

PREPARATION CODES

1. Portion of neat sample taken from sample jar (clean fuel oils).
2. Portion of sample taken from sample jar, anhydrous MgSO₄ added, then centrifuged.
3. Portion of sample taken from sample jar, diluted with cyclohexane, anhydrous MgSO₄ added, then centrifuged.
4. Entire sample extracted with cyclohexane, anhydrous MgSO₄ added, then centrifuged.
5. Entire sample extracted with two separate 10 ml portions of cyclohexane, anhydrous MgSO₄ added to the combined cyclohexane solution, then centrifuged.
6. Cyclohexane Solution: ratio of oil to cyclohexane is known and shown in "ratio" column.
7. Cyclohexane Solution of unknown concentration.
8. Solvent evaporated with heat and a stream of N₂. Sample of unknown concentration.
9. Others: _____

Preparer's Signature: James P. Griffin

Date: 15 DEC 95

QUALITY CONTROL SHEET

COIL CASE NUMBER: 96-097

DATE PREPARED: 15 DEC 95

1. A Quality Control (QC) sample was analyzed along with the other samples in this case.

~~X~~ The Quality Control (QC) is a duplicate of sample 96-097-2
 Due to limited sample quantity in all samples involved in the case, reference oil _____ from the COIL Library was used for the Quality Control (QC) and its duplicate sample.
 Infrared Spectroscopy used for screening samples before final sample preparation. No QC sample available during IR screening

2. ANALYTICAL METHODS.

INFRARED SPECTROSCOPY

GAS CHROMATOGRAPHY

FLUORESCENCE SPECTROSCOPY

GAS CHROMATOGRAPHY/MASS SPECTROMETRY

| SAT | N/A |
|-----|-----|
| | X |
| X | |
| | X |
| X | |

3. The data and conclusions for the QC and its duplicate were identical:

Yes X No _____

COMMENTS:

SUPERVISOR OF ANALYSIS: Martha Hendrick

DATE: 20 Dec 95

UNITED STATES COAST GUARD
MARINE SAFETY LABORATORY

OIL SPILL IDENTIFICATION ANALYSES
COST RECOVERY DOCUMENTATION

LABORATORY CASE NUMBER: 96-097

REQUESTOR: MARINE SAFETY OFFICE PUGET SOUND

UNIT CASE NUMBER: MC95015622

NUMBER OF SAMPLES: 05

COST PER SAMPLE PREPARED: \$20.00

TOTAL COSTS OF SAMPLE PREPARATION: \$100.00

NUMBER OF ANALYSES: 15

COST PER ANALYSIS: \$85.98

TOTAL COSTS FOR ANALYSIS: \$1289.70

TOTAL COSTS: \$1389.70

This documentation is provided for purposes of Phase IV - Documentation and Cost Recovery under the National Oil and Hazardous Substances Pollution Contingency Plan(40 CFR Part 300).

Martha S. Hendrick

MARTHA S. HENDRICK DATE: 20DEC95
Chemist

OIL SPILL IDENTIFICATION SYSTEM (OIS)

RELEVANCE TO SPILL SOURCE DETERMINATION

Petroleum is a complex mixture of thousands of different organic compounds formed from a variety of organic materials that are chemically converted under differing geological conditions over long periods of time. The infinitely variable nature of these factors results in distinct chemical differences between oils formed under dissimilar conditions and/or environments. While oil from one crude oil field is readily distinguishable from another, differences in the makeup of oils from the same crude oil field can sometimes be observed as well. Refined oils are fractions usually derived by distillation of crude oil. Two refined oils of the same type differ because of dissimilarities in the characteristics of their crude oil feed stocks as well as variations in refinery processes and any subsequent contact with other oils mixed in during transfer operation from residues in tanks, ships, pipes, hoses etc... Thus, all petroleum oils, to some extent have chemical compositions that differ from each other.

The characteristic properties of an oil can be explored by a variety of analytical methods. The results of analysis by any of these methods can be presented in graph form. In general, when the graphical data for two oils produced by a particular method are compared, the differences between the graphs reflect differences between the oils.

The OIS System, developed during the mid-1970s at the Coast Guard Research and Development Center, is based on a multi-method approach to "fingerprinting" oils. In 1978, the Central Oil Identification Laboratory (COIL) was established as the operating facility to implement the OIS. In 1988, COIL was renamed the Marine Safety Laboratories (MSL), though the acronym COIL is still widely used. OIS is designed to determine the unique, intrinsic chemical properties of oils via analytical techniques and establish whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. Since 1978, MSL/COIL has analyzed over 39,000 samples, involving more than 5,700 spill cases, in support of oil pollution investigations.

DATA PRODUCTION AND INTERPRETATION

Oil sample preparation, testing and storage are conducted in accordance with American Society for Testing and Materials (ASTM) consensus standards. MSL/COIL currently utilizes three primary analytical techniques: Gas Chromatography (GC) (ASTM D-3328), Fluorescence Spectroscopy (FL) (ASTM D 3650), Infrared Spectroscopy (IR) (ASTM D-3414), and Gas Chromatography-Mass Spectrometry (GC-MS) (ASTM D-5739) that is used as a complementary analytical method. A rigorous laboratory quality assurance program monitors both instrument performance and sample preparation to ensure that data are accurate and reproducible.

All samples in a given case are initially analyzed by one method to determine the class of petroleum product. Samples can be excluded from further analysis based on results from the initial analysis. Further analyses are performed on samples which are potential matches to the source of the oil.

The Supervisor of Analysis interprets the data from all test methods performed and draws conclusions concerning whether or not certain spilled oil and suspected source samples were derived from the same chemical source. Data interpretation in oil spill source identification is non-trivial and fundamentally different from typical chemical analyses because the chemical properties of spilled oil are altered when oil is introduced into the environment. From the moment oil enters the environment, evaporation, dissolution, photochemical oxidation, biodegradation and other forces begin to alter the oil's characteristics or "fingerprint". These combined processes are termed weathering and can significantly complicate data interpretation. Contamination of the spilled oil with other oils or substances is another complicating factor. The experienced oil spill analyst is familiar with the complexities of the weathering processes and is able to distinguish real differences between two oils from those apparent differences resulting from weathering alterations. Interferences from contaminants can usually be recognized as such and discounted when weighing the test results. However, at times, severe weathering and/or contamination can mask many of the inherent differences between oils of a similar type.

REPORTING

The typical MSL/COIL OIS Report consists of four parts: case identifying information, a listing of analysis techniques performed, the results section and the conclusions section. The results section describes the types of petroleum observed in the samples provided, and comments on chemical similarities or dissimilarities between spill samples and/or between spill and suspected source samples. In all cases the Supervisor of Analysis bases the written results on interpretations from the aggregate of all data generated.

The conclusions section establishes whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. There are two outcomes most frequently found in the conclusions section of the typical MSL/COIL OIS Report: "derived from a common source" and "not derived from a common source". However, to maintain the high degree of reliability for both "common source" and "not a common source" determinations, it is necessary to exclude some comparisons from these categories. Oil spill cases vary widely in possible explanations for why a determination could not be made. Instead of using only a statement of "inconclusive", the comments will concisely explain the reason for the outcome for each individual case. For example, some sources are highly inhomogeneous, and a sample of such a spill may not reflect the composition of the product remaining in such a source. The spill may contain very little oil, or it may be excessively weathered or contaminated. Of important note, MSL/COIL conclusions address chemical comparisons and not physical aspects of evidence. Additionally, chemical evidence provided in a MSL/COIL conclusion that is other than "common source" might still be used by the investigating officer, when combined with physical evidence to establish a preponderance of the evidence argument against an alleged responsible party.

MSL/COIL OIS Reports are submitted to Marine Safety Offices (MSO's) for inclusion, as chemical evidence, in Marine Violation/Casualty Reports. The outcomes in the conclusions section of the OIS Report define the nature of the chemical evidence provided. MSO personnel are advised to combine the chemical evidence provided in the MSL/COIL OIS Reports with physical and circumstantial evidence developed during the investigation when writing Marine Violation Reports. Inquiries challenging the technical content of MSL/COIL OIS Reports by representatives of the alleged responsible party should be handled at the Hearing Officer level. Explicit guidance describing the communications process between the Hearing Officer and the MSL/COIL Supervisor of Analysis on technical issues involving chemical evidence is given in Commandant (G-LMI) memorandum 16460 dated 26 January 1981.

PERSONNEL QUALIFICATIONS

MSL/COIL laboratory technicians performing sample preparation and testing are graduates of the Coast Guard Marine Science Technician School. Each MSL/COIL technician has successfully completed a comprehensive training program at the MSL/COIL facility. Additionally, many have received supplemental training at leading civilian institutions in their specialty area.

The Supervisor of Analysis monitors all aspects of the analysis, certifies and interprets the test results, and prepares the final MSL/COIL report. This individual is a professionally trained chemist experienced in oil spill source identification. Individuals currently qualified to perform this function are:

Lieutenant Commander Kristy L. Plourde, U.S. Coast Guard
Commanding Officer
B.S. Physical Sciences, 1983, US Coast Guard Academy
M.S. Chemistry, 1989, University of Connecticut

Dr. Martha Hendrick
Chemist
B.A. Chemistry, 1969, Rhodes College
M.A. Education, 1974, Stanford University
Ph.D. Analytical Chemistry, 1985, University of Connecticut
Chair, ASTM Subcommittee D19.31, Waterborne Oils

REFERENCES


A more technical description of the OIS is contained in Report CG-D-52-77 "Oil Spill Identification System", Final Report, June 1977, USCG R&D Center. This document is available through the National Technical Information Service, Springfield, VA 22161.

For information concerning the ASTM standards used in Oil Spill Identification, consult "Oil in the Environment", Martha S. Hendrick, Ph.D., ASTM Standardization News, April 1991.

For additional information regarding the applicability of the Coast Guard's OIS, see "Chemical Identification of Oil Spill Sources", Allen P. Bentz, Ph.D., The Forum, Volume XIII, Number 2, Winter 1978. Dr. Bentz is a research scientist at the Coast Guard Research and Development Center and a recognized expert in the field of oil spill source identification. He has been closely involved with most of the development work leading to the present state-of-the-art.

OIL SAMPLE ANALYSIS REPORT
MARINE SAFETY OFFICE PUGET SOUND
CASE NUMBER MC95015622

MARINE SAFETY LABORATORY
CASE NUMBER 96-117

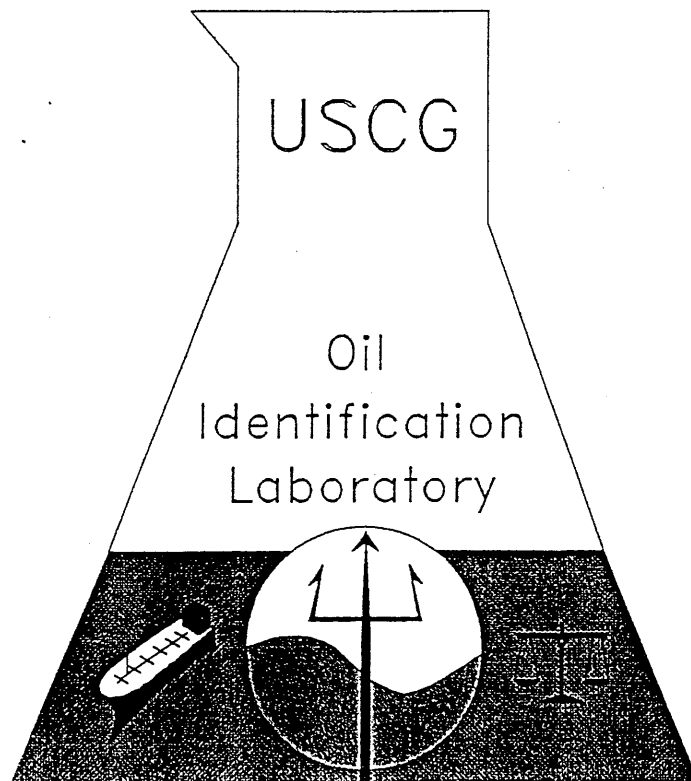

U.S. Department
of Transportation

United States
Coast Guard



Commanding Officer
U. S. Coast Guard
Marine Safety
Laboratories

1082 Shennecossett Road
Groton, CT 06340-6094
Phone: (860) 441-2645
Fax: (860) 441-2641

16400

JAN 16 1996

From: Commanding Officer, Marine Safety Laboratories
To: Commanding Officer, Marine Safety Office Puget Sound

Subj: OIL SAMPLE ANALYSIS REPORT, MSO PUGET SOUND CASE# MC95015622
MSL CASE #96-117

1. The laboratory analysis of this case has been completed and our report is forwarded. The technical data supporting the report (spectrograms and chromatograms) have been archived at our facility and are available upon request. We will maintain the oil samples in refrigerated storage pending final case disposition.

2. Questions concerning this report or the analytical methods used should be directed to the Supervisor of Analysis, LCDR Plourde.


K. L. PLOURDE

Encl: (1) MSL Report 96-117
(2) OIS Addendum

UNITED STATES COAST GUARD MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY

OIL SPILL IDENTIFICATION REPORT

LABORATORY CASE NUMBER: 96-117

REQUESTOR: MARINE SAFETY OFFICE PUGET SOUND

UNIT CASE NUMBER: MC95015622

RECEIVED: 12JAN96 VIA: CERTIFIED MAIL (# P 902 422 187)

NUMBER OF SAMPLES: FIVE (05)

LAB NO. OF SPILLS: 96-117-1

LAB NO. OF SUSPECTS: 96-117-3, 4 AND 5

LAB NO. OF CLEAN WATER: 96-117-2

ANALYSIS METHODS:


GAS CHROMATOGRAPHY (GC)

RESULTS:

1. Sample 1 was specified to have been representative of spilled oil. Analysis indicates that it contains a slightly weathered and severely biodegraded petroleum oil.
2. Suspected source samples 3, 4, and 5 are observed to contain heavy fuel oils with characteristics different than those observed for the spilled oil sample.
3. Sample 2 was designated as a clean water sample. No petroleum oil was detectable by Gas Chromatography.

CONCLUSIONS:

1. Because of the severely biodegraded condition of spill sample 1, comparison with suspected source samples 3, 4 and 5 is inconclusive. Suspected source samples 3, 4, and 5 do not appear to be the source of spill sample 1. The slightly weathered and severely biodegraded condition of sample 1 is characteristic of an oil that has been retained in a contaminated environment, such as soil, for an extended period of time.
2. Sample 2 represents essentially oil-free water.


SUPERVISOR OF ANALYSIS K. L. FLOURDE, LCDR, USCG DATE: 16JAN96
Commanding Officer/Chemist

11/89

UNITED STATES COAST GUARD
OIL IDENTIFICATION LABORATORY

SAMPLE CHECK-IN LOG, COIL CASE NUMBER: 96-117

REQUESTOR: MSO PUGET SOUND

UNIT CASE#: MC95015622

| METHOD OF DELIVERY | | DATE RECEIVED |
|---------------------------|-----------------|---------------|
| XXXXXXXXXX/CERTIFIED MAIL | MESSENGER | |
| NUMBER | DATE MAILED O/A | |
| P 902 422 187 | 09 JAN 96 | 12 JAN 96 |

Samples were observed to be: broken NO, tampered with NO, leaking YES, or subject to contamination NO. For these and other unusual conditions, place an asterisk (*) next to the sample(s) in question and describe condition of sample(s) in remarks below.

| LAB NO. | SAMPLE DESCRIPTION | SPILL | SUSPECT |
|----------------|--|-------|---------|
| 96-117-1 | [1] OIL RECOVERED IN THE WATER 08 JAN 96 1503 | XXXXX | |
| 96-117-2 | [2] FRESH WATER SAMPLE 08 JAN 96 1529 | XXXXX | |
| 96-117-3 | [3] PIPE OUTSIDE PUMP STATION 08 JAN 96 1400 | | XXXXX |
| ** 96-117-4 | [4] SOUTH WALL FUEL YARD MIDDLE 08 JAN 96 1410 | | XXXXX |
| 96-117-5 | [5] MIDDLE SOUTH WALL STAND PIPE 08 JAN 96 1415 | | XXXXX |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

REMARKS:

** SAMPLE 96-117-4 WAS RECEIVED LEAKING

Samples checked-in by: [Signature] Date: 12 JAN 96
Sample Custodian: [Signature] Date: 12 JAN 96
Supervisor of Analysis: KE Plomdo Date: 16 JAN 96

From: Commanding Officer, MARINE SAFETY OFFICE Puget Sound
To: Commanding Officer, Marine Safety Laboratories

Subj: REQUEST FOR OIL SAMPLE ANALYSIS

1. Request analysis of the 5 samples listed on attached Chain of Custody Record to assist in our investigation of spill case
13-6001 MC95015622
(Federal Project Number and Marine Casualty "MC" number)

2. Questions concerning this case should be directed to
Bm2 CHRIS P. SCARBERRY COMMERCIAL# 206 219-6232

3. The spill samples were collected from OUTFALL, BAY, SAWHOLE PIPE SHORE
(river, outfall, shore, etc)

4. Estimated number of gallons spilled 200; Estimated cost of cleanup 10,000.

5. Wind conditions: mild breeze; Very Windy; X Calm.

6. Air Temperature: below 32F; X 32 to 60F; 60 to 85F
 85 to 95F; over 95F.

7. Sky conditions: X Overcast; Bright Sun; Rain;
Other (specify) BUT PARTLY SUNNY

8. Spill involves seepage of oil through the soil: X Yes No.
If Yes, estimated distance to the nearest possible suspected source:
200 YARDS

9. List any possible non-petroleum contamination sources in the area NONE

10. Are all samples involved in this case being sent to the laboratory? YES If not, explain

11. Have all possible suspect sources been sampled, YES If NO, include a detailed explanation of possible sources not sampled. Provide any additional information about the samples or overall situation which may be helpful to lab personnel:
NEED MOST ALKALIC TEST DONE. NEED GAS CHROMATOGRAPHY SENT TO UNIT FOR ECOLOGY STUDY

12. Specify prosecution type: X Class 1; Class 2; DOJ.

(SIGNATURE)
MST3

UNITED STATES COAST GUARD
 CHAIN OF CUSTODY REPORT
 U.S. COAST GUARD

(UNIT AND ADDRESS)

MARINE SAFETY OFFICE
 PUGET SOUND
 1515 ALASKAN WAY SOUTH
 SEATTLE, WA. 98134-1192

| SPILL | SOURCE | SAMPLE NO. | DESCRIPTION OF SAMPLES FOR CASE# <u>MC95015622</u> |
|---------------|--------|------------|--|
| XX | | 1 | OIL RECOVERED FROM WATER |
| XX | | 2 | FRESH WATER SAMPLE 100 YARDS FROM SPILL |
| | XX | 3 | PIPE OUTSIDE PUMP STATION |
| | XX | 4 | SOUTH WALL FUEL YARD MIDDLE |
| | XX | 5 | SOUTH WALL FUEL YARD STAND PIPE |


| PERSON ASSUMING RESPONSIBILITY FOR SAMPLES | | | | | TIME/DATE |
|--|--|------------------|---------------------------|-------------------|------------------------------|
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-5 | <i>[Signature]</i> BM2 G.P. Seaberg | 9 JAN 96 1800 | MST <i>[Signature]</i> | | STORAGE |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-5 | MST <i>[Signature]</i> BM2 Seaberg | | <i>[Signature]</i> | 6 JAN 96 6700 | SHIP TO COIL |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-5 | <i>[Signature]</i> BM2 Chi P. Seaberg | 9 JAN 96 0800 | TROY FREIHANMER AT 152 | 12 JAN 96 0915 | |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| | | | | | |

Bill No. Returned CODs Registered Return Rcpt. for Merchandise Insured Certified Int'l. Recorded Delivery Svc. Mail for **Coast Guard**

| No. of Article | * Code | Office of Origin Use ONLY for International | No. of Article | * Code | Office of Origin Use ONLY for International |
|----------------|--------|--|----------------|--------|--|
| 1 | | Seattle WA | 11 | | A.S. Russell |
| 2 | | | 12 | | |
| 3 | | | 13 | | |
| 4 | | | 14 | | |
| 5 | | | 15 | | |
| 6 | | | 16 | | |
| 7 | | | 17 | | |
| 8 | | | 18 | | |
| 9 | | | 19 | | |
| 10 | | | 20 | | |

*CODE: R = Return Receipt Requested. OS = Officially Sealed. RE = Re-enveloped. SD = Special Delivery.
 RW = Returned to Writer. DC = Received in Damaged Condition.

Date of Delivery: **1-12-96**
 Delivered by (Clerk or Carrier): **Jm**
 Received the: **1**
 Pieces Described Above:
 Addressee: **Agent Helen R Nelson**



COIL CASE NUMBER: 96-117

DATE PREPARED: 12 JAN 96

Oil samples were obtained using preparation techniques listed below. T samples were then placed into a vial and identified with the COIL case number and sample number along with the corresponding preparation code(

Oil samples eliminated by IR screening method: _____

The Quality Control sample is a duplicate of sample: 96-117-3

| SAMPLE NUMBERS (sequential portion only) | PREPARATION CODE | RATIO |
|--|------------------|-------|
| 1, 4, 5 | 3, 7 | |
| 2 | 4, 7 | |
| 3, QC | 2 | |
| | | |
| | | |
| | | |

PREPARATION CODES

1. Portion of neat sample taken from sample jar (clean fuel oils).
2. Portion of sample taken from sample jar, anhydrous MgSO₄ added, then centrifuged
3. Portion of sample taken from sample jar, diluted with cyclohexane, anhydrous MgSO₄ added, then centrifuged.
4. Entire sample extracted with cyclohexane, anhydrous MgSO₄ added, then centrifuge
5. Entire sample extracted with two separate 10 ml portions of cyclohexane, anhydro MgSO₄ added to the combined cyclohexane solution, then centrifuged.
6. Cyclohexane Solution: ratio of oil to cyclohexane is known and shown in "ratio" column.
7. Cyclohexane Solution of unknown concentration.
8. Solvent evaporated with heat and a stream of N₂. Sample of unknown concentration
9. Others: _____

Preparer's Signature: [Signature] Date: 12 JAN 96

QUALITY CONTROL SHEET

COIL CASE NUMBER: 96-117 DATE PREPARED: 12 JAN 96

1. A Quality Control (QC) sample was analyzed along with the other samples in this case.

✓ The Quality Control (QC) is a duplicate of sample 96-117-3
 Due to limited sample quantity in all samples involved in the case, reference oil _____ from the COIL Library was used for the Quality Control (QC) and its duplicate sample.
 Infrared Spectroscopy used for screening samples before final sample preparation. No QC sample available during IR screening.

2. ANALYTICAL METHODS.

INFRARED SPECTROSCOPY

GAS CHROMATOGRAPHY

FLUORESCENCE SPECTROSCOPY

GAS CHROMATOGRAPHY/MASS SPECTROMETRY

| SAT | N/A |
|-----|-----|
| | X |
| X | |
| | X |
| | X |

3. The data and conclusions for the QC and its duplicate were identical:

Yes X No _____

COMMENTS:

SUPERVISOR OF ANALYSIS: JC Plande

DATE: 16 JAN 96

**UNITED STATES COAST GUARD MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY
GAS CHROMATOGRAPHY (GC) WORKSHEET**

Case Number: 96-117 Instrument: ANA 2 Date of Analysis: 16 JAN 96

| | Comparison Spills | | | | | | | | | | cyclo- hexane soln. (unk. conc.) | |
|---|-------------------|---|--|--|--|--|--|--|--|--|--|---|
| | 1 | 2 | | | | | | | | | | |
| 1 | / | - | | | | | | | | | | X |
| 2 | - | / | | | | | | | | | | X |
| 3 | I | - | | | | | | | | | | X |
| 4 | I | - | | | | | | | | | | X |
| 5 | I | - | | | | | | | | | | X |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |


1. Method/Analytical Conditions: ASTM D 3328 **SOP: MSLINST 5200.8**
 HP program used: Column Used: FRONT/ REAR
 OIL Method Column: DB-5, 30m x 0.32mm ID
 GAS Method Film Thickness: 0.1 micron
 OTHER: _____ Column Number: 3768943

2. Sample Preparation: Solvent: Cyclohexane
 Concentration: 3.0 µL oil / 1000.0 µL solvent Other: _____

3. Comments: Do comparisons show all spill samples the same? Yes No N/A


Analyst: [Signature] Date: 16 JAN 96
 Supervisor: [Signature] Date: 16 JAN 96
 Page 1 of 1

Data File: C:\INFORM\2\DATA\0112\96 11:00:54
Injection Date: 1/12/96 9:59:13 PM Seq. Line: 8
Acq. Method: OIL1.M Vial No.: 8
Operator: *m.l.w.* *PEL* Inj. No.: 1
Sample Name: 96-081-BLANK Inj. Vol.: not available
Comments:

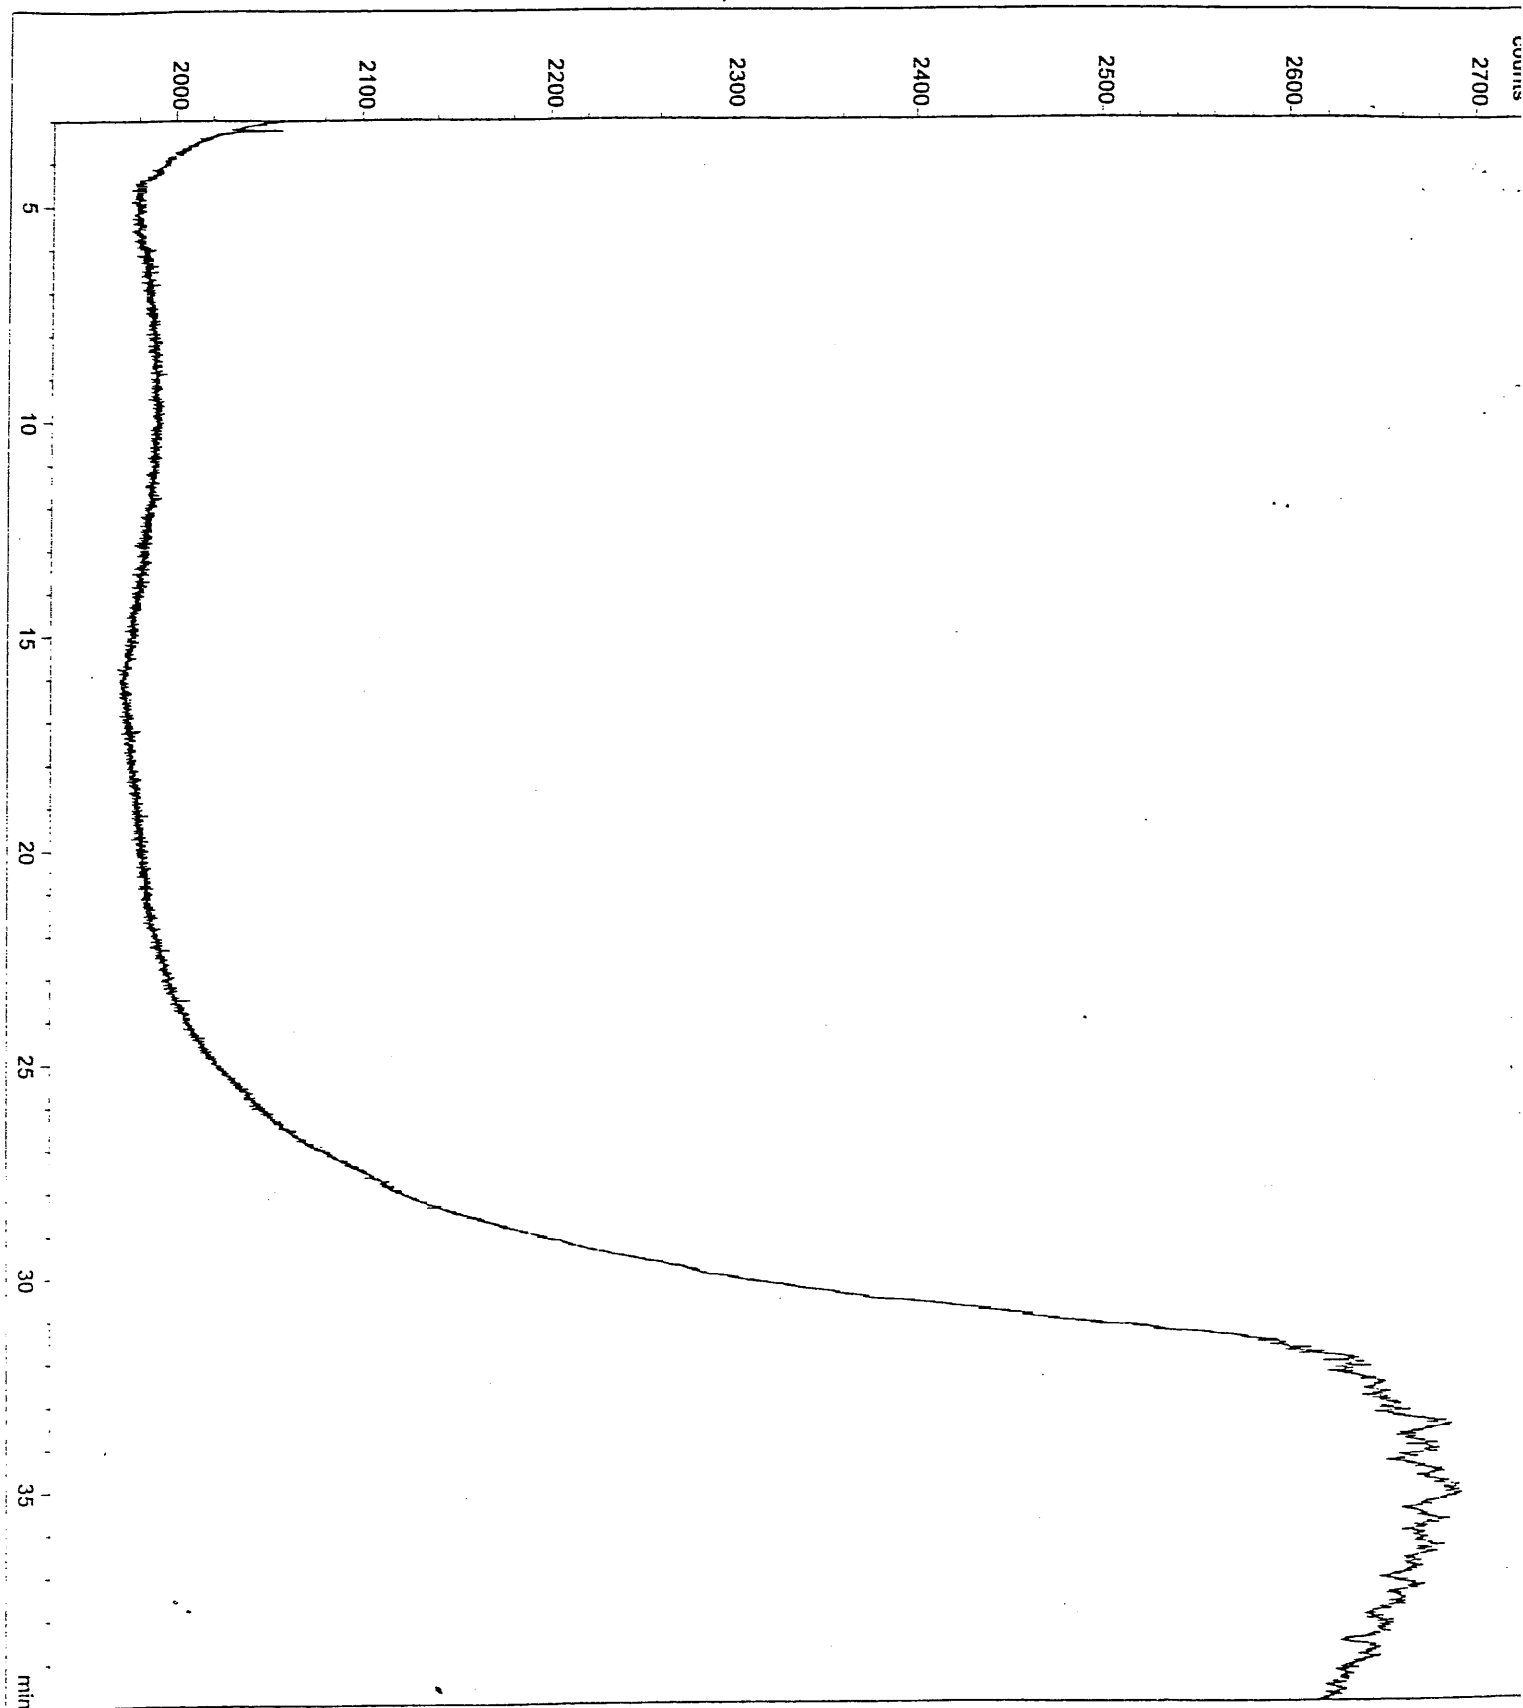


Injection Date: 1/12/96 8:52:03 PM
Acq. Method: OIL1.M
Operator: *[Signature]*
Sample Name: 96-117-QC
Comments:

Seq. Line: 7
Vial No.: 7
Inj. No.: 1
Inj. Vol.: not available

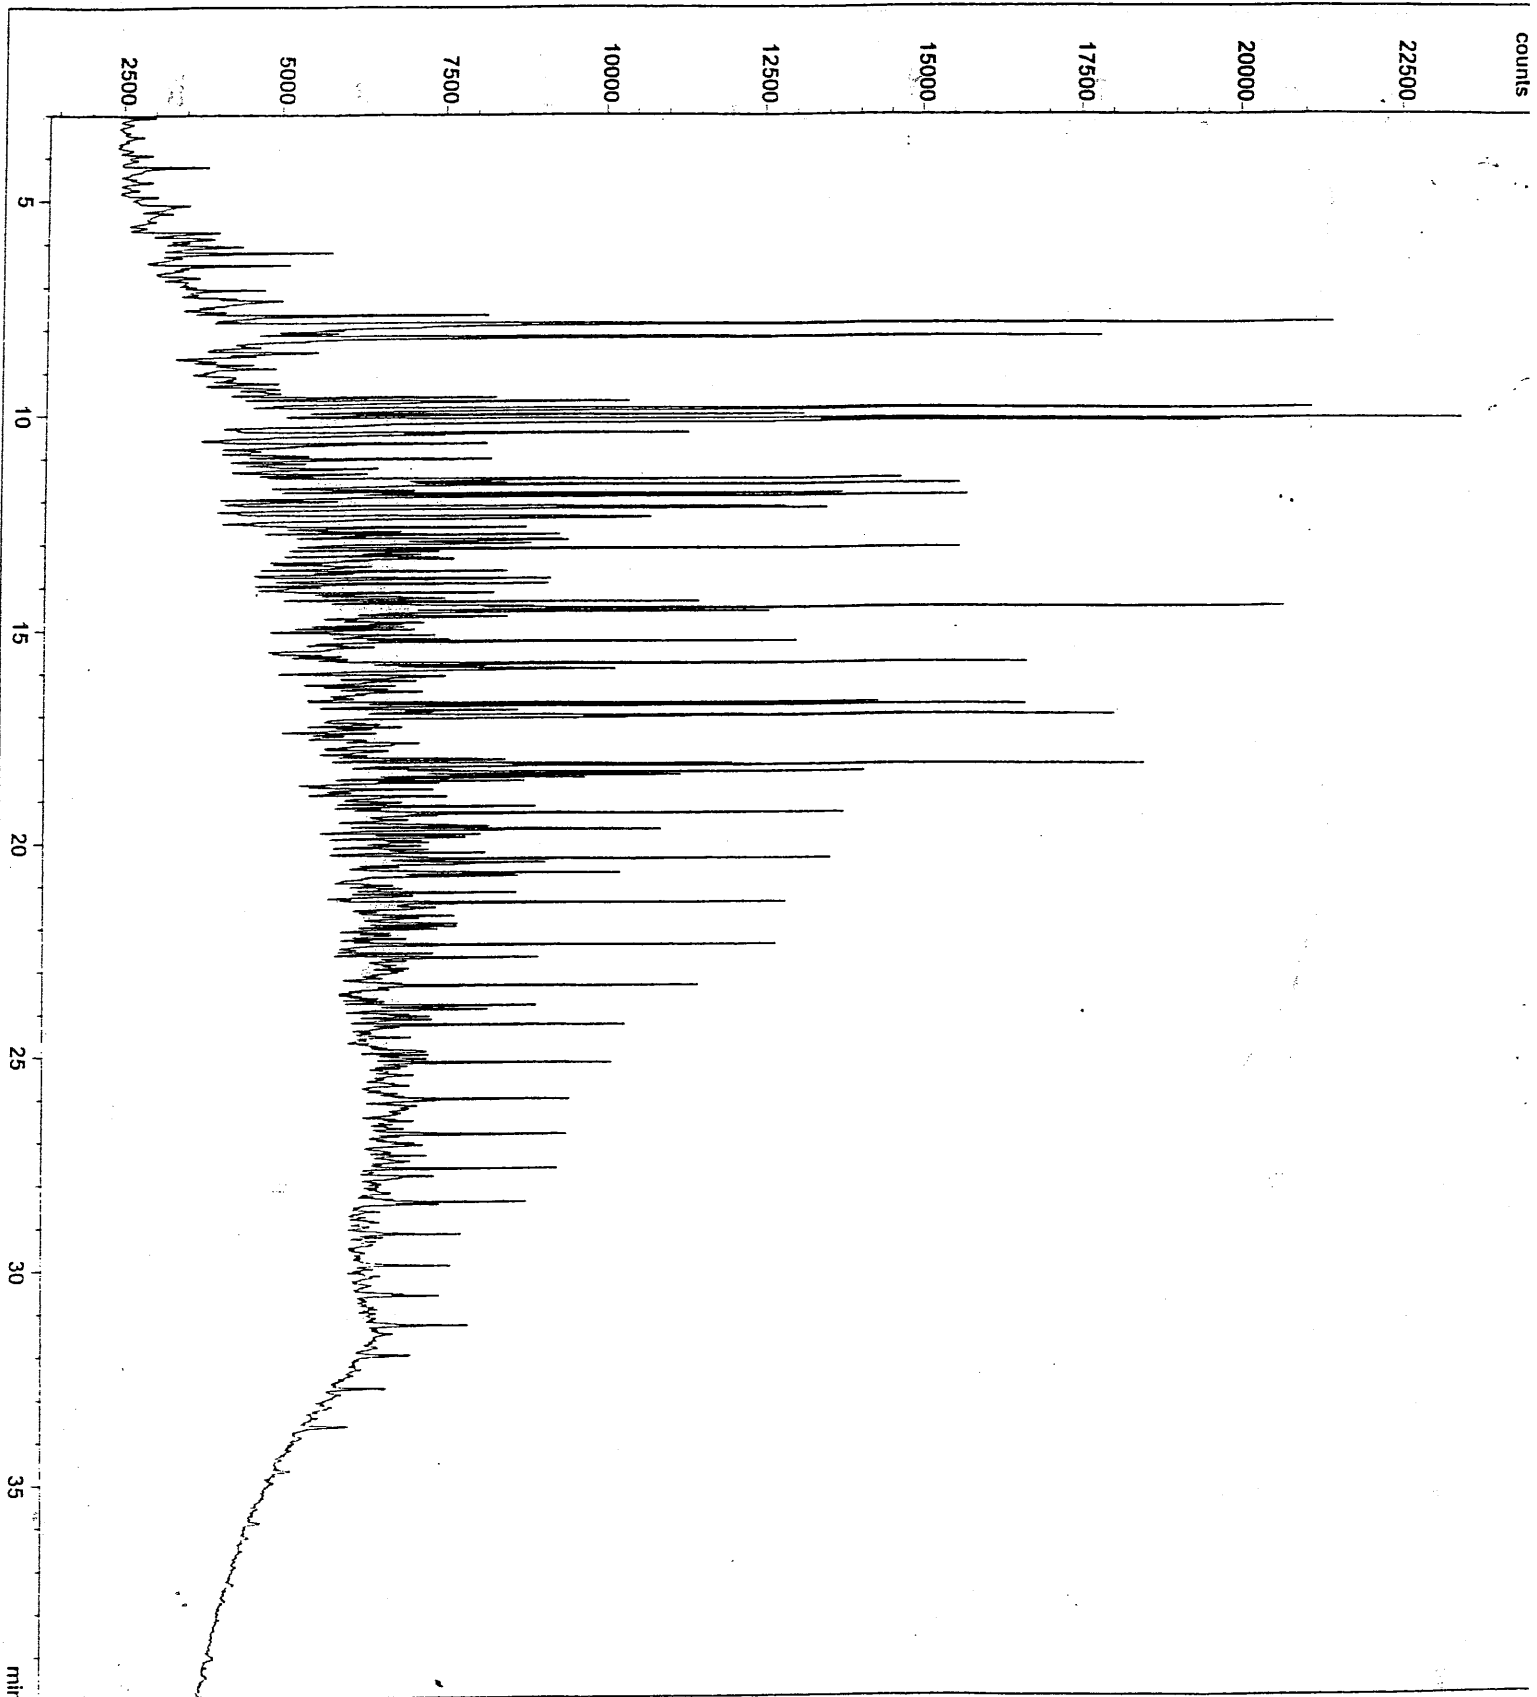


Data File: C:\MPCHEM\2\DATA\0112\96 117021.D
Injection Date: 1/12/96 3:16:33 PM Seq. Line: 2
Acq. Method: OIL1.M Vial No.: 2
Operator: *[Signature]* Inj. No.: 1
Sample Name: 96-117-03, QCM Inj. Vol.: not available
Comments:

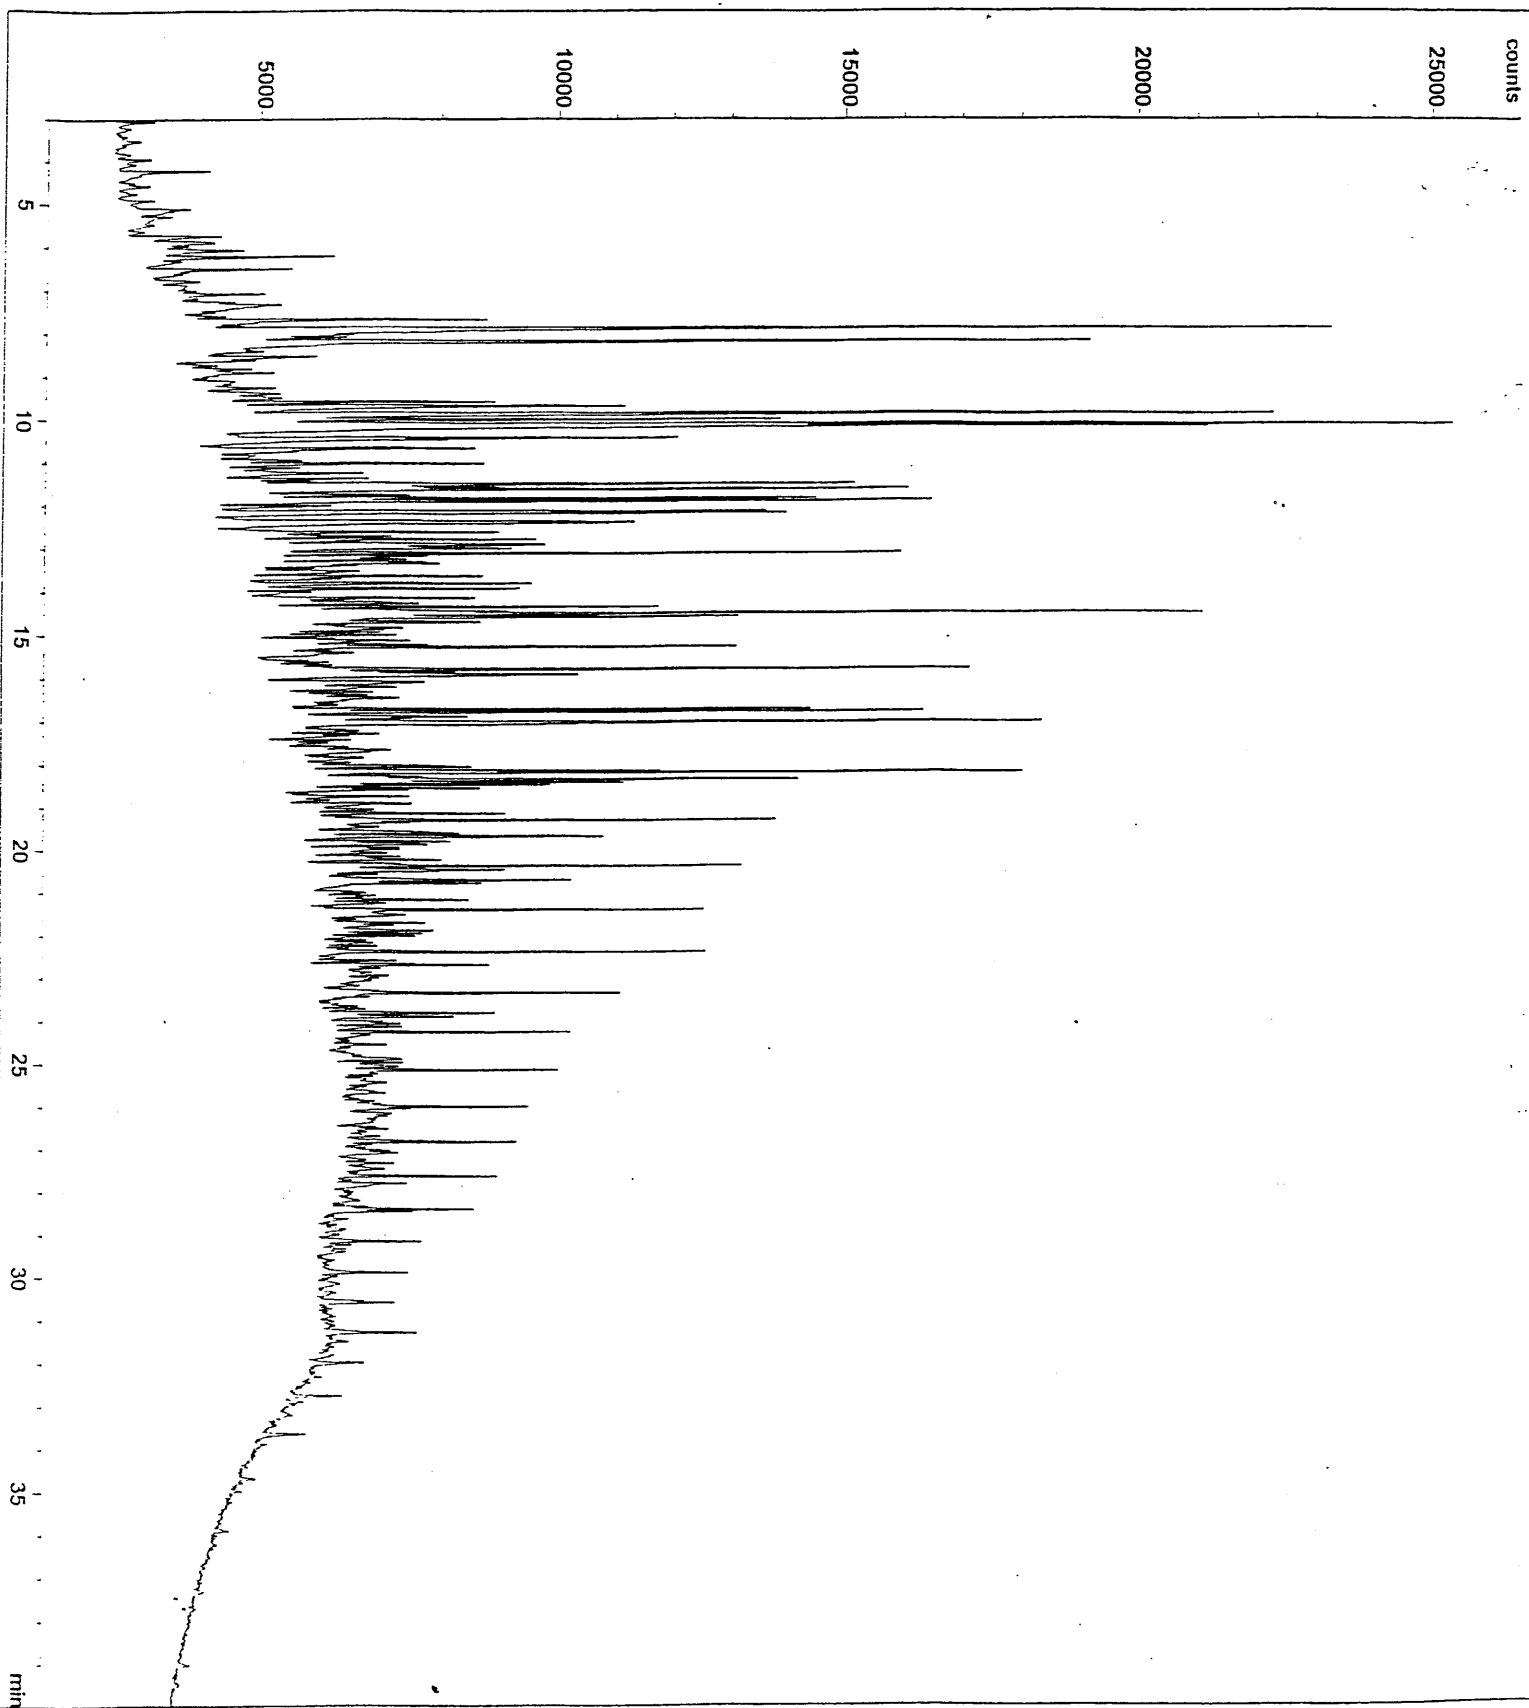


Data File:
Injection Date: 1/12/96 4:23:38 PM
Acq. Method: OIL1.M
Operator: *[Signature]*
Sample Name: 96-117-01, SPILL
Comments:


Seq. Line: 3
Vial No.: 3
Inj. No.: 1
Inj. Vol.: not available

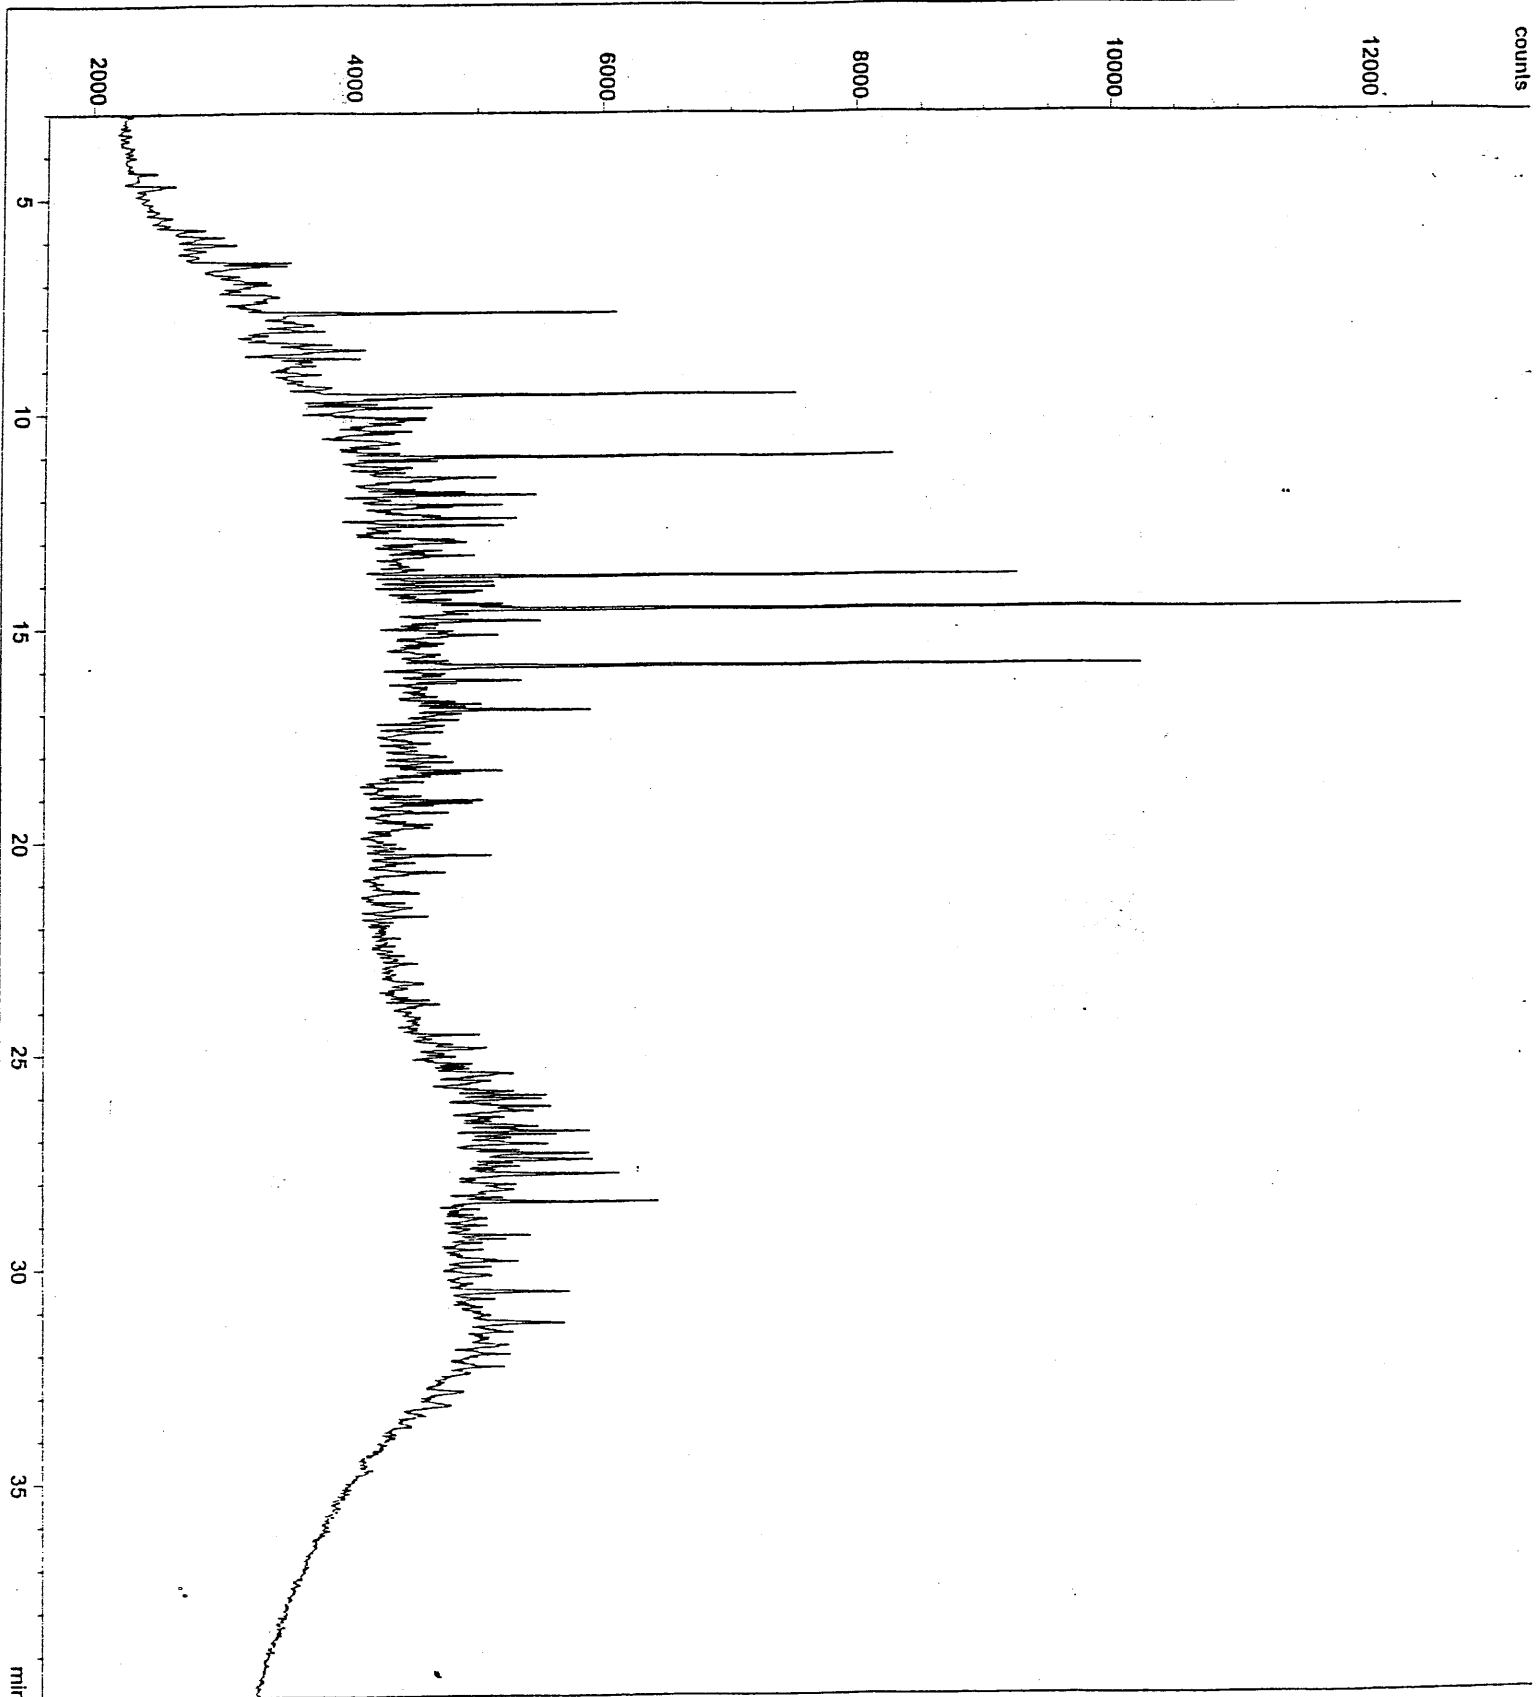


Data File: C:\INSTRUMENTS\DATA\0112\96\117-02
Injection Date: 1/12/96 5:30:45 PM Seq. Line: 4
Acq. Method: OIL1.M Vial No.: 4
Operator: *[Signature]* Inj. No.: 1
Sample Name: 96-117-02, SPILL Inj. Vol.: not available
Comments:

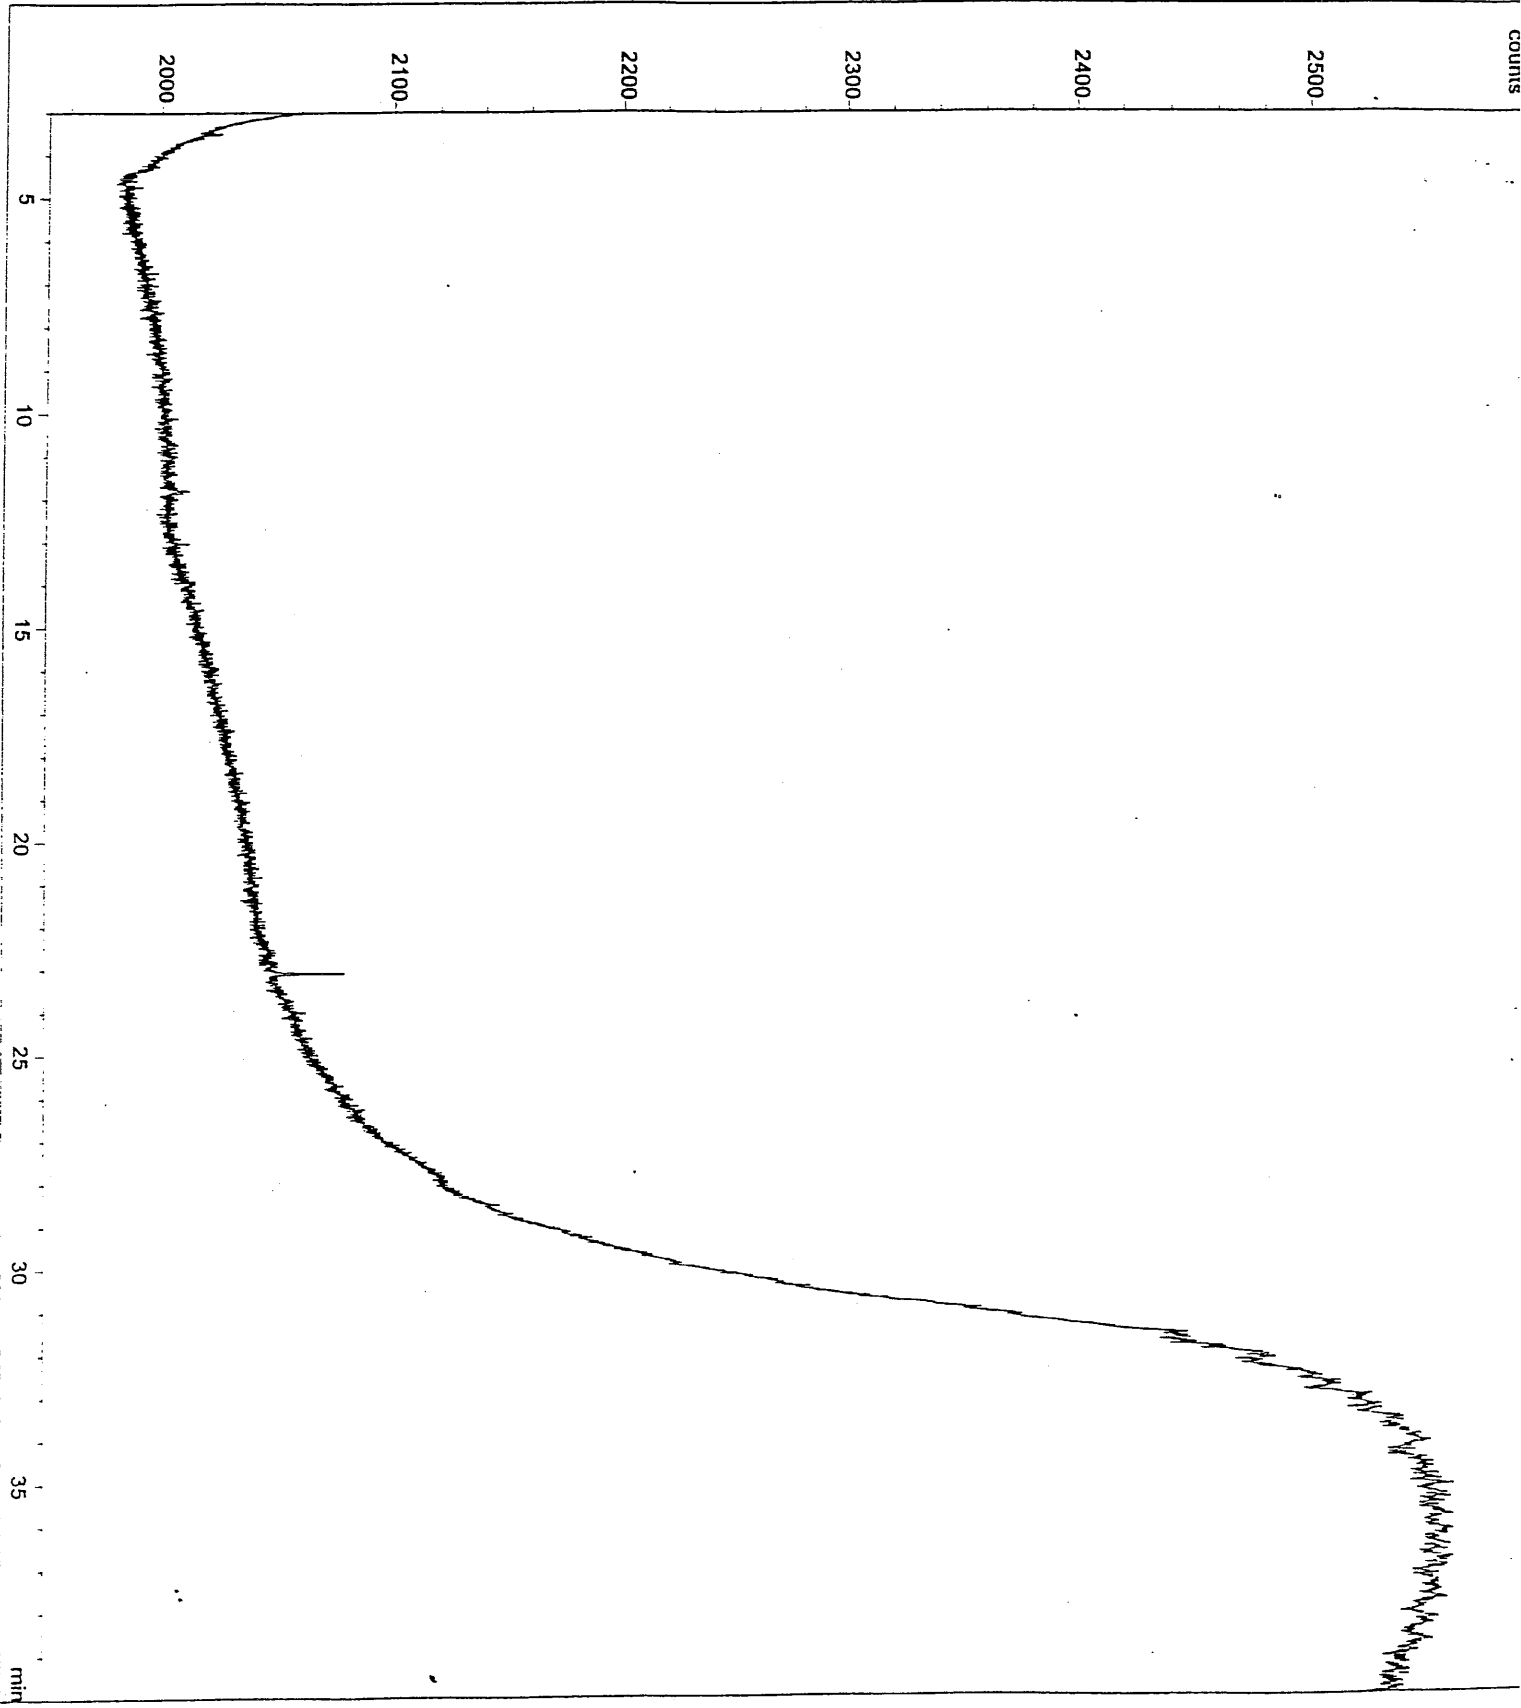

Data File: C:\MSDCHEM\2\DATA\96-117-04.D
Injection Date: 1/12/96 6:37:49 PM Seq. Line: 5
Acq. Method: OIL1.M Vial No.: 5
Operator: *[Signature]* Inj. No.: 1
Sample Name: 96-117-04 Inj. Vol.: not available
Comments:

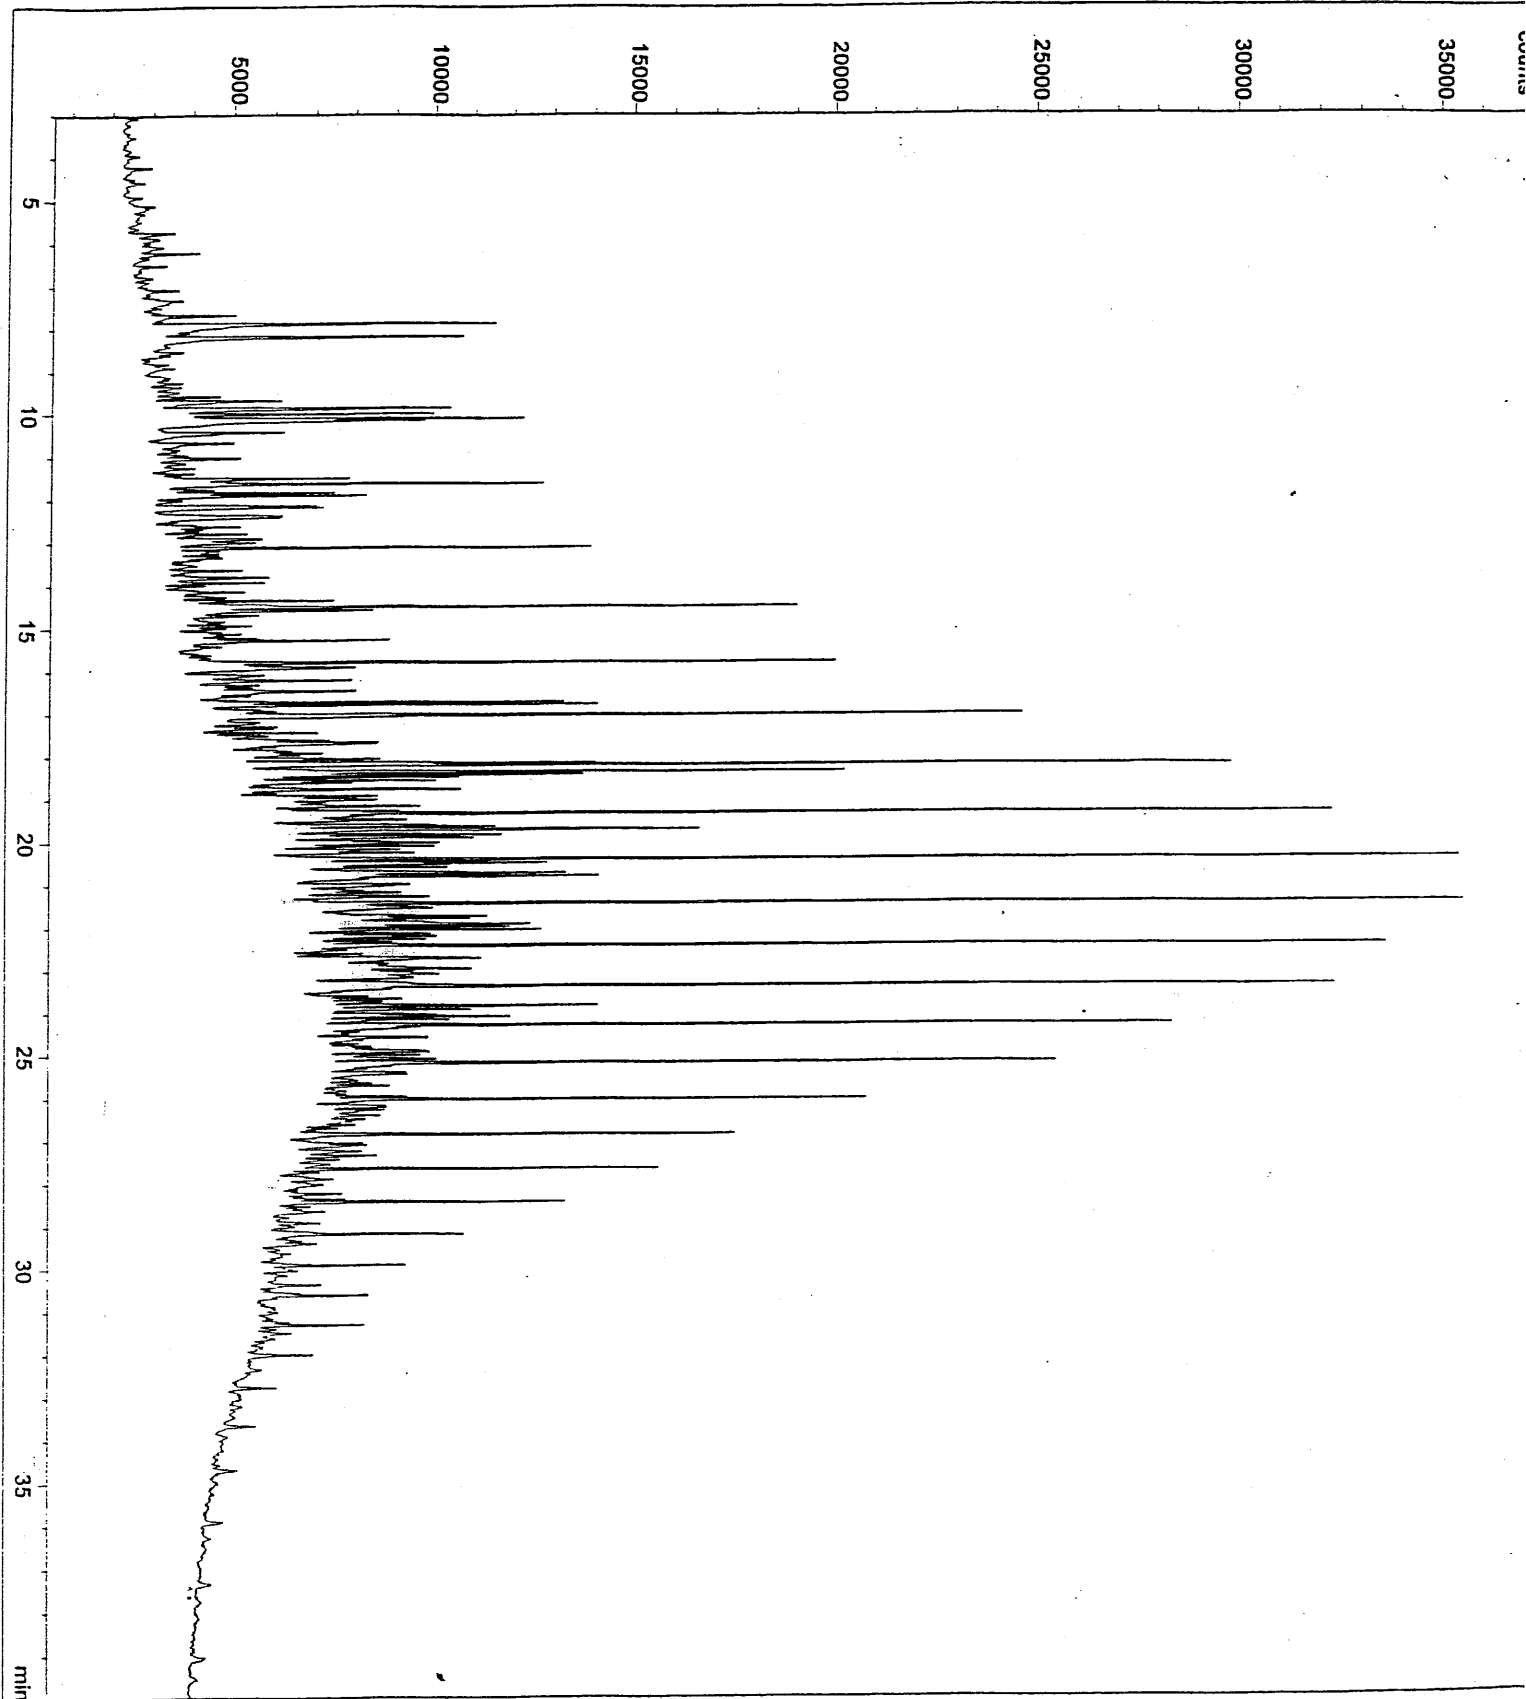

Data File: C:\HPCHEM1\2\DATA\0112\96-11706.D
Injection Date: 1/12/96 7:44:55 PM Seq. Line: 6
Acq. Method: OIL1.M Vial No.: 6
Operator: *[Signature]* Inj. No.: 1
Sample Name: 96-117-05 Inj. Vol.: not available
Comments:

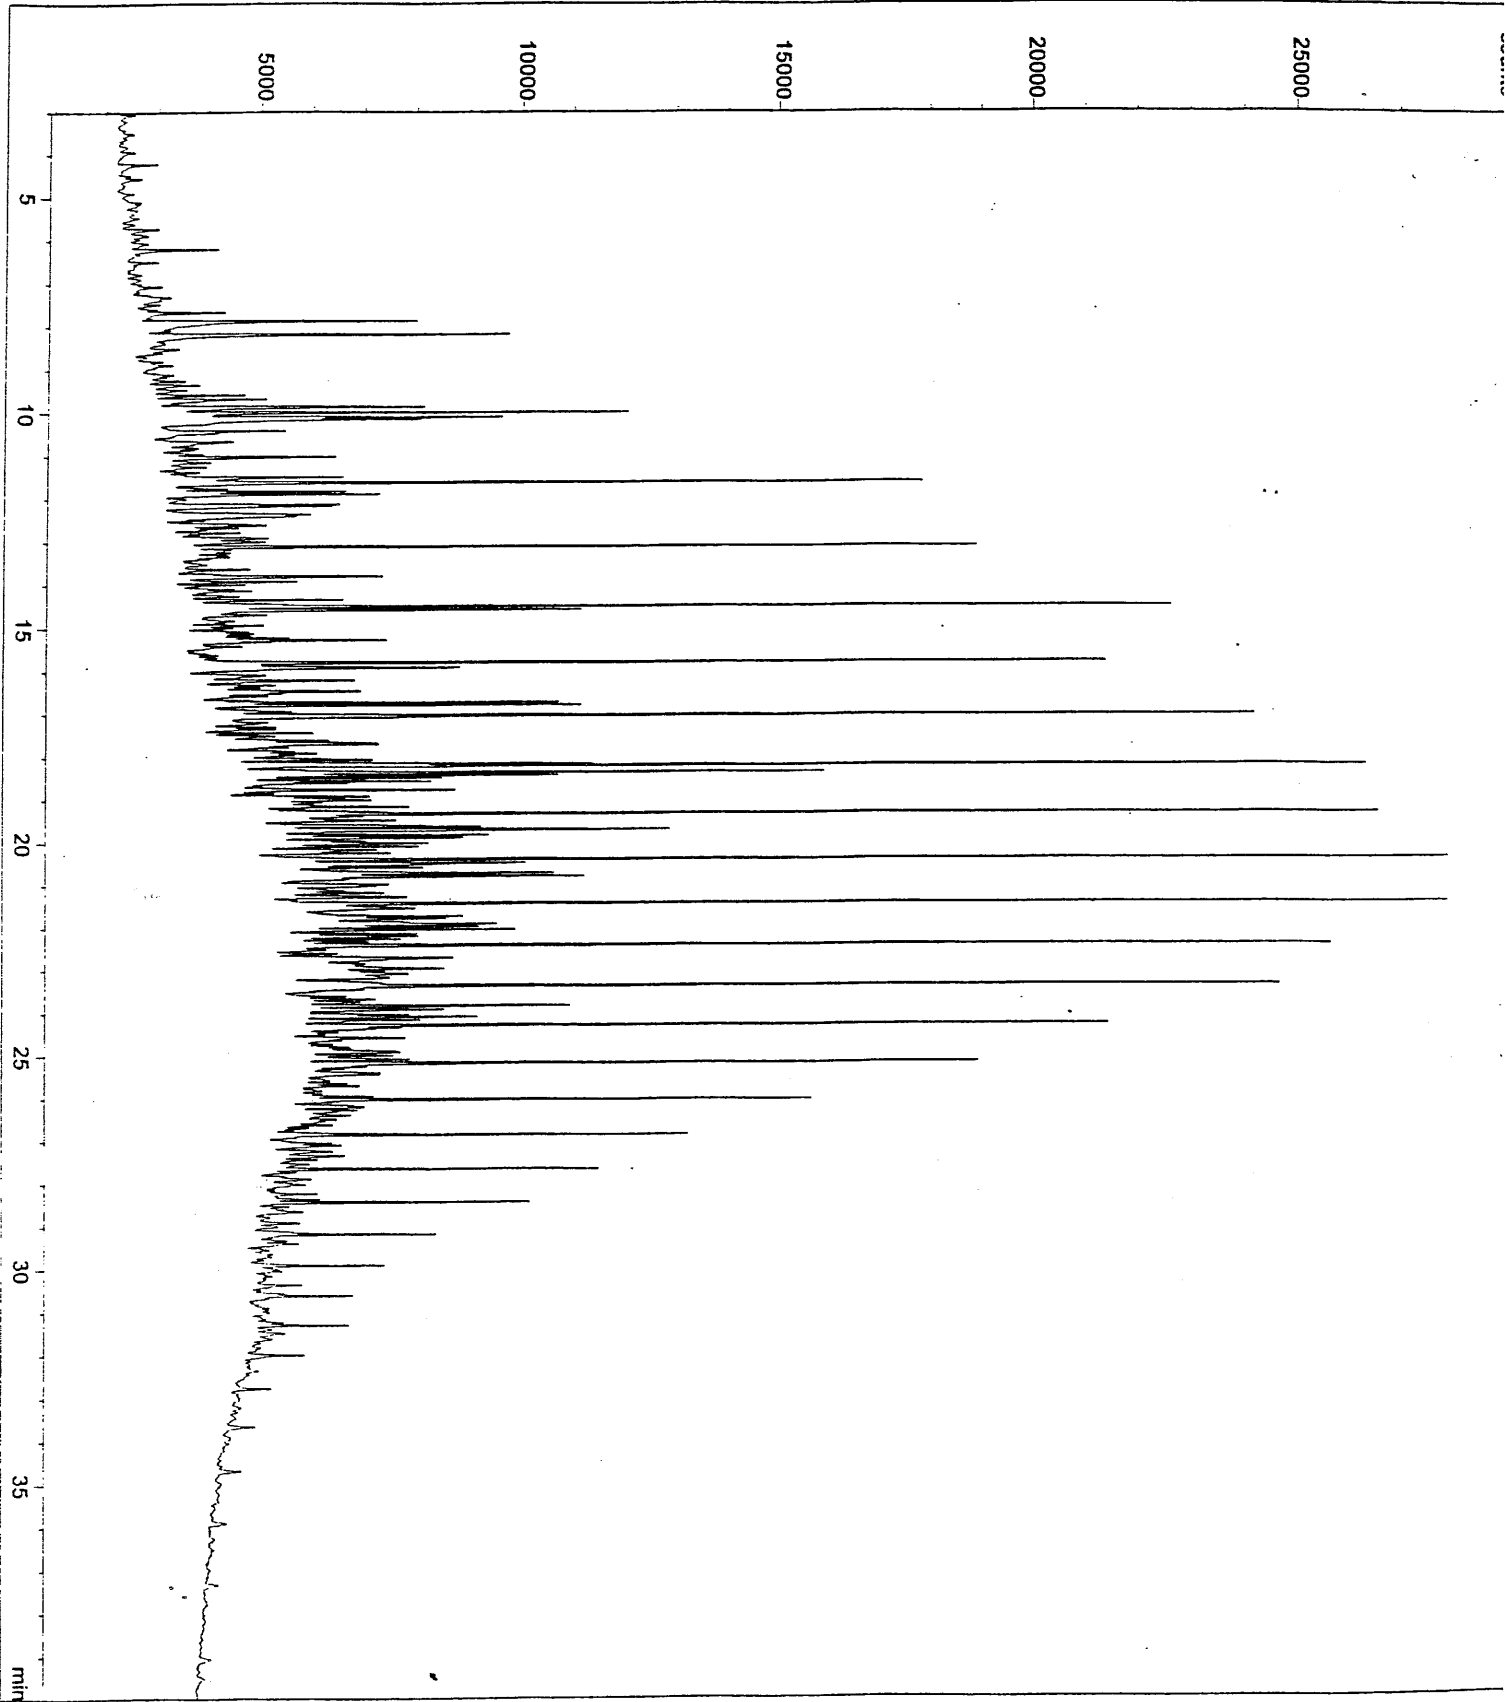

UNITED STATES COAST GUARD
MARINE SAFETY LABORATORY

OIL SPILL IDENTIFICATION ANALYSES
COST RECOVERY DOCUMENTATION

LABORATORY CASE NUMBER: 96-117

REQUESTOR: MARINE SAFETY OFFICE PUGET SOUND

UNIT CASE NUMBER: MC95015622

NUMBER OF SAMPLES: 05

COST PER SAMPLE PREPARED: \$20.00

TOTAL COSTS OF SAMPLE PREPARATION: \$100.00

NUMBER OF ANALYSES: 06

COST PER ANALYSIS: \$85.98

TOTAL COSTS FOR ANALYSIS: \$515.88

TOTAL COSTS: \$615.88

This documentation is provided for purposes of Phase IV - Documentation and Cost Recovery under the National Oil and Hazardous Substances Pollution Contingency Plan(40 CFR Part 300).


K. L. PLOURDE DATE: 16JAN96
Commanding Officer

OIL SPILL IDENTIFICATION SYSTEM (OIS)**RELEVANCE TO SPILL SOURCE DETERMINATION**

Petroleum is a complex mixture of thousands of different organic compounds formed from a variety of organic materials that are chemically converted under differing geological conditions over long periods of time. The infinitely variable nature of these factors results in distinct chemical differences between oils formed under dissimilar conditions and/or environments. While oil from one crude oil field is readily distinguishable from another, differences in the makeup of oils from the same crude oil field can sometimes be observed as well. Refined oils are fractions usually derived by distillation of crude oil. Two refined oils of the same type differ because of dissimilarities in the characteristics of their crude oil feed stocks as well as variations in refinery processes and any subsequent contact with other oils mixed in during transfer operation from residues in tanks, ships, pipes, hoses etc... Thus, all petroleum oils, to some extent have chemical compositions that differ from each other.

The characteristic properties of an oil can be explored by a variety of analytical methods. The results of analysis by any of these methods can be presented in graph form. In general, when the graphical data for two oils produced by a particular method are compared, the differences between the graphs reflect differences between the oils.

The OIS System, developed during the mid-1970s at the Coast Guard Research and Development Center, is based on a multi-method approach to "fingerprinting" oils. In 1978, the Central Oil Identification Laboratory (COIL) was established as the operating facility to implement the OIS. In 1988, COIL was renamed the Marine Safety Laboratories (MSL), though the acronym COIL is still widely used. OIS is designed to determine the unique, intrinsic chemical properties of oils via analytical techniques and establish whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. Since 1978, MSL/COIL has analyzed over 39,000 samples, involving more than 5,700 spill cases, in support of oil pollution investigations.

DATA PRODUCTION AND INTERPRETATION

Oil sample preparation, testing and storage are conducted in accordance with American Society for Testing and Materials (ASTM) consensus standards. MSL/COIL currently utilizes three primary analytical techniques: Gas Chromatography (GC) (ASTM D-3328), Fluorescence Spectroscopy (FL) (ASTM D 3650), Infrared Spectroscopy (IR) (ASTM D-3414), and Gas Chromatography-Mass Spectrometry (GC-MS) (ASTM D-5739) that is used as a complementary analytical method. A rigorous laboratory quality assurance program monitors both instrument performance and sample preparation to ensure that data are accurate and reproducible.

All samples in a given case are initially analyzed by one method to determine the class of petroleum product. Samples can be excluded from further analysis based on results from the initial analysis. Further analyses are performed on samples which are potential matches to the source of the oil.

The Supervisor of Analysis interprets the data from all test methods performed and draws conclusions concerning whether or not certain spilled oil and suspected source samples were derived from the same chemical source. Data interpretation in oil spill source identification is non-trivial and fundamentally different from typical chemical analyses because the chemical properties of spilled oil are altered when oil is introduced into the environment. From the moment oil enters the environment, evaporation, dissolution, photochemical oxidation, biodegradation and other forces begin to alter the oil's characteristics or "fingerprint". These combined processes are termed weathering and can significantly complicate data interpretation. Contamination of the spilled oil with other oils or substances is another complicating factor. The experienced oil spill analyst is familiar with the complexities of the weathering processes and is able to distinguish real differences between two oils from those apparent differences resulting from weathering alterations. Interferences from contaminants can usually be recognized as such and discounted when weighing the test results. However, at times, severe weathering and/or contamination can mask many of the inherent differences between oils of a similar type.

REPORTING

The typical MSL/COIL OIS Report consists of four parts: case identifying information, a listing of analysis techniques performed, the results section and the conclusions section. The results section describes the types of petroleum observed in the samples provided, and comments on chemical similarities or dissimilarities between spill samples and/or between spill and suspected source samples. In all cases the Supervisor of Analysis bases the written results on interpretations from the aggregate of all data generated.

The conclusions section establishes whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. There are two outcomes most frequently found in the conclusions section of the typical MSL/COIL OIS Report: "derived from a common source" and "not derived from a common source". However, to maintain the high degree of reliability for both "common source" and "not a common source" determinations, it is necessary to exclude some comparisons from these categories. Oil spill cases vary widely in possible explanations for why a determination could not be made. Instead of using only a statement of "inconclusive", the comments will concisely explain the reason for the outcome for each individual case. For example, some sources are highly inhomogeneous, and a sample of such a spill may not reflect the composition of the product remaining in such a source. The spill may contain very little oil, or it may be excessively weathered or contaminated. Of important note, MSL/COIL conclusions address chemical comparisons and not physical aspects of evidence. Additionally, chemical evidence provided in a MSL/COIL conclusion that is other than "common source" might still be used by the investigating officer, when combined with physical evidence to establish a preponderance of the evidence argument against an alleged responsible party.

MSL/COIL OIS Reports are submitted to Marine Safety Offices (MSO's) for inclusion, as chemical evidence, in Marine Violation/Casualty Reports. The outcomes in the conclusions section of the OIS Report define the nature of the chemical evidence provided. MSO personnel are advised to combine the chemical evidence provided in the MSL/COIL OIS Reports with physical and circumstantial evidence developed during the investigation when writing Marine Violation Reports. Inquiries challenging the technical content of MSL/COIL OIS Reports by representatives of the alleged responsible party should be handled at the Hearing Officer level. Explicit guidance describing the communications process between the Hearing Officer and the MSL/COIL Supervisor of Analysis on technical issues involving chemical evidence is given in Commandant (G-LMI) memorandum 16460 dated 26 January 1981.

PERSONNEL QUALIFICATIONS

MSL/COIL laboratory technicians performing sample preparation and testing are graduates of the Coast Guard Marine Science Technician School. Each MSL/COIL technician has successfully completed a comprehensive training program at the MSL/COIL facility. Additionally, many have received supplemental training at leading civilian institutions in their specialty area.

The Supervisor of Analysis monitors all aspects of the analysis, certifies and interprets the test results, and prepares the final MSL/COIL report. This individual is a professionally trained chemist experienced in oil spill source identification. Individuals currently qualified to perform this function are:

Lieutenant Commander Kristy L. Plourde, U.S. Coast Guard
Commanding Officer
B.S. Physical Sciences, 1983, US Coast Guard Academy
M.S. Chemistry, 1989, University of Connecticut

Dr. Martha Hendrick
Chemist
B.A. Chemistry, 1969, Rhodes College
M.A. Education, 1974, Stanford University
Ph.D. Analytical Chemistry, 1985, University of Connecticut
Chair, ASTM Subcommittee D19.31, Waterborne Oils

REFERENCES

A more technical description of the OIS is contained in Report CG-D-52-77 "Oil Spill Identification System", Final Report, June 1977, USCG R&D Center. This document is available through the National Technical Information Service, Springfield, VA 22161.

For information concerning the ASTM standards used in Oil Spill Identification, consult "Oil in the Environment", Martha S. Hendrick, Ph.D., ASTM Standardization News, April 1991.

For additional information regarding the applicability of the Coast Guard's OIS, see "Chemical Identification of Oil Spill Sources", Allen P. Bentz, Ph.D., The Forum, Volume XIII, Number 2, Winter 1978. Dr. Bentz is a research scientist at the Coast Guard Research and Development Center and a recognized expert in the field of oil spill source identification. He has been closely involved with most of the development work leading to the present state-of-the-art.

APPENDIX C

Boring Logs, Monitoring Well Logs, and Test Pit Logs

Appendix B

Lithologic Logs

| Elevation reference: Ground surface elevation: | | Well completed: Casing elevation: | | | | | | AS-BUILT DESIGN | | TESTING |
|---|---|--------------------------------------|------------------|----------------|----------------|-----------------|-----------------|-----------------|--|---------|
| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER | AS-BUILT DESIGN | | | |
| 0 | <i>Inferred medium dense, moist, brown SILT with gravel and some sand. Slight odor noted.</i> | | | | | | | | | |
| 5 | <i>Inferred meium dense, moist, grey, SILT with some sand and gravel. Strong odor noted.</i> | | | | | ▼ ATD | | | | |
| 10 | <i>Inferred, medium dense, wet, grey, SILT with sand and organics. Strong odor noted.</i> | | | | | | | | | |
| 15 | <i>Inferred, dense, wet, dark grey, organics (wood and peat) with some sand and silt.</i> | | | | | | | | | |
| <i>Boring terminated at 18 feet.</i> | | | | | | | | | | |
| 20 | | | | | | | | | | |
| 25 | | | | | | | | | | |
| 30 | | | | | | | | | | |

LEGEND

▼
ATD Observed groundwater level
(ATD = at time of drilling)






RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
Environmental Consultants
1400 140th Ave NE
Bellevue, Washington 98005



| SOIL DESCRIPTION | DEPTH (FEET) | LAB TESTS | SAMPLING | GROUND WATER | STANDARD PENETRATION RESISTANCE | | | | | |
|---|--------------|-----------|----------|--------------|--|----|----|----|----|----|
| | | | | | ▲ BLOWS PER FOOT (140 lb. hammer, 30 inch drop) | | | | | |
| Ground Surface Elevation Approximately Feet | 0 | | | | 0 | 10 | 20 | 30 | 40 | 50 |
| Loose to medium dense, wet to saturated, gray and brown-gray, silty fine to coarse SAND with a trace of gravel and wood debris (Fill) | 0 - 10 | | I | ▽ | | 10 | | | | |
| Soft, saturated, brown, silty PEAT | 10 - 11 | | I | | | | | | | |
| Total depth 11 feet Boring completed 9 March 1988 | 11 - 40 | | | | | | | | | |

- SAMPLING**
 I 2' OD SPLIT SPOON SAMPLE
 II 3' OD SHELBY SAMPLE
 III 2.5' ID RING SAMPLE
 BULK SAMPLE
 * SAMPLE NOT RECOVERED



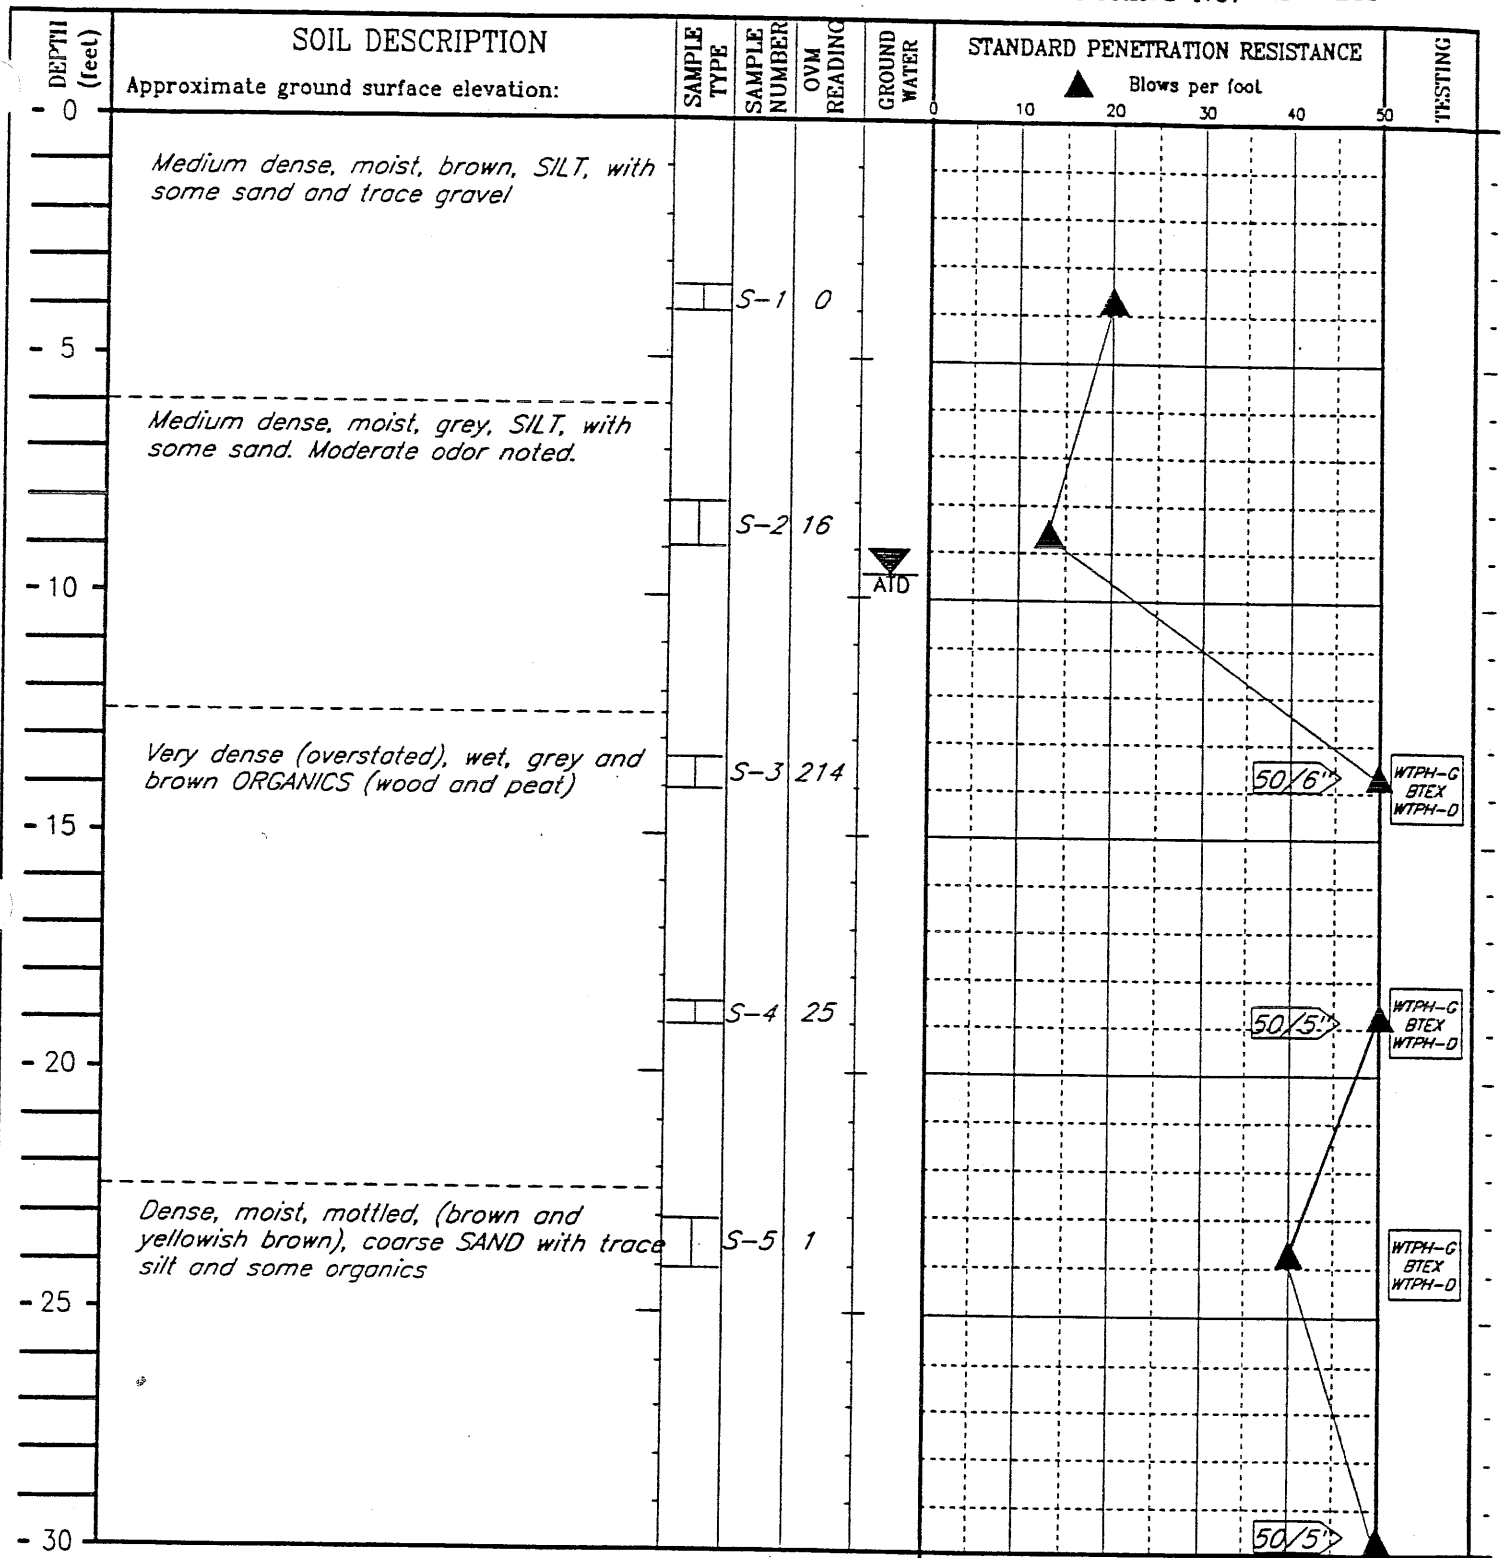


LEGEND

I 2-inch OD split-spoon sample

▽/ATD Groundwater level at time of drilling


WTPH-G
BTEX
WTPH-D Soil analyses method




RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005


| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | OVM READING | GROUND WATER | STANDARD PENETRATION RESISTANCE | | | | | TESTING | |
|-----------------|---|----------------|------------------|----------------|-----------------|---------------------------------|----|----|----|----|---------|--|
| | | | | | | Blows per foot | | | | | | |
| 0 | Approximate ground surface elevation: | | | | | 0 | 10 | 20 | 30 | 40 | 50 | |
| | <i>Boring terminated at approximately 31 feet</i> | | <i>S-6</i> | <i>0</i> | | | | | | | | |
| -5 | | | | | | | | | | | | |
| -10 | | | | | | | | | | | | |
| -15 | | | | | | | | | | | | |
| -20 | | | | | | | | | | | | |
| -25 | | | | <i>1</i> | | | | | | | | |
| -30 | | | | | | | | | | | | |

LEGEND


 2-inch OD split-spoon sample



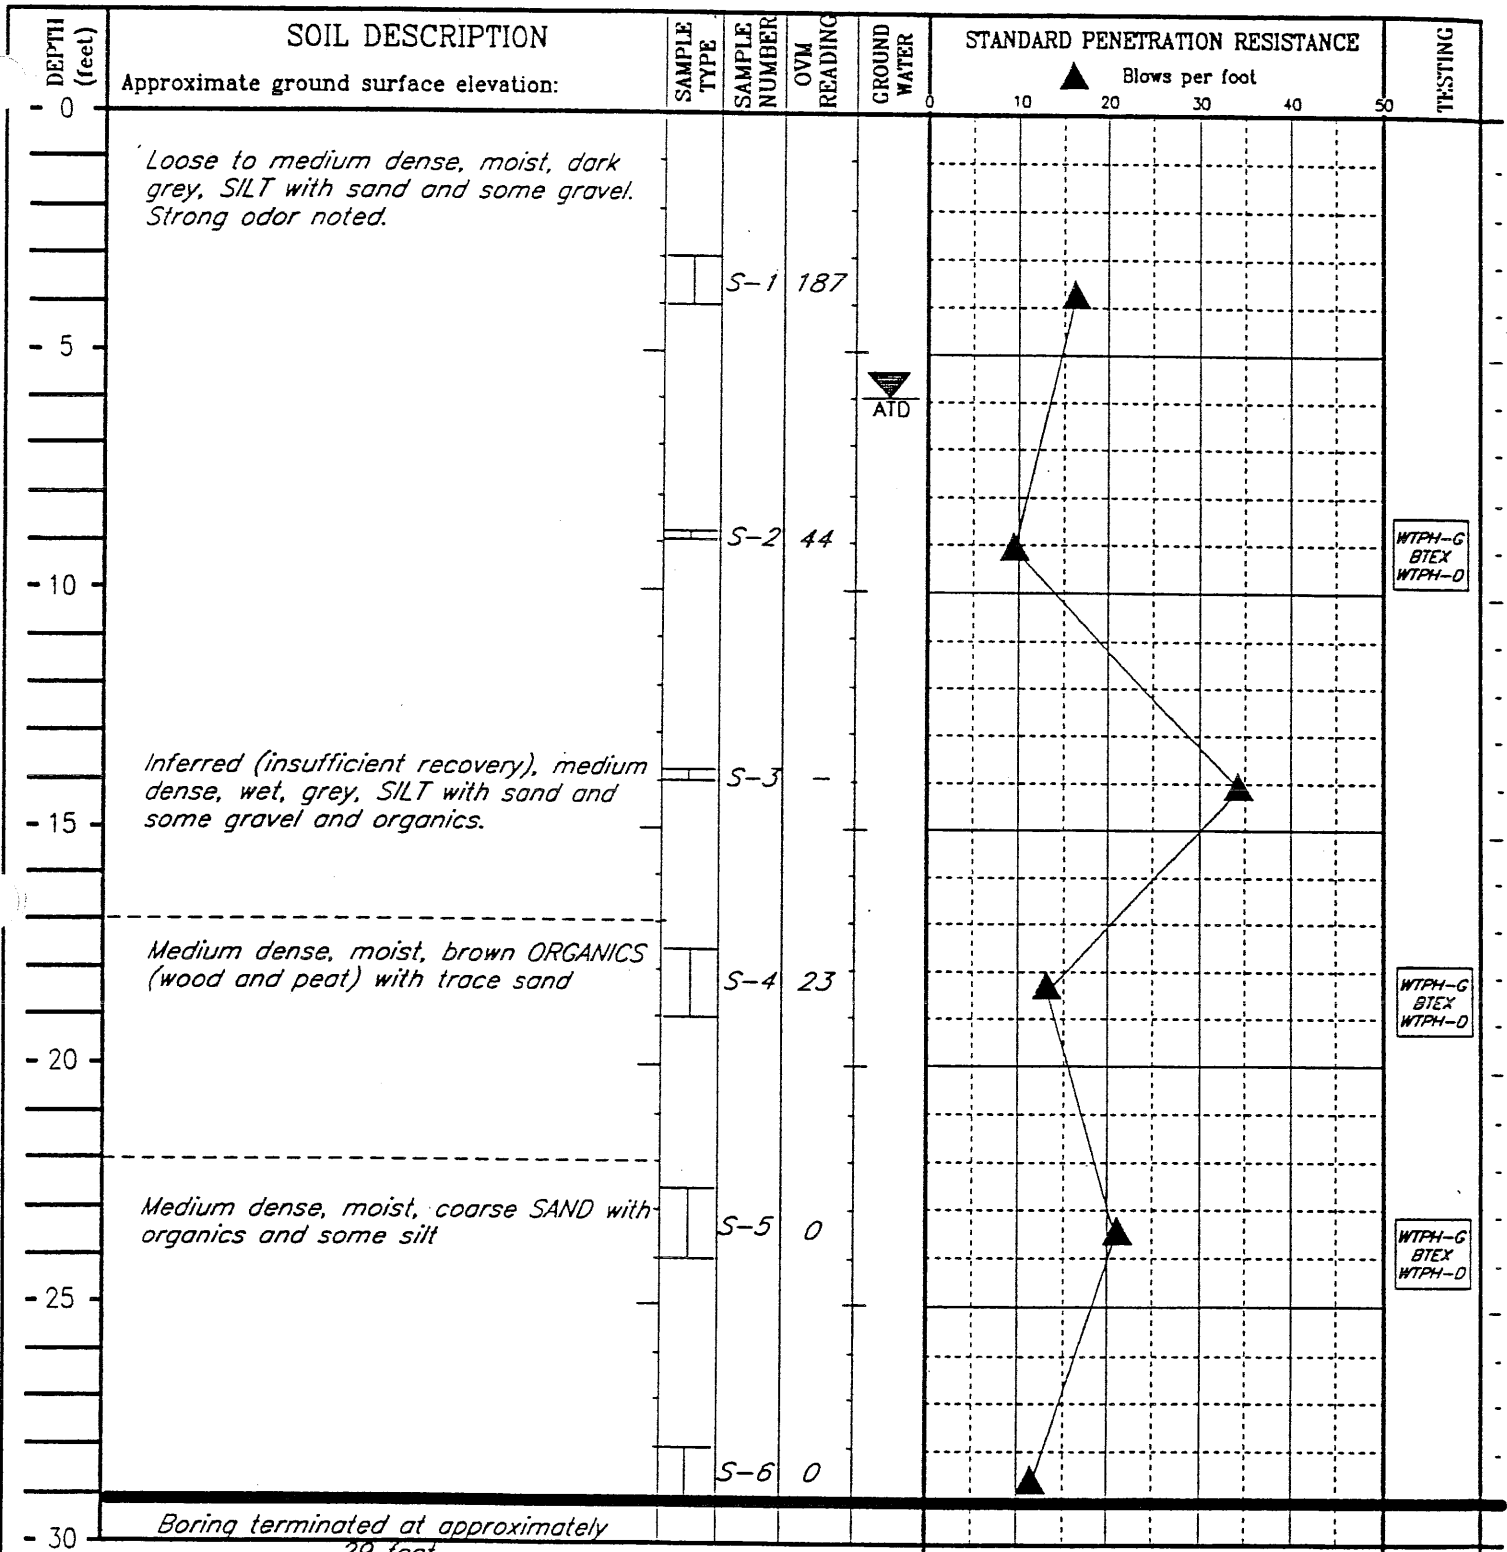

RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005




LEGEND


 2-inch OD split-spoon sample

 Groundwater level at time of drilling

 Soil analyses method



RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
Geotechnical & Environmental Consultants
 1400 140Lb Ave NE
 Bellevue, Washington 98005

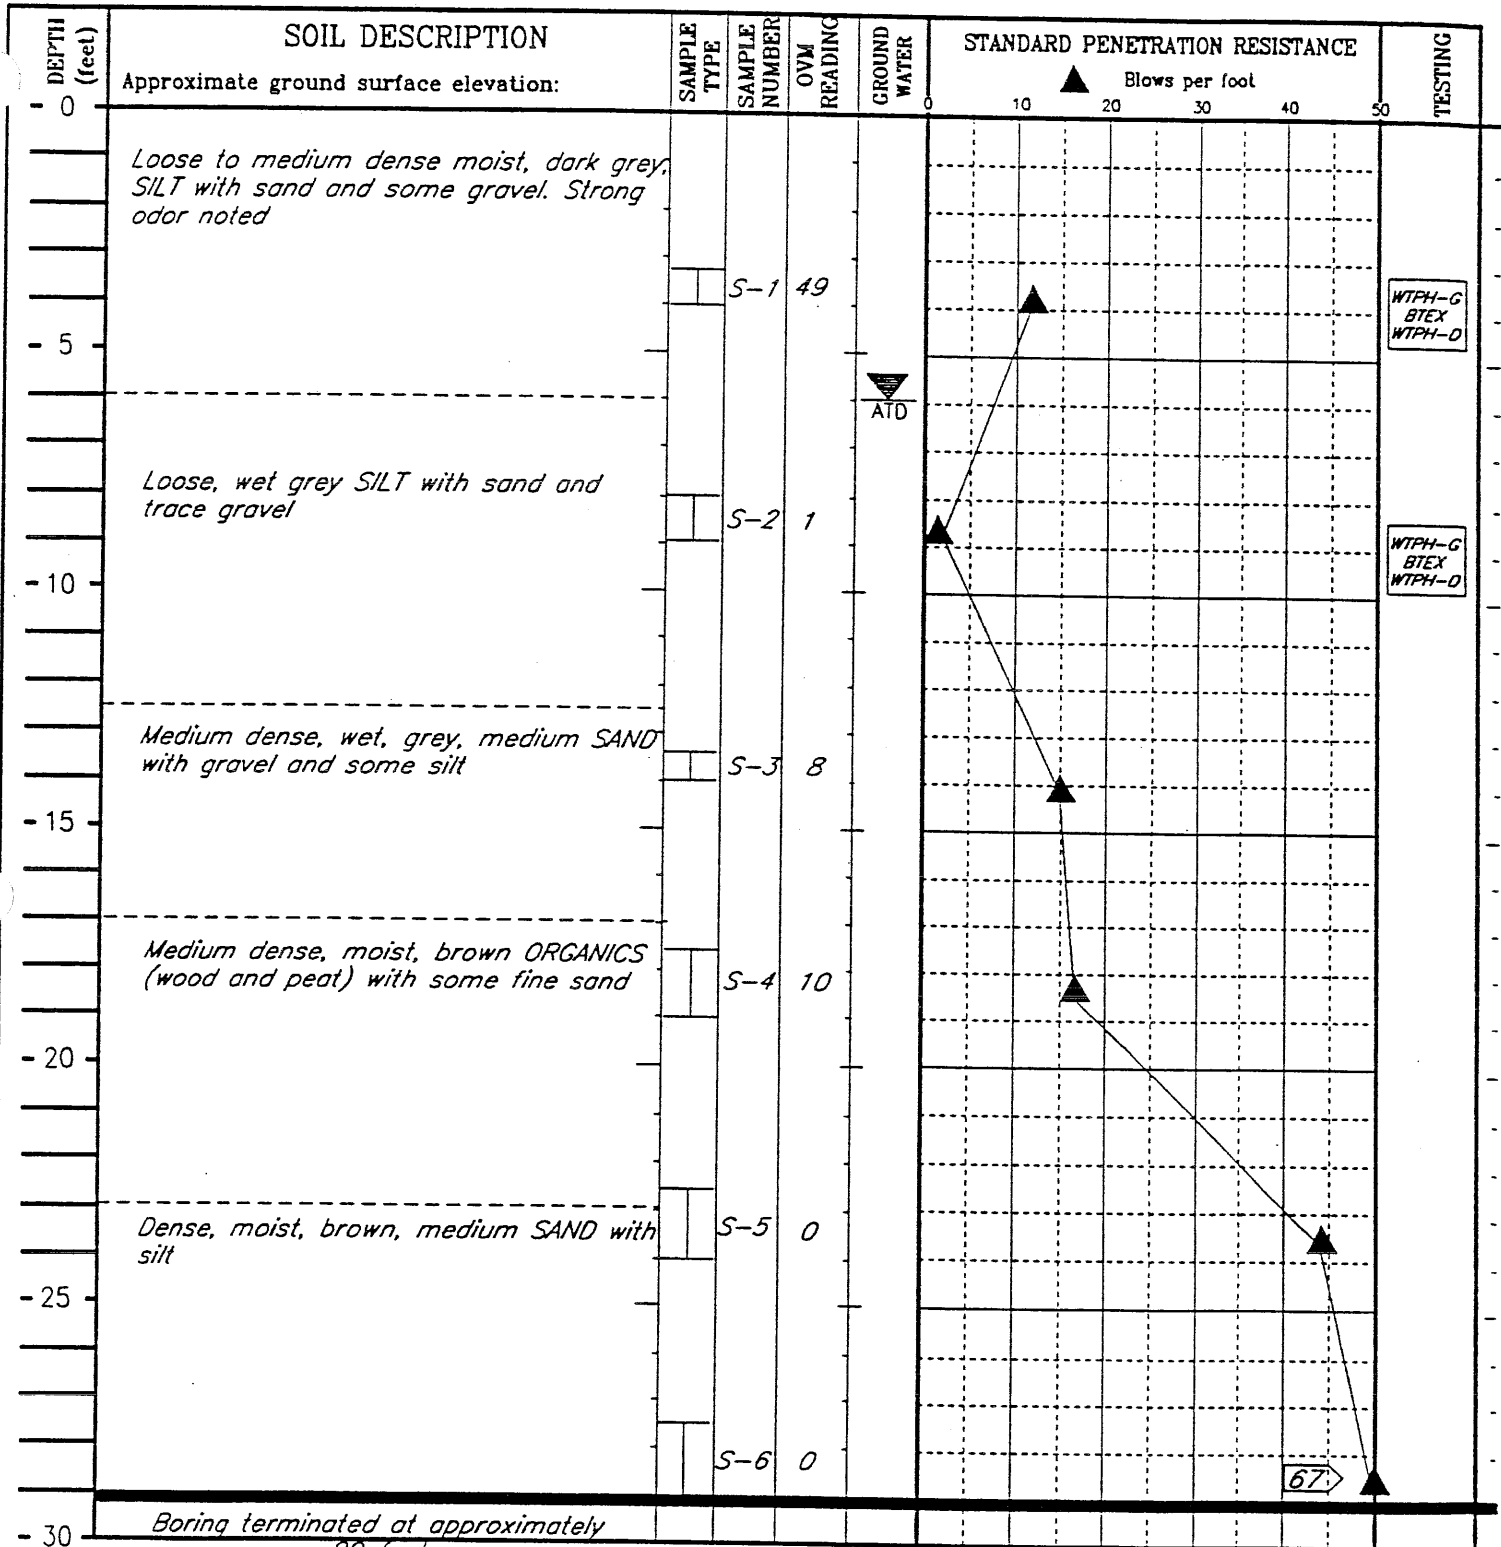


LEGEND


I 2-inch OD split- spoon sample

▼ Groundwater level at time of drilling
ATD

WTPH-G
BTEX
WTPH-D
Soil analyses method



RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
Geotechnical & Environmental Consultants
1400 140th Ave NE
Bellevue, Washington 98005

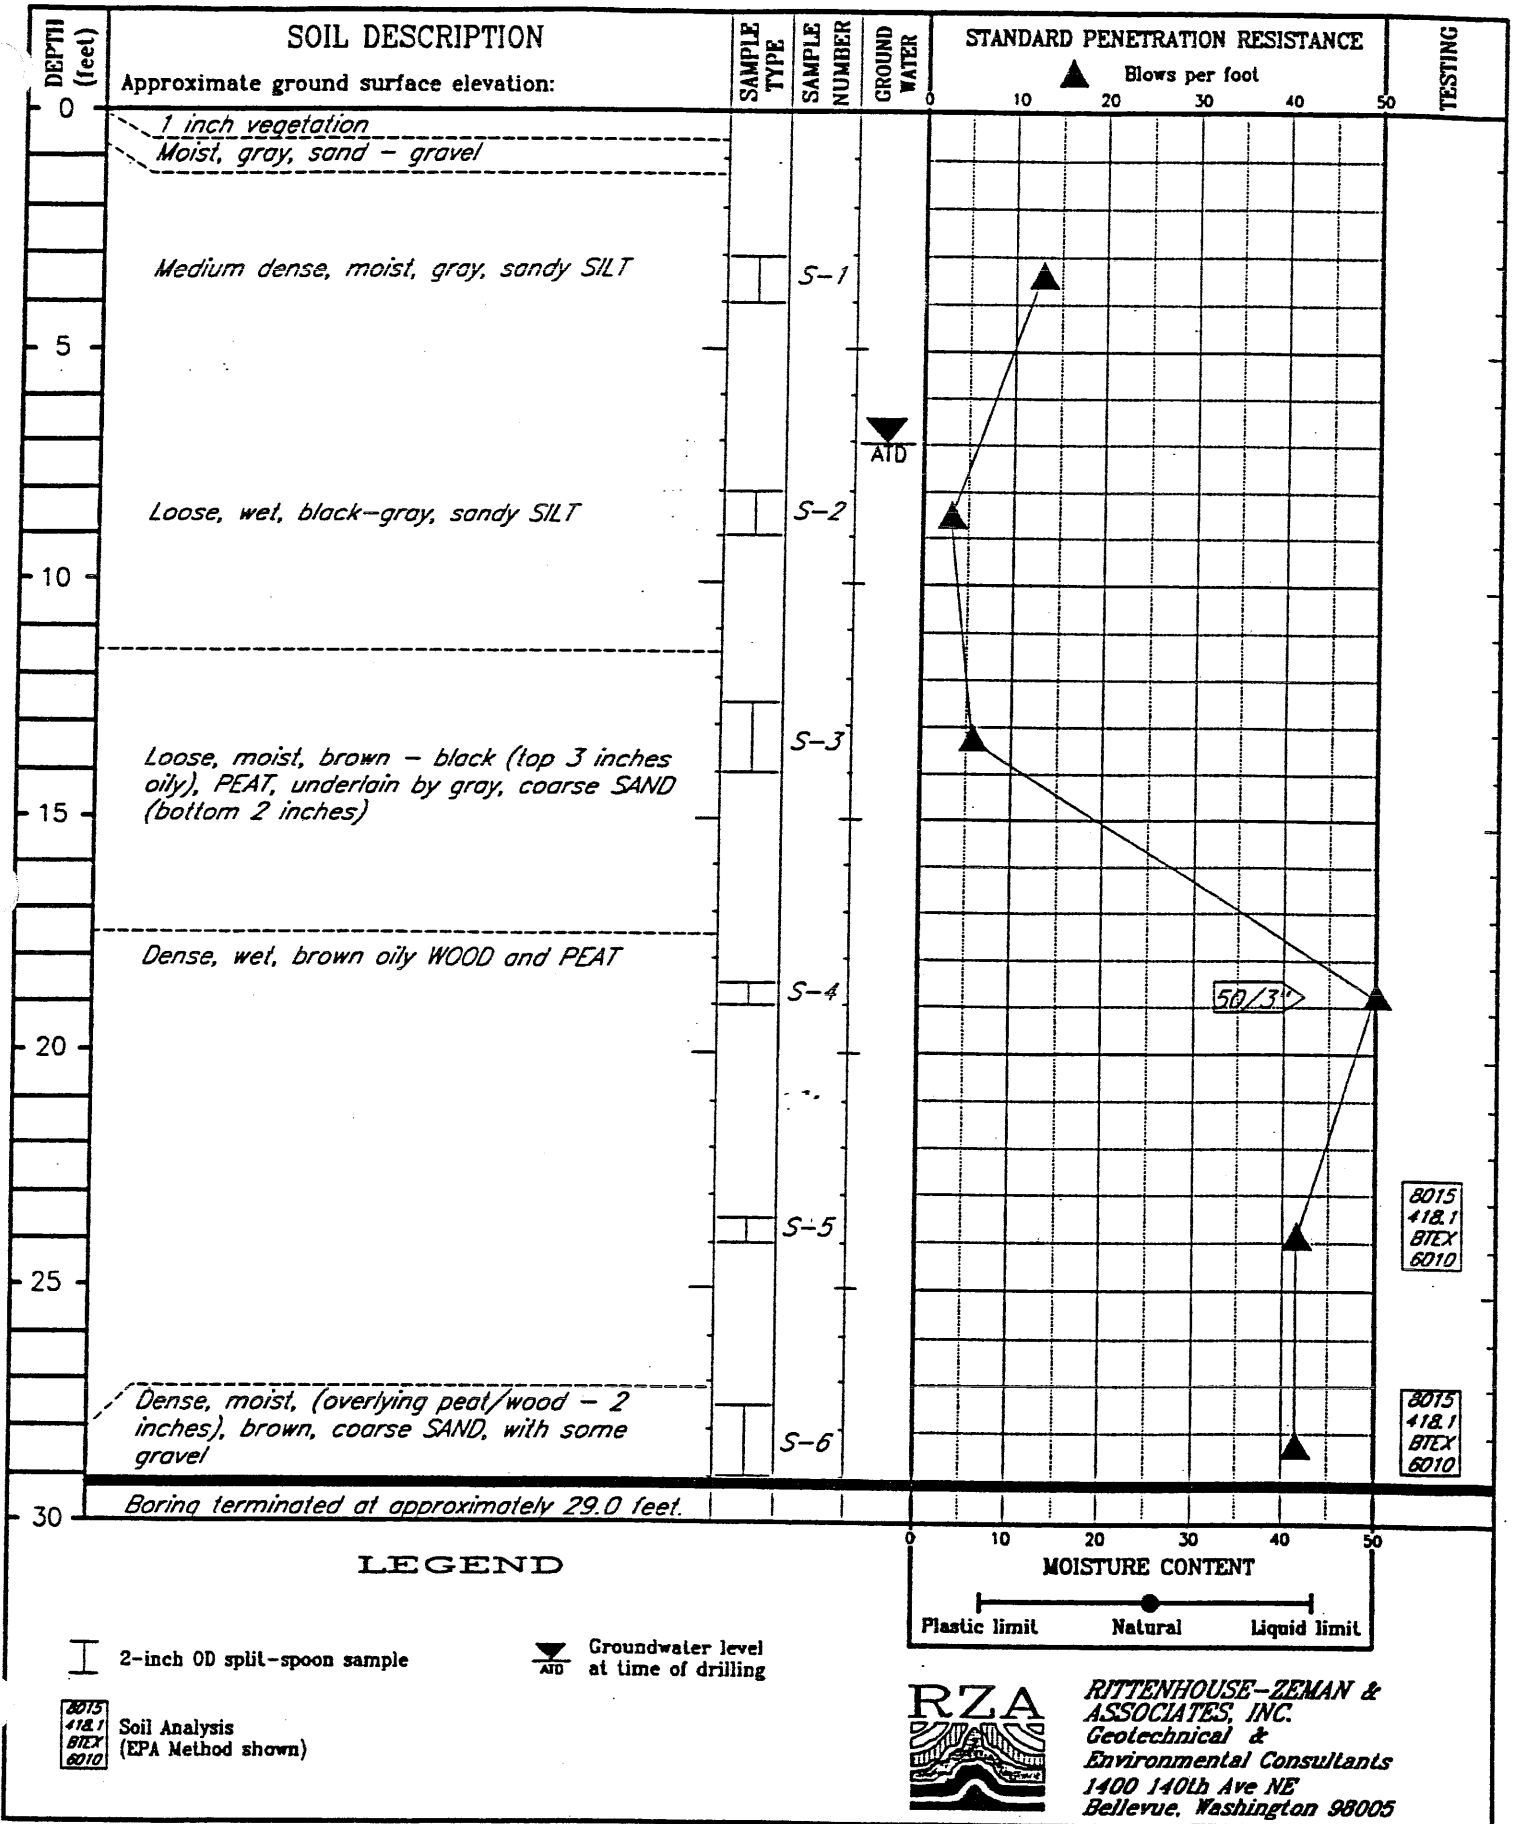

PROJECT: *Everett Mobil Bulk Plant* W.O. 11-04558-04 WELL NO. B-34


Elevation reference: N/A Well completed: N/A
 Ground surface elevation: N/A Casing elevation: N/A


AS-BUILT DESIGN


Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVN READING | GROUND WATER | TESTING |
|--------------|---|-------------|---------------|-------------|-------------|--------------|---|
| 0 | | | | | | | |
| | Loose, moist, brown, silty, fine to medium SAND interbedded with gray, sandy SILT with trace gravel | | S-1 | 5 | 17 | | Boring abandoned by backfilling with bentonite. |
| | | | S-2 | | 69 | | |
| 5 | | | S-3 | | | ▼ ATD | |
| | Medium dense to dense, saturated, gray, silty, fine to medium SAND with some wood debris | | S-4 | 41 | 80 | | |
| | | | | | | | |
| 10 | Grades to grayish-black, silty, medium to coarse SAND | | S-5 | 12 | | | |
| | | | | | | | |
| 15 | Bottom of boring at 14 feet. Petroleum-like staining and odor observed in all samples. Field FT-IR analysis of sample S-5 indicated > 10,000 ppm TPH. | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

LEGEND

 2-inch O.D. split-spoon sample

 Observed groundwater level
ATD = at time of drilling

 3-inch OD Shelby sampler

RZA AGRA, Inc.
 Geotechnical & Environmental Group

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started:

06 December 1993

Drilling completed:

06 December 1993

Logged by:

GKS

Bobcat Boring Logs

BB-1

Gray, moist to wet, silty, gravelly SAND with some cobbles. Slow seepage at approximately 1.0 foot; no other seepage encountered; soil exhibits a petroleum hydrocarbon-like odor. No LPH observed. Met with refusal at approximately 3.0 feet.

BB-2

Gray, moist to wet, gravelly SAND. Slow seepage at approximately 1.5 feet; no other seepage encountered; soil exhibits a petroleum hydrocarbon-like odor. Seepage from 1.5 foot depth pooled at bottom of boring and exhibits an iridescent sheen. No LPH observed. Boring terminated at a depth of approximately 4.0 feet.

BB-3

Gray, moist to wet, gravelly SAND with some gravel. Slow seepage below approximately 2.5 feet; soil exhibits a petroleum hydrocarbon-like odor. Discontinuous blebs of LPH observed on water pooled at the bottom of the boring. Boring terminated at a depth of approximately 4.0 feet. Boring allowed to remain open approximately two hours; discontinuous blebs of LPH still present on the water pooled in the bottom of the boring.

BB-4

Gray, moist to wet, silty, gravelly SAND with some wood debris. Slow seepage at approximately 1.0 foot; soil exhibits a petroleum hydrocarbon-like odor. Moderate seepage observed below approximately 3.5 feet. Approximately 0.01 to 0.02 feet of LPH accumulated on groundwater in the boring. Boring terminated at a depth of approximately 4.0 feet.

BB-5

Dark gray, wet, SAND with some silt, gravel, and wood debris. Moderate seepage observed below approximately 3.0 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet; caved to approximately 3.5 feet. Gauged fluid at bottom of boring using Colorcut paste; it appeared to be 100% LPH. Collected two bottles of LPH for potential future laboratory analysis; collected one bag sample of soil for possible sieve analysis.

BB-6

Gray, moist to wet, gravelly, SAND with some silt. LPH seepage observed at approximately 3.8 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Gauged fluid at bottom of boring using Colorcut paste; it appeared to be 100% LPH.

BB-7

Gray, moist to wet, gravelly, SAND with some silt and wood debris. Slow water and LPH seepage observed at approximately 1.0 feet; rapid LPH seepage observed below approximately 3.5 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Gauged fluid at bottom of boring using Colorcut paste; it appeared to be 100% LPH.

BB-8

Gray, moist to wet, gravelly SAND with some silt; scattered glass shards. LPH observed on tip of auger at approximately 2.5 feet. Slow seepage observed below approximately 3.8 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Gauged fluid at bottom of boring using Colorcut paste approximately one hour after drilling boring; LPH thickness approximately 0.05 feet.

BB-9

Gray, moist to wet, gravelly SAND with some silt. Slow seepage observed at approximately 1.5 feet. Slow seepage observed again below approximately 3.8 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Gauged fluid at bottom of boring using Colorcut paste; fluid appears to be a mixture of LPH and water (stains tape black like LPH but changes Colorcut from yellow to red like water).

BB-10

Gray, moist to wet, gravelly SAND with some silt and cobbles. No seepage observed; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet.

BB-11

Gray, moist to wet, gravelly SAND with some silt. No seepage observed in boring but soil and auger tip appears to be saturated with water; no LPH observed. Soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Boring left open overnight. Fluid level in boring in 5/23/96 was at approximately 3.0 feet. Gauged fluid with Colorcut paste; LPH thickness measured in boring using this method was approximately four inches. Collected two bottles of LPH for potential future laboratory analysis; collected one bag sample of soil for possible sieve analysis.

BB-12

Gray, wet, gravelly SAND with some silt. Rapid seepage observed below approximately 3.0 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Seepage accumulated in the boring to a depth of approximately 2.0 feet. Gauged fluid at bottom of boring using Colorcut paste; LPH thickness approximately 0.01 feet. Collected two bottles of LPH for potential future laboratory analysis.

BB-13

Gray, moist, gravelly SAND overlying saturated $\frac{3}{4}$ -inch minus round rock at approximately 2.0 feet. LPH on tip of auger when removed from the boring. However, boring caved as fast as the auger was removed; consequently, LPH thickness was indeterminate; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet.

BB-14

Gray, moist, gravelly SAND with some silt and scattered metal debris. No seepage observed; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet.

LOG OF
EXPLORATORY BORING

Project No: 05-487-002 Boring No: W-1
 Date: 2-23-90
 Client: American Distributing Co Driller: Geotech
 Location: Bulk Terminal-Everett, Drilling Method: CMEC-55
 Hollow Stem Auger
 Logged by: G. Stuesse Hole Diameter: 7"
 Installation Data: (See Below) Page No: 1 of 1


Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time: | Date: | Comments: |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|---|-------|-------|-----------|
| 0 - | | 4.00 | | Ring @ 3.0' | Pt | 0-3.0" Asphalt | | | |
| 2 - | | | | | | 3.0' Organic debris, silty, brown, loose, moist, primarily wood shavings, slight organic odor | | | |
| 4 - | | | | | | | | | |
| 6 - | | | | | | | | | |
| 8 - | | | | | | | | | |
| 10 - | | | | | | 10.0' Silt, brown, soft, wet, wood shavings, slight odor. | | | |
| 12 - | | | | | | ML | | | |
| 14 - | | | | | | | | | |
| 16 - | | | | | | | | | |
| 18 - | | | | | | 15.0' Silt, brown, soft, wet, wood shavings, slight petroleum sheen on cuttings. | | | |
| 20 - | ML | | | | | | | | |
| 22 - | | | | | | | | | |
| 24 - | | | | | | | | | |
| 26 - | | | | | | | | | |
| 28 - | | | | | | | | | |
| 30 - | | | | | | | | | |
| 32 - | | | | | | | | | |
| 34 - | | | | | | | | | |
| 36 - | | | | | | | | | |
| 38 - | | | | | | | | | |
| 40 - | | | | | | | | | |
| 42 - | | | | | | | | | |
| 44 - | | | | | | | | | |
| 46 - | | | | | | | | | |
| 48 - | | | | | | | | | |
| 50 - | | | | | | | | | |
| 52 - | | | | | | | | | |
| 54 - | | | | | | | | | |
| 56 - | | | | | | | | | |
| 58 - | | | | | | | | | |
| 60 - | | | | | | | | | |
| 62 - | | | | | | | | | |
| 64 - | | | | | | | | | |
| 66 - | | | | | | | | | |
| 68 - | | | | | | | | | |
| 70 - | | | | | | | | | |
| 72 - | | | | | | | | | |
| 74 - | | | | | | | | | |
| 76 - | | | | | | | | | |
| 78 - | | | | | | | | | |
| 80 - | | | | | | | | | |
| 82 - | | | | | | | | | |
| 84 - | | | | | | | | | |
| 86 - | | | | | | | | | |
| 88 - | | | | | | | | | |
| 90 - | | | | | | | | | |
| 92 - | | | | | | | | | |
| 94 - | | | | | | | | | |
| 96 - | | | | | | | | | |
| 98 - | | | | | | | | | |
| 100 - | | | | | | | | | |
| | TD=23.0' | | | | | Installation Data: Screen: 23.0' - 3.0' Blank: 3.0' - 0 Sand: 23.0' - 2.0' Bentonite: 2.0' - 1.0' Concrete: 1.0' - 0 | | | |

**LOG OF
EXPLORATORY BORING**

Project No: 05-487-002 Boring No: W-2
 Date: 2-22-90
 Client: American Distributing Co Driller: Geotech
 Location: Bulk Terminal-Everett, Drilling Method: CMEC-55
 Hollow Stem Auger
 Logged by: G. Stuesse Hole Diameter: 7"
 Installation Data: (See Below) Page No: 1 of 1

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time: | Date: | Comments: |
|------------|---|---------|---------------------------|-----------------------|------------------------------|--|-------|-------|--------------------------------|
| | | | | | | | | | |
| 0 - |  | 11 | 60 | Ring @ 3.0' | ----- | | | | 0-3" Gravel; degraded asphalt. |
| 2 - | | | | | SW | 3-5" Sand, fine-coarse, grey, loose, very moist, occasional fine gravel, slight-moderate oily odor, dark brown, oily film on outside of sampler. | | | |
| 4 - | | | | | SW | 5.0' Sand, fine-coarse, grey, loose, wet, occasional fine gravel, slight, moderate oily, odor, dark brown oily film on outside of sampler. | | | |
| 6 - | | | | | SW | 15.0' Sand, fine-coarse, grey, loose, wet, occasional coarse gravel, slight-medium oily odor, dark brown oily film on outside of sampler. | | | |
| 8 - | | | | | SW | 20.0' Sand, fine coarse, grey, loose, wet, occasional coarse gravel, slight-medium oily odor, dark brown oily film on outside of sampler. | | | |
| 10 - | | | | | OL | 23.0' Clay, brown, soft, wet, possible organic, very slight organic odor. | | | |
| 12 - | | | | | | | | | |
| 14 - | | | | | | | | | |
| 16 - | | | | | | | | | |
| 18 - | | | | | | | | | |
| 20 - | | | | | | | | | |
| 22 - | | | | | | | | | |
| 24 - | | | | | | | | | |
| 26 - | | | | | | | | | |
| 28 - | | | | | | | | | |
| 30 - | | | | | | | | | |
| 32 - | | | | | | | | | |
| 34 - | | | | | | | | | |
| 36 - | | | | | | | | | |
| 38 - | | | | | | | | | |
| 40 - | | | | | | | | | |
| 42 - | | | | | | | | | |
| 44 - | | | | | | | | | |
| 46 - | | | | | | | | | |
| 48 - | | | | | | | | | |
| 50 - | | | | | | | | | |
| 52 - | | | | | | | | | |
| 54 - | | | | | | | | | |
| 56 - | | | | | | | | | |
| 58 - | | | | | | | | | |
| 60 - | | | | | | | | | |
| 62 - | | | | | | | | | |
| 64 - | | | | | | | | | |
| 66 - | | | | | | | | | |
| 68 - | | | | | | | | | |
| 70 - | | | | | | | | | |
| 72 - | | | | | | | | | |
| 74 - | | | | | | | | | |
| 76 - | | | | | | | | | |
| 78 - | | | | | | | | | |
| 80 - | | | | | | | | | |
| 82 - | | | | | | | | | |
| 84 - | | | | | | | | | |
| 86 - | | | | | | | | | |
| 88 - | | | | | | | | | |
| 90 - | | | | | | | | | |
| 92 - | | | | | | | | | |
| 94 - | | | | | | | | | |
| 96 - | | | | | | | | | |
| 98 - | | | | | | | | | |
| 100 - | | | | | | | | | |

Installation Data:
 Screen: 23.0' - 3.0'
 Blank: 3.0' - 0'
 Sand: 23.0' - 2.0'
 Bentonite: 2.0' - 1.0'
 Concrete: 1.0' - 0'

NOTE: The lower 3.0' of well could not be sand packed due to heaving sands.

TD=23.0'

LOG OF
EXPLORATORY BORING

Project No: 05-487-002 Boring No: W-3
 Date: 2-22-90
 Client: American Distributing Co Driller: Geotech
 Location: Bulk Terminal-Everett, Drilling Method: CMEC-55
 Hollow Stem Auger
 Logged by: G. Stuesse Hole Diameter: 7"
 Installation Data: (See Below) Page No: 1 of 1

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time: | Date: | Comments: |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|-------------|-------|-------|---|
| 0 - | | 11 | | Ring @ 3.0' | SP | | | | 0-3" Asphalt |
| 2 - | | | | | | | | | 3.0' Sand, slight silty, fine-medium, grey, loose, moist, occasional gravel, no odor. |
| 4 - | | | | | | | | | 7.0' Sand, slight silty, fine-medium, grey, loose, wet, occasional gravel, no odor. |
| 6 - | | | | | | | | | |
| 8 - | | | | | | | | | 15.0' Sand, slight silty, fine-medium, grey, loose, wet, occasional gravel, no odor. |
| 10 - | | | | | | | | | |
| 12 - | | | | | | | | | |
| 14 - | | | | | | | | | |
| 16 - | | | | | | | | | |
| 18 - | | | | | | | | | |
| 20 - | | | | | | | | | 20.0' Sand, slight silty, fine-medium, grey, loose, wet, occasional gravel, no odor. |
| 22 - | | | | | | | | | |
| 23.0 - | TD=23.0' | | | | | | | | NOTE: Vapors from well have H2S odor. |
| | | | | | | | | | Installation Data: Screen: 23.0' - 3.0' Blank: 3.0' - 0' Sand: 23.0' - 2.0' Bentonite: 2.0' - 1.0' Concrete: 1.0' - 0' |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-4

Date: 2/22/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal

Drilling Method:

Everett, WA

Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|---------------|-------------|---------|---------------------------------|------------------------------------|------------------------------------|-------------|------|--|------------------|
| | | | | | | | | | |
| 0 | | 16 | 0 | Ring @ 4' | SM | | | | 0 - 3" Concrete. |
| 2 | | | | | | | | @ 4' Sand, silty, fine to medium grained, gray/brown, loose, wet, moderate odor, film of brown oil on sampler. | |
| 4 | | | | | | | | @ 10' Sand, silty, fine to medium grained, gray/brown, loose, wet, moderate odor, pieces of glass, metal and wood. | |
| 6 | | | | | | | | @ 15' Clay, organic, brown, soft, wet, pieces of wood, very slight odor. | |
| 8 | | | | | | | | | |
| 10 | | | | | | | | @ 20' Clay, organic, brown, soft, wet, pieces of wood, very slight odor. | |
| 12 | | | | | | | | | |
| 14 | | | | | | | | | |
| 16 | | | | | | | | | |
| 18 | | | | | | | | | |
| 20 | | | | | | | | | |
| 22 | | | | | | | | | |
| 23 | | | | | | | | | |
| 24 | | | | | | | | | |
| 26 | | | | | | | | | |
| 28 | | | | | | | | | |
| 30 | | | | | | | | | |
| 32 | | | | | | | | | |
| 34 | | | | | | | | | |
| 36 | | | | | | | | | |
| 38 | | | | | | | | | |
| 40 | | | | | | | | | |
| 42 | | | | | | | | | |
| 44 | | | | | | | | | |
| 46 | | | | | | | | | |
| 48 | | | | | | | | | |
| 50 | | | | | | | | | |
| 52 | | | | | | | | | |
| 54 | | | | | | | | | |
| 56 | | | | | | | | | |
| 58 | | | | | | | | | |
| 60 | | | | | | | | | |
| 62 | | | | | | | | | |
| 64 | | | | | | | | | |
| 66 | | | | | | | | | |
| 68 | | | | | | | | | |
| 70 | | | | | | | | | |
| 72 | | | | | | | | | |
| 74 | | | | | | | | | |
| 76 | | | | | | | | | |
| 78 | | | | | | | | | |
| 80 | | | | | | | | | |
| 82 | | | | | | | | | |
| 84 | | | | | | | | | |
| 86 | | | | | | | | | |
| 88 | | | | | | | | | |
| 90 | | | | | | | | | |
| 92 | | | | | | | | | |
| 94 | | | | | | | | | |
| 96 | | | | | | | | | |
| 98 | | | | | | | | | |
| 100 | | | | | | | | | |
| | | | | Installation Data: Screen 23' - 3' | | | | | |
| | | | | Blank 3' - 0' | | | | | |
| | | | | Sand 23' - 2' | | | | | |
| | | | | Bentonite 2' - 1' | | | | | |
| | | | | Concrete 1' - 0' | | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003 Boring No: W-5
 Date: 2/22/90
 Client: American Distributing Co. Driller:
 Location: Bulk Terminal Drilling Method:
 Everett, WA Hole Diameter: 7"
 Logged By: Page No: 1 of 1
 Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|--|------|------|---|
| | | | | | | | | | |
| 0 - | | 28 | 50 | Ring @ 3' | SP | | | | 0 - 6" Gravel. |
| 2 - | | | | | | @ 3' Sand, fine to medium grained, slightly silty, gray, loose, moist, slight odor, pieces of wood and metal. | | | |
| 4 - | | | | | | @ 6' Sand, fine to medium grained, slightly silty, gray, loose, wet, slight odor, film of brown oil on cuttings. | | | |
| 6 - | | | | | | | | | |
| 8 - | | | | | | | | | |
| 10 - | | | | | | | | | |
| 12 - | | | | | | | | | |
| 14 - | | | | | | | | | |
| 16 - | | | | | | | | | |
| 18 - | | | | | | | | | |
| 20 - | | | | | | | | | |
| 22 - | | | | | | | | | |
| 24 - | | | | | | | | | |
| 26 - | | | | | | | | | |
| 28 - | | | | | | | | | |
| 30 - | | | | | | | | | |
| 32 - | | | | | | | | | |
| 34 - | | | | | | | | | |
| 36 - | | | | | | | | | |
| 38 - | | | | | | | | | |
| 40 - | | | | | | | | | |
| 42 - | | | | | | | | | |
| 44 - | | | | | | | | | |
| 46 - | | | | | | | | | |
| 48 - | | | | | | | | | |
| 50 - | | | | | | | | | |
| 52 - | | | | | | | | | |
| 54 - | | | | | | | | | |
| 56 - | | | | | | | | | |
| 58 - | | | | | | | | | |
| 60 - | | | | | | | | | |
| 62 - | | | | | | | | | |
| 64 - | | | | | | | | | |
| 66 - | | | | | | | | | |
| 68 - | | | | | | | | | |
| 70 - | | | | | | | | | |
| 72 - | | | | | | | | | |
| 74 - | | | | | | | | | |
| 76 - | | | | | | | | | |
| 78 - | | | | | | | | | |
| 80 - | | | | | | | | | |
| 82 - | | | | | | | | | |
| 84 - | | | | | | | | | |
| 86 - | | | | | | | | | |
| 88 - | | | | | | | | | |
| 90 - | | | | | | | | | |
| 92 - | | | | | | | | | |
| 94 - | | | | | | | | | |
| 96 - | | | | | | | | | |
| 98 - | | | | | | | | | |
| 100 - | | | | | | | | | |
| | TD=23' | | | | | | | | Installation Data: Screen 23' - 3' Blank 3' - 0' Sand 23' - 2' Bentonite 2' - 1' Concrete 1' - 0' |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-6

Date: 2/23/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method:

Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments | | | | |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|------------------------------------|------|------|---|--|--|--|---|
| | | | | | | | | | | | | | |
| 0 - | | 19 | 30 | Ring @ 3' | SM | | | | @ 0 - 5' Sand, slightly silty, fine to medium grained, gray, loose moist, slight odor, some gravel. | | | | |
| 2 - | | | | | | | | | | | | | |
| 4 - | | | | | | | | | | | | | |
| 6 - | | | | | | | | | | | | | @ 6' Sand, slightly silty, fine to medium grained, gray, loose, wet, slight odor, some gravel, pieces of wood, brown oily film on water and cuttings. |
| 8 - | | | | | | | | | | | | | |
| 10 - | | | | | | | | | | | | | @ 10' Sand, very silty, fine to medium grained, gray, loose, wet, slight odor, some gravel, pieces of wood, brown oily film on water and cuttings. |
| 12 - | | | | | | | | | | | | | |
| 14 - | | | | | | | | | | | | | |
| 16 - | | | | | | | | | | | | | |
| 18 - | | | | | | | | | | | | | |
| 20 - | | | | | OL | | | | @ 20' Clay, organic, dark brown, soft, wet, hydrogen sulfide odor. | | | | |
| 22 - | | | | | | | | | | | | | |
| 24 - | | | | | | | | | | | | | |
| 26 - | | | | | | | | | | | | | |
| TD=23' | | | | | | Installation Data: Screen 23' - 3' | | | | | | | |
| | | | | | | Blank 3' - 0' | | | | | | | |
| | | | | | | Sand 23' - 2' | | | | | | | |
| | | | | | | Bentonite 2' - 1' | | | | | | | |
| | | | | | | Concrete 1' - 0' | | | | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-8

Date: 6/28/90

Client: American Distributing Co.

Driller: ESE

Location: Bulk Terminal

Drilling Method: Hand Auger

Everett, WA

Hole Diameter: 4"

Logged By: G. Stuesse

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: | |
|------------|---------------|---------|---------------------------|-----------------------|------------------------------|---|------|------|--|--|
| | | | | | | | | | | |
| 0 - | <p>TD=10'</p> | | | | SM | | | | 0 - 3' Sand, silty, brown, loose, moist to wet, no odor. | |
| - | | | | | | | | | @ 3' - 10' Silt, gray, soft, wet, slight odor. | |
| 2 - | | | | | | ML | | | | |
| - | | | | | | | | | | |
| 4 - | | | | | | | | | | |
| - | | | | | | | | | | |
| 6 - | | | | | | | | | | |
| - | | | | | | | | | | |
| 8 - | | | | | | | | | | |
| 0 | | | | | | | | | | |
| | | | | | | Installation Data: Screen 10' - 2' Blank 2' - 0' Sand 10' - 1' Bentonite 1' - .5' Concrete .5' - 0' | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-11

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal

Drilling Method: Hand Auger

Everett, WA

Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: | |
|---------------|----------------|---------|--------------------------------------|--------------------------|------------------------------------|---------------------------------------|------|------|---|--|
| | | | | | | | | | | |
| 0 - | | | | | Pt | | | | 0 - 2' Peat, silty, brown, moist, no odor. @ 2' - 6.5' Peat, brown, wet, brown, oil sheen. | |
| - | | | | | | | | | | |
| 2 - | | | | | | | | | | |
| - | | | | | | | | | | |
| 4 - | | | | | | | | | | |
| 6 - | | | | | | | | | | |
| - | TD=6.5' | | | | | Installation Data: Screen 6.5' - 1.5' | | | | |
| - | | | | | | Blank 1.5' - 0 | | | | |
| - | | | | | | Sand 6.5' - 1.0' | | | | |
| - | | | | | | Bentonite 1.0' - 0.5' | | | | |
| - | | | | | | Concrete 0.5' - 0 | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-14

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|---------------|--|---------|--------------------------------------|--------------------------|------------------------------------|-------------|------|------|---|
| | | | | | | | | | |
| 0 - |  | | | | ML | | | | 0 - 6.5' Silt, sandy, moist to wet, very slight odor. |
| 2 - | | | | | | | | | |
| 4 - | | | | | | | | | |
| 5 - | | | | | | | | | |
| 6.5 - | | TD=6.5' | | | | | | | Installation Data: Screen 6.5' - 2.0' Blank 2.0' - 0' Sand 6.5' - 1.0' Bentonite 1.0' - 0.5' Concrete 0.5' - 0' |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-15

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

location of boring:

| epth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|--------------|--|---------|--------------------------------------|--------------------------|------------------------------------|-------------|------|------|---|
| | | | | | | | | | |
| 0 - |  | | | | | | | | 0 - 7' Silt, some sand and cobbles, moist to wet, slight odor. Installation Data: Screen 6.0' - 1.5' Blank 1.5' - 0 Sand 6.0' - 1.0' Bentonite 1.0' - 0.5' Concrete 0.5' - 0 |
| 2 - | | | | ML | | | | | |
| 4 - | | | | | | | | | |
| 6 - | | | | | | | | | |
| 8 - | | TD=7' | | | | | | | |
| - | | | | | | | | | |
| - | | | | | | | | | |
| - | | | | | | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-16

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method: Band Auger


Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|---------------|--|---------|--------------------------------------|--------------------------|------------------------------------|---|------|------|---|
| | | | | | | | | | |
| 0 - |  | | | | ML | | | | 0 - 6' Silt, some sand and gravel, moist to wet, occasional cobbles, oil on ground water surface. |
| 2 - | | | | | | | | | |
| 4 - | | | | | | | | | |
| 6 - | | | | | | | | | |
| 8 - | | | | | | | | | |
| - | | | | | | | | | |
| | TD=6' | | | | | Installation Data: Screen 6' - 2' Blank 2' - 0' Sand 6' - 1' Bentonite 1' - .5' Concrete .5' - 0' | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-17

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: | |
|------------|---|---------|---------------------------|-----------------------|------------------------------|-------------|------|------|---|-----------------------------------|
| 0 - |  | | | | ML | | | | 0 - 6' Silt, some sand and gravel, moist to wet, occasional cobbles, oil on ground water surface. | |
| 2 - | | | | | | | | | | |
| 4 - | | | | | | | | | | |
| 6 - | | | | | | | | | | |
| 8 - | | TD=6' | | | | | | | | Installation Data: Screen 6' - 2' |
| - | | | | | | | | | | Blank 2' - 0' |
| - | | | | | | | | | Sand 6' - 1' | |
| - | | | | | | | | | Bentonite 1' - .5' | |
| - | | | | | | | | | Concrete .5' - 0' | |

Mobil Oil/ADC Bulk

PROJECT: **Plant Properties**

W.O. 11-04558-09 WELL NO. GP-1


Elevation reference: *Unknown*
Ground surface elevation: *Unknown*

Well completed: **19 March 1996**
Casing elevation: *Unknown*

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|--|-------------|----------------|-------------|-------------|----------------|
| 0 | Gravel Surfacing over moist, brown, silty, gravelly SAND, non-odorous | | | | | |
| | Weathered, red clay brick | | | | | |
| | Moist, brown, silty, fine SAND with some gravel and minor brick fragments | | GP-1/ 3.0' | | 0.0 | |
| 5 | | | | | | |
| | Moist to wet, gray, fine to medium SAND, petroleum odor at 7.0 feet | | GP-1/ 8.0' | | 27.0 | 3/22/96 ATD |
| | Grades to wet, gray, fine to coarse SAND (3-inch fine sandy silt layer at 10.0 feet) | | GP-1/ 10.0' | | 7.0 | |
| 10 | | | | | | |

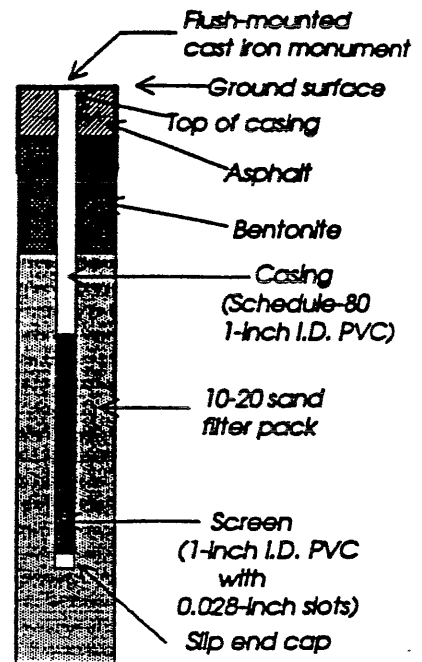

TESTING

WPH-D

Bottom of boring at 12 feet.

15

20

25

30

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ Observed groundwater level
ATD = at time of drilling

WPH-G/ BEX WPH-D WPH-D Dr. Analytical testing

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: **19 March 1996**

Drilling completed: **19 March 1996**

Logged by: **CCC**

Mobil Oil/ADC Bulk

PROJECT: *Plant Properties*

W.O. 11-04558-09 WELL NO. GP-2

Elevation reference: *Unknown*
 round surface elevation: *Unknown*

Well completed: 19 March 1996
 Casing elevation: *Unknown*

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | AS-BUILT DESIGN | TESTING |
|--------------|---|-------------|---------------|-------------|-------------|----------------|-----------------|---------|
| | | | | | | | | WTPH-D |
| 0 | Asphalt and base course over moist, gray/brown, silty, gravelly SAND | | | | | | | |
| | Moist, gray, fine to coarse SAND with some silt, non-odorous | | GP-2/ 3.5' | | 0.0 | | | |
| 5 | Grades to gray/brown, silty, fine to medium SAND, non-odorous | | | | | | | |
| | 2-inch fine sandy SILT layer at 7.3 feet | | GP-2/ 8.0' | | 11.0 | 3/22/96 ATD | | |
| 10 | Grades to saturated, stained black, fine to medium SAND, strong petroleum odor and LPH globules | | | | | | | |
| | Fine SAND interbedded with fine wood fragments | | GP-2/ 11.0' | | 11.0 | | | |
| | Bottom of boring at 12 feet. | | | | | | | |
| 15 | | | | | | | | |
| 20 | | | | | | | | |
| 25 | | | | | | | | |
| 30 | | | | | | | | |

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
 0/00/00 0/00/00 = date observed

▼ Observed groundwater level
 ATD = at time of drilling

WPH-G/
 SEZ
 WPH-D
 WPH-D BY Analytical testing

AGRA
 Earth & Environmental

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started: 19 March 1996

Drilling completed: 19 March 1996

Logged by: CCC

AGRA Earth and Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-3

Elevation reference: *Unknown* Well completed: *Not Applicable*
 Ground surface elevation: *Unknown* Casing elevation: *Unknown*

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|--------------|--|-------------|---------------|-------------|-------------|--------------|---------|
| | | | | | | | |
| 0 | Asphalt and base course over moist, gray/brown fine SAND, non-odorous | | | | | | |
| 5 | Grades to moist to wet, gray, fine SAND, strong petroleum odor and LPH | | GP-3/ 3.0' | | 11.0 | ATD | |
| 6.5 | Bottom of boring at 6.5 feet, due to refusal. | | GP-3/ 6.5' | | 17.0 | | WPH-D |
| 10 | | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |



Bentonite adbondonment

WPH-D

LEGEND

2-inch O.D. Geoprobe sample

Observed groundwater level
 0/00/00 0/00/00 = date observed

Observed groundwater level
 ATD = at time of drilling

WPH-G/SEX
 WPH-D
 WPH-D EX. Analytical testing

AGRA
Earth & Environmental
 11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started: 19 March 1996

Drilling completed: 19 March 1996

Logged by: CCC

AGRA Earth & Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-4

| Elevation reference: Unknown Ground surface elevation: Unknown | | Well completed: 19 March 1996 Casing elevation: Unknown | | AS-BUILT DESIGN | | | Page 1 of 1 |
|---|--|--|---------------|-----------------|-------------|--------------|--|
| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
| 0 | Asphalt over base course over gray/brown, gravelly, silty SAND, non-odorous | | | | | | |
| 5 | Moist, brown/black/gray, silty, fine to medium SAND with some gravel, wood and brick fragments, non-odorous Moist to wet, gray/brown, fine SAND, moderate petroleum odor Wood debris and LPH | | GP-4/ 4.0 | | 0.0 | 3/22/96 | |
| | | | GP-4/ 6.0 | | 7.0 | ATD | |
| | | | GP-4/ 8.0 | | 11.0 | | |
| 10 | Fine grained wood fragments, slight petroleum staining and odor | | | | | | <div style="border: 1px solid black; padding: 2px; width: fit-content;">WITH-D</div> |
| Bottom of boring at 12 feet. | | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ Observed groundwater level
ATD ATD = at time of drilling

WITH-D
 EX
 WITH-D
 WITH-D EX

 Analytical testing


AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Elevation reference: Unknown Well completed: 19 March 1996
 Ground surface elevation: Unknown Casing elevation: Unknown

AS-BUILT DESIGN

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVIM READING | GROUND WATER | TESTING |
|--------------|---|-------------|---------------|-------------|--------------|--------------|---------|
| 0 | Asphalt and base course over moist, gray/black, fine SAND and broken gravel | | | | | | |
| | Moist to wet, brown, fine SAND with some silt, trace petroleum odor | | GP-5/ 3.0' | | | ATD | |
| | Moist to wet, gray, fine SAND, strong petroleum odor, LPH below 3.7 feet | | GP-5/ 4.0' | | | 3/22/96 | WPH-D |
| 5 | Grades to moist, fine sandy SILT | | GP-5/ 6.5' | | | | |
| | Fine grained wood debris with LPH | | | | | | |
| | Saturated, gray, fine SAND with LPH | | GP-5/ 8.0' | | | | WPH-D |
| 10 | Bottom of boring at 9.5 feet, due to refusal. | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

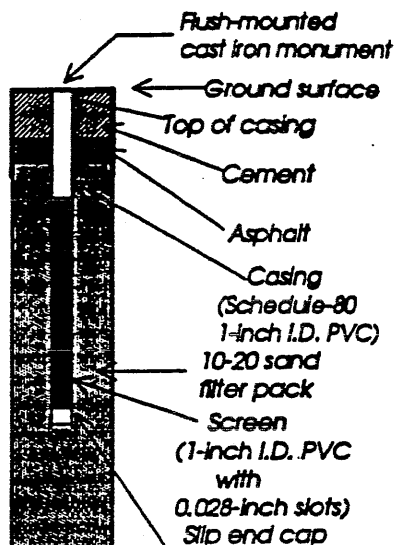

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
 0/00/00 0/00/00 = date observed

▼ Observed groundwater level
 ATD = at time of drilling

WPH-D
 BEX
 WPH-D Est. Analytical testing

AGRA
 Earth & Environmental
 11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Mobil Oil/ADC Bulk

PROJECT: *Plant Properties*

W.O. 11-04558-09 WELL NO. GP-6


Elevation reference: *Unknown*
Ground surface elevation: *Unknown*

Well completed: 19 March 1996
Casing elevation: *Unknown*

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|----------------|
| 0 | Asphalt and base course over moist, gray, fine SAND with silt rich zones (2 to 3 feet - silty, gravelly SAND with wood debris, non-odorous) | | | | | |
| 5 | Black, fine to medium sandy SILT and wood fragments, saturated with very viscous LPH | | GP-6/ 3.5 | | 15 | ATD 3/22/96 |
| | Fine to medium grained wood debris, petroleum odor, no LPH | | GP-6/ 6.0 | | | |
| 10 | Wood fragments saturated with very viscous LPH | | | | | |

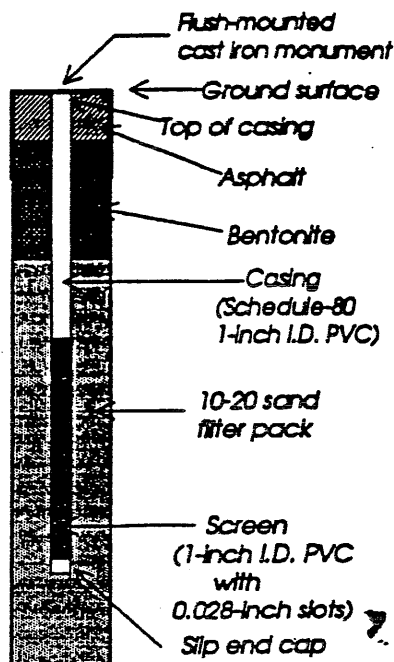

TESTING

Bottom of boring at 12 feet.

15
20
25
30

LEGEND

2-inch O.D. Geoprobe sample

Observed groundwater level
000/00 01/00/00 = date observed

Observed groundwater level
ATD = at time of drilling

ANALYTICAL TESTING
WFWG/
SIX
WFWG
WFWG Dr.

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 19 March 1996

Drilling completed: 19 March 1996

Logged by: CCC

AGRA Earth & Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-7

Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: Not Applicable
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|--------------|--|-------------|---------------|-------------|-------------|--------------|---------|
| 0 | Asphalt and base course over moist, brown, fine SAND with some silt (5-inch sandy SILT layer at 3.0 feet), non-odorous | | | | | | |
| | | | GP-7/4.0 | | | ▼ ATD | |
| 5 | Moist, brown, silty, gravelly SAND with wood debris and very viscous LPH grading to fine grained wood debris | | GP-7/5.5 | | | | |
| | Bottom of boring at 7.0 feet, due to refusal. | | | | | | |
| 10 | | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |



Bentonite abandonment

WTPH-G/
BTEX
WTPH-D Ed.

LEGEND

┆ 2-inch O.D.
Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼
ATD Observed groundwater level
ATD = at time of drilling

WTPH-G/
BTEX
WTPH-D Ed.
Analytical testing

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 20 March 1996

Drilling completed: 20 March 1996

Logged by: CCC

AGRA Earth and Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: **Plant Properties**

W.O. 11-04558-09 WELL NO. GP-8


Elevation reference: *Unknown*
Ground surface elevation: *Unknown*

Well completed: 20 March 1996
Casing elevation: *Unknown*

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER |
|--------------|--|-------------|---------------|-------------|-------------|--------------|
| 0 | Asphalt and base course | | | | | |
| | Minor recovery, moist, dark gray SAND, slight petroleum odor | | GP-8/ 3.0' | | | ▼ 3/22/96 |
| 5 | Moist, black to gray/green, fine sandy SILT with wood debris, 1" thick zone of LPH | | | | | |
| | Fine grained wood debris saturated with LPH over gray/green SILT | | GP-8/ 9.0' | | 11 | |
| 10 | Minor recovery - silty, fine SAND over fine grained wood debris, petroleum odor | | | | | |
| | Bottom of boring at 11 feet. | | | | | |
| 15 | | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

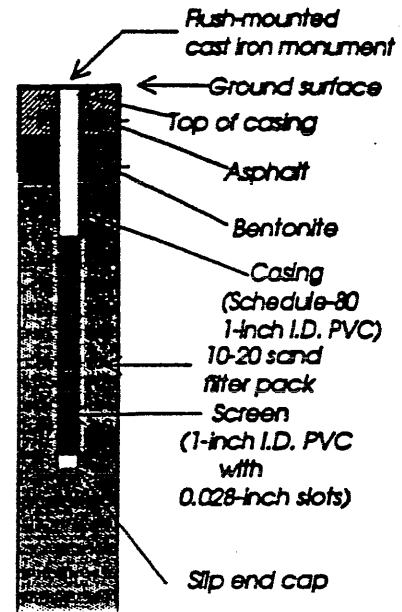

TESTING

WPH-G/
BTEX
WPH-D Bt.

LEGEND

- 1-inch O.D. Geoprobe sample
- Observed groundwater level
- Observed groundwater level ATD = at time of drilling
- Analytical testing
- Observed groundwater level 0/00/00 = date observed

AGRA
Earth & Environmental
11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 20 March 1996

Drilling completed: 20 March 1996

Logged by: CCC

AGRA Earth and Environmental, Inc.


Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | Asphalt and base course | | | | | |
| - | Trace recovery; minor gravel and wood fragments | | | | | |
| 5 | Minor recovery; moist, gray, fine SAND over minor wood debris and sandy SILT with gravel, strong petroleum odor | | | | | 3/22/96 |
| 10 | No recovery | | GP-9/ 8.0 | | 3.0 | |
| 12 | Bottom of boring at 12 feet. | | | | | |
| 15 | | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

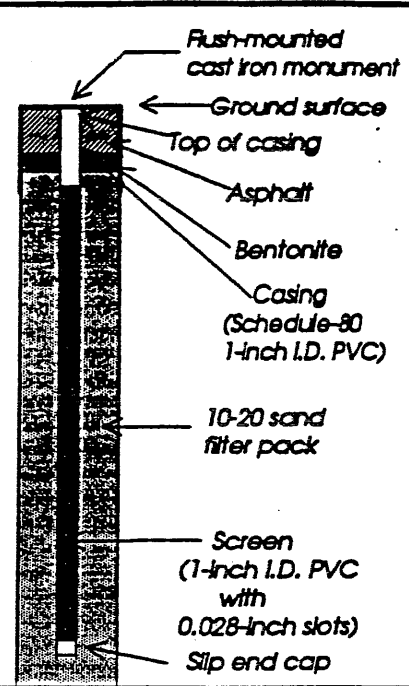

TESTING

WTPH-G/
BTEX
WTPH-D B2
WTPH-D

LEGEND

- 2-inch O.D. Geoprobe sample
- Observed groundwater level
0/00/00 = date observed
- Observed groundwater level
ATD = at time of drilling
- Analytical testing

AGRA
Earth & Environmental
11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

AGRA Earth & Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-10

Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING | |
|--------------|---|-------------|-----------------|-------------|-------------|--------------|---------|-----------------|
| | | | | | | | | AS-BUILT DESIGN |
| 0 | Asphalt and base course over moist, brown/gray, silty, fine SAND, non-odorous | | GP-10/ 3.0' | | 1.0 | | | |
| 5 | Moist, gray, fine sandy SILT with some gravel, slight petroleum odor Woody debris saturated with LPH Moist to wet, gray/orange/brown, gravelly, medium to coarse SAND, petroleum odor | | GP-10/ 7.0' | | | 3/22/96 | | |
| 10 | Wet, brown stained gray, fine sandy SILT, strong petroleum odor, minor LPH Wet, brown, fine grained wood debris with LPH, minor saturated sand | | GP-10/ 11.0' | | 0.0 | | | |
| 12 | Bottom of boring at 12 feet. | | | | | | | |
| 15 | | | | | | | | |
| 20 | | | | | | | | |
| 25 | | | | | | | | |
| 30 | | | | | | | | |

LEGEND

2-inch O.D. Geoprobe sample

Observed groundwater level
0/00/00 0/00/00 = date observed

Observed groundwater level
ATD = at time of drilling

WPH-G/
SEX
WPH-O
WPH-O-EX

Analytical testing

AGRA
Earth & Environmental
11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-11


Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER |
|--------------|--|-------------|-----------------|-------------|-------------|--------------|
| 0 | Asphalt and base course over moist, brown, silty, fine SAND, non-odorous | | GP-11/ 3.0' | | 4.0 | |
| 5 | Moist, gray, silty, fine SAND with mottling and some shells and wood debris Moist, tan grading to gray, fine sandy SILT with interbedded wood debris, slight petroleum odor at 4.0 feet | | GP-11/ 6.5' | | | 3/22/96 |
| | Wet to saturated, brown, silty, gravelly SAND, strong petroleum odor, minor LPH | | GP-11/ 8.0' | | 0.0 | |
| 10 | Saturated, black, fine SAND, trace petroleum odor | | GP-11/ 12.0' | | | |

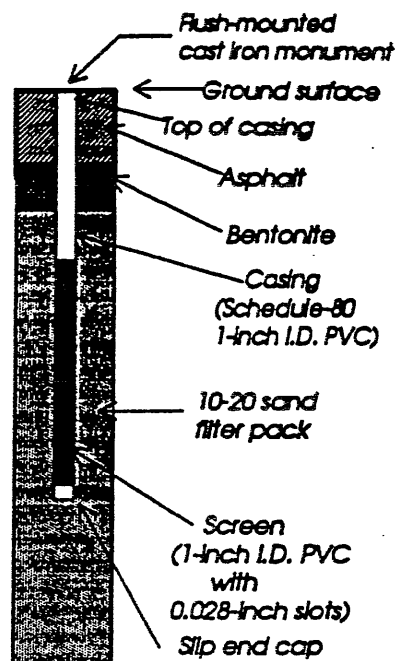

TESTING

WTPH-D
WTPH-G/
WTEX
WTPH-D
WTPH-D Ed.

Bottom of boring at 12 feet.

15

20

25

30

LEGEND

2-inch O.D. Geoprobe sample

Observed groundwater level
0.00/00 0/00/00 = date observed

Observed groundwater level
ATD = at time of drilling

Analytical testing

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 20 March 1996

Drilling completed: 20 March 1996

Logged by: CCC

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-12


Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER | TESTING |
|--------------|---|-------------|-----------------|-------------|-------------|----------------|---------|
| 0 | Asphalt and base course over moist, black, gravelly SAND, slight petroleum odor | | | | | | |
| 5 | Moist, gray/brown, fine to coarse SAND grading to brown, fine SAND with some gravel, non-odorous | | GP-12/ 8.0' | | | | |
| 10 | Wet, gray stained globules black, fine SAND with gravel, strong petroleum odor and minor LPH globules | | GP-12/ 10.0' | | | 3/22/96 ATD | |
| | Saturated, gray, fine SAND with some gravel, strong petroleum odor, minor globules of LPH | | GP-12/ 11.0' | | | | WITH-D |
| | | | GP-12/ 12.5' | | 3.2 | | WITH-D |
| 15 | Bottom of boring at 14 feet. | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

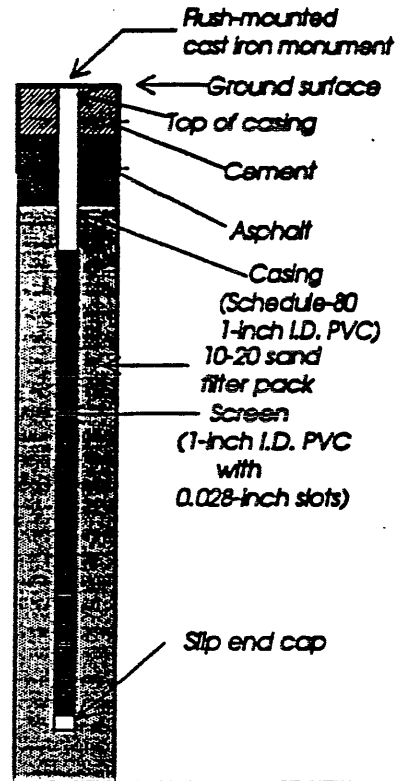

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ Observed groundwater level
ATD = at time of drilling

WITH-D/SDX/SDX/SDX/SDX Analytical testing

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 19 March 1996

Drilling completed: 19 March 1996

Logged by: CCC

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-13

Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1
of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|------------------------------|---|-------------|-----------------|-------------|-------------|--------------|--|
| 0 | Asphalt over dense, moist, gray, gravelly, fine to coarse SAND, non-odorous | | GP-13/ 3.5' | | | | |
| 5 | Grades to moist, gray/black, gravelly, fine to medium SAND, non-odorous | | GP-13/ 7.0' | | | | WPH-D |
| 10 | Wet/saturated, gray/black, silty, fine SAND with some gravel and some wood debris, organic odor | | GP-13/ 10.0' | | ATD | | WPH-G/ WPH-D WPH-D Ext. WPH-D |
| Bottom of boring at 12 feet. | | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |



Bentonite abandonment

AGRA Earth & Environmental, Inc.

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ ATD Observed groundwater level
ATD = at time of drilling

WPH-G/
WPH-D
WPH-D Ext.
WPH-D Analytical testing

AGRA
Earth & Environmental
11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 20 March 1996

Drilling completed: 20 March 1996

Logged by: CCC



SOIL DESCRIPTION

Ground Surface Elevation Approximately Feet

Loose, wet to saturated, brown-gray, silty fine SAND and fine sandy SILT with a trace of gravel (Fill)

Very loose to loose, saturated, gray, silty fine to medium SAND with a trace of gravel (Fill)

Soft, saturated, brown, silty PEAT

Total depth 11½ feet
Boring completed 9 March 1988

DEPTH (FEET)

LAB TESTS


SAMPLING

GROUND WATER

STANDARD PENETRATION RESISTANCE

▲ BLOWS PER FOOT
(140 lb. hammer, 30 inch drop)

0 10 20 30 40 50

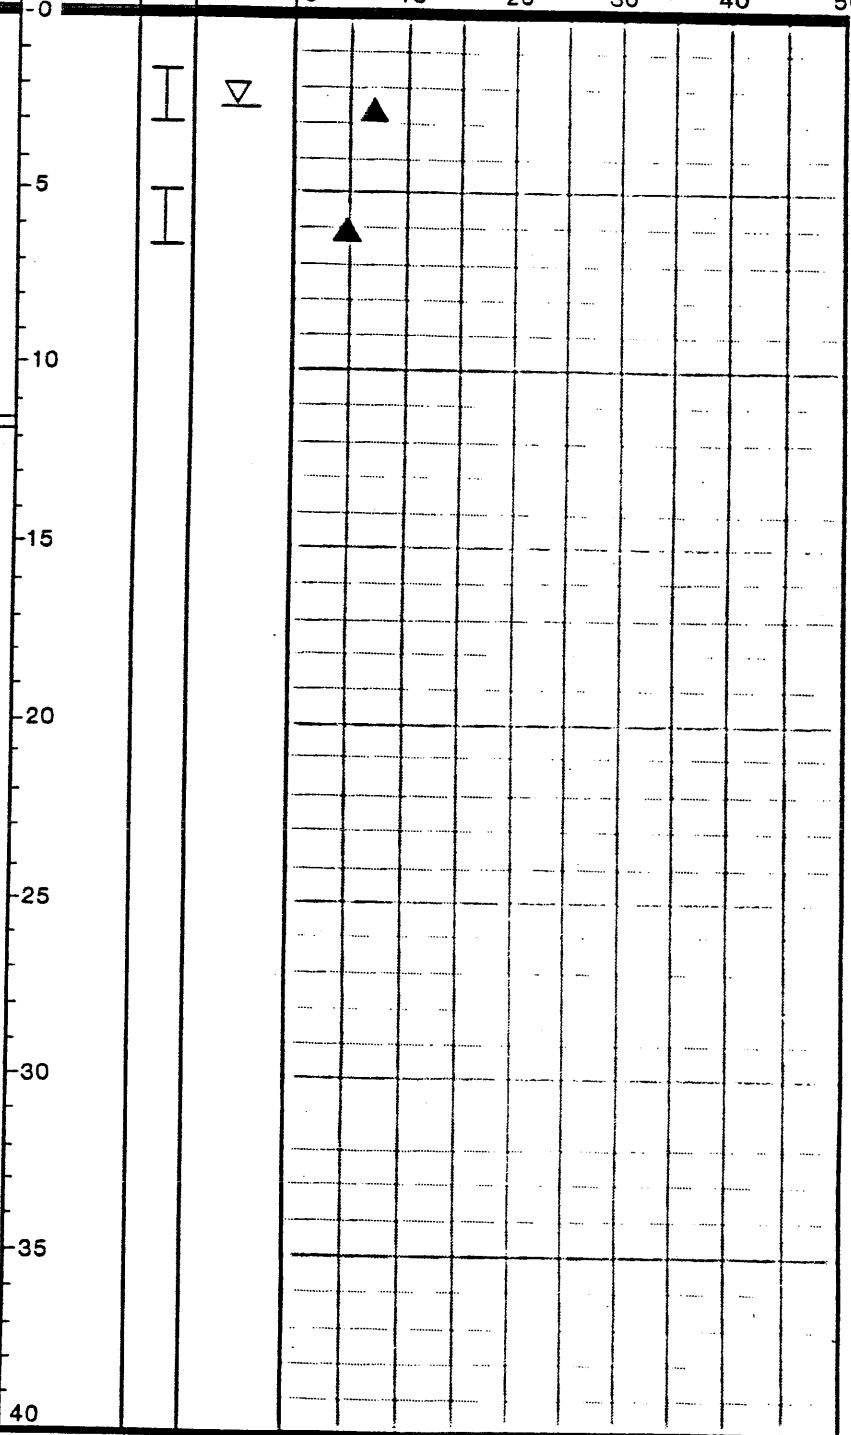

SAMPLING

- I 2' OD SPLIT SPOON SAMPLE
- II 3' OD SHELBY SAMPLE
- 1.5' ID RING SAMPLE
- BULK SAMPLE
- * SAMPLE NOT RECOVERED

GROUND WATER SEAL

DATE


WATER LEVEL AT TIME OF DRILLING




OBSERVATION WELL TIP



LABORATORY TESTS


- % WATER CONTENT
- NP NON PLASTIC




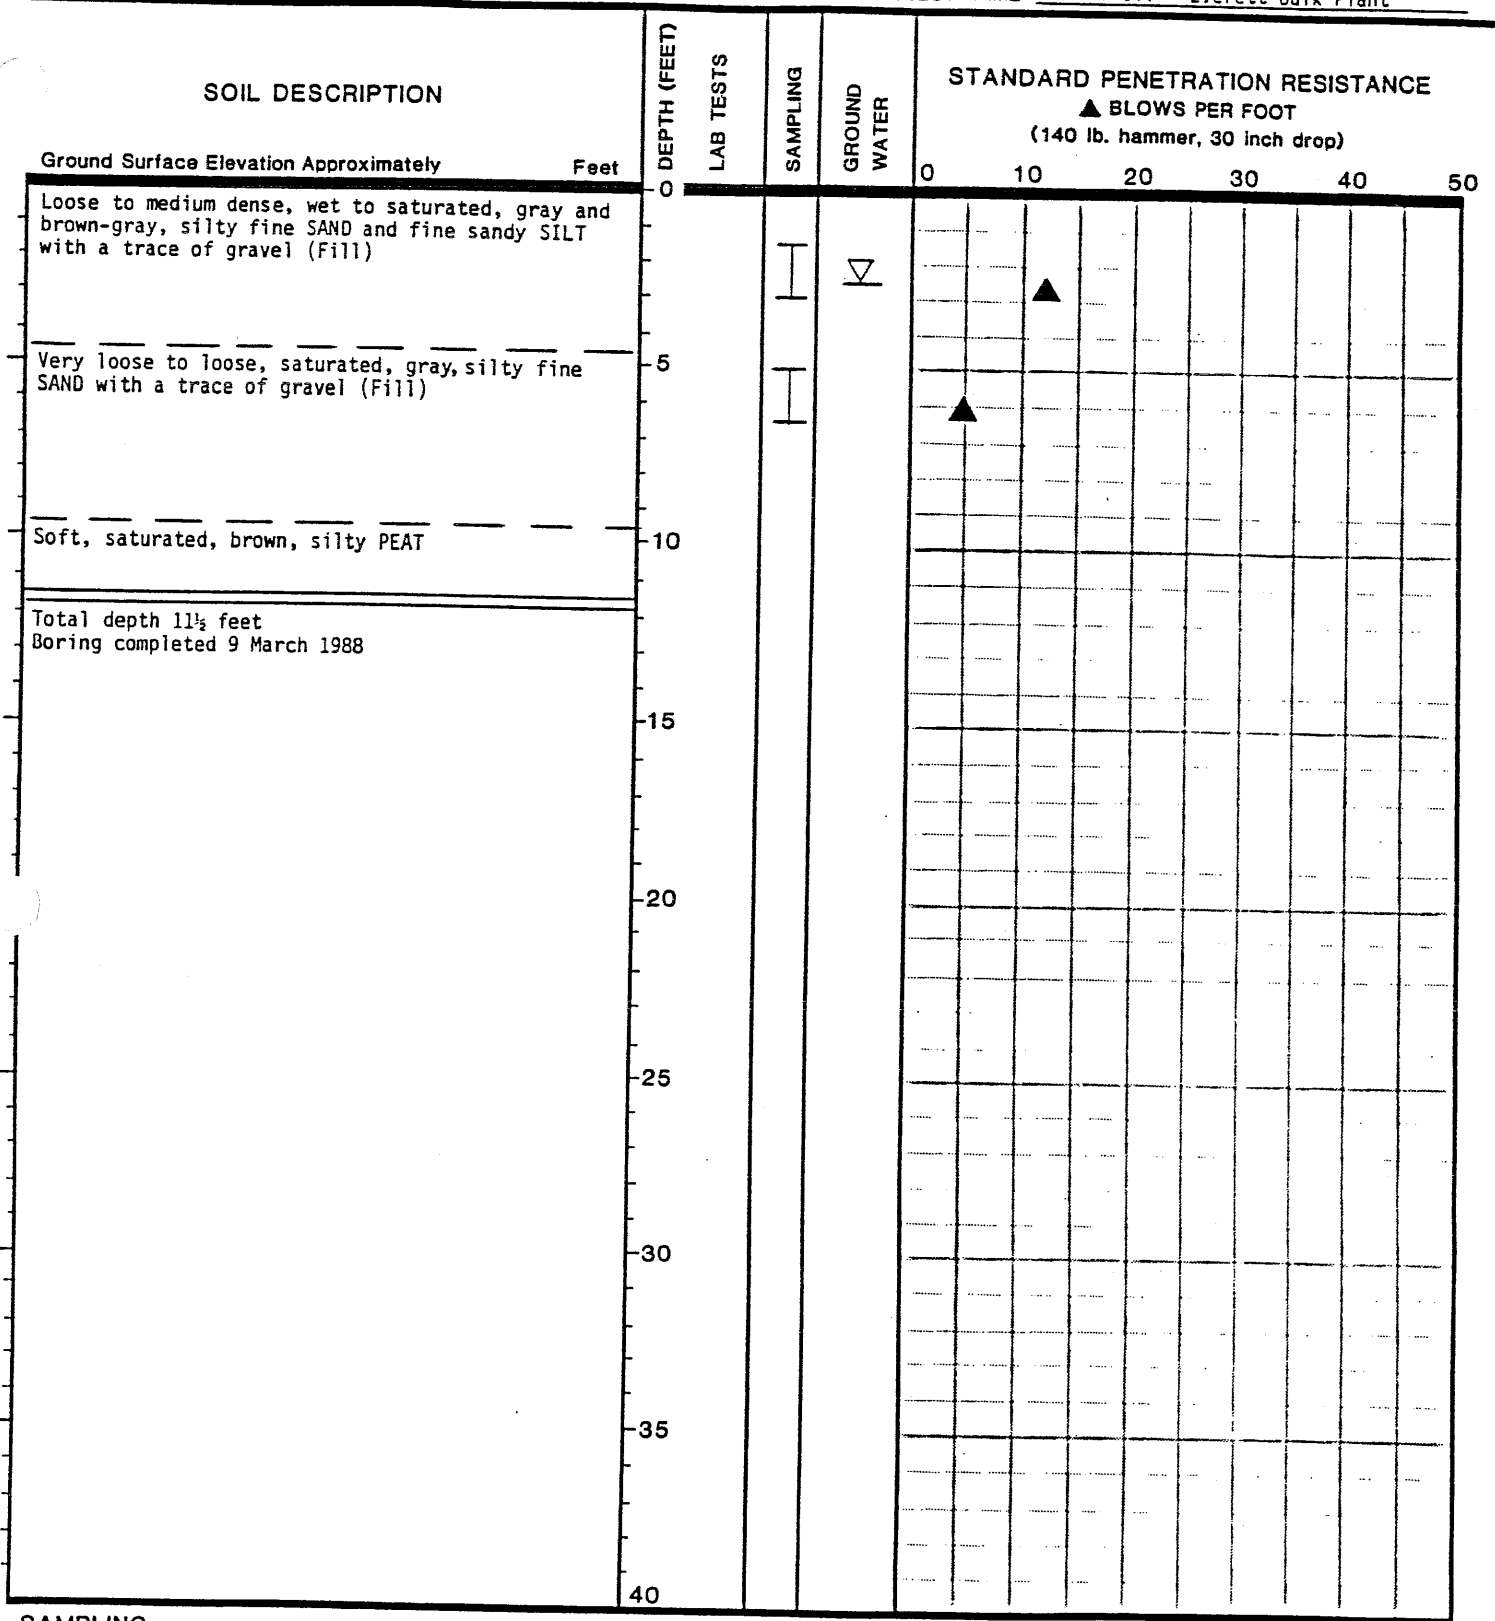



- SAMPLING**
- I 2" OD SPLIT SPOON SAMPLE
 - II 3" OD SHELBY SAMPLE
 - III 2.5" ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED




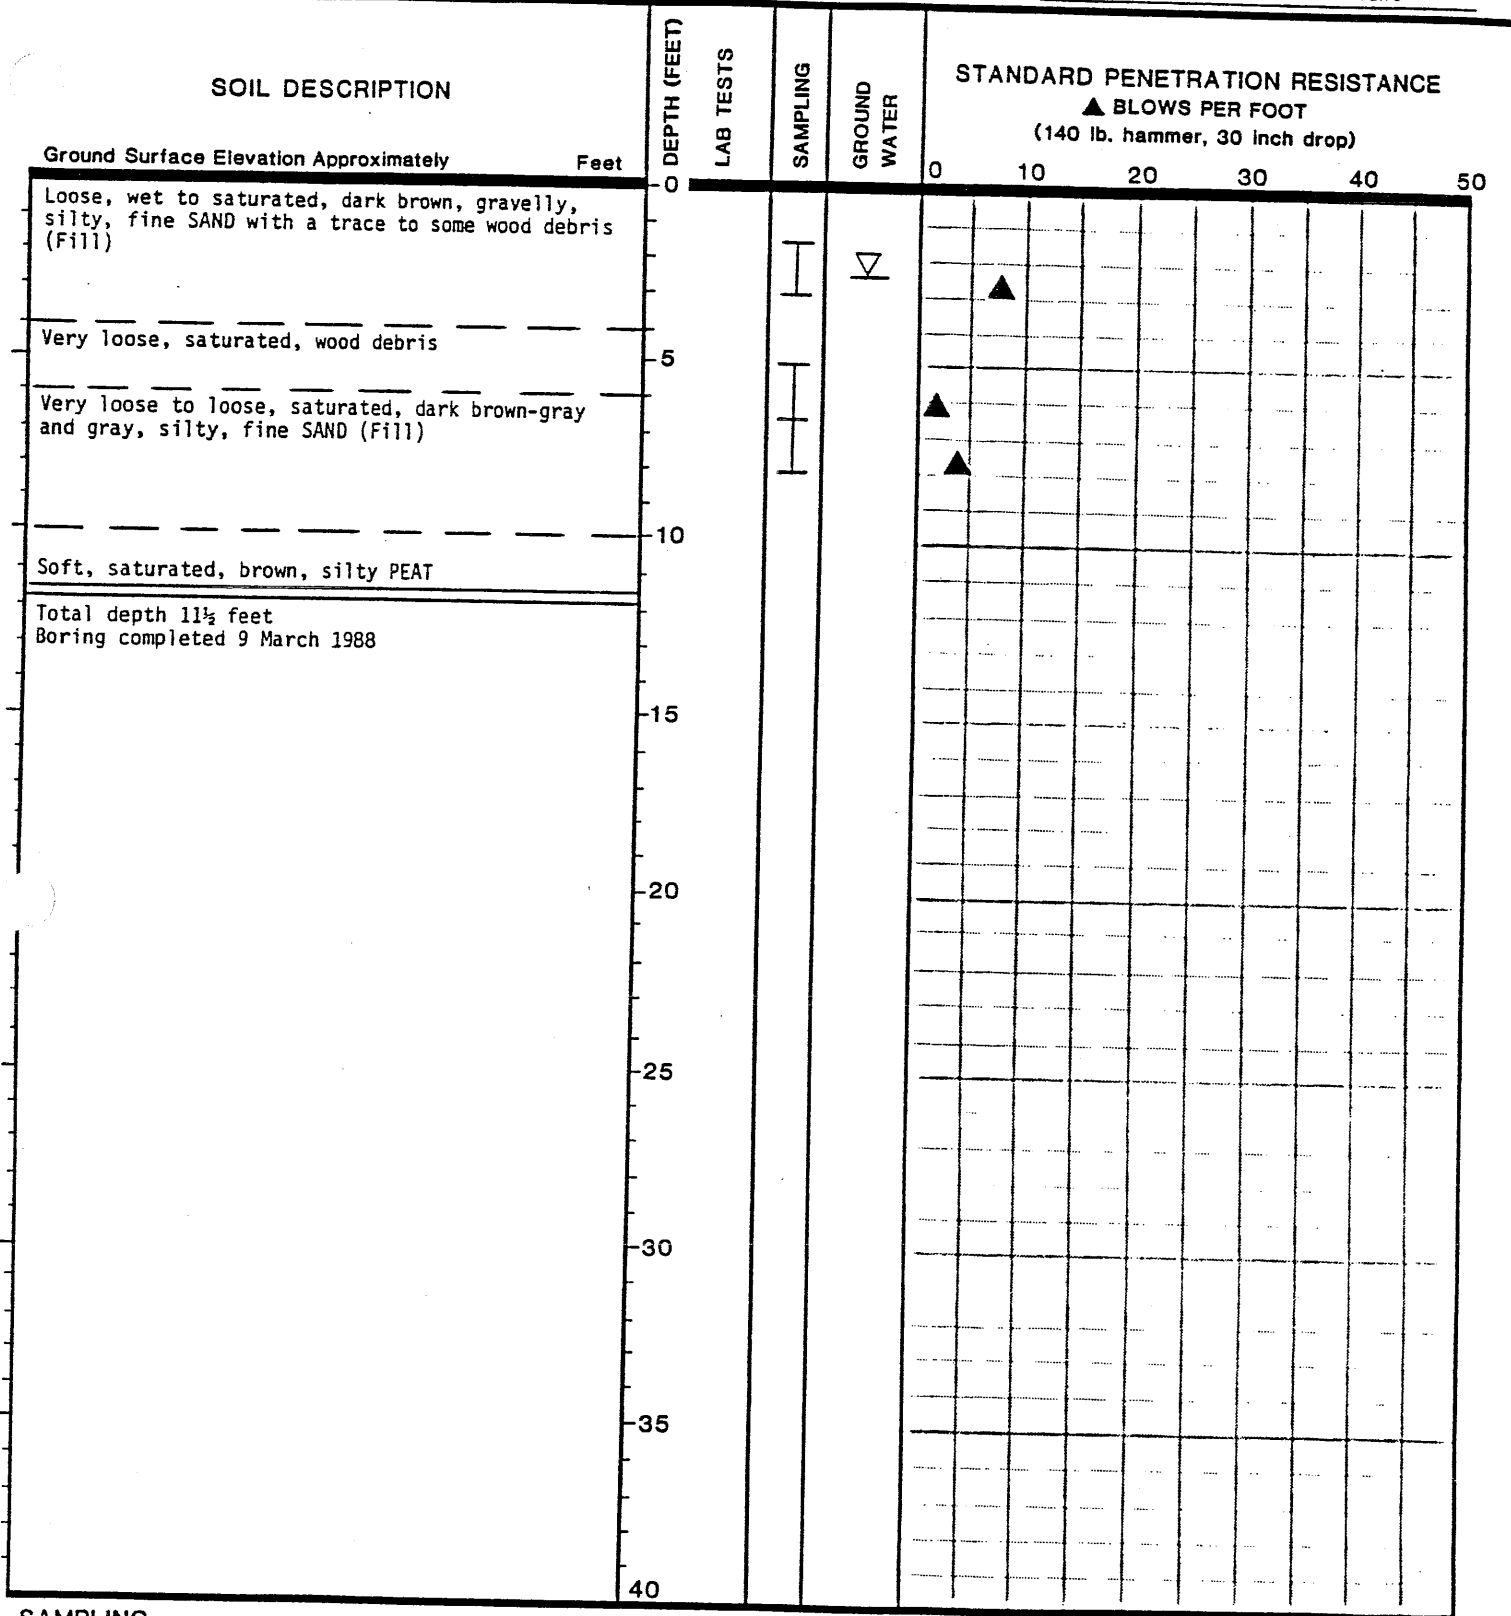


- SAMPLING**
- I 2" OD SPLIT SPOON SAMPLE
 - II 3" OD SHELBY SAMPLE
 - 2.5" ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED



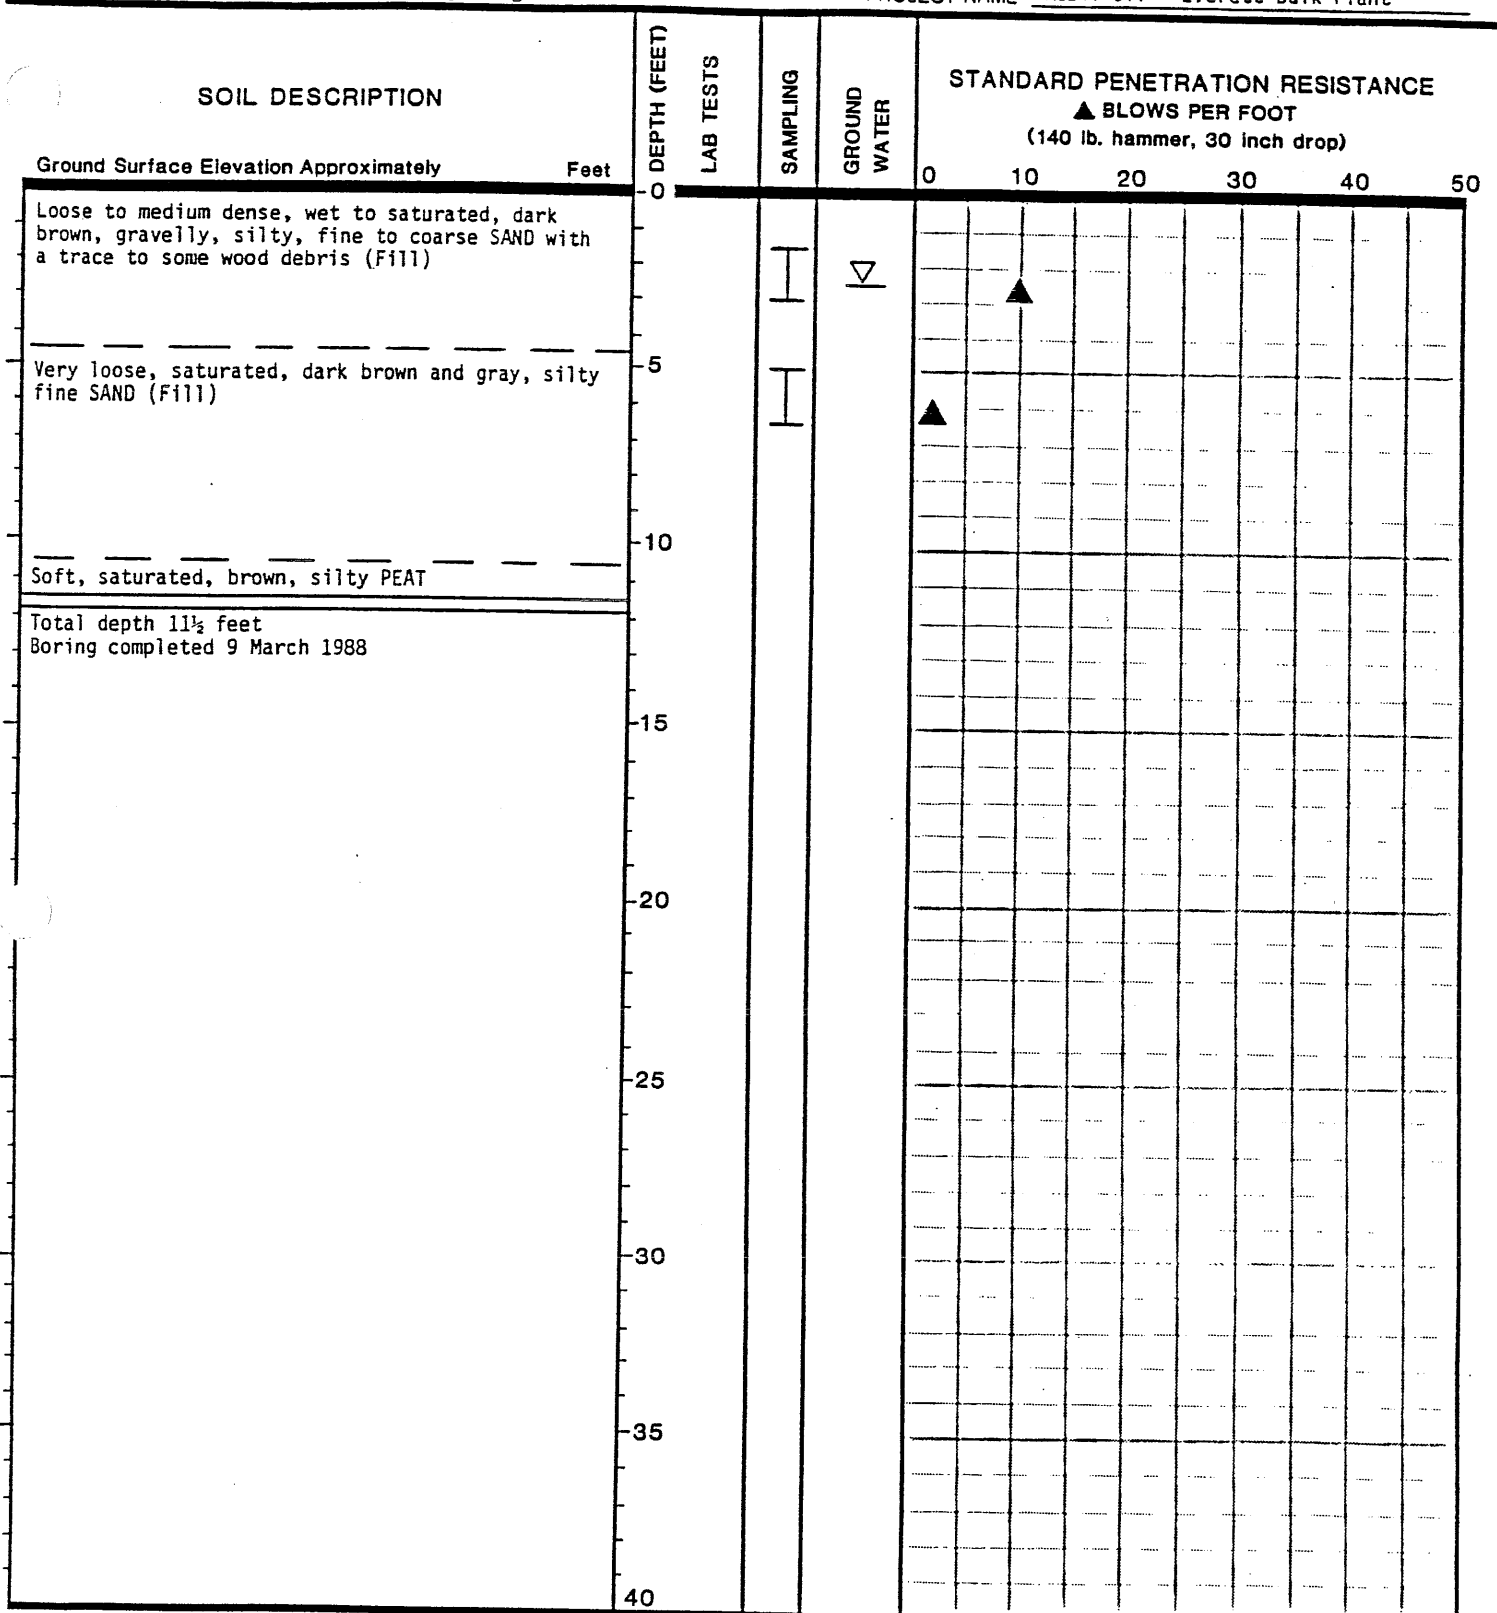

- SAMPLING**
 I 2' OD SPLIT SPOON SAMPLE
 II 3' OD SHELBY SAMPLE
 2.5' ID RING SAMPLE
 BULK SAMPLE
 * SAMPLE NOT RECOVERED





SOIL DESCRIPTION

Ground Surface Elevation Approximately Feet

Very loose, wet to saturated, gray and brown-gray, silty, fine SAND with a trace of gravel and wood debris (Fill)

Loose to medium dense, saturated, gray, silty fine SAND with some fine sandy SILT and a trace of gravel (Fill)

Soft, saturated, brown, silty PEAT

Total depth 11½ feet
 Boring completed 9 March 1988

DEPTH (FEET)

LAB TESTS

SAMPLING

GROUND WATER



STANDARD PENETRATION RESISTANCE


▲ BLOWS PER FOOT
 (140 lb. hammer, 30 inch drop)

0 10 20 30 40 50



40


- SAMPLING**
- I 2' OD SPLIT SPOON SAMPLE
 - II 3' OD SHELBY SAMPLE
 - III 5' ID RING SAMPLE
 - LK SAMPLE
 - * SAMPLE NOT RECOVERED




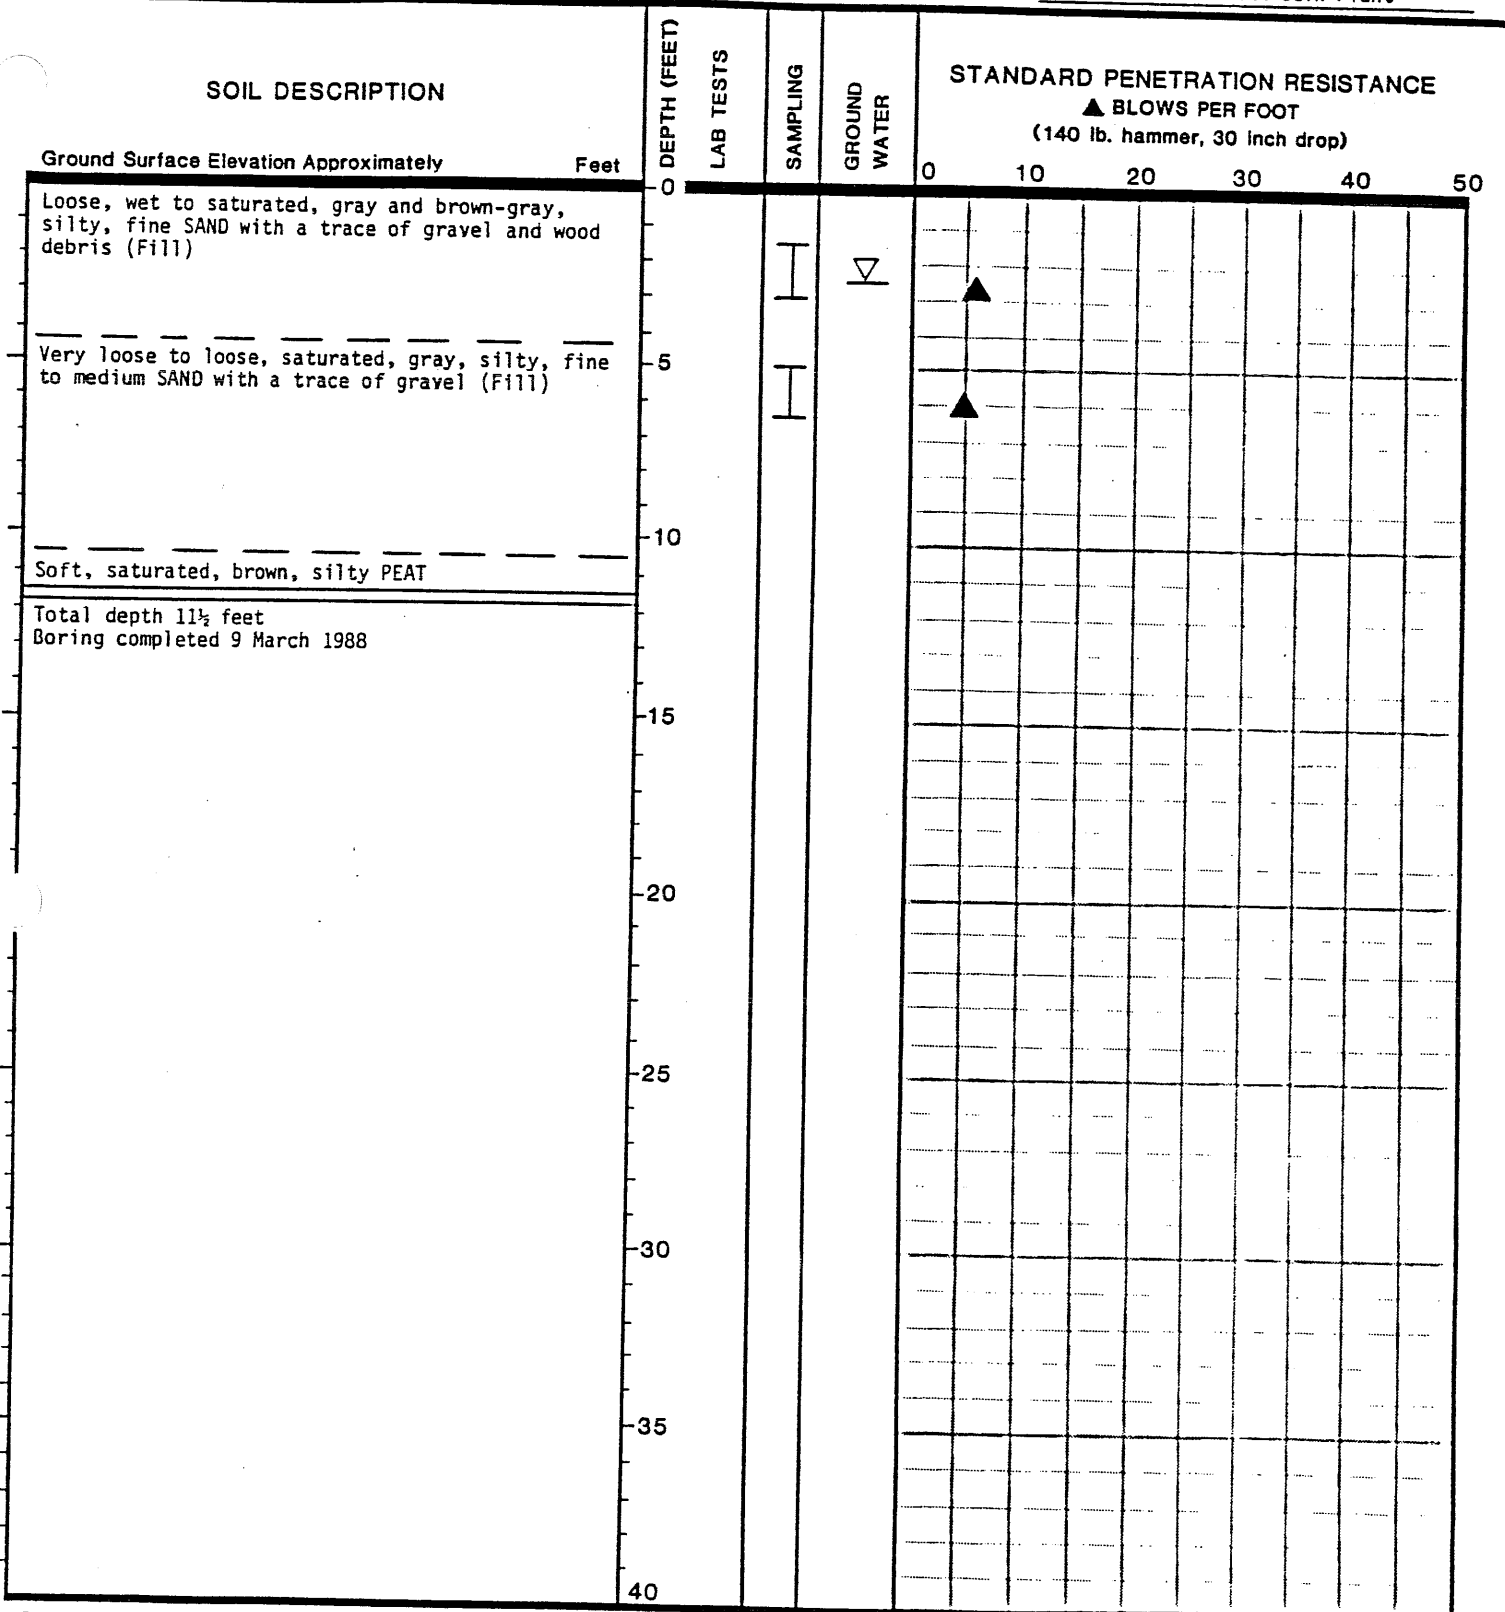


- SAMPLING**
- I 2" OD SPLIT SPOON SAMPLE
 - II 3" OD SHELBY SAMPLE
 - 2.5" ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED



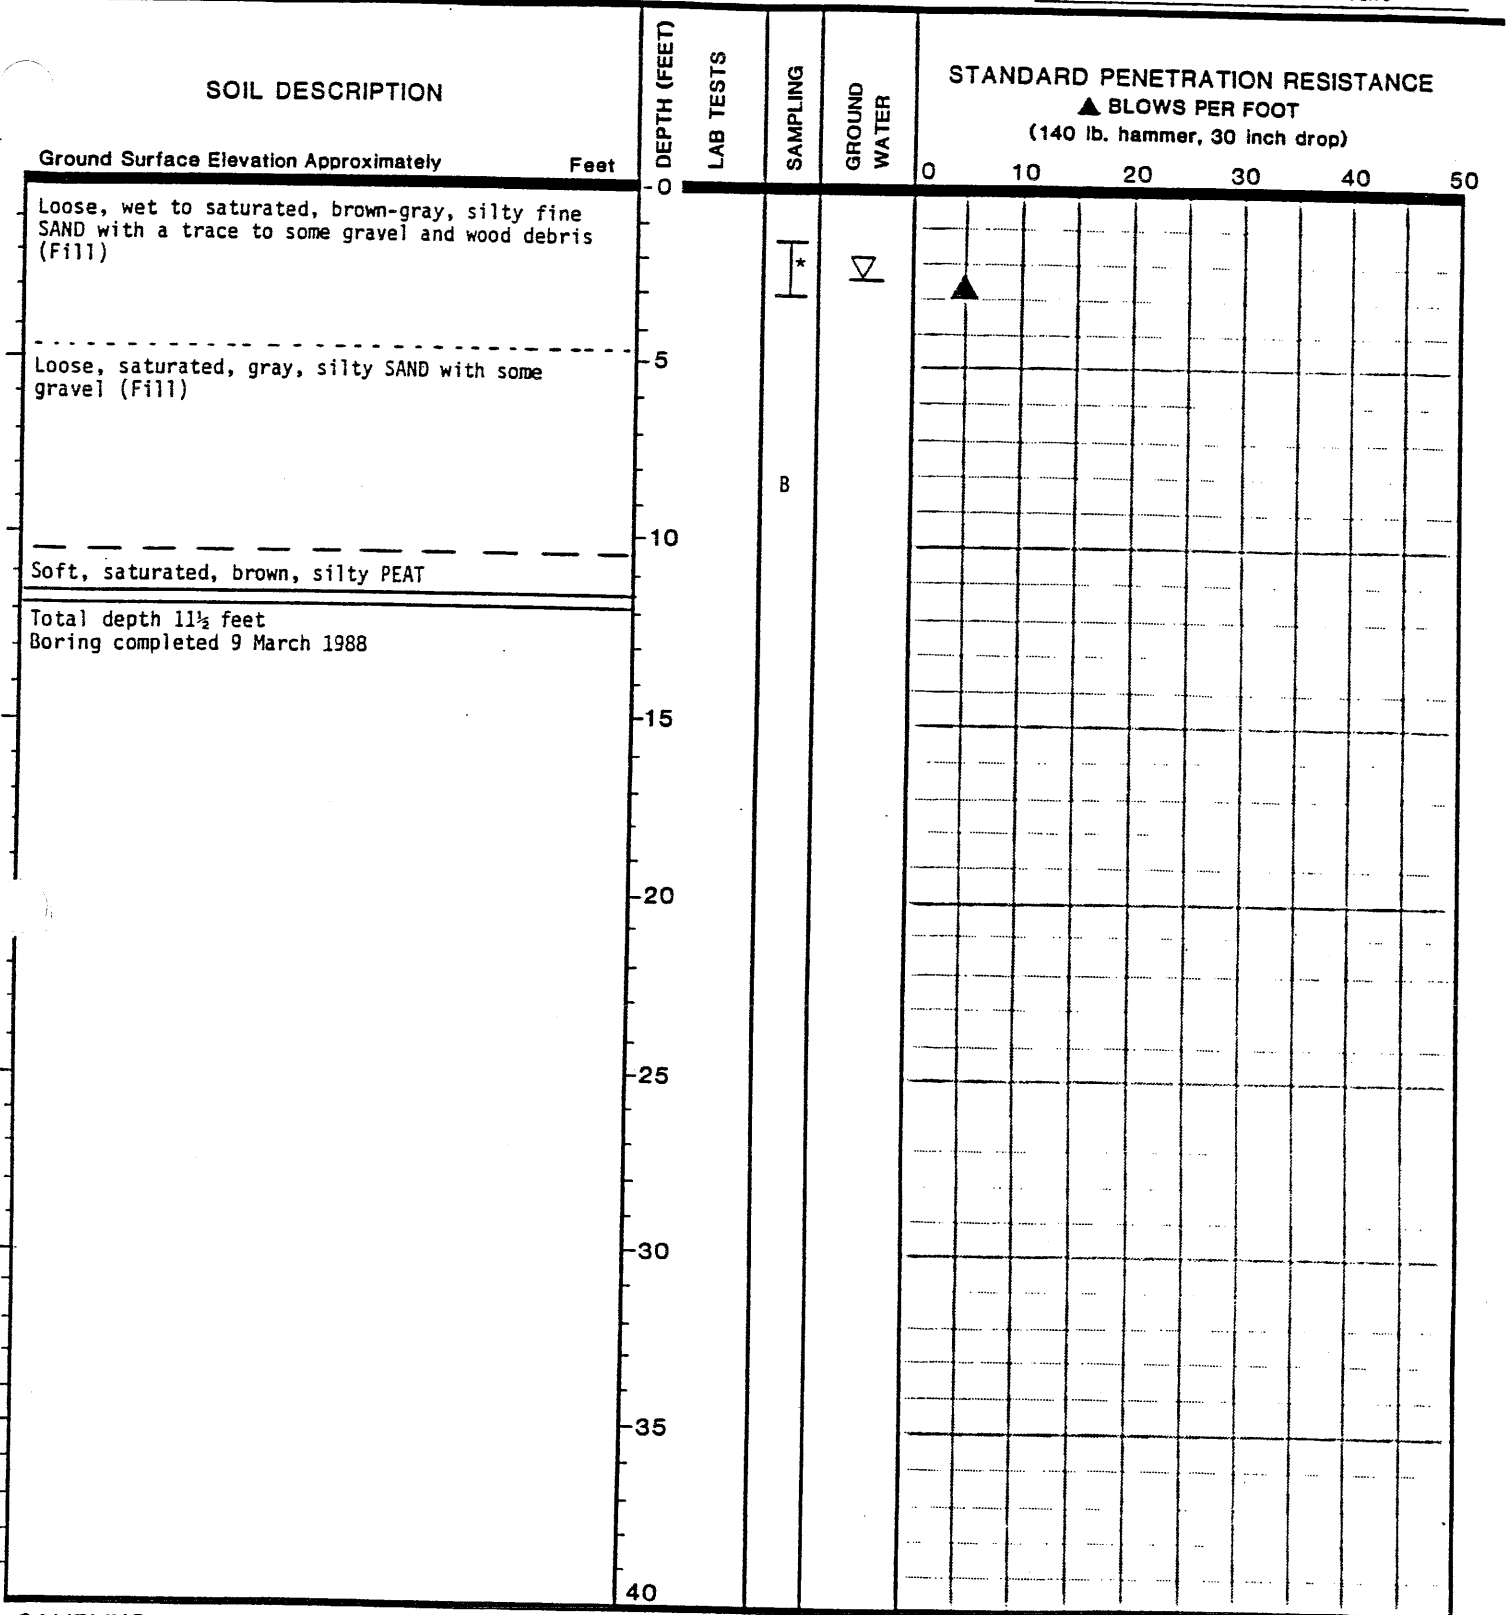



- SAMPLING**
- I 2" OD SPLIT SPOON SAMPLE
 - II 3" OD SHELBY SAMPLE
 - III 2.5" ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED








| SOIL DESCRIPTION | DEPTH (FEET) | LAB TESTS | SAMPLING | GROUND WATER | STANDARD PENETRATION RESISTANCE ▲ BLOWS PER FOOT (140 lb. hammer, 30 inch drop) | | | | | | | | | | | | | | | |
|---|--------------|-----------|----------|--------------|---|----|----|----|----|----|--|--|--|--|--|--|--|--|--|--|
| | | | | | 0 | 10 | 20 | 30 | 40 | 50 | | | | | | | | | | |
| Ground Surface Elevation Approximately _____ Feet | 0 | | | | | | | | | | | | | | | | | | | |
| Very loose to medium dense (variable), wet to saturated, dark brown to black, silty fine SAND with some zones of wood, brick, etc. (Fill) | 0 - 5 | | I * | ▽ | ▲ | ▲ | | | | | | | | | | | | | | |
| Loose, saturated, gray, silty SAND with a trace to some gravel (Fill) | 5 - 10 | | | | | | | | | | | | | | | | | | | |
| Soft, saturated, brown, silty PEAT | 10 - 11.5 | | | | | | | | | | | | | | | | | | | |
| Total depth 11½ feet Boring completed 9 March 1988 | 11.5 | | | | | | | | | | | | | | | | | | | |
| | 15 | | | | | | | | | | | | | | | | | | | |
| | 20 | | | | | | | | | | | | | | | | | | | |
| | 25 | | | | | | | | | | | | | | | | | | | |
| | 30 | | | | | | | | | | | | | | | | | | | |
| | 35 | | | | | | | | | | | | | | | | | | | |
| | 40 | | | | | | | | | | | | | | | | | | | |


- SAMPLING**
- I 2" OD SPLIT SPOON SAMPLE
 - II 3" OD SHELBY SAMPLE
 - III 2.5" ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED




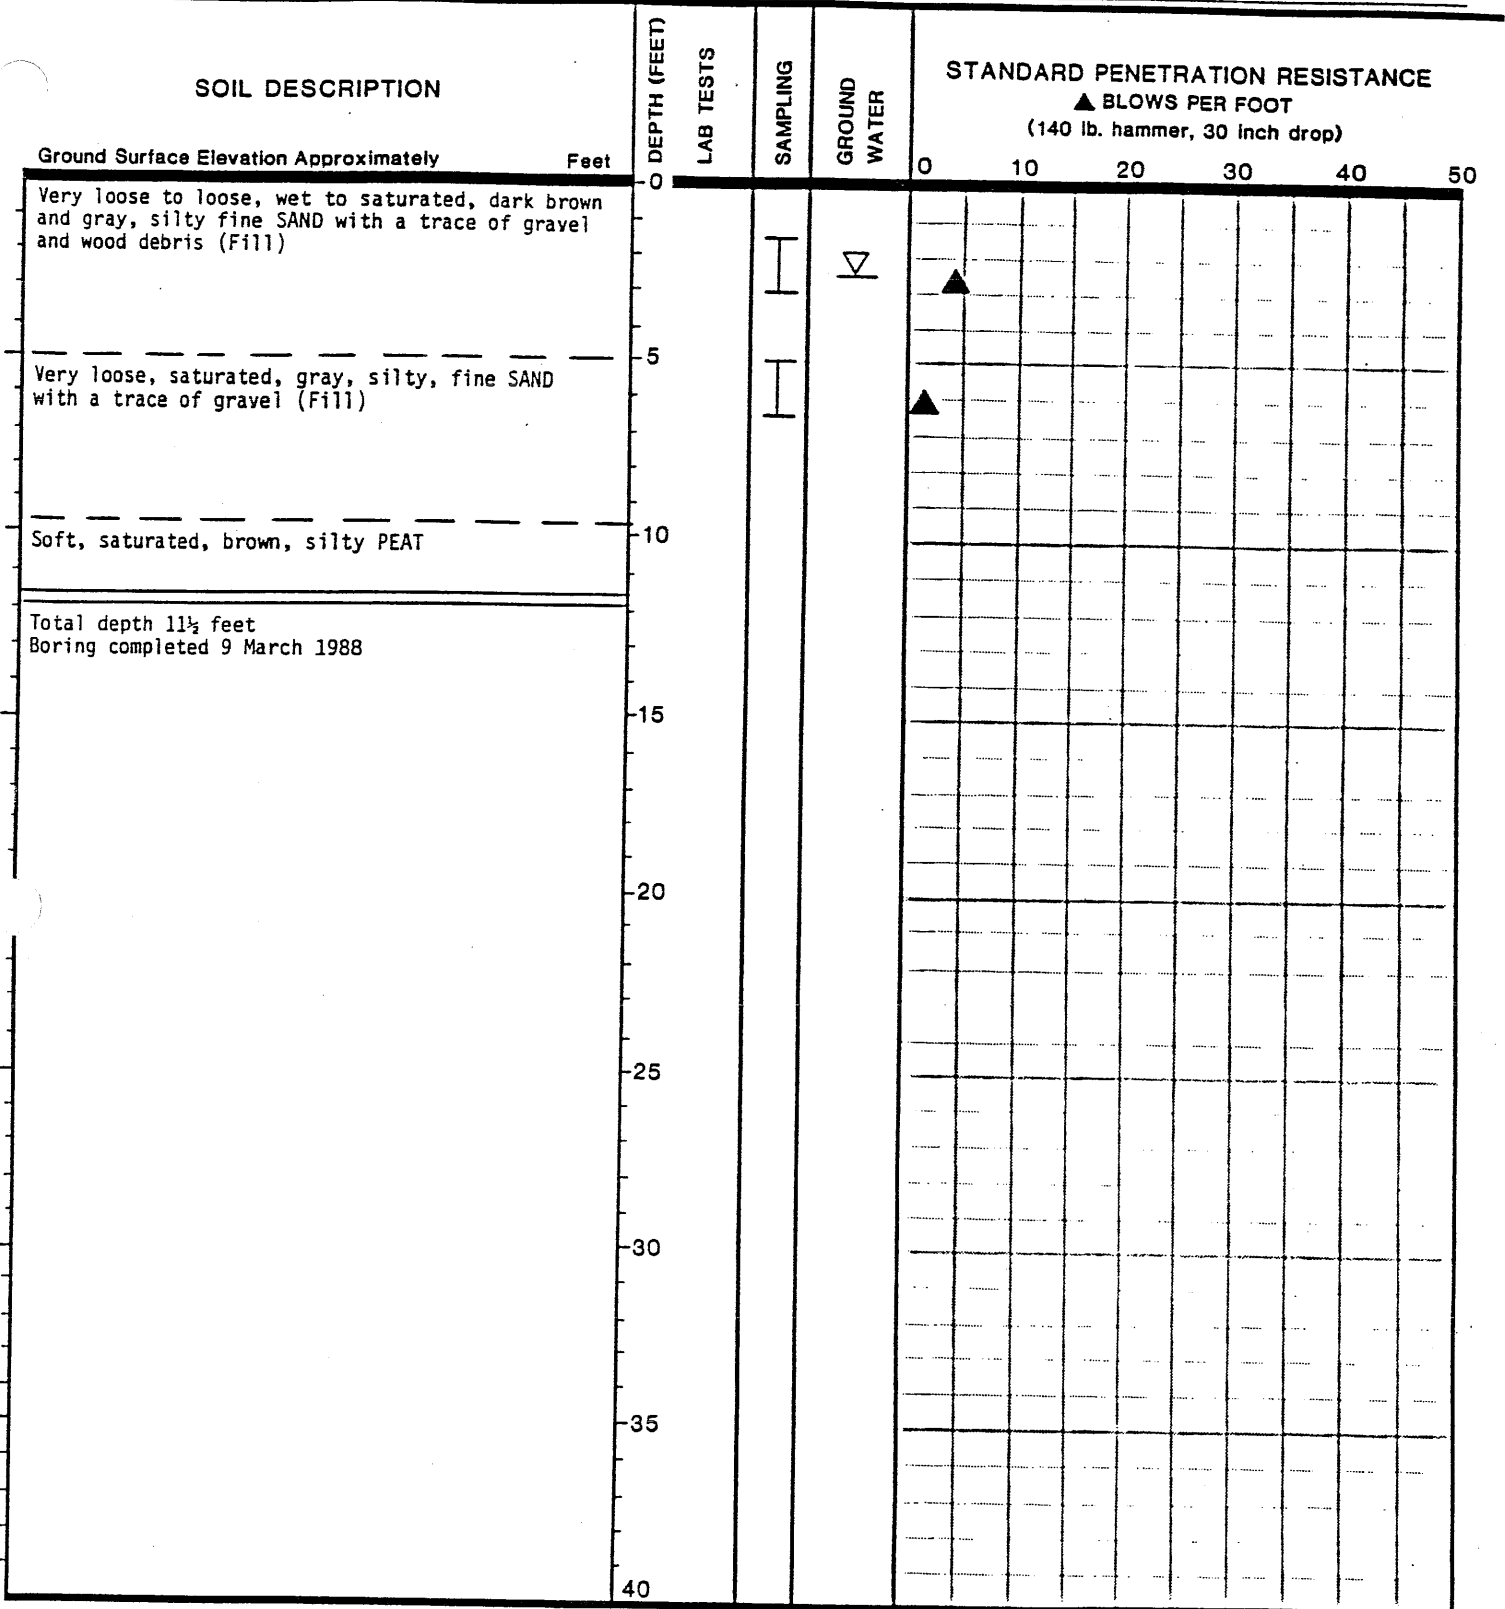


- SAMPLING**
- I 2' OD SPLIT SPOON SAMPLE
 - II 3' OD SHELBY SAMPLE
 - 2.5' ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED



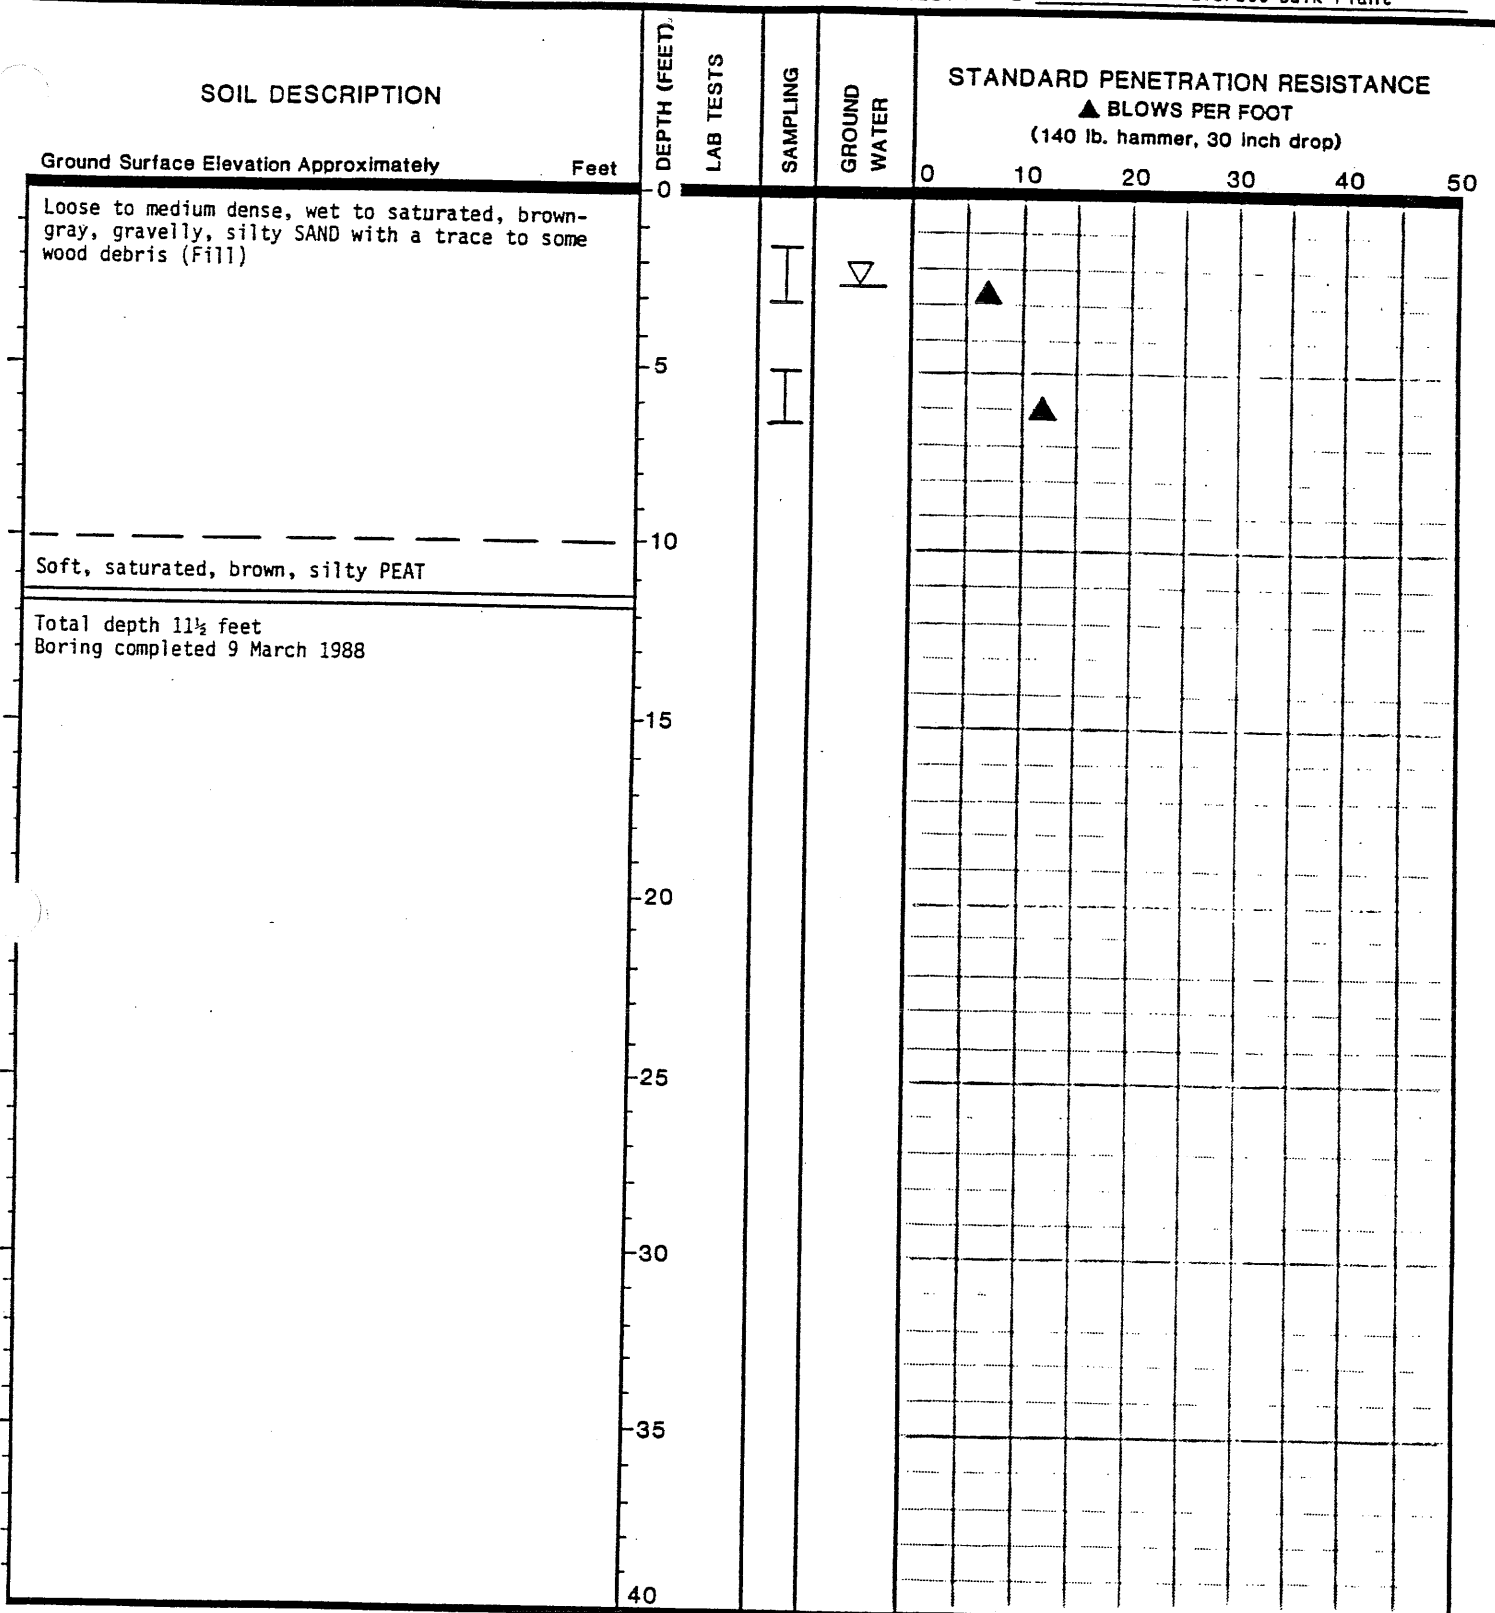

- SAMPLING**
- I 2' OD SPLIT SPOON SAMPLE
 - II 3' OD SHELBY SAMPLE
 - III 2.5' ID RING SAMPLE
 - IV BULK SAMPLE
 - * SAMPLE NOT RECOVERED





SOIL DESCRIPTION

Ground Surface Elevation Approximately Feet

Loose to medium dense, wet to saturated, brown-gray to gray, silty, fine to medium SAND with a trace of gravel (Fill)

Very loose, saturated, gray, silty, fine to medium SAND with trace of gravel, wood debris and black organics (Fill)

Soft, saturated, brown, silty PEAT

Total depth 11½ feet
Boring completed 10 March 1988

DEPTH (FEET)

LAB TESTS

SAMPLING

GROUND WATER

STANDARD PENETRATION RESISTANCE

▲ BLOWS PER FOOT
(140 lb. hammer, 30 inch drop)

0 10 20 30 40 50

40

SAMPLING

- I 2' OD SPLIT SPOON SAMPLE
- II 3' OD SHELBY SAMPLE
- III 2.5' ID RING SAMPLE
- IV JULK SAMPLE
- * SAMPLE NOT RECOVERED

GROUND WATER SEAL


DATE


WATER LEVEL
AT TIME OF DRILLING

OBSERVATION
WELL TIP



LABORATORY TESTS

- % WATER CONTENT
- NP NON PLASTIC




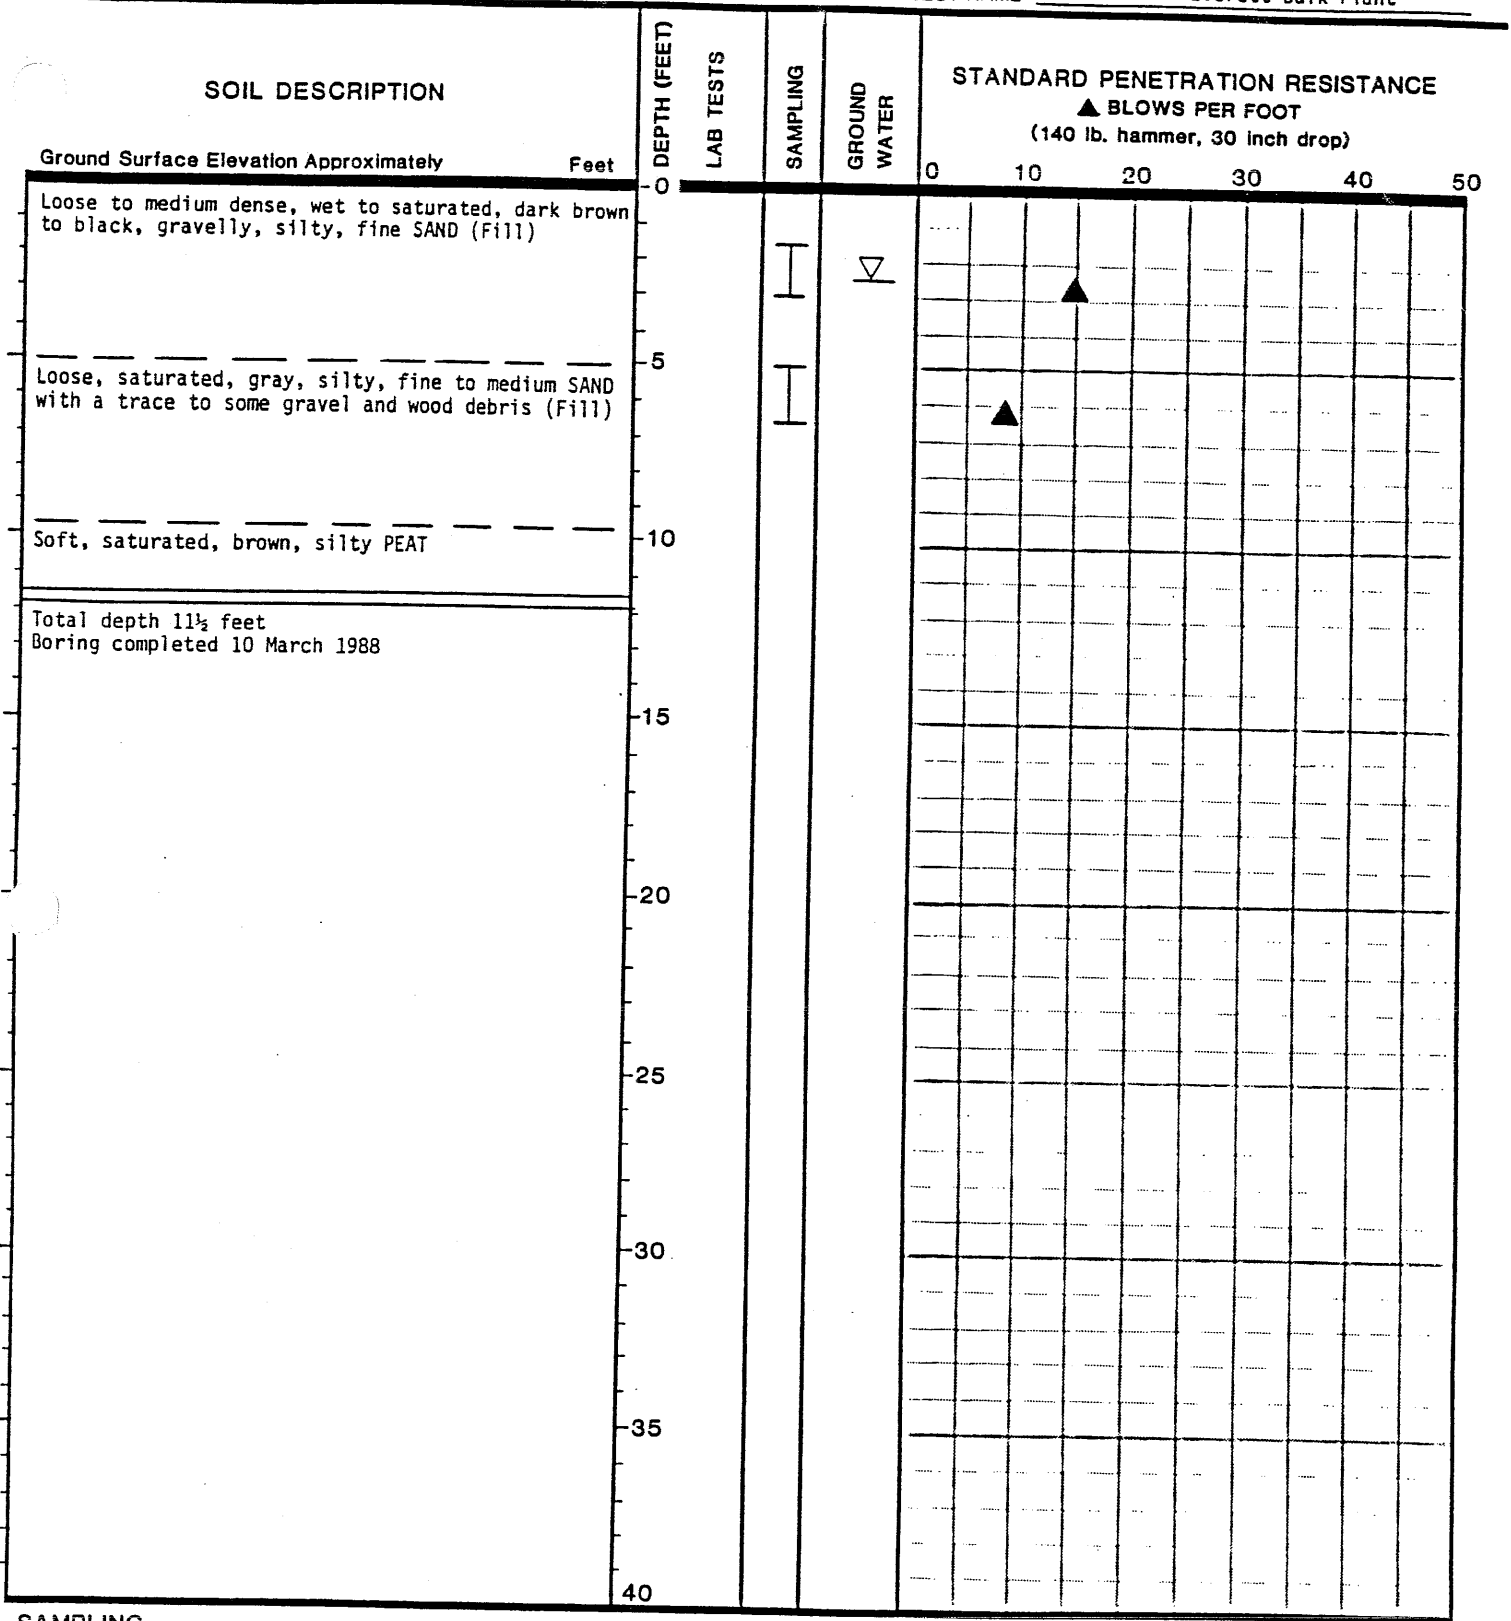


- SAMPLING**
- I 2' OD SPLIT SPOON SAMPLE
 - II 3' OD SHELBY SAMPLE
 - III 2.5' ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED



PORTABLE PERCUSSION BORING LOG MW-19

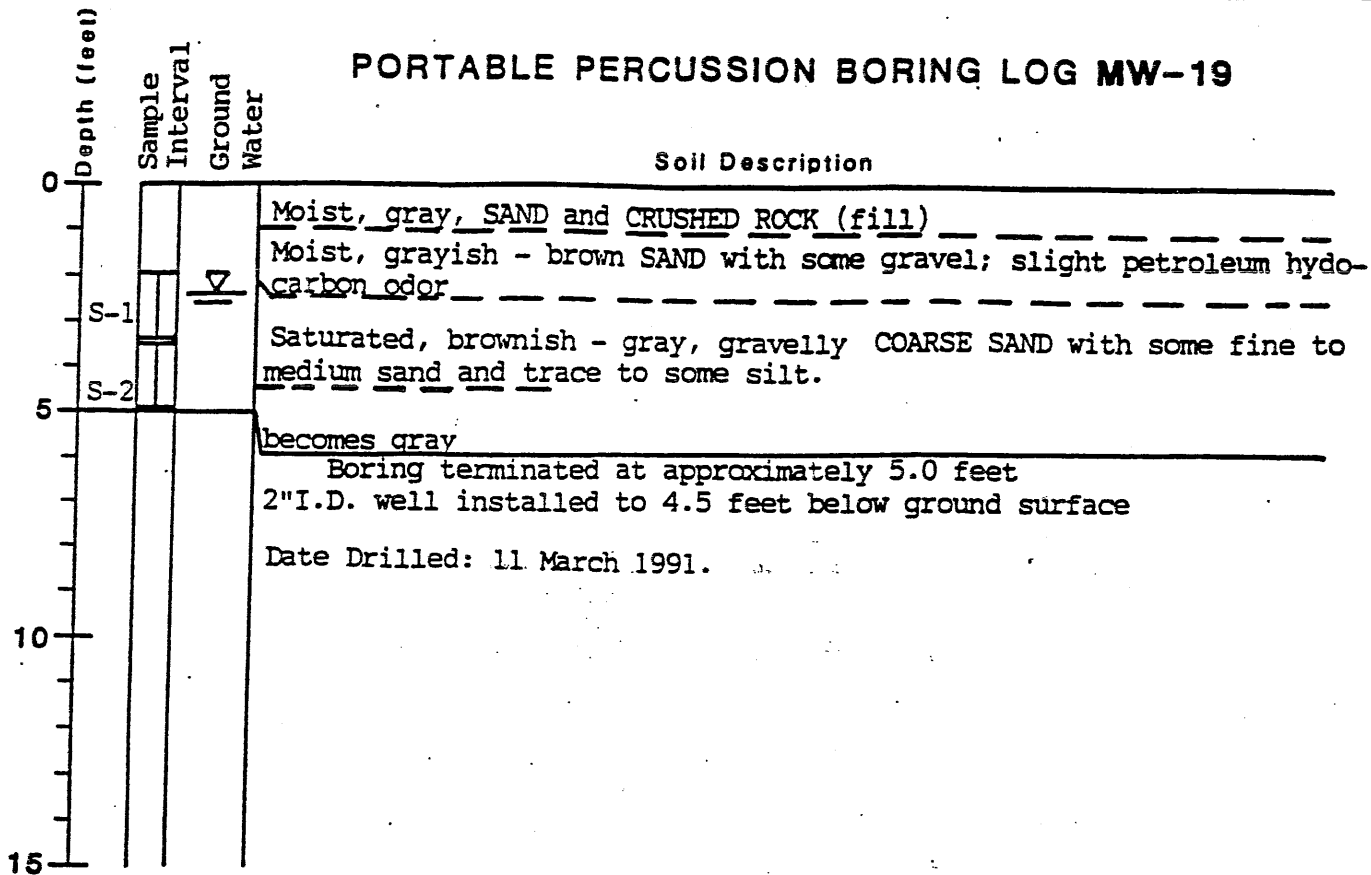

PORTABLE PERCUSSION BORING LOG MW-20

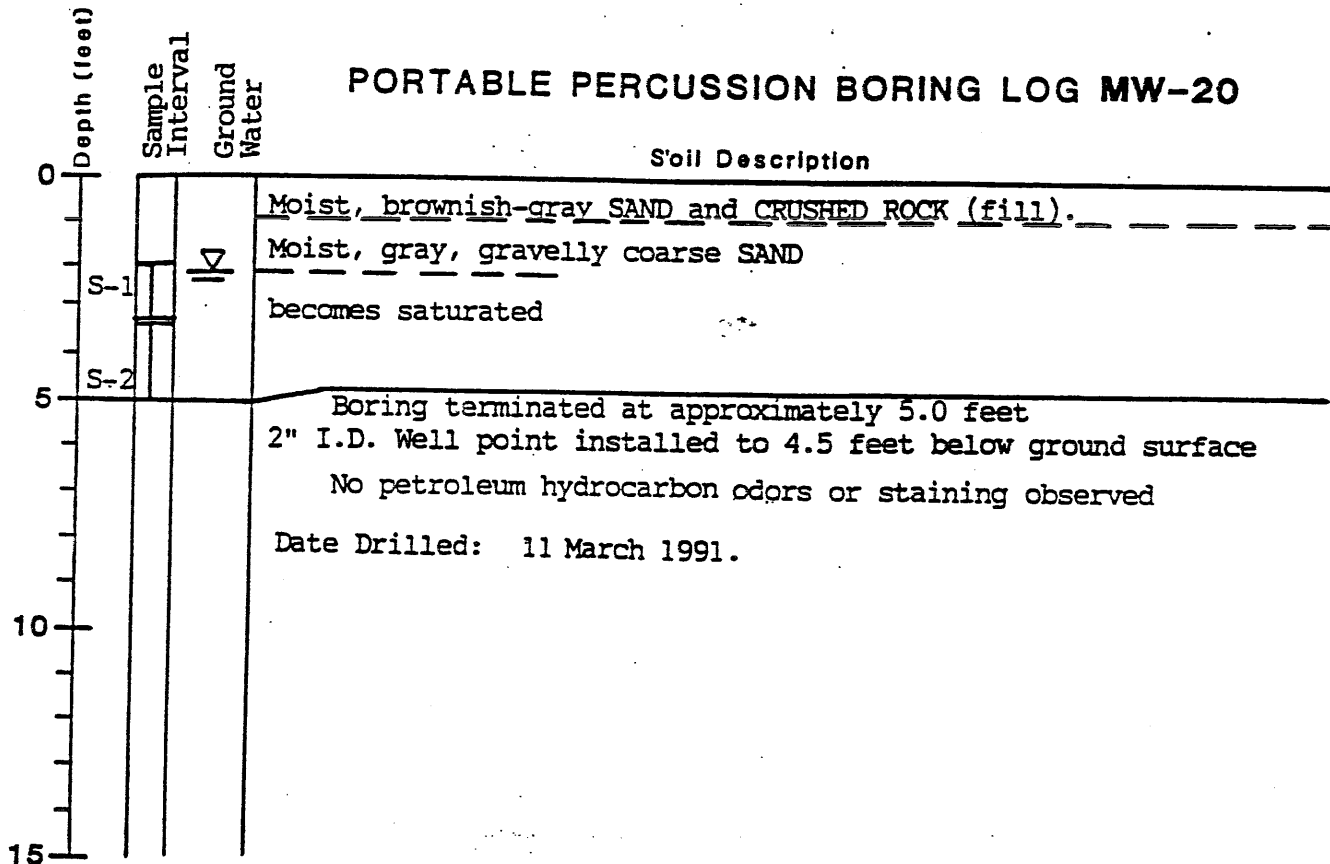


▽ ATD groundwater level at time of drilling


RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical Consultants
 1400 140th N.E.
 Bellevue, Washington 98007
 (206) 716-8020



PORTABLE PERCUSSION BORING LOG MW-21

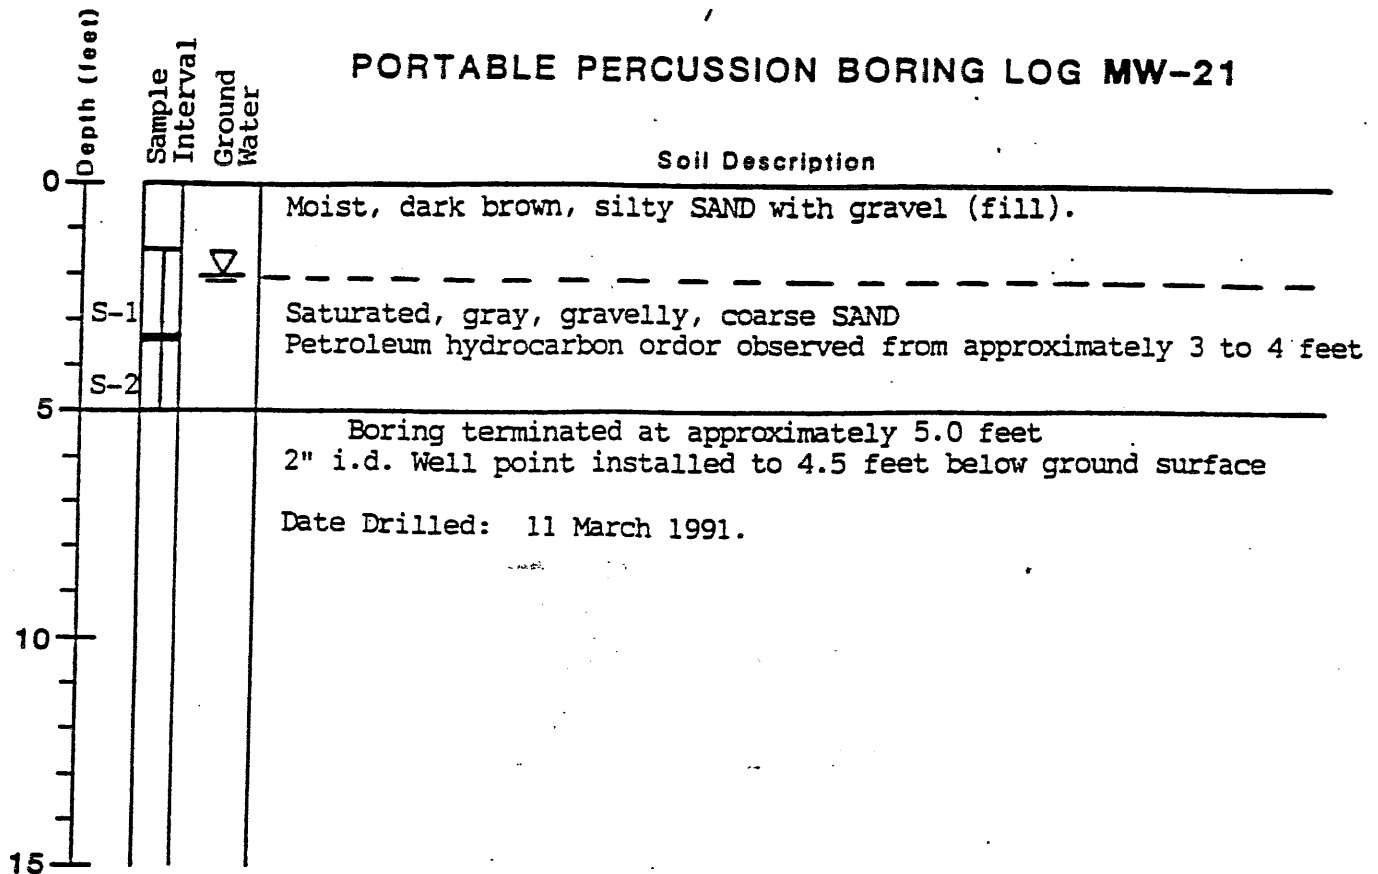

PORTABLE PERCUSSION BORING LOG MW-22

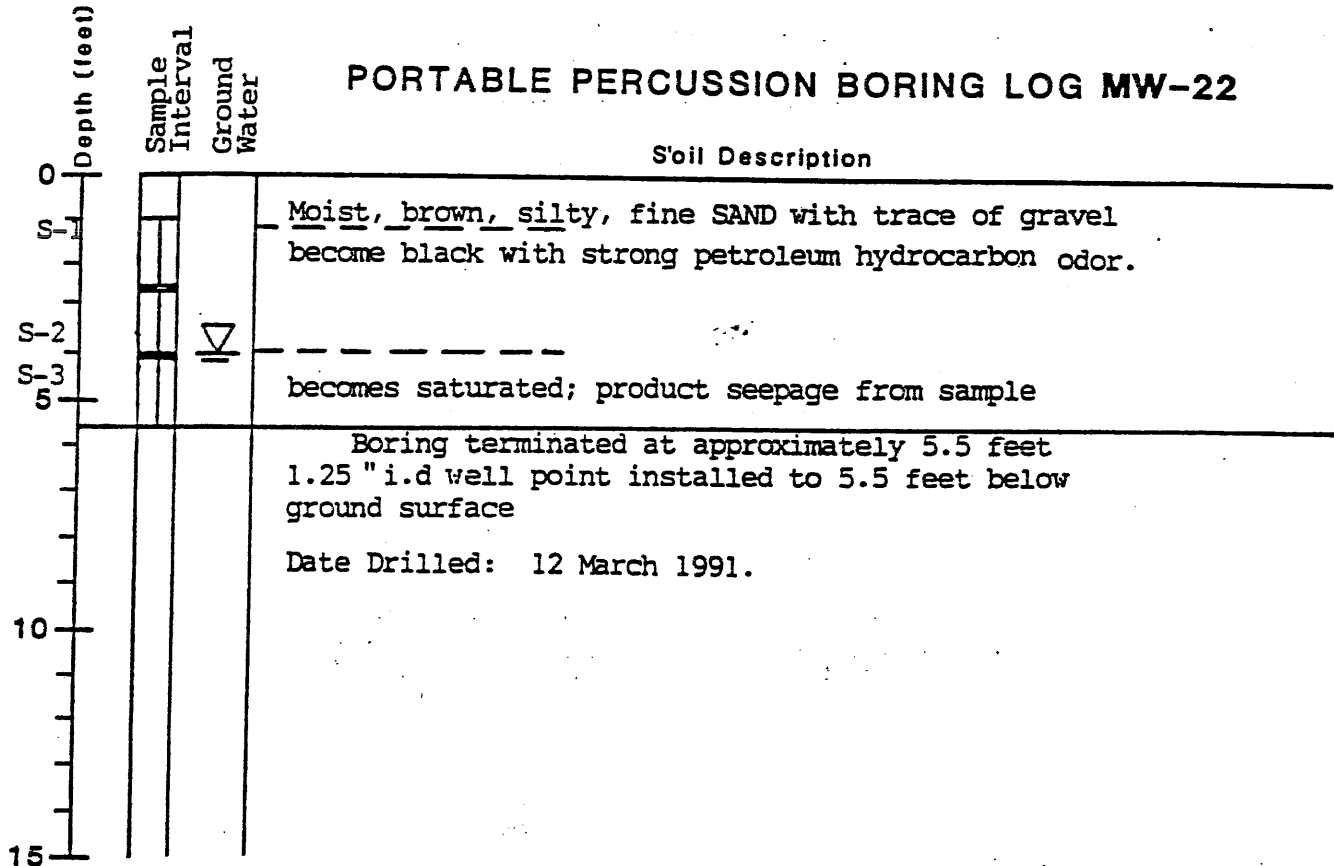

ATD groundwater at time of drilling


**RITTENHOUSE-ZEMAN &
ASSOCIATES, INC.**

Geotechnical Consultants


1400 140th N.E.
Bellevue, Washington 98007
(206) 736-8020



PORTABLE PERCUSSION BORING LOG MW-23

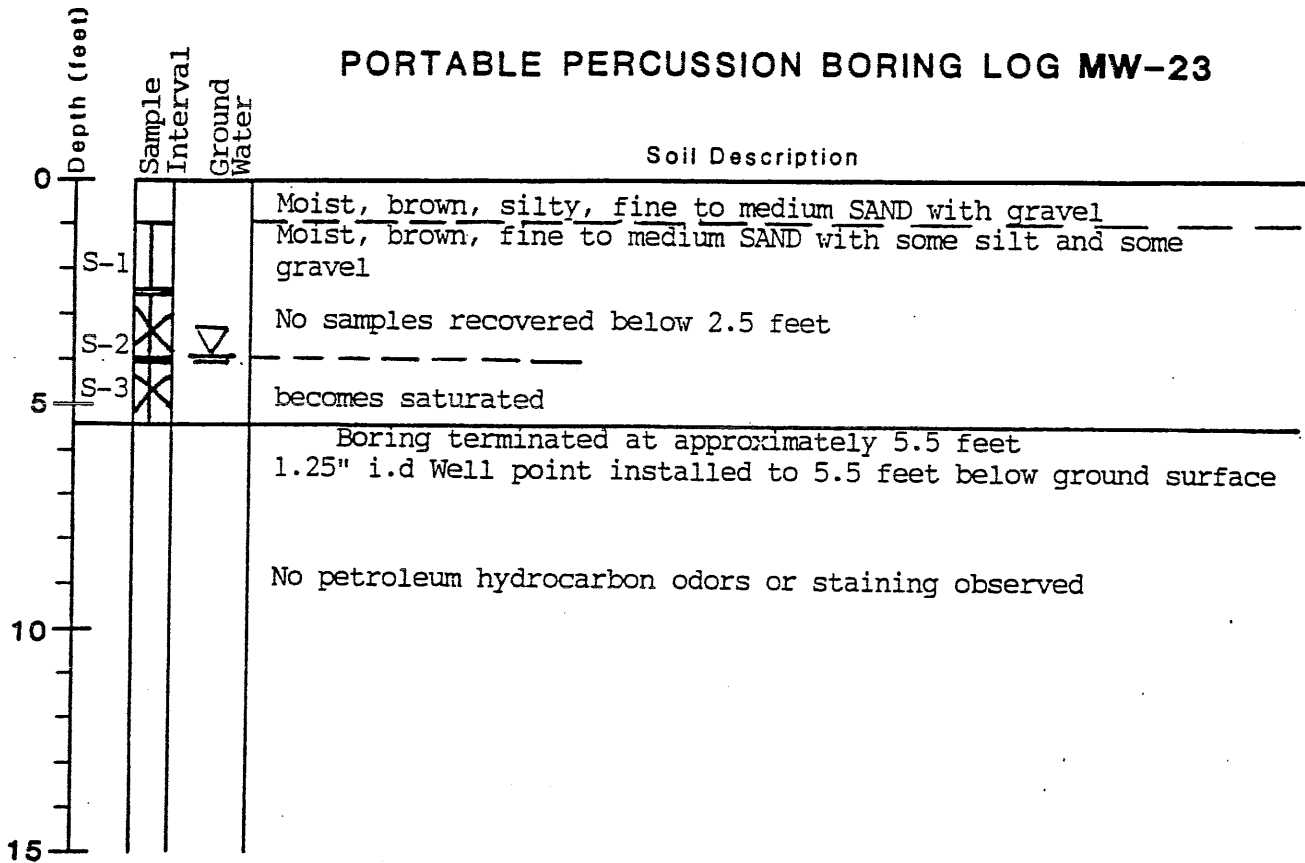

PORTABLE PERCUSSION BORING LOG MW-24

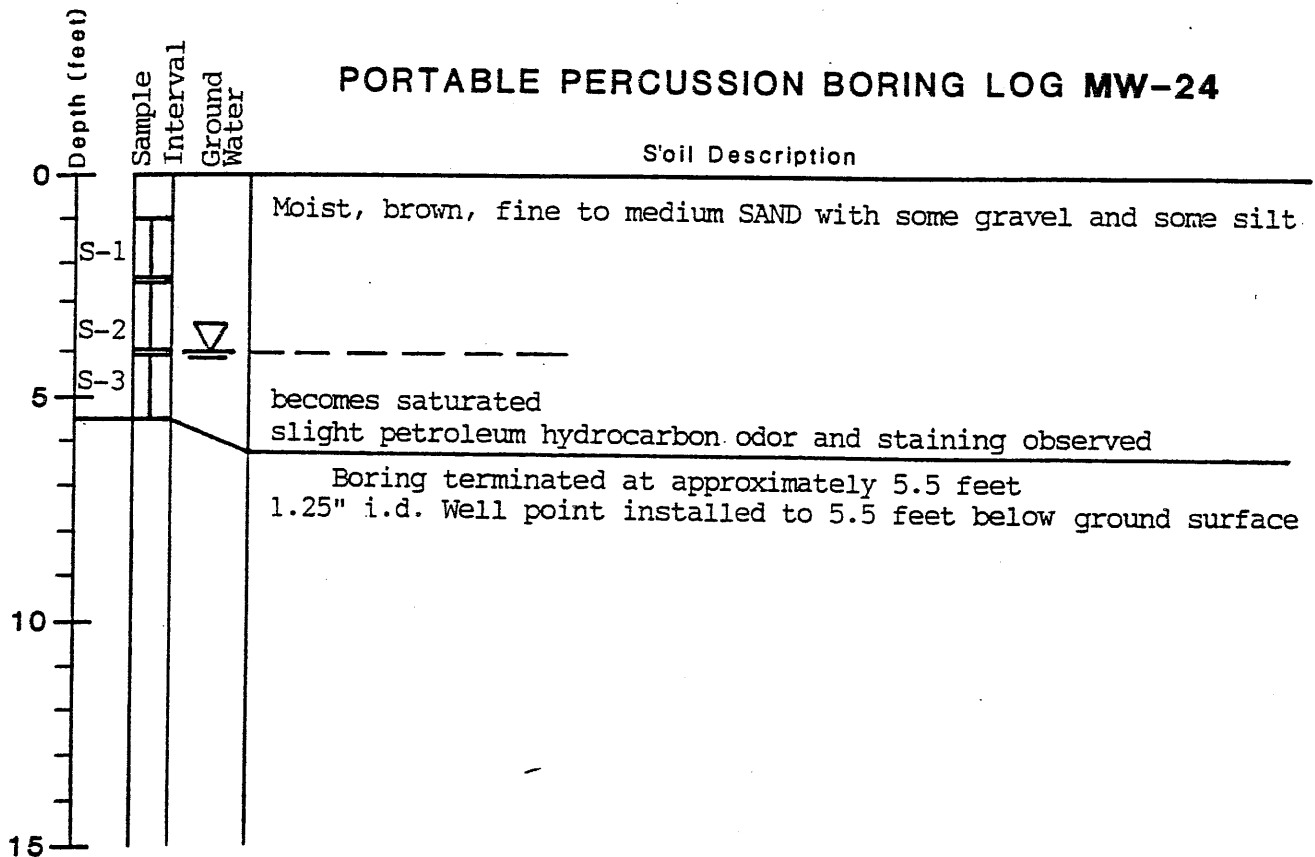


**RITTENHOUSE-ZEMAN &
ASSOCIATES, INC.**

Geotechnical Consultants


1400 140th N.E.
Belleve, Washington 98007
(206) 746-8020



PORTABLE PERCUSSION BORING LOG MW-25

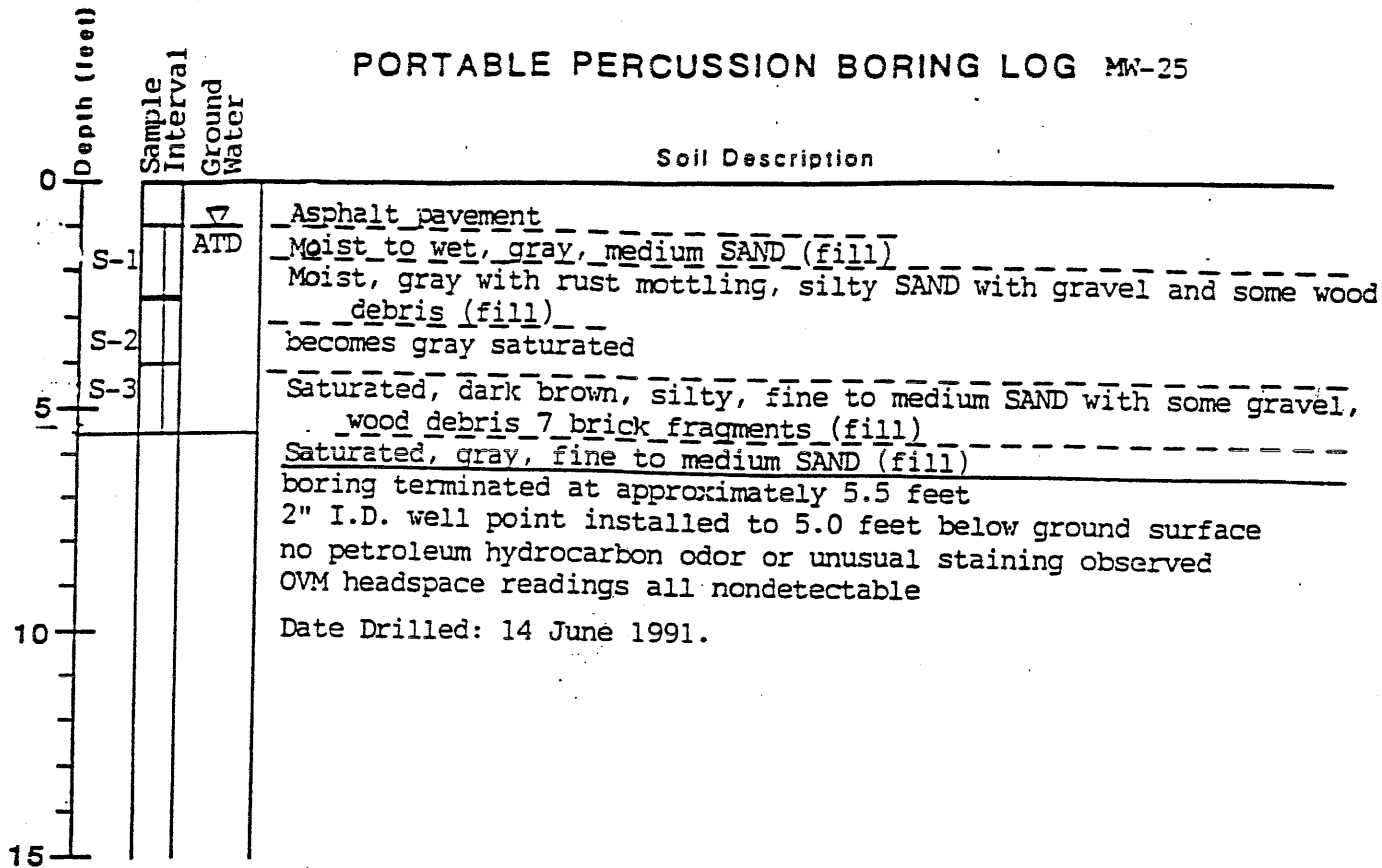

PORTABLE PERCUSSION BORING LOG MW-26

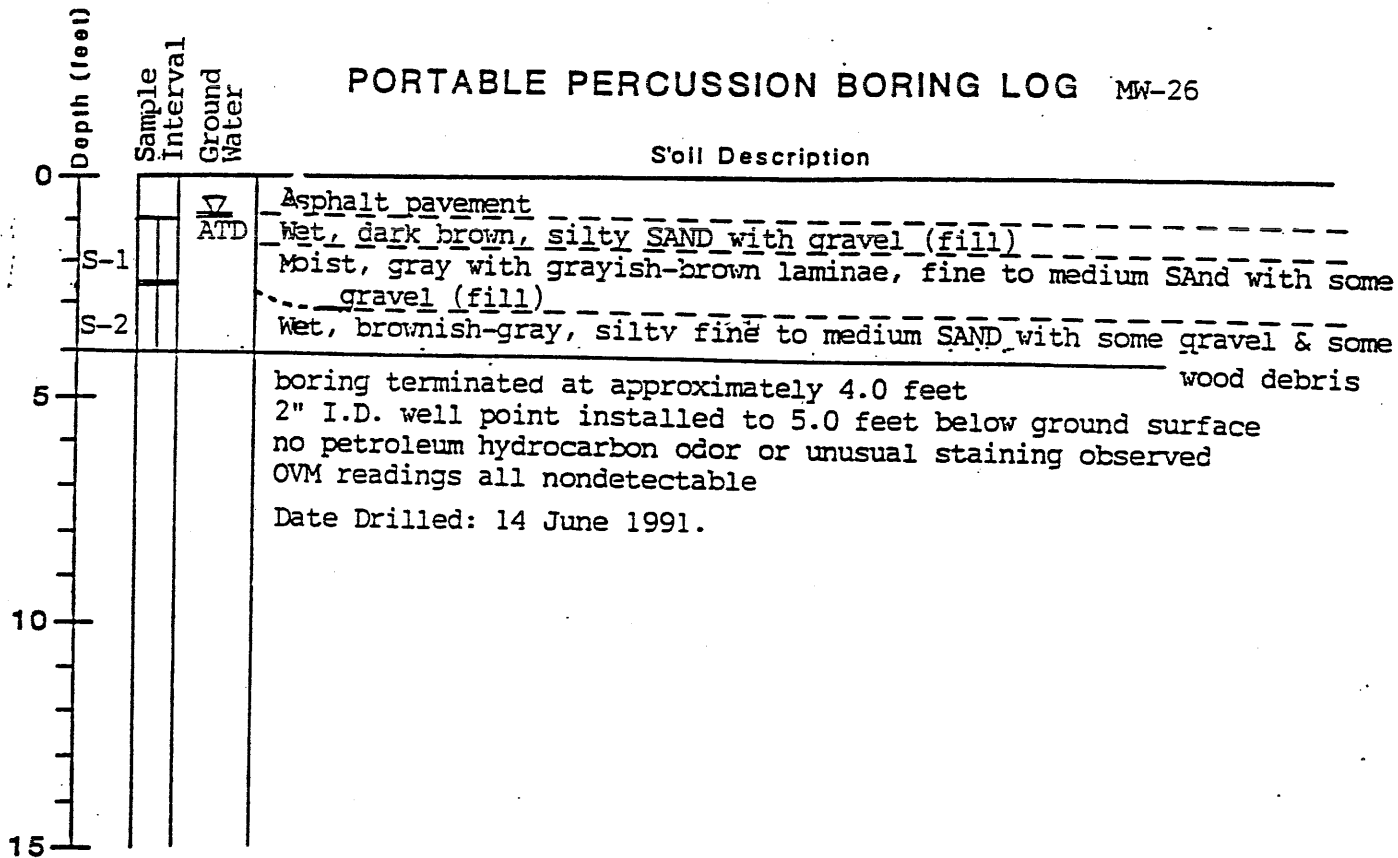

∇ ATD groundwater level at time of drilling

RITTENHOUSE-ZEMAN & ASSOCIATES, INC.

Geotechnical Consultants

1400 140th N.E.
Bellerue, Washington 98007
(206) 746-8020




Elevation reference: Well completed: *20 June 1991*
 Ground surface elevation: Casing elevation:

AS-BUILT DESIGN

TESTING

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER |
|--------------|--|-------------|---------------|-------------|-------------|--------------|
| 0 | 2" Asphalt. | | | | | |
| 0 - 5 | Medium dense, moist, gray, silty fine SAND with hydrocarbon odor | | S-1 | 15 | | ATD |
| 5 - 10 | Loose, wet, brown, PEAT with oily sheen and hydrocarbon odor | | S-2 | 2 | | |
| 10 - 13.5 | Loose, moist, gray, medium SAND hydrocarbon odor and sheen | | S-3 | 4 | | |
| 13.5 - 15 | Boring terminated at 13.5 feet. | | | | | |
| 15 - 20 | | | | | | |
| 20 - 25 | | | | | | |
| 25 - 30 | | | | | | |

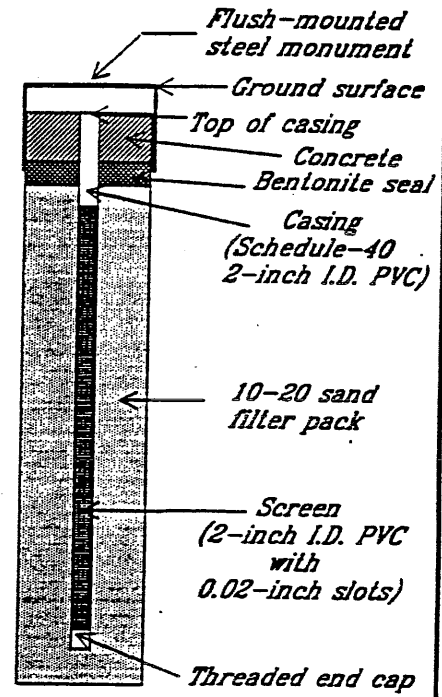

8015
418.1
BTEX
6010

8015
418.1
BTEX
6010

LEGEND

I 2-inch O.D. split-spoon sample

▽ ATD Observed groundwater level (ATD = at time of drilling)

8015
418.1
BTEX
6010 Soil Analysis (EPA Method shown)

RZA RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005


Elevation reference:
Ground surface elevation:

Well completed: *20 June 1991*
Casing elevation:

AS-BUILT DESIGN

TESTING

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | 2" Asphalt. | | | | | |
| | 3 inches brown/gray sandy GRAVEL | | | | | |
| 5 | Loose, moist, gray silty fine SAND | | S-1 | 2 | | ATD |
| 10 | Loose, moist, brown, PEAT layer, strong hydrocarbon odor | | S-2 | 2 | | |
| | Loose, moist to wet, brown, silty medium SAND with organics (peat); moderate hydrocarbon odor | | S-3 | 2 | | |
| 15 | Boring terminated at 13.5 feet. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

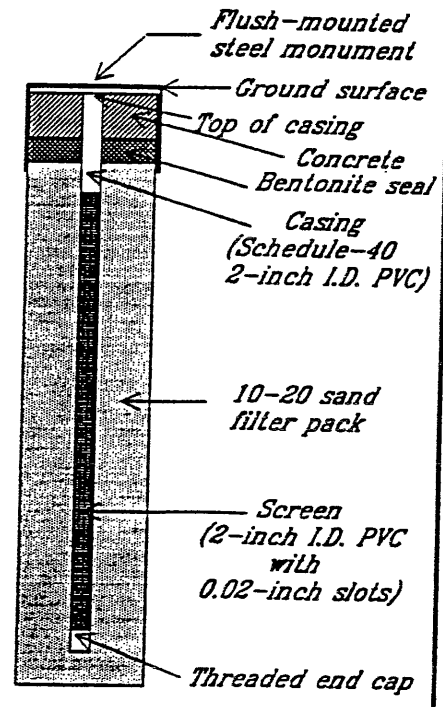

8015
418.1
BTX
6010

8015
418.1
BTX
6010

LEGEND

I 2-inch O.D. split-spoon sample
Soil Analysis (EPA Method shown)

▼
ATD Observed groundwater level (ATD = at time of drilling)

RZA RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
Geotechnical & Environmental Consultants
1400 140th Ave NE
Bellevue, Washington 98005

Drilling started: *20 June 1991*

Drilling completed: *20 June 1991*


Logged by: *JK*

Elevation reference:
 Ground surface elevation: Well completed: *20 June 1991*
 Casing elevation:

AS-BUILT DESIGN

TESTING

| DEPT (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER |
|-------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | 2" to 3" Asphalt. Loose, moist, gray, sandy, gravel | | | | | |
| 5 | Loose, moist, gray fine sandy SILT grading into silty fine sand | | S-1 | 3 | | ATD |
| 10 | Loose, wet, black oil-saturated PEAT with wood | | S-2 | 5 | | |
| 13.5 | Boring terminated at 13.5 feet. | | S-3 | 50/3" | | |

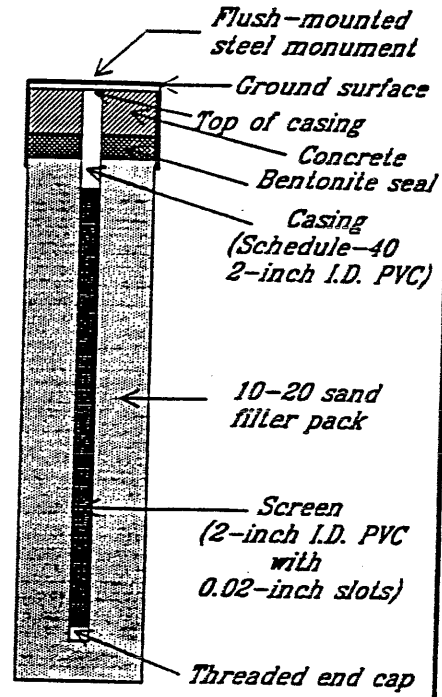

LEGEND

I 2-inch O.D. split-spoon sample

▽
ATD Observed groundwater level (ATD = at time of drilling)

8015 418.1 BTEX 6010 Soil Analysis (EPA Method shown)

× Sample not recovered



RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005

Drilling started: *20 June 1991*

Drilling completed: *20 June 1991*


Logged by: *JK*

Elevation reference: Well completed: *20 June 1991*
 Ground surface elevation: Casing elevation:

AS-BUILT DESIGN

TESTING

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | 2" Asphalt. | | | | | |
| | Loose, moist, gray, silty SAND | | | | | |
| | Loose, moist, gray, silty fine SAND | ⊗ | S-1 | 5 | | ▼ ATD |
| 5 | Loose, black, oily wood and PEAT | | | | | |
| | Very loose, wet, oily, gray medium SAND with organics (wood and peat) | | S-2 | 2 | | |
| 10 | Loose, wet (oily), black/brown PEAT and wood | | S-3 | 8 | | |
| 15 | Boring terminated at 13.5 feet. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

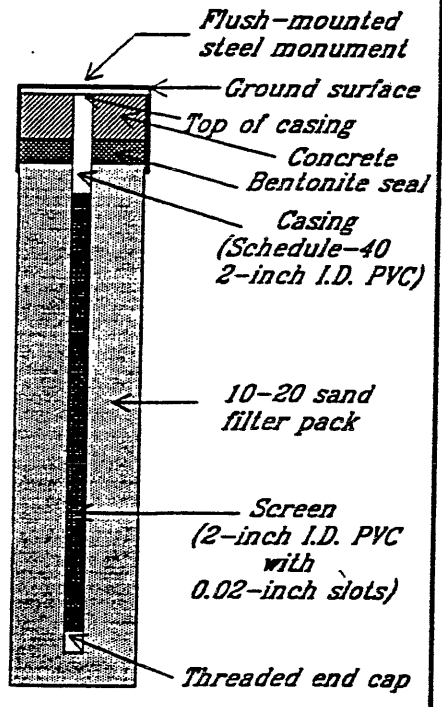

8015
418.1
BTEX
6010

8015
418.1
BTEX
6010

LEGEND

I 2-inch O.D. split-spoon sample

▼
ATD Observed groundwater level (ATD = at time of drilling)

8015
418.1
BTEX
6010
Soil Analysis (EPA Method shown)

⊗ Sample not recovered

RZA RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005

Drilling started: *20 June 1991*

Drilling completed: *20 June 1991*


Logged by: *JK*

PROJECT: *Everett Mobil Bulk Plant* W.O. 11-04558-04 WELL NO. MW-3

Elevation reference: 100.00 feet
 Well completed: 07 December 1993
 Ground surface elevation: Unknown
 Casing elevation: 98.58 feet

AS-BUILT DESIGN
 Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | Asphaltic Concrete | | | | | |
| 0 - 5 | Medium dense, wet, brownish-gray, fine SAND with gravel (Fill). Slight petroleum-like odor observed | | S-1 | 25 | 5 | |
| 5 - 10 | Loose, wet to saturated, dark greenish-gray, SAND with some gravel and wood debris (Fill) | | S-2 | 6 | 5 | 12/8/93 |
| 10 - 15 | Medium dense, saturated, dark gray, medium SAND with wood debris | | S-3 | 22 | 5 | |
| 15 | Bottom of boring at 15 feet. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

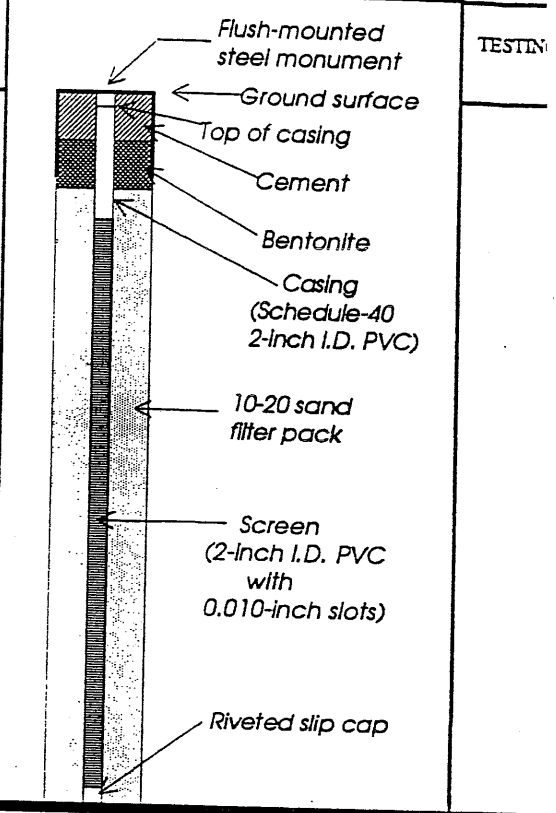

LEGEND
 I 2-inch O.D. split-spoon sample
 ▼ Observed groundwater level
 0/00/00 0/00/00 = date observed

RZA AGRA, Inc.
 Geotechnical & Environmental Group
 11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started: 07 December 1993 Drilling completed: 07 December 1993 Logged by: TJP


PROJECT: *Everett Mobil Bulk Plant W.O. 11-04558-04* WELL NO. MW-32

Elevation reference: 100.00 feet Well completed: 07 December 1993
 Ground surface elevation: Unknown Casing elevation: 99.17 feet

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | Gravel surface | | | | | |
| 5 | Medium dense, wet to saturated, greenish-gray, gravelly, medium SAND (Fill) | | S-1 | 13 | 5 | 12/8/93 |
| 10 | Medium dense, saturated, grayish-dark brown, medium SAND with gravel, some silt and wood fragments | | S-2 | 17 | 5 | |
| 15 | Medium dense, saturated, grayish-dark brown, silty, fine to medium SAND with some gravel and wood fragments | | S-3 | 17 | 5 | |
| 15 | Bottom of boring at 15 feet. No unusual staining or petroleum-like odors observed. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

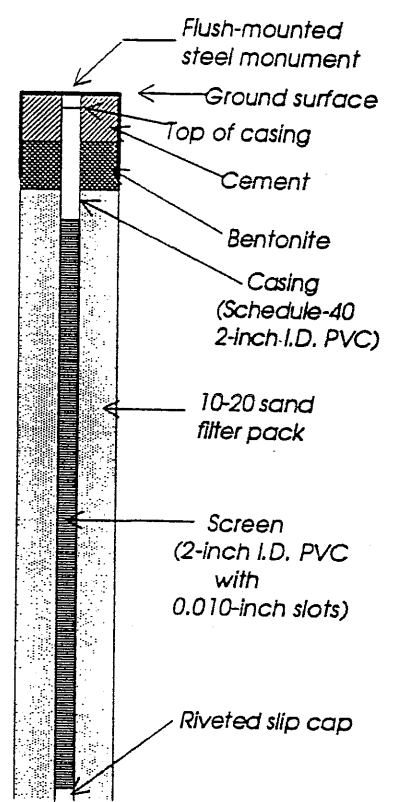

TESTING

LEGEND

- 2-inch O.D. split-spoon sample
- Observed groundwater level
- 0/00/00 = date observed

RZA AGRA, Inc.
 Geotechnical & Environmental Group

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918


PROJECT: *Everett Mobil Bulk Plant* W.O. 11-04558-04 WELL NO. MW-33

Elevation reference: 100.00 feet
 Ground surface elevation: Unknown
 Well completed: 07 December 1993
 Casing elevation: 97.64 feet

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OMV READING | GROUND WATER |
|--------------|--|-------------|---------------|-------------|-------------|--------------|
| 0 | Asphaltic Concrete | | | | | |
| 0 - 5 | Medium dense, wet to saturated, gray, medium to coarse SAND with some gravel (Fill) | | S-1 | 21 | 5 | ▼ 12/8/93 |
| 5 - 7 | Medium dense, saturated, greenish-gray, silty, fine to medium SAND (Fill) | | S-2 | 11 | 5 | |
| 7 - 10 | Loose, saturated, brown, silty PEAT | | S-3 | 5 | 5 | |
| 10 - 13 | Loose to medium dense, saturated, gray to brownish-gray, SAND with trace to some silt, gravel and wood fragments | | S-4 | 8 | 5 | |
| 13 - 15 | (Chunk of wood stuck in sample tube; S-5 blow count probably not representative) | | S-5 | 50/ 5 | 5 | |
| 15 - 17 | | | S-6 | 11 | 5 | |
| 17 - 18 | | | S-7 | 6 | 5 | |
| 18 - 20 | | | S-8 | 10 | 5 | |
| 20 - 22 | | | S-9 | 17 | 5 | |
| 22 - 25 | | | S-10 | 14 | 5 | |
| 25 - 29 | Very stiff, saturated, brown, clayey SILT with organics (PEAT-Like) | | S-11 | 17 | 5 | |
| 30 | Bottom of boring at 29 feet. No unusual staining or petroleum-like odors observed. | | | | | |

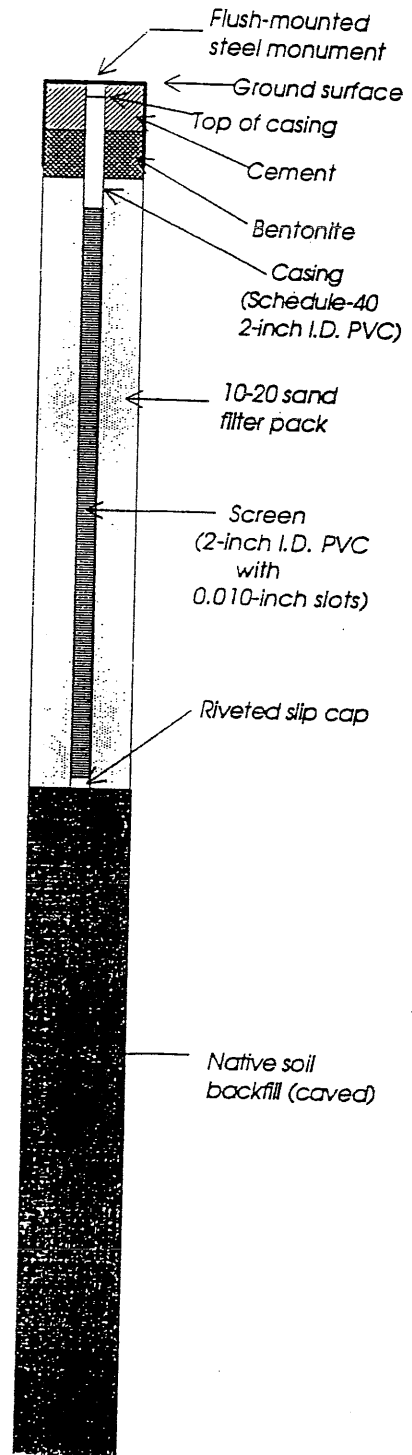

TESTING

LEGEND

— 2-inch O.D. split-spoon sample

▼ Observed groundwater level
 0/00/00 0/00/00 = date observed

RZA AGRA, Inc.
 Geotechnical & Environmental Group

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started: 07 December 1993 Drilling completed: 07 December 1993 Logged by: TJP

PROJECT: *Everett Mobil Bulk Plant* W.O. 11-04558-04 WELL NO. MW-35

Elevation reference: 100.00 feet
 Well completed: 06 December 1993
 Ground surface elevation: Unknown
 Casing elevation: 103.96 feet

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|--------------|---|-------------|---------------|-------------|-------------|--------------|---------|
| | | | | | | | |
| 0 | | | | | | | |
| 5 | Dense, moist, gray, silty, fine to medium SAND with some gravel | S-1 | 38 | 0 | | | |
| 10 | Loose, moist to saturated, gray, fine sandy SILT with some gravel | S-2 | 6 | 0 | | | |
| 15 | Bottom of boring at 15 feet. Field FT-IR analysis of samples S-1 and S-2 indicated TPH concentrations of <50 ppm. | S-3 | 4 | 0 | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

LEGEND

I 2-inch O.D. split-spoon sample

▼ Observed groundwater level
 0/00/00 0/00/00 = date observed

RZA AGRA, Inc.
 Geotechnical & Environmental Group

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

PROJECT: *Everett Mobil Bulk Plant* W.O. 11-04558-04 WELL NO. MW-36

Elevation reference: 100.00 feet
 Well completed: 06 December 1993
 Ground surface elevation: Unknown
 Casing elevation: 99.91 feet

AS-BUILT DESIGN

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | AS-BUILT DESIGN | TESTING | |
|--------------|---|-------------|---------------|-------------|-------------|--------------|-----------------|---------|--|
| | | | | | | | | | |
| 0 | | | | | | | | | |
| 0 - 5 | Medium dense, moist, blackish-gray, silty, fine to medium SAND with some gravel | | S-1 | 19 | 0 | 12/8/93 | | | |
| 5 - 10 | Becomes very loose, with increasing silt content | | S-2 | 2 | 0 | | | | |
| 10 - 15 | Wood debris | | S-3 | 4 | 0 | | | | |
| 15 | Bottom of boring at 15 feet. | | | | | | | | |
| 20 | | | | | | | | | |
| 25 | | | | | | | | | |
| 30 | | | | | | | | | |

LEGEND

2-inch O.D. split-spoon sample

Observed groundwater level
 0/00/00 0/00/00 = date observed


RZA AGRA, Inc.
 Geotechnical & Environmental Group

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918




PROJECT: *Everett Mobil Bulk Plant W.O. 11-04558-04 WELL NO. MW-37*

Elevation reference: 100.00 feet Well completed: 06 December 1993
 Ground surface elevation: Unknown Casing elevation: 103.87 feet
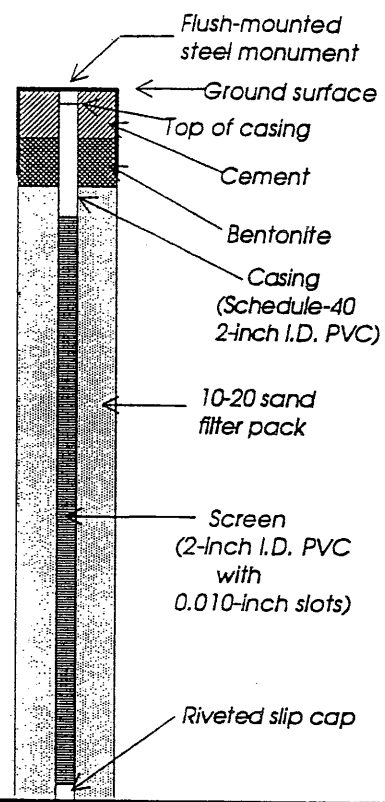
| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | AS-BUILT DESIGN | | TESTING |
|--------------|---|-------------|---------------|-------------|-------------|--------------|--------------------------------------|--------|---------|
| | | | | | | | Diagram | Labels | |
| 0 | | | | | | | Flush-mounted steel monument | | |
| | | | | | | | Ground surface | | |
| | | | | | | | Top of casing | | |
| | | | | | | | Cement | | |
| | | | | | | | Bentonite | | |
| | | | | | | | Casing (Schedule-40 2-inch I.D. PVC) | | |
| 5 | Medium dense, moist, gray, silty, fine to medium SAND with trace gravel | | S-1 | 17 | 51 | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | Becomes very loose, saturated; strong petroleum-like odor | | S-2 | 3 | 57 | 12/8/93 | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| 10 | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | Very loose, saturated, reddish-brown, medium to coarse SAND with some silt, trace gravel and organics; petroleum seepage observed | | S-3 | 3 | 34 | | | | |
| 15 | Bottom of boring at 15 feet. | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| 20 | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| 25 | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| 30 | | | | | | | | | |



LEGEND

-  2-inch O.D. split-spoon sample
-  Observed groundwater level
-  0/00/00 = date observed


RZA AGRA, Inc.
 Geotechnical & Environmental Group
 11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Location reference: Unknown
 Ground surface elevation: Unknown

Well completed: 05 June 1996
 Casing elevation: Unknown

AS-BUILT DESIGN

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------------------------|--|-------------|---------------|-------------|-------------|--------------|
| 0 | Grass and Roots Loose, moist, dark brown, silty SAND with gravel (strong petroleum hydrocarbon-like odor) | Grab sample | MW-38/2.5 | | | |
| 5 | | | MW-38/5.0 | 10 | 0.0 | ATD |
| | | | MW-38/7.5 | 50/1" | 0.0 | |
| 10 | Medium dense, saturated, brown WOOD CHIPS with trace silt (Fill) (strong petroleum hydrocarbon-like odor) | | MW-38/10.0 | 11 | 0.0 | |
| Bottom of boring at 12.5 feet. | | | | | | |
| 15 | | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

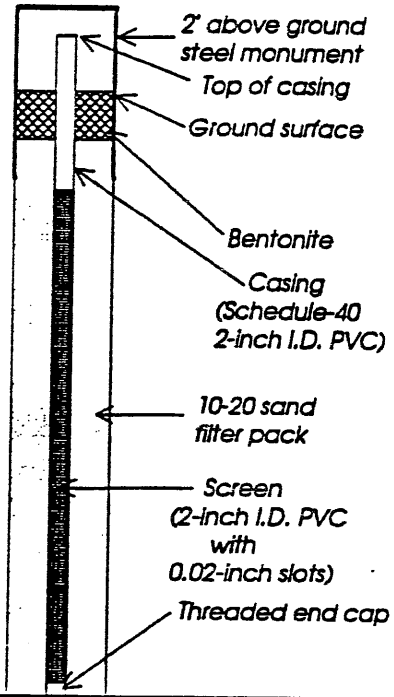


TESTING

LEGEND

- 2-inch O.D. split-spoon sample
- Grab sample
- Observed groundwater level
- ATD = at time of drilling

AGRA
 Earth & Environmental
 11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918



HOLE NO. VRW-1
SHEET L OF 1
TOTAL DEPTH 15.0
DATE BEGUN 6/5/96
DATE COMPLETED 6/5/96

WEATHER partly cloudy, 50's

TEST BORING LOG

| SAMPLING | | GROUNDWATER TABLE | | EST. NAME | |
|----------|-------|----------------------|-------|------------------|-----|
| DATE | DEPTH | DEPTH | DEPTH | NO. | NO. |
| 6/5/96 | 6.7 | | | MOBIL/700 | |
| | 0430 | | | 11-04558-09 | T17 |
| | | | | RAE | |
| | | | | CASCADE | |
| | | | | HSA | |
| | | SAMPLING METHOD | | TEST TUBE R-RING | |
| | | STANDARD PENETRATION | | DEM | |

SOIL DESCRIPTION

GRASS AND ROOTS OVER
BACKFILL BENTONITE TO APPROX. 5.0 Feet

| DEPTH (ft) | DEPTH (m) | SOIL DESCRIPTION | TESTS |
|------------|-----------|---|-------------------------|
| 15.0 | 4.6 | 5m dense, saturated, dark brown silty SAND with GRAVEL (5m) - wood debris, free product (oil), strong oil. | NO SAMPLE FOR HEADSPACE |
| 8.0 | 2.4 | stiff, moist saturated, brown PEAT - trace silt, strong odor. | HNU = 14 ppm |
| 10.0 | 3.0 | 5m dense, saturated, grey brown SAND with silt (SP) - trace peat, wood debris from 10-10.5 feet, strong odor. | HNU = 40 ppm |
| 12.5 | 3.8 | stiff, saturated, brown PEAT - trace silt, strong odor. | HNU = 5 ppm |

DRILL OUT TO 15' MENING SAND
0.5 THREADED CAP.

140 lb - 30" Drop

BORING
LOG
SUMMARY




LOCATION

OBSERVED BY PATL
DRILLER/INSTALLER CASCADE


PROJECT No. 11-04558-09
PROJECT NAME MOBILE/AD
BORING/WELL I.D. URW-1
DATE 6/5/96

SOIL TYPE DEPTH



ABOVE GROUND RISER HEIGHT (IF APPLICABLE) 9
MONUMENT TYPE (IF APPLICABLE)
WELL CAP TYPE locking

0 SURFACE




~~GROUT TYPE/=SACKS~~
BENTONITE SEAL /=SACKS

1

WELL CASING I.D. 4"
TYPE OF CASING Schedule 40 PVC
TYPE OF CONNECTION Thread-d

2

FILTER PACK/SIZE/=SACKS 6x12



WELL SCREEN I.D. 4"
TYPE OF SCREEN "V" screen
SLOT SIZE 0.030


DIAMETER OF BOREHOLE 12"

140
145
145

ENDCAP TYPE threaded (0.5' pointed)

REMARKS





AGRA
Earth & Environmental

HOLE NO. RW-1
SHEET 1 OF 1
TOTAL DEPTH 15.0
DATE BEGUN 6/5/96
DATE COMPLETED 6/5/96

WTR. partly cloudy, 50's

TEST BORING LOG

| SAMPLING | | GROUNDWATER TABLE | | PROJECT NAME | |
|---------------|--------|-------------------------|------|-------------------------|---|
| DATE | 6/5/96 | AT/DAT TIME OF DRILLING | 0930 | PROJECT NUMBER | 11-04558-09 T17 |
| DEPTH IN FEET | 6.7 | AB= AFTER BORING | | GEOLOGIST/ENGINEER | RAL |
| TIME | 0930 | | | DRILLING CONTACTOR/CREW | CASCADE |
| | | | | METHOD USED | HSA |
| | | | | SAMPLING METHOD | SPT=STANDARD PENETRATION TEST T=TUBE R=RING D&M |

SOIL DESCRIPTION

GRASS AND ROOTS OVER
BACKFILL BENTONITE TO APPROX. 5.0 Feet

| | | | | | |
|------|----|----|---|----|--|
| RW-1 | 15 | 7 | 6 | 5m | m. dense, saturated, dark brown silty SAND with GRAVEL (5m) - wood debris, free product (oil), strong oil. NO SAMPLE FOR HEADSPACE |
| RW-1 | 8 | 6 | 6 | pt | stiff, moist saturated, brown PEAT - trace silt, strong odor HNU = 14 ppm |
| RW-1 | 12 | 11 | 8 | sp | m. dense, saturated, grey brown SAND with silt (SP) - trace peat, wood debris from 10-10.5 feet, strong odor. HNU = 40 ppm |
| RW-1 | 6 | 6 | 5 | pt | stiff, saturated, brown PEAT - trace silt, strong odor HNU = 5 ppm |

DRILL OUT TO 15'. HEAVY SAND
0.5 THREADED CAP.

140 lb - 30" Drop

BORING
LOG
SUMMARY




MONITORING WELL AS-BUILT REPORT

LOCATION _____
OBSERVED BY PAL
DRILLER/INSTALLER CASCADE

PROJECT No. 11-04558-09
PROJECT NAME MOBILE/AD
BORING/WELL I.D. URW-1
DATE 6/5/96

SOIL TYPE DEPTH

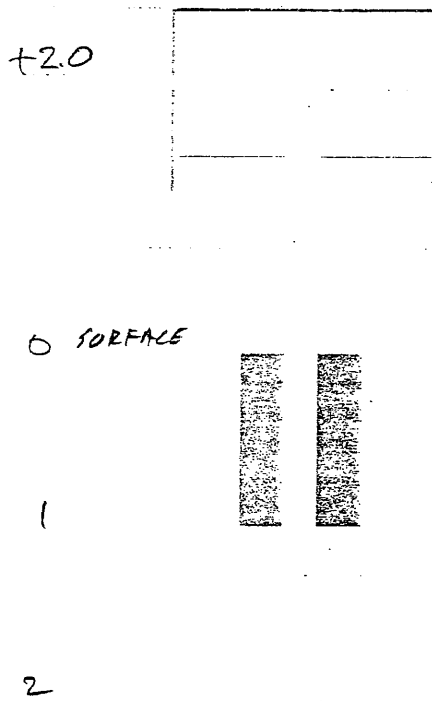

ABOVE GROUND RISER HEIGHT (IF APPLICABLE) _____
MONUMENT TYPE (IF APPLICABLE) _____
WELL CAP TYPE locking

~~GROUT TYPE~~ = SACKS _____
BENTONITE SEAL = SACKS _____

WELL CASING I.D. 4"
TYPE OF CASING Schedule 40 PVC
TYPE OF CONNECTION Threaded

FILTER PACK/SIZE = SACKS 6x12

WELL SCREEN I.D. 4"
TYPE OF SCREEN "V" screen
SLOT SIZE 0.030

DIAMETER OF BOREHOLE 12"

14.0
14.5
14.5

ENDCAP TYPE threaded (0.5' points)

REMARKS _____



LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-01

Date: 1-15-90

Client: American Distributing Co.

Driller: D. Alford

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger



Hole Diameter: 2"

Logged by: D. Alford

Page No: 1 of 1

Installation Data: Backfill with enviroplug

1 location of boring:

| epth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|--------------|---|---------|--------------------------------------|--------------------------|------------------------------------|-------------|------|------|---|
| | | | | | | 3.0' | | | |
| 0 - |  | | | Sample @ 0.5-1.0' | sp | | | | Grass |
| 1 - |  | | | | | | | | 0.5-1.0 Sand, coarse grained, occasional gravel, very slight clay loose, moist, no odor. |
| 2 - | | | | | sc | | | | 2.0' Sand, clayey, fine grained, grey brown, loose, very moist, moderate petroleum odor. |
| 3 - | | | | Sample @ 3.0' | | | | | 2.5-3' Sand, clayey, occasional gravel, light grey brown, very moist, loose, strong petroleum odor. |
| 4 - | TD = 3.0' | | | | | | | | 3' Sand, coarse grained, slightly clayey, some gravel, light grey wet, moderate petroleum odor. |
| 5 - | | | | | | | | | |
| | | | | | | | | | Groundwater at approximately 3'. |

LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-02

Date: 1-15-90

Client: American Distributing Co.

Driller: D. Alford

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger

Hole Diameter: 2"

Logged by: D. Alford

Page No: 1 of 1

Installation Data: Backfill with enviroplug

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|---------------|----------------|---------|--------------------------------------|--------------------------|------------------------------------|-----------------|------|---|--|
| | | | | | | approx. 2.0' | | | |
| 0 - | | | | Sample @ | sp | | | | Grass |
| 1 - | | | | 0.5-1.0' | | | | 0.5-1.0' Sand, coarse grained with occasional gravel, saturated, slight petroleum odor. | |
| 2 - | | | | Sample @ | sm | | | | 2.5-3.0' Sand, coarse grained with grey/green clayey silt, organic debris, strong petroleum odor, iridescent sheen on water. |
| 3 - | | | | 2.5-3.0' | | | | | |
| 4 - | | | | | | | | | |
| 5 - | | | | | | | | | |
| | | | | | | | | | Groundwater at approximately 2' |

LOG OF
EXPLORATORY BORING

| | |
|---|-----------------------------|
| Project No: 05-487-001 | Boring No: AD-07 |
| | Date: 1-15-90 |
| Client: American Distributing Co. | Driller: D. Alford |
| Location: Bulk Terminal-Everett, WA | Drilling Method: Hand Auger |
| | Hole Diameter: 2" |
| Logged by: D. Alford | Page No: 1 of 1 |
| Installation Data: Backfill with Enviroplug | |

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|--|------|------|----------|
| | | | | | | Approx. 6" | | | |
| 0 - | TD = 1.0' | | | Sample @ | sp | 0.5-1.0 Sand, coarse grained, gravelly, loose, moist to wet, moderate odor, groundwater has iridescent film. | | | |
| - | | | | 0.5-1.0" | | | | | |
| 1 - | | | | | | Groundwater at approximately 6 inches. | | | |
| - | | | | | | | | | |
| 2 - | | | | | | | | | |
| - | | | | | | | | | |
| 3 - | | | | | | | | | |
| - | | | | | | | | | |
| 4 - | | | | | | | | | |
| - | | | | | | | | | |
| 5 - | | | | | | | | | |
| - | | | | | | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-08

Date: 1-16-90

Client: American Distributing Co.

Driller: D. Alford

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger

Hole Diameter: 2"

Logged by: D. Alford

Page No: 1 of 1

Installation Data: Backfill with enviroplug

location of boring:

| epth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|--------------|----------------|---------|--------------------------------------|--------------------------|------------------------------------|-----------------|------|------|--|
| | | | | | | Approx. 5.0' | | | |
| 0 - | | | | | | | | | Grass |
| - | | | | Sample @ 0.5-1.0' | sm | 0.5-1.0' | | | Sand, silty with occasional gravel, medium grained, light brown, dry, no odor. |
| 1 - | | | | | sm | 1.5-2.0' | | | Sand, coarse grained, gravelly, some silt/clay, light to dark brown, loose, moist, no odor. |
| 2 - | | | | Sample @ 2.5-3.0' | sc | 2.5-3.0' | | | Sand, clayey, with occasional gravel, light grey, moist strong petroleum odor. |
| 3 - | | | | Sample @ 4.5-5.0' | sc | 4.5-5.0' | | | Sand, clayey, with occasional gravel, light grey, moist strong petroleum odor. Saturated at 5.0' |
| 4 - | | | | | | | | | |
| 5 - | | | | | | | | | |
| - | | | | | | | | | Groundwater at approximately 5.0' |

LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-12

Date: 1-16-90

Client: American Distributing Co.

Driller: D. Alford

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 2"

Logged by: D. Blaes

Page No: 1 of 1

Installation Data: Backfill with Enviroplug

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: | |
|------------|--|---------|---------------------------|-----------------------|------------------------------|--------------|----------|------|--|---|
| | | | | | | Approx. 3.5' | | | | |
| 0 - |  | | | Sample @ 0.5-1.0' | sp | 0.5-1.0' | | | Sand, with gravel, medium grained, brown, loose, moist, no petroleum odor. | |
| 1 - | | | | Sample @ 2.5-3.0' | sp | 2.5-3.0' | | | Sand, medium grained, gravelly, grey brown, loose, visible oil staining, strong diesel odor. | |
| 2 - | | | | Sample @ 3.0-3.5' | | | 3.0-3.5' | | | Sand, medium grained, gravelly, grey, wet, strong petroleum odor. |
| 3 - | | | | | | | | | | |
| 4 - | TD = 3.5' | | | | | | | | | |
| 5 - | | | | | | | | | | |
| | | | | | | | | | Groundwater at approximately 3.5' | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-15

Date: 1-17-90

Client: American Distributing Co.

Driller: D. Blaes

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 2"

Logged by: D. Blaes

Page No: 1 of 1

Installation Data: Backfill with Enviroplug

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|---------------|--|---------|---------------------------------|--------------------------|------------------------------------|-----------------|------|------|--|
| | | | | | | Approx. 3.0' | | | |
| 0 - |  | | | Sample @ 0.5-1.0' | sp | 0.5-1.0' | | | Sand, fine to medium grained, brown, dry, loose, no odor. |
| 1 - | | | | | | | | | |
| 2 - | | | | | | | | | |
| 3 - | TD = 3.0' | | | Sample @ 2.5-3.0' | sp | 2.5-3.0' | | | Sand, medium grained, grey to black, loose, moist to wet, very strong gasoline odor. |
| 4 - | | | | | | | | | |
| 5 - | | | | | | | | | Groundwater approximately 3.0' |

LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-17

Date: 1-17-90

Client: American Distributing Co.

Driller: D. Blaes

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 2"

Logged by: D. Blaes

Page No: 1 of 1

Installation Data: Backfill with Enviroplug

Location of boring:

| epth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|--------------|--|---------|--------------------------------------|--------------------------|------------------------------------|-----------------------------------|------|------|---|
| | | | | | | Approx. 1.0' | | | |
| 0 - |  | | | Sample @ 0.5-1.0' | sp | Grass | | | 0.5-1.0' Sand, medium grained, gravel, dark grey loose, wet, moderate gasoline odor. |
| 1 - | | | | | | Groundwater at approximately 1.0' | | | |
| 2 - | | | | | | | | | |
| 3 - | | | | | | | | | |
| 4 - | | | | | | | | | |
| 5 - | | | | | | | | | |
| 6 - | | | | | | | | | |
| 7 - | | | | | | | | | |
| 8 - | | | | | | | | | |
| 9 - | | | | | | | | | |
| 10 - | | | | | | | | | |
| 11 - | | | | | | | | | |
| 12 - | | | | | | | | | |
| 13 - | | | | | | | | | |
| 14 - | | | | | | | | | |
| 15 - | | | | | | | | | |
| 16 - | | | | | | | | | |
| 17 - | | | | | | | | | |
| 18 - | | | | | | | | | |
| 19 - | | | | | | | | | |
| 20 - | | | | | | | | | |
| 21 - | | | | | | | | | |
| 22 - | | | | | | | | | |
| 23 - | | | | | | | | | |
| 24 - | | | | | | | | | |
| 25 - | | | | | | | | | |
| 26 - | | | | | | | | | |
| 27 - | | | | | | | | | |
| 28 - | | | | | | | | | |
| 29 - | | | | | | | | | |
| 30 - | | | | | | | | | |
| 31 - | | | | | | | | | |
| 32 - | | | | | | | | | |
| 33 - | | | | | | | | | |
| 34 - | | | | | | | | | |
| 35 - | | | | | | | | | |
| 36 - | | | | | | | | | |
| 37 - | | | | | | | | | |
| 38 - | | | | | | | | | |
| 39 - | | | | | | | | | |
| 40 - | | | | | | | | | |
| 41 - | | | | | | | | | |
| 42 - | | | | | | | | | |
| 43 - | | | | | | | | | |
| 44 - | | | | | | | | | |
| 45 - | | | | | | | | | |
| 46 - | | | | | | | | | |
| 47 - | | | | | | | | | |
| 48 - | | | | | | | | | |
| 49 - | | | | | | | | | |
| 50 - | | | | | | | | | |

TD = 1.0'

Grass
0.5-1.0' Sand, medium grained, gravel, dark grey loose, wet,
moderate gasoline odor.

Groundwater at approximately 1.0'

LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-18

Date: 1-17-90

Client: American Distributing Co.

Driller: D. Alford

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 2"

Logged by: D. Blaes

Page No: 1 of 1

Installation Data: Backfill with Enviroplug

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|------------|--|---------|---------------------------|-----------------------|------------------------------|-----------------|------|------|---|
| | | | | | | Approx. 4.5' | | | |
| 0 - |  | | | Sample @ | sc | | | | 0.5-1.0' Sand, clayey, brown, slightly cohesive, moist, no odor |
| 1 - | | | | 0.5-1.0' | sc | | | | 1.0-4.0' Sand, medium grained, clayey, brown to grey, organic debris, medium dense, moist, moderate diesel odor at 2.0-3.0' |
| 2 - | | | | | | | | | |
| 3 - | | | | | | | | | |
| 4 - | | | | | Sample @ | sc | | | |
| 5 - | TD = 4.5' | | | | | | | | Groundwater at approximately 4.5' |

TEST PIT LOGS

Depth (feet)

Soil Classification

11-04558-04

Test Pit TP-1

0.0 - 0.5 Gravel surface
0.5 - 1.5 Loose, wet, dark grayish-brown, silty SAND with gravel (Fill)
1.5 - 3.5 Loose, wet to saturated, gray, coarse SAND with gravel
Strong petroleum-like odor and black oily staining observed;
Test pit terminated at approximately 3.5 feet
Moderate groundwater and liquid petroleum hydrocarbon seepage below 3 feet

Field FT-IR analysis indicated > 4,600 ppm TPH at 3 foot depth

Test Pit TP-2

0.0 - 0.5 Gravel surface; old A/C at 0.5 feet
0.5 - 4.0 Loose, wet to saturated, gray, coarse SAND with gravel
No unusual odors or staining observed;
Test pit terminated at approximately 4.0 feet
Moderate groundwater seepage observed below 3.5 feet
A large block of concrete encountered at a depth of approximately 1 foot

Field FT-IR analysis indicated 30 ppm TPH at 3.5 foot depth

Test Pit TP-3

0.0 - 0.5 Gravel surface old A/C at 0.5 feet
0.5 - 4.0 Loose, wet to saturated, gray, coarse SAND with gravel
Test pit terminated at approximately 4.0 feet
Moderate groundwater seepage observed below 3.5 feet
Slight surface sheen observed on groundwater emanating from the east side of the test pit

Field FT-IR analysis indicated 80 ppm TPH at 3.5 foot depth

Depth (feet) Soil Classification

Test Pit TP-4

0.0 - 0.5 Gravel surface
0.5 - 4.0 Loose, wet to saturated, gray, coarse SAND with gravel
Test pit terminated at approximately 4.0 feet
Moderate groundwater seepage observed below 3.5 feet
No unusual odors or staining observed

Field FT-IR analysis indicated 30 ppm TPH at 3.5 feet

Test Pit TP-5

0.0 - 0.5 Gravel surface
0.5 - 4.0 Loose, wet to saturated, gray, coarse SAND with gravel
Test pit terminated at approximately 4.0 feet
Moderate groundwater seepage observed below 3.5 feet
No unusual odors or staining observed

Field FT-IR analysis indicated 50 ppm TPH at 3.5 feet

Date excavated: 8 December 1993

Logged by: TJP

Backhoe Test Pit Logs

TP-1-96

Gray, moist to wet, silty SAND with gravel and some cobbles. Met with refusal at a depth of approximately 3.0 feet due to buried concrete. Slow seepage observed at approximately 1.5 feet. Soil exhibits a petroleum hydrocarbon-like odor. After approximately 1.5 hours, discontinuous blebs of LPH were observed on the water accumulated in the test pit.

TP-2-96

Brown, moist to wet, silty SAND with gravel and some wood and metal debris; becomes gray below approximately 1.0 feet. Slow seepage observed at approximately 1.0 feet and again below approximately 4.0 feet. Soil exhibits a petroleum hydrocarbon-like odor. After approximately 1.5 hours, discontinuous blebs of LPH were observed on the water accumulated in the test pit. Test pit terminated at approximately 4.5 feet.

TP-3-96

Gray, moist, gravelly SAND with some silt with scattered wood and brick debris. Underlain at approximately 4.0 feet by gray, wet to saturated, cohesive, silty, fine to medium SAND. Slow seepage observed at approximately 1.5 feet. Moderate seepage observed below a depth of approximately 6.0 feet. Soil exhibits a petroleum hydrocarbon-like odor. No LPH observed; sheen present of water accumulated in the test pit. Test pit terminated at approximately 6.5 feet.

Backhoe Test Pit Logs

TP-4-96

Brown, moist to wet, silty SAND with some gravel; becomes gray with a petroleum hydrocarbon-like odor below 2.5 feet. Slow seepage observed below approximately 5.0 feet. Discontinuous blebs of LPH observed on the groundwater accumulated in the bottom of the test pit. Test pit terminated at approximately 6.0 feet.

TP-5-96

Brown, moist to wet, silty SAND with some gravel with some brick and glass debris; becomes gray with a petroleum hydrocarbon-like odor below 2.5 feet. Slow seepage observed below approximately 5.0 feet. Encountered a 4-inch diameter clay pipe at approximately 4.5 feet. LPH and water drained from the pipe for approximately 10 to 15 minutes after digging through the pipe. Discontinuous blebs of LPH observed on the groundwater accumulated in the bottom of the test pit. The LPH appeared to originate from both seepage from the soil and infiltration from the broken clay pipe. Test pit terminated at approximately 6.0 feet.

TP-6-96

Brownish-gray, moist to wet, silty SAND with gravel and wood debris; becomes gray with a petroleum hydrocarbon-like odor below approximately 2.0 feet. Moderate to rapid LPH and groundwater seepage observed below approximately 4.0 feet. Approximately 0.02 feet of LPH accumulated as a continuous layer on top of groundwater pooled inside of the test pit. Test Pit terminated at approximately 6.0 feet.

TP-7-96

Moist to wet, dark brown to black, SAND with some silt and gravel; strong petroleum hydrocarbon-like odor observed. Moderate LPH and groundwater seepage observed below 3.0 feet. LPH accumulated as a continuous layer on top of the groundwater pooled in the test pit. LPH thickness was approximately 0.10 feet. Test pit terminated at approximately 4.0 feet.

APPENDIX D


SELECTED GEOTECHNICAL BORING LOGS

LOG OF BORING NO. DM-7-99

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: December 8, 1999
DATE COMPLETED: December 8, 1999
DRILLING CONTRACTOR: Cascade Drilling
DRILLER: Scott Kruger
DRILLING METHOD: Hollow Stem Auger to Mud Rotary
SAMPLING METHOD: D&M U, 300lb hammer, 30" drop

WATER LEVEL: ∇ 7.00 ft

ELEVATION: 18 ft
TOTAL DEPTH: 45.00 ft
WEATHER: Light rain
FIELD ENGINEER: BBS
CHECKED BY:

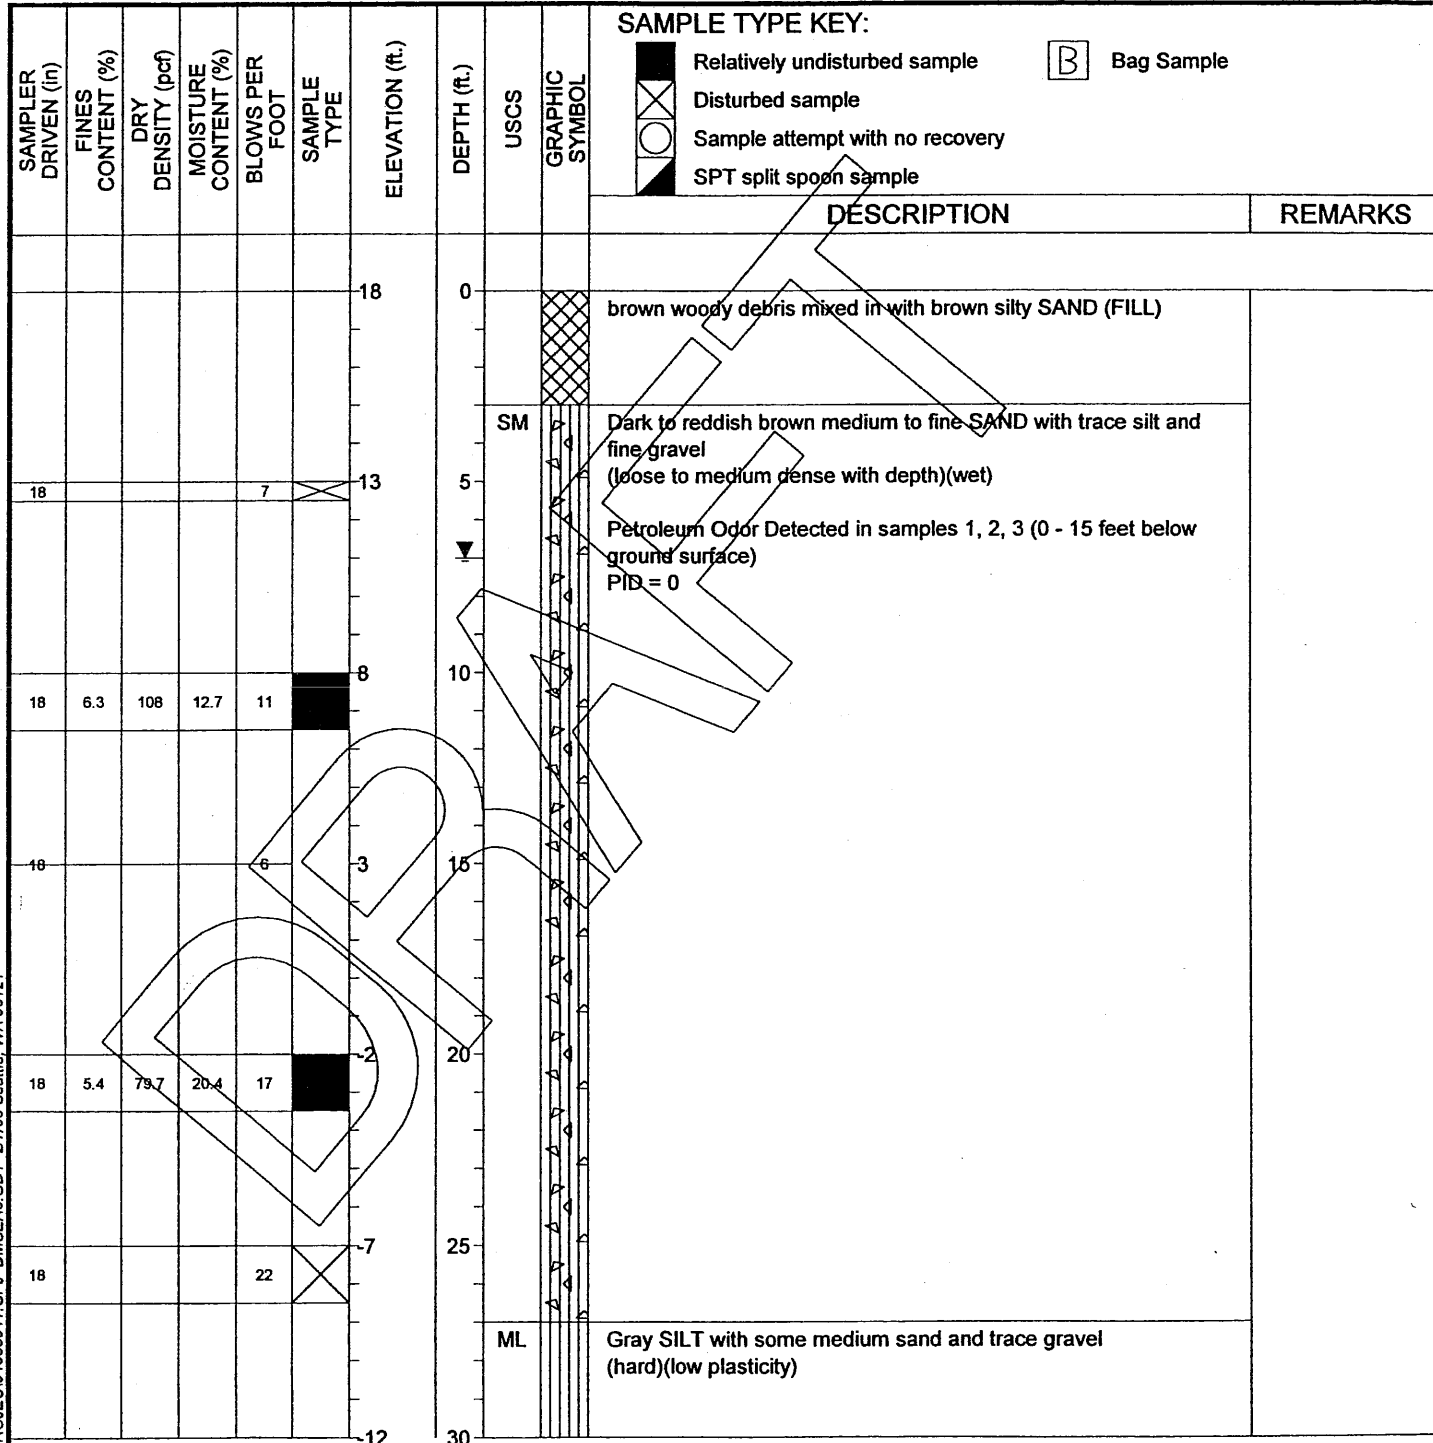

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

093 DRAFT K:11630-PROJECT\04333041.GPJ DM5E46.GDT 2/7/00 Seattle, WA 98121

PROJECT: California Street Overcrossing
 PROJECT NO: 04333-041-189
 PROJECT LOCATION: Everett, WA

FIELD ENGINEER: BBS
 CHECKED BY:

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION(ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | SAMPLE TYPE KEY: | |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|----------------|-------------|------|-------------------|--|------------------|
| | | | | | | | | | | Relatively undisturbed sample | Disturbed sample |
| | | | | | | | | | | DESCRIPTION | REMARKS |
| 18 | | 119.2 | 25.8 | 81 | ■ | -12 | 30 | | | | |
| | | | | | | | | SM | | Brown medium SAND with some silt and trace of fine gravel (very dense)(wet) | |
| 12 | | 107.2 | 15 | 50/6" | ■ | -17 | 35 | | | | |
| 18 | | 109.8 | 11.4 | 68 | ■ | -22 | 40 | | | | |
| 10 | | | | 100/10" | ⊗ | -27 | 45 | | | | |
| | | | | | | | | | | End of Boring at 46 feet below ground surface Ground water encountered at 7 feet below ground surface | |

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

0B3 DRAFT K116310-PROJ/EC/04333041.GPJ DIMSEA6.GDT 2/7/00 Seattle, WA 98121

LOG OF BORING NO. DM-8-99

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: December 1, 1999
DATE COMPLETED: December 1, 1999
DRILLING CONTRACTOR: Cascade Drilling
DRILLER: Scott Kruger
DRILLING METHOD: Hollow Stem Auger to Mud Rotary
SAMPLING METHOD: D&M U, 300lb hammer, 30" drop

WATER LEVEL: ∇ 5.00 ft

ELEVATION: 18 ft
TOTAL DEPTH: 50.00 ft
WEATHER: Overcast, light rain
FIELD ENGINEER: BBS
CHECKED BY:

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS GRAPHIC SYMBOL | SAMPLE TYPE KEY: | |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|---------------------------|---|---------|
| | | | | | | | | | DESCRIPTION | REMARKS |
| | | | | | | 18 | 0 | SM/ML | Asphalt | |
| | | | | | | | | | Black SAND with some silt and trace fine gravel (fill)(very loose)(wet) | |
| | | | | | | | | | Petroleum Odor Detected in samples 1, 2 (0 - 10 feet below ground surface) PID = 0 | |
| 18 | 19.6 | | | 2 | | 13 | | | | |
| | | | | | | | | | | |
| 18 | 5.1 | | | 5 | | 8 | | SM | Reddish brown medium SAND with some gravel and trace silt (very dense)(wet) | |
| | | | | | | | | | | |
| 18 | | 78 | 13.9 | 52 | | 3 | | | | |
| | | | | | | | | | | |
| 18 | | 119.3 | 16.9 | 87 | | 2 | | | | |
| | | | | | | | | | | |
| 18 | | 111.3 | 15.5 | 95 | | 7 | | | | |
| | | | | | | | | | | |
| | | | | | | 12 | 30 | | | |

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

083 DRAFT K:\1630-PROJECT\04333041.GPJ DMSEA6.GDT 2/7/00 Seattle, WA 98121



DAMES & MOORE
A DAMES & MOORE GROUP COMPANY

LOG OF BORING DM-8-99

FIGURE A-10.1

PROJECT: **California Street Overcrossing**

PROJECT NO: **04333-041-189**

PROJECT LOCATION: **Everett, WA**

FIELD ENGINEER: **BBS**

CHECKED BY:

Sheet 2 of 2

| SAMPLER DRIVEN (ft) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION(ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | SAMPLE TYPE KEY: | |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|----------------|-------------|------|-------------------|--|------------|
| | | | | | | | | | | DESCRIPTION | REMARKS |
| 9 | 113.1 | 14.3 | 50/3" | | | 12 | 30 | | | Relatively undisturbed sample | Bag sample |
| 6 | | | 50/6" | | | 17 | 35 | | | Disturbed sample | |
| 18 | | | 29 | | | 22 | 40 | ML | | Gray SILT with trace fine to medium sand and fine gravel (very stiff) | |
| 18 | 90.2 | | 36 | | | 27 | 45 | SM | | Gray fine to medium SAND with some silt (very dense)(wet) | |
| 18 | | | 50/6" | | | 32 | 50 | | | End of Boring at 51.5 feet below ground surface Ground water encountered at 5 feet below ground surface | |

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

LOG OF BORING DM-8-99

FIGURE A-10.2

DB3 DRAFT K:\16310-PROJECT\04333041.GPJ_DMSEA6.GDT 27700 Seattle, WA 9/1/21



DAMES & MOORE


A DAMES & MOORE GROUP COMPANY

MONITORING WELL NO. DM-6-99

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: December 6, 1999
DATE COMPLETED: December 6, 1999
DRILLING CONTRACTOR: Cascade Drilling
DRILLER: Scott Kruger
DRILLING METHOD: Hollow Stem Auger to Mud Rotary
SAMPLING METHOD: D&M U, 300lb hammer, 30" drop

WATER LEVEL: ∇ 0.00 ft

ELEVATION: +20.00
TOTAL DEPTH: 55.00 ft
WEATHER: Overcast, light rain
FIELD ENGINEER: BBS
CHECKED BY:

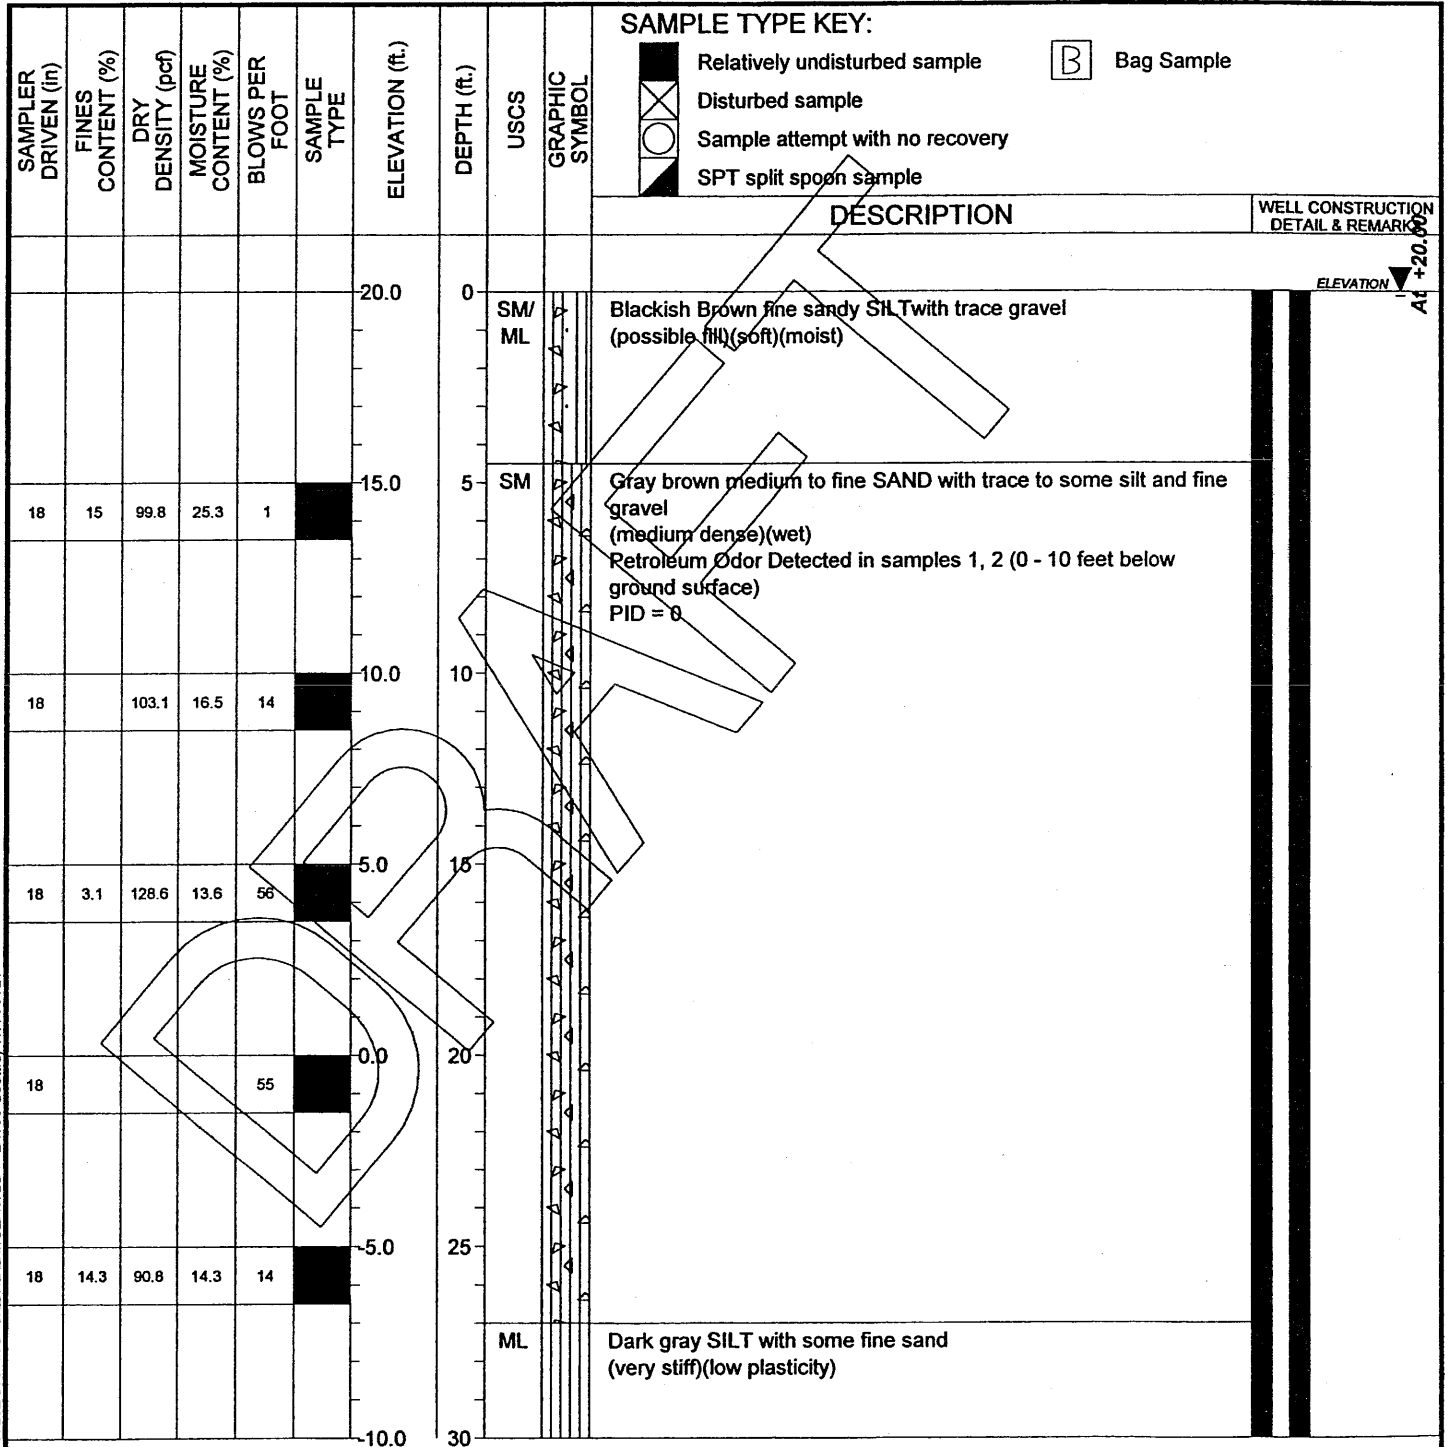

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample


NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

5/11/03/PR/W/EL/1/6/RA/FR/04/6/00/04/3/29/41/2/FR/00/01/5E/A6.GDT 2/7/00 Seattle, WA 98121



- WELL SYMBOL KEY:**
- Bentonite grout
 - Bentonite plug
 - Filter Pack
 - Well screen
 - Concrete plug

MONITORING WELL DM-6-99
 FIGURE A-8.1

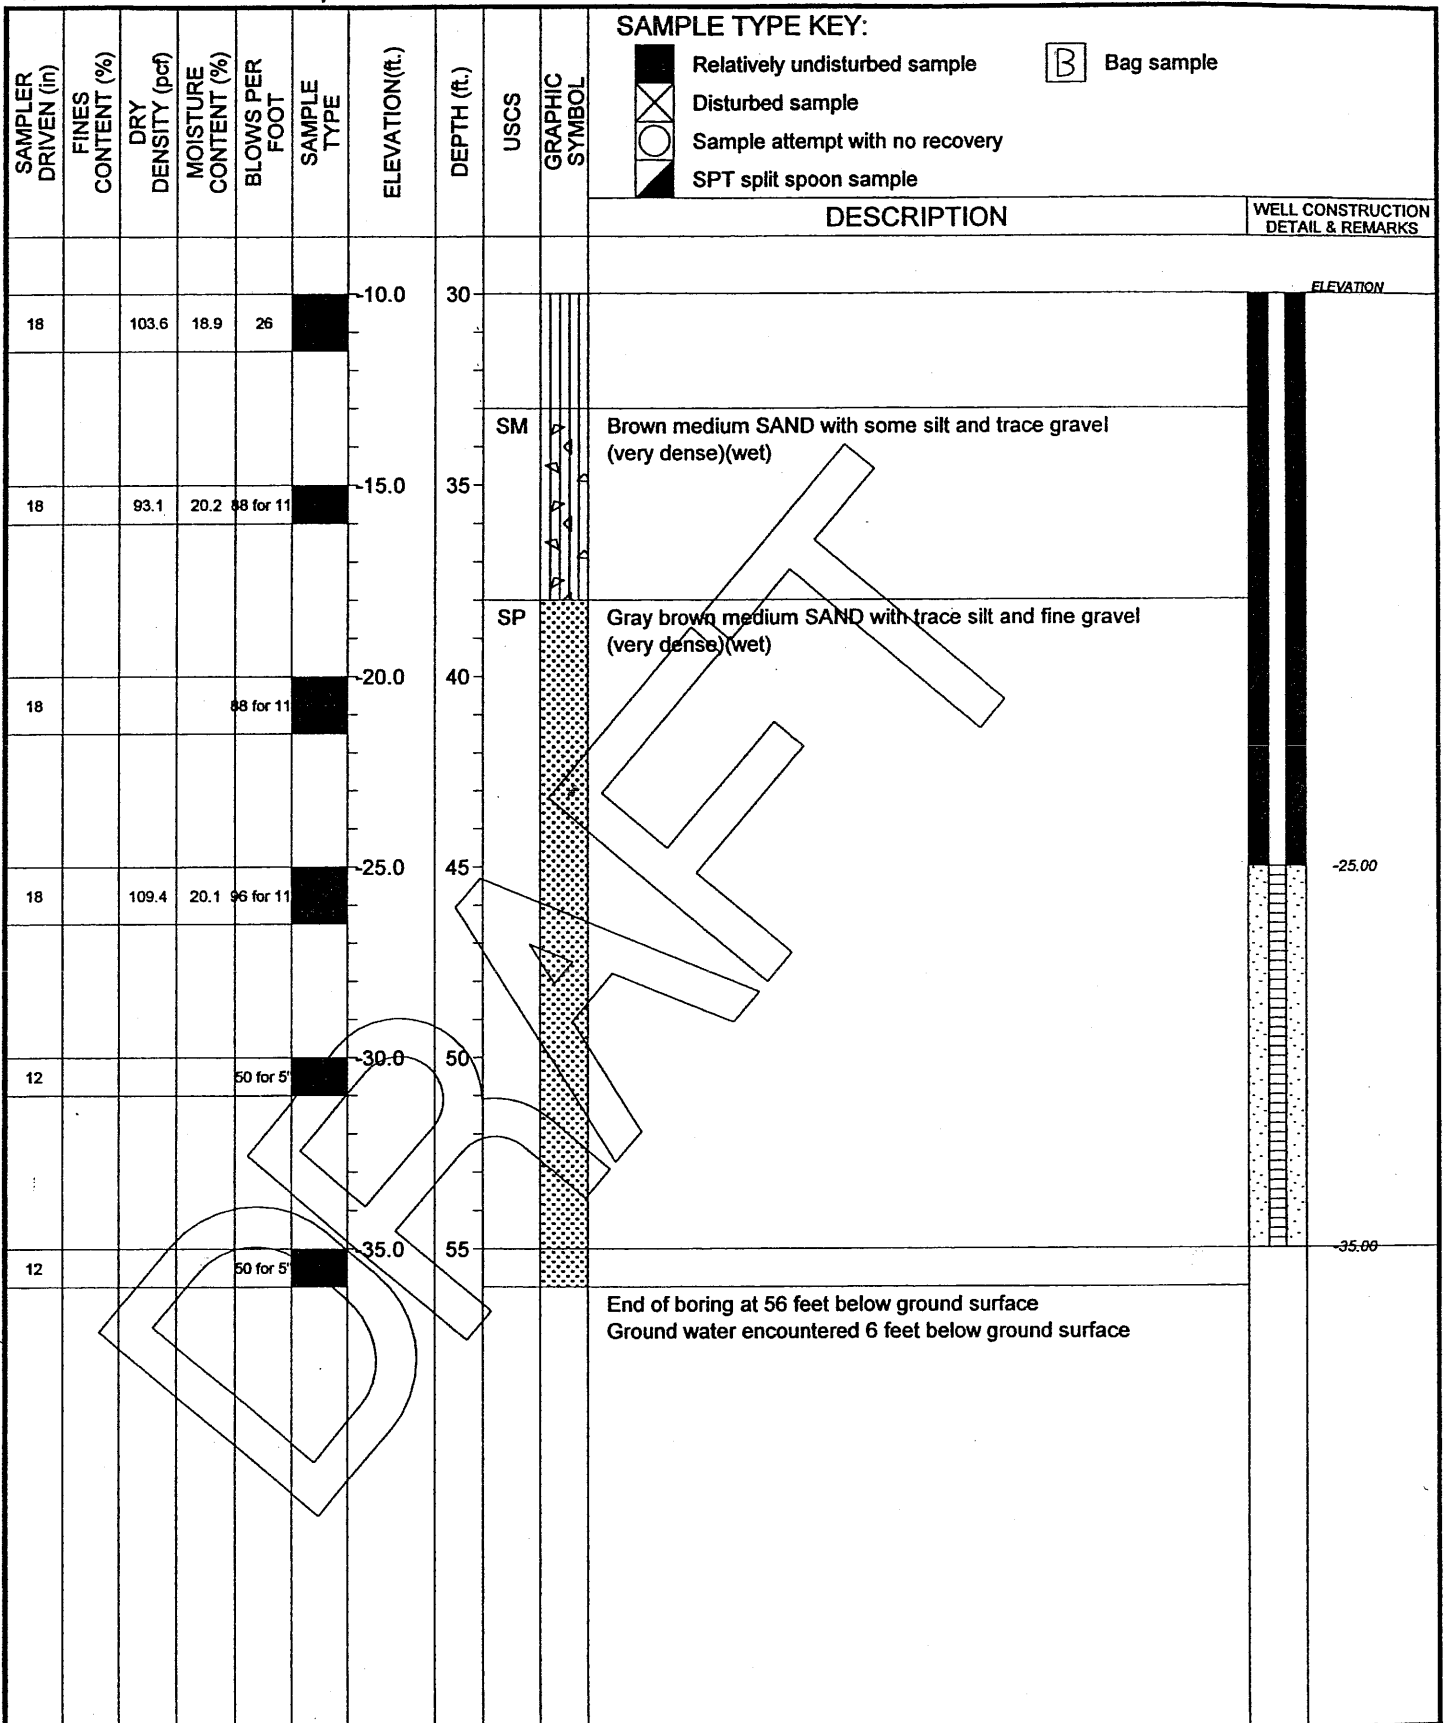

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

WELL DRAFT K:\16310-PROJ\JEC\04333041.GPJ DMSEA6.GDT 2/7/00 Seattle, WA 98121

WELL SYMBOL KEY:

Bentonite grout
 Bentonite plug
 Filter Pack

MONITORING WELL DM-6-99

Well screen
 Concrete plug

FIGURE A-8.2

**APPENDIX B
BORING LOGS**

LOG OF BORING NO. UG-1

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 25, 2000**
 DATE COMPLETED: **September 25, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼ 4.00 ft**

ELEVATION: **18 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **T. Parkington**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|----------------|---------------------------------------|------------------------|
| | | | | | | 18 | 0 | | | Asphaltic Concrete. | |
| | | | | | | | | GP | | Gravel subgrade | |
| | | | | | | | | PT | | Dark brown silty peat | PID = 3 ppm |
| | | | | | | 13 | 5 | SM | | Black silty sand with some woody peat | PID = 24 ppm |
| | | | | | | | | SM | | Brown sand with some silt. h.c. odor | PID = 2 ppm |
| | | | | | | 8 | 10 | | | Brown gray sand, wet. | PID = 0 ppm No odor |
| Boring completed at 12 feet. Backfilled with Bentonite. Ground water at 4 feet bgs. | | | | | | | | | | | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

LOB3 K:\16304333--1\GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT_11/3/00_Seattle, WA 98121

NOTES:



LOG OF BORING NO. UG-2

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: September 25, 2000
DATE COMPLETED: September 25, 2000
DRILLING CONTRACTOR: Cascade Drilling
DRILLER:
DRILLING METHOD: Geoprobe
SAMPLING METHOD: Geoprobe

WATER LEVEL: ▼ 3.00 ft

ELEVATION: 16 ft
TOTAL DEPTH: 17.00 ft

WEATHER:
FIELD ENGINEER: T. Parkington
CHECKED BY: M. McCabe

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|---------------------------|--|--|
| | | | | | | 16 | 0 | OL | Asphaltic Concrete. Black organic silt | |
| | | | | | X | ▼ | 3 | SM | Black silty sand. Strong odor. | PID = 200 ppm |
| | | | | | X | 11 | 5 | PT | Black woody peat | Very oily. PID = 200 ppm GW sample taken PID = 300 ppm |
| | | | | | X | 6 | 10 | | | PID = 12 ppm |
| | | | | | X | 1 | 15 | SM | Brown silty sand. | PID = 0 ppm |
| | | | | | | | | | Boring completed at 17 feet. Backfilled with bentonite. Ground water at 3 feet | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample

- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

LOB3 K:116304333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT 11/3/00 Seattle, WA 98121

NOTES:



LOG OF BORING UG-2

FIGURE G 2

LOG OF BORING NO. UG-3

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: September 25, 2000
DATE COMPLETED: September 25, 2000
DRILLING CONTRACTOR: Cascade Drilling
DRILLER:
DRILLING METHOD: Geoprobe
SAMPLING METHOD: Geoprobe

WATER LEVEL: ∇ 5.00 ft

ELEVATION: 18 ft
TOTAL DEPTH: 14.50 ft
WEATHER:
FIELD ENGINEER: T. Parkinson
CHECKED BY: M. McCabe

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|-------|----------------|--|--|
| | | | | | | 18 | 0 | | ■ | Asphaltic Concrete. | |
| | | | | | | | | GP | □ | Gravel subgrade | |
| | | | | | ⊗ | | | SM | □ | Gray brown silty sand | PID = 0 ppm |
| | | | | | ⊗ | 13 | | SM | □ | Red-tan silty sand | PID = 0 ppm |
| | | | | | ⊗ | | | SM/ML | □ | Brown silty sand / sandy silt with lenses of woody peat. | PID = 1 ppm |
| | | | | | ○ | 8 | 10 | | □ | | No evidence of hydrocarbons in water on rods |
| | | | | | | | | | | Boring completed at 14.5 feet. Backfilled with bentonite. Groundwater at 5 feet bgs. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- B Bag Sample
- ↓ Pocket Penetrometer
- ▽ Vane Shear (psf)

LOB3 K1163104333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT 11/23/00 Seattle, WA 98121

NOTES:



LOG OF BORING UG-3












FIGURE G 3

LOG OF BORING NO. UG-4

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 25, 2000**
 DATE COMPLETED: **September 25, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **4.00 ft**

ELEVATION: **20 ft**
 TOTAL DEPTH: **14.50 ft**
 WEATHER:
 FIELD ENGINEER: **T. Parkington**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | SAMPLE TYPE KEY: | | DESCRIPTION | REMARKS |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|------|---|--|---|---|---------|
| | | | | | | | | | |  Relatively undisturbed sample  Disturbed sample  Sample attempt with no recovery  SPT split spoon sample |  Bag Sample  Pocket Penetrometer  Vane Shear (psf) | | |
| | | | | | | 20 | 0 | GP |  | | Gravel | | |
| | | | | | | | | SM |  | | Brown sand with some silt and gravel. No odor | PID = 0 ppm | |
| | | | | | | 15 | 5 | ML |  | | Gray silt | PID = 0 ppm | |
| | | | | | | | | SM |  | | Brown sand with some silt | PID = 0 ppm | |
| | | | | | | 10 | 10 | | | | | | |
| | | | | | | | | | | | | Boring completed at 14.5 feet. Backfilled with bentonite. Groundwater at 4 feet. | |

NOTES:



LOG OF BORING NO. UG-5

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 25, 2000**
 DATE COMPLETED: **September 25, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼ 6.00 ft**

ELEVATION: **19 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|----------------|--|-------------|
| | | | | | | 19 | 0 | GP | | Gravel | |
| | | | | | | | | SM | | Brown silty sand with trace gravel. No odor. | PID = 0 ppm |
| | | | | | | 14 | 5 | SM | | Gray silty sand | PID = 0 ppm |
| | | | | | | | | SM | | Dark brown silty sand with trace gravel and wood fragments. | PID = 0 ppm |
| | | | | | | 9 | 10 | | | | PID = 0 ppm |
| | | | | | | | | | | End of boring at 12 feet. Backfilled with bentonite. Ground water at 6 feet bgs. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

LOB3_K116304333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT_11/3/00 Seattle, WA 98121

NOTES:



LOG OF BORING UG-5

FIGURE G 5

LOG OF BORING NO. UG-6

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 26, 2000**
 DATE COMPLETED: **September 26, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼ 5.00 ft**
 ELEVATION: **18 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | SAMPLE TYPE KEY: | | DESCRIPTION | REMARKS |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|-----------|-------------------|--|---|--|-------------|
| | | | | | X | 18 | 0 | SM/ GM | | Relatively undisturbed sample Disturbed sample Sample attempt with no recovery SPT split spoon sample | Bag Sample Pocket Penetrometer Vane Shear (psf) | Brown silty gravel and sand | |
| | | | | | X | 13 | | SM | | | | Gray silty sand, some gravel. No odor. | PID = 0 ppm |
| | | | | | X | 13 | ▼ | | | | | Traces of brown color | PID = 0 ppm |
| | | | | | X | 10 | | | | | | Some wood fragments. | PID = 0 ppm |
| | | | | | X | 8 | 10 | SP | | | | Brown sand, silt and gravel. | PID = 0 ppm |
| | | | | | | | | | | | | End of boring at 12 feet. Backfilled with bentonite. Ground water at 5 feet bgs. | |

NOTES:

LOB3 K16304333-1GEOPROBE.GPJ URSSEA1.GLB URSSEA1.GDT 11/3/00 Seattle, WA 98121



LOG OF BORING UG-6

FIGURE G 6

LOG OF BORING NO. UG-7

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 26, 2000**
 DATE COMPLETED: **September 26, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼ 2.00 ft**
 ELEVATION: **16 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|----------------|---|-------------|
| | | | | | | 16 | 0 | | ■ | Asphaltic Concrete. | |
| | | | | | X | | ▼ | SM | ▲ | Dark brown to gray silty sand with some gravel | PID = 0 ppm |
| | | | | | X | 11 | 5 | | ▲ | Some wood fragments | PID = 0 ppm |
| | | | | | X | 6 | 10 | | ▲ | Dark brown sand with some silt and gravel. | PID = 0 ppm |
| | | | | | | | | | | End of boring at 12 feet. Backfilled with bentonite. Groundwater at 2 feet bgs. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- B Bag Sample
- I Pocket Penetrometer
- V Vane Shear (psf)

NOTES:



LOG OF BORING UG-7

FIGURE G 7

LOB3 K:\16304333-1\GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT_11/3/00 Seattle, WA_98121

LOG OF BORING NO. UG-8

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: September 26, 2000
DATE COMPLETED: September 26, 2000
DRILLING CONTRACTOR: Cascade Drilling
DRILLER:
DRILLING METHOD: Geoprobe
SAMPLING METHOD: Geoprobe

WATER LEVEL: ∇ 4.00 ft

ELEVATION: 17 ft
TOTAL DEPTH: 19.50 ft
WEATHER:
FIELD ENGINEER: B. Strickler
CHECKED BY: M. McCabe

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS GRAPHIC SYMBOL | SAMPLE TYPE KEY: | | REMARKS | |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|---------------------------|--|---------------------------------|---------------------|---------------|
| | | | | | | | | | DESCRIPTION | | | |
| | | | | | | 17 | 0 | GP | Gravel | Relatively undisturbed sample | Bag Sample | |
| | | | | | | | | SM | Gray silty sand with some gravel | Disturbed sample | Pocket Penetrometer | |
| | | | | | | | | SM | Dark brown to black silty sand with some gravel and wood fragmenst. Strong odor. | Sample attempt with no recovery | Vane Shear (psf) | PID = 186 ppm |
| | | | | | | 12 | 5 | SM | Gray silty sand with some gravel Black silty sand with some wood fragments. Strong odor | SPT split spoon sample | | PID = 180 ppm |
| | | | | | | | | PT | Black woody peat, strong odor. Color grades to red with no odor. | | | PID = 105 ppm |
| | | | | | | 7 | 10 | | | | | PID = 5 ppm |
| | | | | | | | | | | | | PID = 0 ppm |
| | | | | | | | | | | | | |
| | | | | | | 2 | 15 | | Brown sand with some silt and gravel. Faint odor No odor. | | | PID = 0 ppm |
| | | | | | | | | | End of boring at 19.5 feet. Backfilled with bentonite. Gound water at 4 feet bgs. | | | |

LOB3 K:116304333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT_11/3/00 Seattle, WA 98121

NOTES:



LOG OF BORING UG-8

FIGURE G 8

LOG OF BORING NO. UG-9

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 26, 2000**
 DATE COMPLETED: **September 26, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼4.00 ft**
 ELEVATION: **18 ft**
 TOTAL DEPTH: **17.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|----------------|---|---------------|
| | | | | | X | 18 | 0 | GP | | Gravel | |
| | | | | | X | | 4 | SM | | Gray silty sand with some gravel. Strong odor. | PID = 430 ppm |
| | | | | | X | 13 | 5 | | | Strong odor. | PID = 175 ppm |
| | | | | | X | | 8 | PT | | Woody peat. Strong odor. | PID = 200 ppm |
| | | | | | X | 8 | 10 | | | Strong odor. | PID = 375 ppm |
| | | 827.4 | | | X | | 15 | SP | | Brown sand with trace silt and some gravel. Some odor. | PID = 0 ppm |
| | | | | | X | 3 | 15 | | | No odor | PID = 0 ppm |
| | | | | | | | | | | End of boring at 17 feet. Backfill with bentonite. Groundwater at 4 feet bgs. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

NOTES:

LOG OF BORING UG-9

FIGURE G 9



LOB3 K:16304333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT_11/3/00 Seattle, WA 98121

LOG OF BORING NO. UG-10

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 26, 2000**
 DATE COMPLETED: **September 26, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼ 3.00 ft**
 ELEVATION: **18 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|----------------|---|-------------|
| | | | | | | 18 | 0 | GP | ○ | Gravel | |
| | | | | | | 3 | 3 | SP | ▼ | Brown to dark brown sand with some to trace silt and gravel. No odor. | PID = 0 ppm |
| | | | | | | 5 | 5 | | | | PID = 0 ppm |
| | | | | | | 8 | 8 | | | | PID = 0 ppm |
| | | | | | | 10 | 10 | | | | PID = 0 ppm |
| | | | | | | | | | | End of boring at 12 feet. Backfilled with Bentonite. Groundwater at 3 feet bgs. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

LOB3 K1163104333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT 11/2/00 Seattle, WA 98121

NOTES:



LOG OF BORING UG-10

FIGURE G 10

LOG OF BORING NO. UG-11

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: September 26, 2000
DATE COMPLETED: September 26, 2000
DRILLING CONTRACTOR: Cascade Drilling
DRILLER:
DRILLING METHOD: Geoprobe
SAMPLING METHOD: Geoprobe

WATER LEVEL: ∇ 4.00 ft

ELEVATION: 18 ft
TOTAL DEPTH: 12.00 ft
WEATHER:
FIELD ENGINEER: B. Strickler
CHECKED BY: M. McCabe

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | SAMPLE TYPE KEY: | |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|--|--|---|
| | | | | | | | | | | Relatively undisturbed sample Disturbed sample Sample attempt with no recovery SPT split spoon sample | Bag Sample Pocket Penetrometer Vane Shear (psf) |
| | | | | | | | | | | DESCRIPTION | REMARKS |
| | | | | | | 18 | 0 | GP | Gravel. | | |
| | | | | | | | 4 | SP | Brown to gray sand with some to trace silt and gravel. Faint odor. | | PID = 0 ppm |
| | | | | | X | 5 | 4 | | No odor | | PID = 0 ppm |
| | | | | | X | 8 | 8 | | | | PID = 0 ppm |
| | | | | | X | 10 | 10 | | | | PID = 0 ppm |
| | | | | | | | | | | End of boring at 12 feet. Backfilled with bentonite. Groundwater at 4 feet bgs. | |

NOTES:

LOB3 K116304333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT 11/3/00 Seattle, WA 98121



LOG OF BORING NO. UG-12

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 26, 2000**
 DATE COMPLETED: **September 26, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼4.00 ft**
 ELEVATION: **18 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|------|-------------------|---|-------------|
| | | | | | X | 18 | 0 | | | | |
| | | | | | X | 13 | 4 | SP | | Brown sand with trace silt and gravel. No odor. | PID = 0 ppm |
| | | | | | X | 8 | 5 | | | Some wood fragments. | PID = 0 ppm |
| | | | | | X | 8 | 10 | | | | PID = 0 ppm |
| | | | | | X | 8 | 11 | PT | | Woody peat | PID = 0 ppm |
| | | | | | X | 8 | 11.5 | SP | | Brown sand with trace silt and gravel. | |
| | | | | | | | 12 | | | End of boring at 12 feet. Groundwater at 4 feet bgs. Backfilled with bentonite. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

NOTES:



LOG OF BORING UG-12

FIGURE G 12

Project Information

| | | | |
|-------------------|--------------------------------|-----------|-------------------------------|
| Project Name: | California Street Overcrossing | Location: | California St and Federal Ave |
| Project/Task No.: | 53-04333041.00 00056 | Weather: | sunny, 60F |

Drilling Information

| | | | |
|------------------|---------------------------------|--------------------------------|--------------------------------|
| Date Started: | Thursday, June 21, 2001 | Annulus Diameter: | 2 inches |
| Date Completed: | Thursday, June 21, 2001 | Hammer Weight and Drop: | NA lbs and NA inches |
| Drilled By: | Kasey Goble of Cascade Drilling | Sampler Type: | 3' stainless steel split spoon |
| Logged By: | Kate Pineo of URS | Approximate Surface Elevation: | NA feet |
| Checked By: | Dave Raubvogel of URS | Groundwater Level: | 4 below ground surface |
| Drilling Method: | Direct Push | Total Depth: | 13 below ground surface |
| Drill Rig Type: | Truck-mounted GeoProbe | Backfill Material: | bentonite chips, asphalt patch |

Well Installation Data

| | | | |
|----------------------|----|--------------------------|----|
| Type of Well Casing: | NA | Top of PVC Elevation: | NA |
| Screen Perforation: | NA | Type/Thickness of Seals: | NA |
| Diameter of Well: | NA | Type of Sand Pack: | NA |
| Screened Interval: | NA | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|------|---------------------|--------------|---|-------------------------|--------------------|-------------|---|
| 0 | | | | | | Asphalt, gravel road base. | | | | |
| 1 | | 36/24 | | SM | | Gray to brown Silt and fine Sand, some very angular fine Gravel, dry. | | 16.1 | JP1/1.5-4.5 | Began sampling at 1.5'. |
| 2 | | | | SP | | Gray medium to coarse sand, mottled, moist. | | | | |
| 3 | | | | ML | | Gray Silt and Clay, wood debris, moist. | | | | |
| 4 | | 36/27 | 8:15 | SM | | Brown fine Sand and Silt, wet. | | 45 | JP1/4.5-7.5 | |
| 5 | | | | ML | | Brown Silt and Clay, wet. | | | | |
| 6 | | | | | | | | | | |
| 7 | | | | | | | | | | |
| 8 | | 36/36 | 8:30 | SM | | Brown Sand and Silt with silty clay interbeds, grading black. | | 15 | JP1/7.5-10 | |
| 9 | | | | | | | | | | |
| 10 | | 36/12 | 8:45 | SP | | Brown medium to coarse Sand, medium soft, mottled, wet. | | 5 | | Refusal at 10' bgs. Moved 6.5' west and sampled 10 - 13'. |
| 11 | | | | | | | | | | |
| 12 | | | | | | | | | | |
| 13 | | | | | | BORING COMPLETED AT 13' | | | | |
| 14 | | | | | | | | | | |
| 15 | | | | | | | | | | |
| 16 | | | | | | | | | | |
| 17 | | | | | | | | | | |
| 18 | | | | | | | | | | |
| 19 | | | | | | | | | | |
| 20 | | | | | | | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.
 PID screening on black soil at 10' bgs = 14 ppm.
 Sampled groundwater JP1/GW at 8:30. Slow recharge, very clear water.
 Slight organic odor in 10 - 13' sample. Not collected for analysis.

Project Information

| | | | |
|-------------------|---------------------------------------|-----------|--------------------------------------|
| Project Name: | <u>California Street Overcrossing</u> | Location: | <u>California St and Federal Ave</u> |
| Project/Task No.: | <u>53-04333041.00 00056</u> | Weather: | <u>sunny, 60F</u> |

Drilling Information

| | | | |
|------------------|---|--------------------------------|---------------------------------------|
| Date Started: | <u>Thursday, June 21, 2001</u> | Annulus Diameter: | <u>2</u> inches |
| Date Completed: | <u>Thursday, June 21, 2001</u> | Hammer Weight and Drop: | <u>NA</u> lbs and <u>NA</u> inches |
| Drilled By: | <u>Kasey Goble</u> of <u>Cascade Drilling</u> | Sampler Type: | <u>3' stainless steel split spoon</u> |
| Logged By: | <u>Kate Pineo</u> of <u>URS</u> | Approximate Surface Elevation: | <u>NA</u> feet |
| Checked By: | <u>Dave Raubvogel</u> of <u>URS</u> | Groundwater Level: | <u>2.3</u> below ground surface |
| Drilling Method: | <u>Direct Push</u> | Total Depth: | <u>6</u> below ground surface |
| Drill Rig Type: | <u>Truck-mounted GeoProbe</u> | Backfill Material: | <u>benonite chips</u> |

Well Installation Data

| | | | |
|----------------------|-----------|--------------------------|-----------|
| Type of Well Casing: | <u>NA</u> | Top of PVC Elevation: | <u>NA</u> |
| Screen Perforation: | <u>NA</u> | Type/Thickness of Seals: | <u>NA</u> |
| Diameter of Well: | <u>NA</u> | Type of Sand Pack: | <u>NA</u> |
| Screened Interval: | <u>NA</u> | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|------|---------------------|--------------|--|-------------------------|--------------------|---------|---------|
| 0 | | 36/24 | 9:15 | ML | | Brown Silt and Clay, some fine Gravel, dry. | | 0 | JP2/0-3 | |
| 1 | | | | SM | | Fine Sand and Silt, some fine Gravel, wet. | | 0 | JP2/3-6 | |
| 2 | | | | | | | | | | |
| 3 | | 36/24 | 9:15 | | | Grading brown fine to coarse Sand and fine Gravel, some Silt. | | | | |
| 4 | | | | | | Grading brown-gray fine Sand and Silt, some fine to coarse Gravel. | | | | |
| 5 | | | | | | Black fine Sand, saturated. | | | | |
| 6 | | | | | | BORING COMPLETED AT 6' | | | | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | | | | | |

NOTES:
 Groundwater level measured down-hole with water level indicator.

Project Information

| | | | |
|-------------------|---------------------------------------|-----------|--------------------------------------|
| Project Name: | <u>California Street Overcrossing</u> | Location: | <u>California St and Federal Ave</u> |
| Project/Task No.: | <u>53-04333041.00 00056</u> | Weather: | <u>sunny, 60F</u> |

Drilling Information

| | | | |
|------------------|---|--------------------------------|---------------------------------------|
| Date Started: | <u>Thursday, June 21, 2001</u> | Annulus Diameter: | <u>2</u> inches |
| Date Completed: | <u>Thursday, June 21, 2001</u> | Hammer Weight and Drop: | <u>NA</u> lbs and <u>NA</u> inches |
| Drilled By: | <u>Kasey Goble</u> of <u>Cascade Drilling</u> | Sampler Type: | <u>3' stainless steel split spoon</u> |
| Logged By: | <u>Kate Pineo</u> of <u>URS</u> | Approximate Surface Elevation: | <u>NA</u> feet |
| Checked By: | <u>Dave Raubvogel</u> of <u>URS</u> | Groundwater Level: | <u>2.5</u> below ground surface |
| Drilling Method: | <u>Direct Push</u> | Total Depth: | <u>6</u> below ground surface |
| Drill Rig Type: | <u>Truck-mounted GeoProbe</u> | Backfill Material: | <u>bentonite chips</u> |

Well Installation Data

| | | | |
|----------------------|-----------|--------------------------|-----------|
| Type of Well Casing: | <u>NA</u> | Top of PVC Elevation: | <u>NA</u> |
| Screen Perforation: | <u>NA</u> | Type/Thickness of Seals: | <u>NA</u> |
| Diameter of Well: | <u>NA</u> | Type of Sand Pack: | <u>NA</u> |
| Screened Interval: | <u>NA</u> | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|-------|---------------------|--------------|---|-------------------------|--------------------|---------|---------|
| 0 | | 36/30 | 10:00 | GP | | Brown fine to medium Sand and fine Gravel, dry. | | 8.5 | JP3/0-3 | |
| 1 | | | | ML | | Brown-gray Silt and Clay, some fine Gravel, damp. | | | | |
| 2 | | | | | | | | | | |
| 3 | | 36/36 | 10:00 | SM | | Brown fine Sand and Silt, wet. | | 6 | JP3/3-6 | |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | | | | | BORING COMPLETED AT 6'. | | | | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.

Project Information

| | | | |
|-------------------|--------------------------------|-----------|-------------------------------|
| Project Name: | California Street Overcrossing | Location: | California St and Federal Ave |
| Project/Task No.: | 53-04333041.00 00056 | Weather: | sunny, 60F |

Drilling Information

| | | | |
|------------------|---------------------------------|--------------------------------|--------------------------------|
| Date Started: | Thursday, June 21, 2001 | Annulus Diameter: | 2 inches |
| Date Completed: | Thursday, June 21, 2001 | Hammer Weight and Drop: | NA lbs and NA inches |
| Drilled By: | Kasey Goble of Cascade Drilling | Sampler Type: | 3' stainless steel split spoon |
| Logged By: | Kate Pineo of URS | Approximate Surface Elevation: | NA feet |
| Checked By: | Dave Raubvogel of URS | Groundwater Level: | 2 below ground surface |
| Drilling Method: | Direct Push | Total Depth: | 10 below ground surface |
| Drill Rig Type: | Truck-mounted GeoProbe | Backfill Material: | bentonite chips |

Well Installation Data

| | | | |
|----------------------|----|--------------------------|----|
| Type of Well Casing: | NA | Top of PVC Elevation: | NA |
| Screen Perforation: | NA | Type/Thickenss of Seals: | NA |
| Diameter of Well: | NA | Type of Sand Pack: | NA |
| Screened Interval: | NA | | |

| Depth (feet) | Blows per 6 inches | Penetration/ Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|--------------------------------|-------|---------------------|--------------|---|-------------------------|--------------------|----------|---------|
| 0 | | 36/24 | 10:30 | GP | | Brown-gray fine Sand and Gravel, dry | | 280 - 300 | JP4/0-3 | Odor. |
| 1 | | | | SM | | Gray fine Sand and Silt, some fine Gravel, dark gray ash/sinder layer, dry. | | | | |
| 2 | | | | | | Grading brown fine Sand and Silt, little coarse Gravel. | | | | |
| 3 | | 36/12 | 10:45 | SP | | Brown fine to coarse SAND, little coarse Gravel, wet. | | 270 | JP4/3-6 | Odor. |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | | | | | No sample collected. | | | | |
| 7 | | | | | | | | | | |
| 8 | | 24/7 | 10:50 | SM | | Gray medium Sand and Silt, wet. Red-brown wood debris noted. | | 5.3 | JP4/8-10 | |
| 9 | | | | | | | | | | |

BORING COMPLETED AT 10'.

NOTES:

Groundwater level measured down-hole with water level indicator.
Groundwater sample JP4/GW collected at 10:50.

Project Information

| | | | |
|-------------------|--------------------------------|-----------|-------------------------------|
| Project Name: | California Street Overcrossing | Location: | California St and Federal Ave |
| Project/Task No.: | 53-04333041.00 00056 | Weather: | sunny, 60F |

Drilling Information

| | | | |
|------------------|---------------------------------|--------------------------------|--------------------------------|
| Date Started: | Thursday, June 21, 2001 | Annulus Diameter: | 2 inches |
| Date Completed: | Thursday, June 21, 2001 | Hammer Weight and Drop: | NA lbs and NA inches |
| Drilled By: | Kasey Goble of Cascade Drilling | Sampler Type: | 3' stainless steel split spoon |
| Logged By: | Kate Pineo of URS | Approximate Surface Elevation: | NA feet |
| Checked By: | Dave Raubvogel of URS | Groundwater Level: | 2 below ground surface |
| Drilling Method: | Direct Push | Total Depth: | 6 below ground surface |
| Drill Rig Type: | Truck-mounted GeoProbe | Backfill Material: | bentonite chips |

Well Installation Data

| | | | |
|----------------------|----|--------------------------|----|
| Type of Well Casing: | NA | Top of PVC Elevation: | NA |
| Screen Perforation: | NA | Type/Thickness of Seals: | NA |
| Diameter of Well: | NA | Type of Sand Pack: | NA |
| Screened Interval: | NA | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|-------|---------------------|--------------|---|-------------------------|--------------------|---------|---------|
| 0 | | 36/36 | 11:05 | SM | | Light gray fine Sand and Silt, some coarse Gravel, dry. | | 4.3 | JP5/0-3 | |
| 1 | | | | ML | | Dark gray SILT and coarse Gravel | | | | |
| 2 | | 36/22 | 11:10 | SM | | Brown dense fine Sand and Silt, wet, grading gray. | | 1.5 | | |
| 3 | | | | | | Grading brown. | | 5.3 | JP5/3-6 | |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | | | SP | | Black fine to medium Sand and Gravel. | | | | |
| 6 | | | | | | BORING COMPLETED AT 6'. | | | | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.

Project Information

| | | | |
|-------------------|---------------------------------------|-----------|--------------------------------------|
| Project Name: | <u>California Street Overcrossing</u> | Location: | <u>California St and Federal Ave</u> |
| Project/Task No.: | <u>53-04333041.00 00056</u> | Weather: | <u>sunny, 60F</u> |

Drilling Information

| | | | |
|------------------|---|--------------------------------|---------------------------------------|
| Date Started: | <u>Thursday, June 21, 2001</u> | Annulus Diameter: | <u>2</u> inches |
| Date Completed: | <u>Thursday, June 21, 2001</u> | Hammer Weight and Drop: | <u>NA</u> lbs and <u>NA</u> inches |
| Drilled By: | <u>Kasey Goble</u> of <u>Cascade Drilling</u> | Sampler Type: | <u>3' stainless steel split spoon</u> |
| Logged By: | <u>Kate Pineo</u> of <u>URS</u> | Approximate Surface Elevation: | <u>NA</u> feet |
| Checked By: | <u>Dave Raubvogel</u> of <u>URS</u> | Groundwater Level: | <u>2</u> below ground surface |
| Drilling Method: | <u>Direct Push</u> | Total Depth: | <u>9</u> below ground surface |
| Drill Rig Type: | <u>Truck-mounted GeoProbe</u> | Backfill Material: | <u>bentonite chips</u> |

Well Installation Data

| | | | |
|----------------------|-----------|--------------------------|-----------|
| Type of Well Casing: | <u>NA</u> | Top of PVC Elevation: | <u>NA</u> |
| Screen Perforation: | <u>NA</u> | Type/Thickness of Seals: | <u>NA</u> |
| Diameter of Well: | <u>NA</u> | Type of Sand Pack: | <u>NA</u> |
| Screened Interval: | <u>NA</u> | | |

| Depth (feet) | Blows per 6 inches | Penetration/ Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|--------------------------------|-------|---------------------|--------------|--|-------------------------|--------------------|---------|----------------|
| 0 | | 36/24 | 11:50 | SM | | Gray-brown fine Sand and Silt, some coarse Gravel, mottled, dry. | | 4.3 | JP5/0-3 | |
| 1 | | | | | | | | | | |
| 2 | | | | | | | | | | |
| 3 | | 36/6 | 11:50 | | | Grading wet. | | 14 | | Poor recovery. |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | 36/18 | 11:50 | | | Grading peat noted. | | 1.5 | JP5/6-9 | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | BORING COMPLETED AT 9'. | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.

Project Information

| | | | |
|-------------------|---------------------------------------|-----------|--------------------------------------|
| Project Name: | <u>California Street Overcrossing</u> | Location: | <u>California St and Federal Ave</u> |
| Project/Task No.: | <u>53-04333041.00 00056</u> | Weather: | <u>sunny, 60F</u> |

Drilling Information

| | | | |
|------------------|---|--------------------------------|---------------------------------------|
| Date Started: | <u>Thursday, June 21, 2001</u> | Annulus Diameter: | <u>2</u> inches |
| Date Completed: | <u>Thursday, June 21, 2001</u> | Hammer Weight and Drop: | <u>NA</u> lbs and <u>NA</u> inches |
| Drilled By: | <u>Kasey Goble</u> of <u>Cascade Drilling</u> | Sampler Type: | <u>3' stainless steel split spoon</u> |
| Logged By: | <u>Kate Pineo</u> of <u>URS</u> | Approximate Surface Elevation: | <u>NA</u> feet |
| Checked By: | <u>Dave Raubvogel</u> of <u>URS</u> | Groundwater Level: | <u>2</u> below ground surface |
| Drilling Method: | <u>Direct Push</u> | Total Depth: | <u>9</u> below ground surface |
| Drill Rig Type: | <u>Truck-mounted GeoProbe</u> | Backfill Material: | <u>bentonite chips</u> |

Well Installation Data

| | | | |
|----------------------|-----------|--------------------------|-----------|
| Type of Well Casing: | <u>NA</u> | Top of PVC Elevation: | <u>NA</u> |
| Screen Perforation: | <u>NA</u> | Type/Thickness of Seals: | <u>NA</u> |
| Diameter of Well: | <u>NA</u> | Type of Sand Pack: | <u>NA</u> |
| Screened Interval: | <u>NA</u> | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|-------|---------------------|--------------|--|-------------------------|--------------------|---------|--------------|
| 0 | | 36/30 | | SM | | Light brown fine Sand and Silt, some fine Gravel, dry. | | | | Odor. |
| 1 | | | | | | Grading dark gray. | | 75 | JP7/1-2 | |
| 2 | | | | SP | | Brown fine to medium Sand, little coarse Gravel, wet. | | 20 | JP7/2-3 | |
| 3 | | 36/0 | | | | | | | | No recovery. |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | 36/24 | 12:20 | | | Grading brown fine to medium Sand. | | 9 | JP7/6-9 | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | BORING COMPLETED AT 9' | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.
 Groundwater sample JP7/GW collected at 12:20.



Project No.: 31174 Boring: MW20 Plate: 1 OF 1
 Site: Former Mobil Oil Terminal 46-108 Date: 07/03/02
 Drill Contractor: Cascade Drilling, Inc. of Woodinville, WA

Sample Method: None Geologist: Antonio Luna
 Drill Rig: CME-55 Bore Hole Diameter: 8" Signature: _____
 Location: Southwest corner of property Registration: _____
in gravel next to Federal Avenue. Logged by: Antonio Luna

| DEPTH (ft) | BLOW COUNTS | PID/OVM (ppm) | SAMPLE | COLUMN | USCS | GEOLOGIC DESCRIPTION | WELL DESIGN |
|------------|-------------|---------------|--------|--------|------|---|-------------|
| 5 | | | | | | Removed steel well and point, backfilled with bentonite, capped with 1 foot of cement | |
| | | | | | | Total depth, 5 feet below ground surface | |

Casing Diameter: N/A, Slot Size: N/A, Sand Size: N/A, Grout: N/A



Project No.: 31174 Boring: MW21 Plate: 1 OF 1
 Site: Former Mobil Oil Terminal 46-108 Date: 07/03/02
 Drill Contractor: Cascade Drilling, Inc. of Woodinville, WA

Sample Method: None Geologist: Antonio Luna
 Drill Rig: CME-55 Bore Hole Diameter: 10" Signature: _____
 Location: Southwest corner of property Registration: _____
in gravel next to Federal Avenue. Logged by: Antonio Luna

| DEPTH (ft) | BLOW COUNTS | PTD/OVM (ppm) | SAMPLE | COLUMN | USCS | GEOLOGIC DESCRIPTION | WELL DESIGN |
|------------|-------------|---------------|--------|--------|------|--|-------------|
| 5 | | | | | | Removed schedule 40 PVC well casing, overdrilled to remove seal and sand pack, backfilled with bentonite, capped with 1 foot of cement | |
| | | | | | | Total depth, 6 feet below ground surface | |

Casing Diameter: N/A, Slot Size: N/A, Sand Size: N/A, Grout: N/A



Project No.: 31174 Boring: Unknown Plate: 1 OF 1

Site: Former Mobil Oil Terminal 46-108 Date: 07/03/02

Drill Contractor: Cascade Drilling, Inc. of Woodinville, WA

Sample Method: None Geologist: Antonio Luna

Drill Rig: CME-55 Bore Hole Diameter: 10" Signature: _____

Location: Southwest corner of property Registration: _____
in gravel next to Federal Avenue. Logged by: Antonio Luna

| DEPTH (ft) | BLOW COUNTS | PD/OVM (ppm) | SAMPLE | COLUMN | USCS | GEOLOGIC DESCRIPTION | WELL DESIGN |
|------------|-------------|--------------|--------|--------|------|--|-------------|
| 5 | | | | | | Well overdrilled to remove well casing, seal, and sand pack, backfilled with bentonite, capped with 1 foot of cement | |
| | | | | | | Total depth, 6 feet below ground surface | |

Casing Diameter: N/A, Slot Size: N/A, Sand Size: N/A, Grout: N/A

| DEPTH (ft bgs) | GRAPHIC LOG | USCS SYMBOL | SOIL DESCRIPTION | SAMPLE | BLOW COUNT SPT N VALUE | VOLATILE READING (ppm) | GROUNDWATER | FIELD AND LABORATORY TESTING | WELL SCHEMATIC |
|----------------|-------------|-----------------|---|--------|---------------------------|---------------------------|-------------|--|--|
| 0 | | | Surface: 0.2 feet of asphalt over 1.6 feet of gray fine to medium angular gravel (crushed rock base course) A vac-truck was utilized from 0 to 5 feet below the ground surface to ensure utilities were cleared. | | | | | | Flush mount in cement seal Hydrated bentonite chip seal |
| 5 | | SP SM | Medium dense, moist, brown, fine to coarse SAND with some silt and trace fine gravel Moist to wet, wood; possibly a large block | | 22 | 0.0 | | | 2-inch PVC casing in 2/12 silica sand filter pack 2-inch PVC 10 slot screen in 2/12 silica sand filter pack |
| | | SP | Loose, wet, brown, fine to medium SAND with trace silt and petroleum odor Becomes saturated and gray at 8.3 feet Water appeared viscous and sediments appeared to have a metallic luster from 8.3 to 9 feet Becomes medium dense at 9.5 feet | | 6 | 0.0 | ▼ | A1_S-1_020408 Sheen Test None Observed A1_S-2_020408 | |
| 10 | | | Becomes gray and brown, with some fine gravel and trace silt and no odor observed at 10.4 feet Cobbles in sampler shoe | | 21 | 0.0 | | | |
| | | GP- GM SP | Medium dense, saturated, dark gray, fine GRAVEL with some fine to medium sand and silt, light to medium sheen Medium dense, saturated, gray fine to medium SAND with trace silt and fine gravel and occasional organics (wood splinters) Approximatley 0.01 foot thick layers of wood splinters at 13, 14, and 15 feet Becomes loose, with petroleum odor and no visible gravel at 14.5 feet | | 16 | 0.0 | | Sheen Test Light Observed | |
| 15 | | | Becomes loose, with petroleum odor and no visible gravel at 14.5 feet | | 14 | 0.0 | | | 2/12 silica sand Bentonite chips |
| | | | Approximatley 0.1 foot thick layer of stiff, moist, brown, SILT with numerous organics / organic SILT (plant fragments, wood fibers, roots) at 18 feet | | 14 | 0.0 | | Sheen Test Light Observed | |
| 20 | | | | | 24 | 0.0 | | Sheen Test None Observed | |
| | | ML | Very stiff, moist, brown, SILT with trace fine to coarse sand and numerous organics / organic SILT with trace fine to coarse sand | | 20 | 0.0 | | | |
| 25 | | SP | Becomes with occasional organics (roots) at 25 feet Medium dense, saturated, gray, fine to medium SAND with trace silt | | 17 | 0.0 | | | |
| | | | Exploration terminated at 26.5 feet below the existing ground surface. | | | | | | |
| 30 | | | | | | | | | |

BORING METHOD: HSA

ELEVATION REFERENCE: NA

BOREHOLE DIAMETER: 8 (in)

GROUND SURFACE ELEVATION: NA

DRILL RIG: CME

CASING ELEVATION: NA

CONTRACTOR: Cascade Drilling, Inc./Scott

START CARD/TAG ID: /BAB238

LOGGED BY: LME

DRILLING DATES: 02/04/2008 - 02/04/2008

REMARKS:

ENVR+WELL-BORING FEDERALAVENUE.GPJ AMEC PORTLAND.GDT 3/17/08

ExxonMobil / American Distributing Company

7-915-15716-B

AMEC Earth and Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, Washington
USA 98034
Tel (425) 820-4669
Fax (425) 821-3914



**LOG OF BORING
MWA1**

PAGE 1 OF 1

| 0 DEPTH (ft bgs) | GRAPHIC LOG | USCS SYMBOL | SOIL DESCRIPTION | SAMPLE | BLOW COUNT SPT N VALUE | VOLATILE READING (ppm) | GROUNDWATER | FIELD AND LABORATORY TESTING | WELL SCHEMATIC |
|---------------------|-------------|-------------|--|--------|---------------------------|---------------------------|-------------|--------------------------------------|--|
| 0 | | | Surface: moist, dark gray, angular fine to medium gravel (crushed rock) A vac-truck was utilized from 0 to 5 feet below the ground surface to ensure utilities were cleared. Approximatley 2 feet of wood with creosote odor (appeared to be blocks of wood treated with creosote) | | | | | | Flush mount in cement seal Hydrated bentonite chip seal |
| 5 | | SP | Very loose, moist, black, fine to medium SAND with some silt and numerous organics (wood splinters) | | 5 | 0.0 | ▼ | A2_S-1_020408 Sheen Test Light | 2-inch PVC casing in 2/12 silica sand filter pack 2-inch PVC 10 slot screen in 2/12 silica sand filter pack |
| | | SP | Very loose, moist, brown, fine to medium SAND with trace silt | | | | | Observed A2_S-2_020408 | |
| | | ML | Stiff, wet to saturated, blue-gray, sandy SILT with slight petroleum odor and light sheen | | | | | | |
| | | OL/ML | Stiff, moist, dark brown to black, organic SILT / SILT with numerous organics (roots, plant fragments) and petroleum odor | | 11 | 0.0 | ▼ | | |
| | | SM | Loose, wet to saturated, silty, fine to medium SAND with trace fine gravel and petroleum odor and light sheen | | | | | | |
| | | ML | Stiff, moist, brown, SILT with some clay and numerous organics (roots) | | 25 | 0.0 | | Sheen Test None Observed | |
| 10 | | SP | Loose, moist to wet, gray, fine to medium SAND with trace silt and scattered organics (roots) | | | | | | |
| | | SP | Medium dense, saturated, gray, fine to medium SAND with trace silt | | 17 | 0.0 | | | |
| 15 | | | Becomes with occasional organics (roots, plant fragments) at 15 feet Tip of sampler shoe contained wet, brown, organic SILT / SILT with numerous organics (roots, plant fragments) | | 11 | 0.0 | | Sheen Test None Observed | 2/12 silica sand Bentonite chips |
| | | | | | 14 | 0.0 | | | |
| 20 | | | | | 16 | 0.0 | | Sheen Test None Observed | |
| | | OL/ML | Stiff, moist, brown, organic stratified SILT with some clay and trace fine to medium sand / stratified SILT with some clay and trace fine to medium sand and numerous organics (roots, plant fragments) | | | | | | |
| | | SP | Medium dense, saturated, gray, fine to medium SAND with trace silt and occasional organics (roots, plant fragments) Becomes no visible organics at 22 feet | | 25 | 0.0 | | | |
| 25 | | | | | 25 | 0.0 | | Sheen Test None Observed | |
| 30 | | | Exploration terminated at 26.5 feet below the existing ground surface. | | | | | | |

| | | |
|--|---|----------|
| BORING METHOD: HSA | ELEVATION REFERENCE: NA | REMARKS: |
| BOREHOLE DIAMETER: 8 (in) | GROUND SURFACE ELEVATION: NA | |
| DRILL RIG: CME | CASING ELEVATION: NA | |
| CONTRACTOR: Cascade Drilling, Inc./Scott | START CARD/TAG ID: /BAB237 | |
| LOGGED BY: LME | DRILLING DATES: 02/04/2008 - 02/04/2008 | |

ENVR+WELL-BORING FEDERAL AVENUE GPJ AMEC PORTLAND.GDT 3/17/08

ExxonMobil / American Distributing Company
7-915-15716-B

AMEC Earth and Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, Washington
USA 98034
Tel (425) 820-4669
Fax (425) 821-3914



LOG OF BORING MWA2
PAGE 1 OF 1

APPENDIX D

PEG Report (Kimberly-Clark Investigations)



Texaco Refining
and Marketing Inc

3400 188th Street SW
Suite 630
Lynnwood WA 98037

RECEIVED

JUN 02 1998

DEPT. OF ECOLOGY

April 20, 1998

Subsurface Investigation Results
Port of Everett - Former Bulk Facilities
2600 Federal Avenue, Everett, Washington

*Received by
Mobil
6-11-98*

Mr. Norm Peck
Washington Department of Ecology Northwest Region
Toxic Cleanup Program
Mail Stop NB-81
3190 - 160th Avenue SE
Bellevue, Washington 98008-5452

Dear Mr. Peck:

Enclosed is a copy of an Environmental Investigation Report for the above-referenced location. The report was prepared by Pacific Environmental Group (PEG) on behalf of Chevron Products Company, Texaco Refining and Marketing, Kimberly-Clark, and Burlington Northern Railroad. The work was conducted in response to Ecology's concern that petroleum bulk distribution facilities formerly located at the site had contributed to the free phase hydrocarbons (free product) identified in a City of Everett Combined Sewer Outfall (CSO Line) located between the subject site and the Mobil/American Distributing facilities to the south.

During June and July 1996, approximately 23,000 gallons of free product (identified as fuel oil) were recovered by others during excavation of the CSO Line. Extensive free product contamination had previously been identified at the Mobil/American Distributing facility. Mobil subsequently conducted a historical investigation of potential off-site sources of petroleum hydrocarbons, and former Standard Oil and Tidewater Oil bulk distribution facilities, located north of the CSO line were identified. Ecology identified Potentially Liable Parties (PLPs) associated with the former facilities and proposed an Agreed Order requiring an investigation to determine whether impacts from the former bulk facilities were contributing to the CSO Line problem.


Four of the PLPs, Chevron, Texaco, Kimberly-Clark, and Burlington Northern/Santa Fe Railroad, decided to conduct an investigation of the former terminals as an independent action in order to expedite the process. The investigation consisted of advancing 15 soil probes and collecting grab samples of groundwater, and installing and sampling two permanent groundwater monitoring wells. The results of the investigation are presented in the enclosed report.

No free product was observed during this investigation. In fact, the only significant dissolved hydrocarbon concentrations identified were in the two probes located adjacent to the CSO Line. Based on the results of this investigation, we believe that it is impossible to conclude that the free product found in the CSO Line is the result of operations at the former Chevron and Tidewater properties, now owned by Kimberley Clark.


Mr. Norm Peck
April 20, 1998
Page 2

Additionally, fuel fingerprinting analysis, conducted during the CSO Line repairs, showed a strong correlation between the fuel oil from the CSO Line and the free product recovered from wells at the Mobil/American Distributing site. Based on these results, we believe that there is no reason to maintain any link between the former bulk plants and the Mobil/American Distributing/CSO problem. Further, we see no reason to conduct additional investigation. Please feel free to contact me at (206) 774-6090 extension 227 if you have any questions regarding this report.


Sincerely,




Tony Palagyi
Project Manager
Texaco EH&S



Ann Marie Johnson
Project Manager
Chevron Products Company



Richard C. Abrams
Environmental Manager
Kimberly Clark



Bruce Sheppard
Manager Env. Remediation
Burlington Northern/Santa Fe

RECEIVED
JUN 02 1998
DEPT. OF ECOLOGY

— Soil Borings were very shallow perhaps too shallow
Considering fill history
— Well screening size may have been too tight to allow viscous fluids to collect.
— may not be acceptable to WDE, Norm Peck.

Environmental Investigation Report

Former Bulk Fuel Facilities
2600 Federal Avenue
Everett, Washington

Prepared for


Chevron Products Company, Texaco Refining and Marketing,
Kimberly-Clark, and BNSF

April 14, 1998

Prepared by

Pacific Environmental Group, Inc.
4020 - 148th Avenue NE, Suite B
Redmond, Washington 98052

Project 520-165.1A



PACIFIC
ENVIRONMENTAL
GROUP, INC.

CONTENTS

| | |
|--|-----------|
| EXECUTIVE SUMMARY | i |
| 1.0 INTRODUCTION | 1 |
| 1.1 Scope of Work | 1 |
| 1.2 Site Description | 2 |
| 1.3 Previous Investigations | 2 |
| 2.0 INVESTIGATIVE PROCEDURES | 3 |
| 2.1 Soil Probe Installation | 3 |
| 2.1.1 Soil and Groundwater Sampling | 3 |
| 2.2 Soil Borings and Monitoring Well Installation | 4 |
| 2.2.1 Soil Sampling | 4 |
| 2.2.2 Well Casing Installation | 4 |
| 2.2.3 Well Development and Groundwater Sampling | 5 |
| 2.3 Analytical Program | 6 |
| 3.0 FINDINGS | 7 |
| 3.1 Subsurface Conditions | 7 |
| 3.2 Sample Analytical Results | 7 |
| 3.2.1 Soil | 7 |
| 3.2.2 Groundwater | 7 |
| 4.0 CONCLUSIONS | 9 |
| 5.0 SIGNATURES OF ENVIRONMENTAL PROFESSIONALS | 10 |

TABLES, FIGURES, AND APPENDICES

Tables

| | |
|---------|--------------------------------|
| Table 1 | Soil Analytical Results |
| Table 2 | Groundwater Analytical Results |

Figures

| | |
|----------|--|
| Figure 1 | Site Location Map |
| Figure 2 | Site Map - Exploration Locations |
| Figure 3 | Site Map - Groundwater Sample Concentrations |

Appendix A - Investigative Procedures/Field Data Sheets

Appendix B - Boring Logs

**Appendix C - Laboratory Analytical Methods and Results
Chain of Custody Documentation**

EXECUTIVE SUMMARY

An environmental assessment of soil and groundwater conditions was performed at 2600 Federal Avenue in Everett, Washington. Pacific Environmental Group, Inc. (PEG) conducted this assessment on behalf of Chevron, Texaco, Kimberly-Clark, and BNSF. The scope of work for this environmental assessment was presented in a sampling and analysis workplan dated August 20, 1997, and was performed between November 17, 1997 and January 19, 1998. This workplan was developed in response to the Washington Department of Ecology's decision to name Chevron, Texaco, Kimberly-Clark, and BNSF as Potentially Liable Persons (PLPs), in regard to petroleum contamination found adjacent to the City of Everett Combined Sewer Outfall (CSO) line, which resulted in an oil release into Port Gardner Bay in 1995.

The project consisted of the following tasks:

- Install fifteen exploratory soil probes (Probe 1 through Probe 15).
- Install two soil borings and convert them to groundwater monitoring wells (KC-1 and KC-2).
- Collect soil and groundwater samples from the borings and probes.

Measurable thicknesses of separate-phase hydrocarbons were not identified in any of the soil probes or monitoring wells installed during this investigation. The analytical results from the soil probes and groundwater monitoring wells indicate that the highest concentrations of hydrocarbons in soil and groundwater are limited to the area immediately adjacent to the CSO line. There is no evidence from this investigation that the former facilities on the 2600 Federal Avenue property contributed to the separate-phase hydrocarbons encountered during repair of the CSO line in 1996.

1.0 INTRODUCTION

1.1 Scope of Work

This investigation was performed between November 17, 1997 and January 19, 1998. The purpose of this investigation was to evaluate soil and groundwater quality in the vicinity of several former petroleum bulk plants adjacent to Port Gardner Bay in Everett, Washington (Figure 1). The goal of this investigation was to show whether evidence exists that would suggest the former facilities contributed to the separate-phase hydrocarbons documented at the CSO line. The scope of work consisted of the following tasks:

- Prepare a site safety plan for the project in accordance with WISHA and OSHA regulations.
- Install fifteen exploratory soil probes (Probe-1 through Probe-15) using a direct push probe sampling rig, and a hand auger.
- Install two soil borings using a hollow-stem auger drilling rig. Convert the borings to groundwater monitoring wells (KC-1 and KC-2) using 2-inch diameter Schedule 40 PVC well casing with 0.020-inch slotted screen.
- Collect soil samples from the borings and probes for soil characterization and possible laboratory analysis.
- Conduct field screening of soil samples using a photoionization detector and an oil sheen test.
- Develop and sample the two newly installed monitoring wells.
- Submit soil and groundwater samples and appropriate documentation to a Washington State accredited laboratory for analyses.
- Prepare this report.

Each of these tasks is described in detail in Section 2.0, and the findings and conclusions are presented in Sections 3.0 and 4.0.

1.2 Site Description

The project site is located on the Port Gardner Bay waterfront near Federal Avenue and the foot of Everett Avenue in Everett, Snohomish County, Washington. The property being investigated is currently the site of a pulp and paper mill owned by Kimberly-Clark, a railroad right-of-way owned by BNSF, and part of the Port of Everett that includes a log yard and a towing business (Dunlap Towing), hereafter referred to as "the Site". The Site was the former location of petroleum bulk plants operated by Standard Oil of California (Chevron) and Associated Oil Company (Texaco). Aboveground petroleum storage tanks were also operated on the Site until recently by Kimberly-Clark. Figure 2 shows the locations of former facilities in relation to the current property use.

The subject property is located in the NE $\frac{1}{4}$ of the SW $\frac{1}{4}$, and the NW $\frac{1}{4}$ of the SE $\frac{1}{4}$, Section 19 of Township 29 North, Range 5 East, Willamette Meridian. According to the United States Geological Survey topographic map of Everett, Washington, the property is located approximately 10 feet above mean sea level.

1.3 Previous Investigations

PEG is not aware of any previous environmental investigations performed at the former Bulk Plant facilities with respect to petroleum hydrocarbons.

Based on information provided by PTI Environmental Services Inc., assessment and remediation activities have occurred on and directly adjacent to the Mobil/American Distributing Co. site, that is located directly south of the Kimberly-Clark mill. In August and October of 1995, the U.S. Coast Guard responded to an oil discharge in Port Gardner Bay that was traced to the City of Everett combined sewer outfall (CSO). The CSO line runs east-west directly south of the Kimberly-Clark warehouse (Figure 2). The oil from the discharge was matched to a sample from the Mobil/American Distributing Co. site.

In April 1996, an Agreed Order was issued by Ecology to Mobil and American Distributing Co., which focused on elimination of oil discharge from the CSO line, followed by definition of the nature and extent of contamination. In June and July 1996, the CSO line was excavated and repaired. Approximately 23,000 gallons of #3 or #4 fuel oil were recovered during dewatering activities for the CSO line repair by Mobil/American Distributing Co. Approximately 800 cubic yards of petroleum contaminated soil were hauled off-site for disposal by Mobil/American Distributing Co.

2.0 INVESTIGATIVE PROCEDURES

2.1 Soil Probe Installation

Transglobal Environmental Geosciences Northwest Inc. (TEG) of Olympia, Washington installed fourteen exploratory soil probes (Probe 2 through Probe 15) to depths ranging from 4 to 13 feet below grade on November 17 and 18, 1997. Soil probe locations were positioned in proximity to former facilities on the Site that could be potential sources of petroleum hydrocarbons, and adjacent to the CSO line. A direct-push hydraulic drive point system was used and a PEG geologist using the Unified Soil Classification System logged the borings. Following the collection of soil samples, the borings were abandoned by grouting with a bentonite sealant to the surface. Investigative procedures are presented in Appendix A. Soil probe locations are presented on Figure 2. Soil probe logs are presented in Appendix B.

2.1.1 Soil and Groundwater Sampling

Soil Probe 1 could not be accessed with the Strataprobe rig, therefore a soil sample was collected from this location utilizing a stainless steel hand auger. Soil samples were collected continuously from a depth of one foot below grade to the bottom of the soil borings in soil Probe 2 through Probe 4, and Probe 7 through Probe 15, utilizing a direct-push hydraulic drive point system. Soil samples were collected continuously from a depth of three feet and two feet below grade in soil Probe 5 and Probe 6, respectively. Soil samples retained for chemical analyses were placed in laboratory supplied sample jars with Teflon[®] lined lids. The samples were placed on ice during transport and submitted to North Creek Analytical, Inc. in Bothell, Washington for chemical analysis. Groundwater samples were also collected from each probe location utilizing a screened probe section which was sampled using a peristaltic pump with disposable tubing.

Soil samples were field screened for the presence of organic vapors using a Thermo Environmental Instruments Inc. Model 580B PID with a 10.0 electron volt (eV) lamp. Soil screening procedures are described in Appendix A. It should be noted that the PID measurements are considered semi-quantitative data since the instrument detects all organic compounds with ionization potentials less than 10 eV. PID results for the soil samples ranged from non-detectable levels to 86 parts per million (ppm). In addition, the soil samples were

field screened for oil sheens. Oil sheen screening procedures are presented in Appendix A. The results of this field screening are also recorded on the exploratory boring logs in Appendix B.

2.2 Soil Borings and Monitoring Well Installation

Two exploratory soil borings (KC-1 and KC-2) were drilled by Cascade Drilling of Bothell, Washington on January 16, 1998. The boring locations were chosen to determine if the former facilities might have contributed to the petroleum hydrocarbons observed in the CSO line excavation. The borings were installed to depths of approximately 16.5 feet below the floor within the existing Kimberly-Clark warehouse. The borings were moved slightly from the original locations in the sampling and analysis workplan to avoid high-traffic areas. Holes were cut through the concrete floor to allow drilling equipment to access the soil.

There was an open space between the warehouse floor and the ground surface. The ground surface was approximately five feet below the concrete warehouse floor at Well KC-1, and approximately 4.5 feet below the floor at Well KC-2. The casings for these two wells protrude above the ground surface and are completed just below the warehouse floor to allow access from within the warehouse. The exploratory boring logs show detail of this well completion arrangement.

2.2.1 Soil Sampling

Eight-inch outside diameter hollow-stem auger drilling equipment was used and a PEG geologist using the Unified Soil Classification System logged the borings. Initial soil samples were collected at approximately seven and nine feet below the warehouse floor, and sampling continued thereafter at approximately five-foot intervals to the total depth explored. Soil samples for chemical analyses were retained in laboratory-supplied glass jars with Teflon™ lined lids. The samples were placed on ice for transport to North Creek Analytical, Inc. accompanied by chain-of-custody documentation. Investigative procedures and sample preservation techniques are presented in Appendix A. Boring locations are shown on Figure 2. Soil samples were field screened for oil sheens and for the presence of organic vapors using a PID. PID test procedures and oil sheen field screening procedures are described in Appendix A. The results of the field screening are recorded on the exploratory boring logs in Appendix B.

2.2.2 Well Casing Installation

The two borings were converted to groundwater monitoring wells (KC-1 and KC-2) with the installation of 2-inch diameter, Schedule 40 PVC casing with 0.020-inch factory slotted screen. The well screen was placed across the saturated zone and extended from approximately 2 feet to 10 feet below ground surface in Well KC-1, and from approximately 1.5 feet to 11.5 feet

below ground surface in Well KC-2. Ground surface refers to the soil surface below the warehouse floor. Refer to the boring logs in Appendix B for specific information on well construction. The annular space of each well was packed with a graded 10x20 Colorado silica sand. The sand pack was placed across the entire screened interval, extending approximately six inches above the top of the screens. The annular space of each well was then sealed with hydrated bentonite chips to the ground surface beneath the warehouse floor. A plug-type locking device was installed at the top of each monitoring well. A metal plate able to withstand forklift traffic was placed in the opening of the concrete floor. Soil cuttings generated during drilling remained beneath the warehouse floor.

2.2.3 Well Development and Groundwater Sampling

Monitoring Wells KC-1 and KC-2 were developed on January 16, 1998 by surging and bailing. Well development procedures and records are presented in Appendix A.

Groundwater samples were collected from Wells KC-1 and KC-2 on January 19, 1998. Depths to groundwater in Wells KC-1 and KC-2 on this date were 6.53 feet and 5.78 feet below top of casing, respectively. Well locations are shown on Figure 2.

Prior to sampling, each well was visually checked for the presence of sheens using a clear single-use disposable polyethylene bailer. No sheens were observed in the wells. The wells were then purged of a minimum of three casing volumes of water by bailing. Groundwater samples were collected after the wells recovered to at least 60 percent of the pre-purge static water level. Samples were collected with a single-use disposable bailer. Groundwater sampling procedures are described in detail in Appendix A. Field sampling data sheets are also presented in Appendix A.

One blind duplicate sample (KC-X) was collected from Monitoring Well KC-2. One trip blank sample (Trip Blank) was also prepared utilizing laboratory provided deionized water, and was carried throughout the sampling event.

Development and purge water was placed directly into the mill's wastewater disposal system.

2.3 Analytical Program

Soil and groundwater samples that were selected for laboratory testing were analyzed for one or more of the following parameters:

| <u>PARAMETER</u> | <u>METHOD</u> |
|--|---|
| Total Petroleum Hydrocarbons as gasoline (TPH-gasoline) | Washington Method WTPH-G |
| TPH-diesel and TPH-oil | Washington Method WTPH-D plus Extended |
| Benzene, toluene, ethyl benzene and xylenes (BTEX compounds) | EPA Method 8020 |

The samples were analyzed by North Creek Analytical of Bothell, Washington.

3.0 FINDINGS

3.1 Subsurface Conditions

In general, soil encountered during soil probe and monitoring well installations consisted of silty sand, and sand. Occurrences of clay, wood, and organic material were also noted in some locations. Boring logs that show detailed lithologic descriptions are included in Appendix B. Groundwater was generally encountered during soil probe installation at depths less than five feet below grade. Measurable thicknesses of separate-phase hydrocarbons were not observed in any of the soil probe or boring locations. Hydrocarbon sheens were noted in soil samples from Probe 6, Probe 7, and Probe 11. On January 19, 1998, depth to groundwater in Monitoring Wells KC-1 and KC-2 was 6.53 feet and 5.78 feet below top of casing, respectively, which is approximately 1.5 feet below the ground surface under the warehouse floor.

3.2 Sample Analytical Results

3.2.1 Soil

A total of three soil samples were submitted for analysis from soil Probe 7, soil Probe 11, and Boring KC-1. The soil samples collected from the soil probes were submitted for analysis based on the observation of sheens during field screening. The soil sample submitted from Boring KC-1 was collected from just above the groundwater interface. Concentrations of TPH-gasoline, TPH-diesel, and TPH-oil were detected in the three soil samples, however all concentrations were below the respective MTCA Method A cleanup levels.

*only
3 samples*

The soil analytical results are summarized in Table 1. Laboratory analytical reports and chain-of-custody documentation are included in Appendix C. Figure 2 should be referenced for sample locations.

3.2.2 Groundwater

Groundwater samples from Probe 3, Probe 4, Probe 5, Probe 7, and Probes 10 through 15 contained detectable concentrations of TPH-gasoline, TPH-diesel, TPH-oil, or BTEX compounds. However, only the samples from Probe 7, Probe 11, Probe 13, and Probe 14

contained TPH-diesel and/or TPH-oil concentrations exceeding MTCA Method A cleanup levels. The samples from Probe 7 and Probe 11 (closest to the CSO line) contained the highest TPH concentrations. Concentrations of TPH-diesel in Probe 7 and Probe 11 were 52,400 parts per billion (ppb) and 56,000 ppb, respectively. Concentrations of TPH-oil in Probe 7 and Probe 11 were 38,400 ppb and 43,900 ppb, respectively. Groundwater analytical results are summarized in Table 2.

The groundwater sample from Well KC-1 contained a detectable concentration of TPH-diesel, below the MTCA Method A cleanup level. The sample from Well KC-2 contained no detectable concentrations of TPH or BTEX compounds. Groundwater analytical results are summarized in Table 2.

A blind duplicate water sample (KC-X) was submitted for analysis, along with a trip blank. The blind duplicate was a duplicate sample from Well KC-2. The blind duplicate contained detectable concentrations of TPH-gasoline and TPH-diesel. Blind duplicate sample KC-X does not correlate with the non-detectable concentrations observed in the sample from Well KC-2, and may indicate a field or laboratory error. However, the concentrations reported in Sample KC-X were not significantly higher than the method reporting limits, and may represent a statistical variation in the laboratory analysis. Concentrations of TPH or BTEX were not detected in the trip blank sample.

Laboratory analytical reports and chain-of-custody documentation are included in Appendix C. Figure 3 should be referenced for sample locations and TPH concentrations.

4.0 CONCLUSIONS

Based on laboratory analytical data, the following conclusions can be made:

- No measurable thicknesses of separate-phase hydrocarbons were identified in any of the soil probes or monitoring wells installed during this investigation.
- Detected concentrations of TPH-gasoline, TPH-diesel, TPH-oil, and toluene in the soil samples analyzed from the exploratory soil probes and borings did not exceed the respective Washington State Model Toxics Control Act (MTCA) Method A cleanup levels.
- Groundwater samples collected from soil Probe 7 and soil Probe 11 (nearest the CSO line) exceeded the MTCA Method A cleanup level for TPH-diesel at levels of 52,400 ppb and 56,000 ppb, respectively.
- Groundwater samples collected from soil Probe 7 and soil Probe 11 (nearest the CSO line) exceeded the MTCA Method A cleanup level for TPH-oil at levels of 38,400 ppb and 43,900 ppb, respectively.
- Groundwater samples collected from soil Probe 13, and soil Probe 14 exceeded the MTCA Method A cleanup level for TPH-oil at levels of 1,420 ppb and 2,930 ppb, respectively.
- All other detected concentrations of BTEX compounds, TPH-gasoline, TPH-diesel, and TPH-oil in groundwater samples were below the MTCA Method A cleanup levels.

The analytical results from the soil probes and groundwater monitoring wells demonstrate that the highest concentrations of hydrocarbons in soil and groundwater are found immediately adjacent to the CSO line. There is no evidence from this investigation that the former facilities located north of the CSO line contributed to the separate phase hydrocarbons encountered during repair of the CSO line.

5.0 SIGNATURES OF ENVIRONMENTAL PROFESSIONALS

ENVIRONMENTAL INVESTIGATION

2600 Federal Avenue

Everett, Washington


February 12, 1998.

PEG Project Number 520-165.1A

This report prepared for:

Chevron Products Company, Texaco Refining and Marketing Inc., Kimberly-Clark, and BNSF


by:



Matthew Miller

Project Geologist

and reviewed by:



Eric Larsen

Senior Geologist

Pacific Environmental Group, Inc.

4020 - 148th Avenue NE,

Suite B

Redmond, Washington 98052

(425) 869-5099

(425) 869-5639 (FAX)

TABLE 2
GROUNDWATER ANALYTICAL RESULTS


Former Bulk Fuel Facilities
2600 Federal Avenue
Everett, Washington

| Sample I.D. | Date | Benzene (ppb) | Toluene (ppb) | Ethyl-benzene (ppb) | Xylenes (ppb) | TPH-Gasoline (ppb) | TPH-Diesel (ppb) | TPH-Oil (ppb) |
|--|----------|-----------------|-----------------|---------------------|---------------|--------------------|------------------|---------------|
| Probe 2 | 11/17/97 | ND | ND | ND | ND | ND | ND | ND |
| Probe 3 | 11/17/97 | ND | ND | ND | ND | ND | ND | 766 |
| Probe 4 | 11/17/97 | 0.877 | 0.569 | 0.602 | 2.52 | 137 | 276 | ND |
| Probe 5 | 11/17/97 | ND | ND | ND | ND | 64.6 | ND | ND |
| Probe 6 | 11/17/97 | ND | ND | ND | ND | ND | ND | ND |
| Probe 7 | 11/17/97 | ND | ND | ND | ND | 327 | 52,400 | 38,400 |
| Probe 8 | 11/17/97 | ND | ND | ND | ND | ND | ND | ND |
| Probe 9 | 11/17/97 | ND | ND | ND | ND | ND | ND | ND |
| Probe 10 | 11/17/97 | ND | 0.672 | ND | ND | ND | ND | ND |
| Probe 11 | 11/17/97 | ND | ND | ND | 4.86 | 736 | 56,000 | 43,900 |
| Probe 12 | 11/17/97 | ND | 0.715 | ND | ND | ND | ND | ND |
| Probe 13 | 11/18/97 | ND | ND | ND | ND | ND | ND | 1,420 |
| Probe 14 | 11/18/97 | ND | ND | ND | ND | ND | 311 | 2,930 |
| Probe 15 | 11/18/97 | ND | 1.26 | 1.23 | 2.37 | 172 | ND | ND |
| KC-1 | 01/19/98 | ND | ND | ND | ND | ND | 430 | ND |
| KC-2 | 01/19/98 | ND | ND | ND | ND | ND | ND | ND |
| KC-X* | 01/19/98 | ND | ND | ND | ND | 57.9 | 355 | ND |
| Trip Blank | 01/19/98 | ND | ND | ND | ND | ND | NA | NA |
| MTCA Method A Cleanup Levels: | | 5.0 | 40 | 30 | 20 | 1000 | 1000 | 1000 |
| Laboratory Reporting Limits: | | 0.50-1.0 | 0.50-1.0 | 0.50-1.0 | 1.00 | 50.0 | 250 | 750 |
| <p>Concentrations reported as parts per billion (ug/l) Certified analytical results are included in Attachment B ND - Not Detected at or above the laboratory reporting limit NA - Not Analyzed * - KC-X is a duplicate sample from Well KC-2 TPH as Diesel and Oil - Analysis by Washington Method WTPH-D plus extended TPH as Gasoline - Analysis by Washington Method WTPH-G BTEX Compounds - Analysis by EPA Method 8020A</p> | | | | | | | | |

TABLE 1
SOIL ANALYTICAL RESULTS

Former Bulk Fuel Facilities
2600 Federal Avenue
Everett, Washington

| Sample I.D. | Date | Depth (feet) | Benzene (ppm) | Toluene (ppm) | Ethyl-benzene (ppm) | Xylenes (ppm) | TPH-Gasoline (ppm) | TPH-Diesel (ppm) | TPH-Oil (ppm) |
|---|----------|--------------|---------------|---------------|---------------------|---------------|--------------------|------------------|---------------|
| Probe 7-3 | 11/17/97 | 3.0 | ND | 0.0545 | ND | ND | ND | 17.6 | 71.1 |
| Probe 11-4 | 11/17/97 | 4.0 | ND | ND | ND | ND | 20.7 | 19.6 | 52.5 |
| KC1-8.5 | 01/16/98 | 8.5 | ND | ND | ND | ND | 6.50 | 52.7 | 81.8 |
| MTCA Method A Cleanup Levels: | | | 0.5 | 40 | 20 | 20 | 100 | 200 | 200 |
| Laboratory Reporting Limits: | | | 0.050 | 0.050 | 0.050 | 0.10 | 5.0 | 10.0 | 25.0 |
| Concentrations reported as parts per million (mg/kg) Certified analytical results are included in Attachment B ND - Not detected at or above the laboratory reporting limits TPH as Diesel and Oil - Analysis by Washington Method WTPH-D plus extended TPH as Gasoline - Analysis by Washington Method WTPH-G BTEX Compounds - Analysis by EPA Method 8020A | | | | | | | | | |

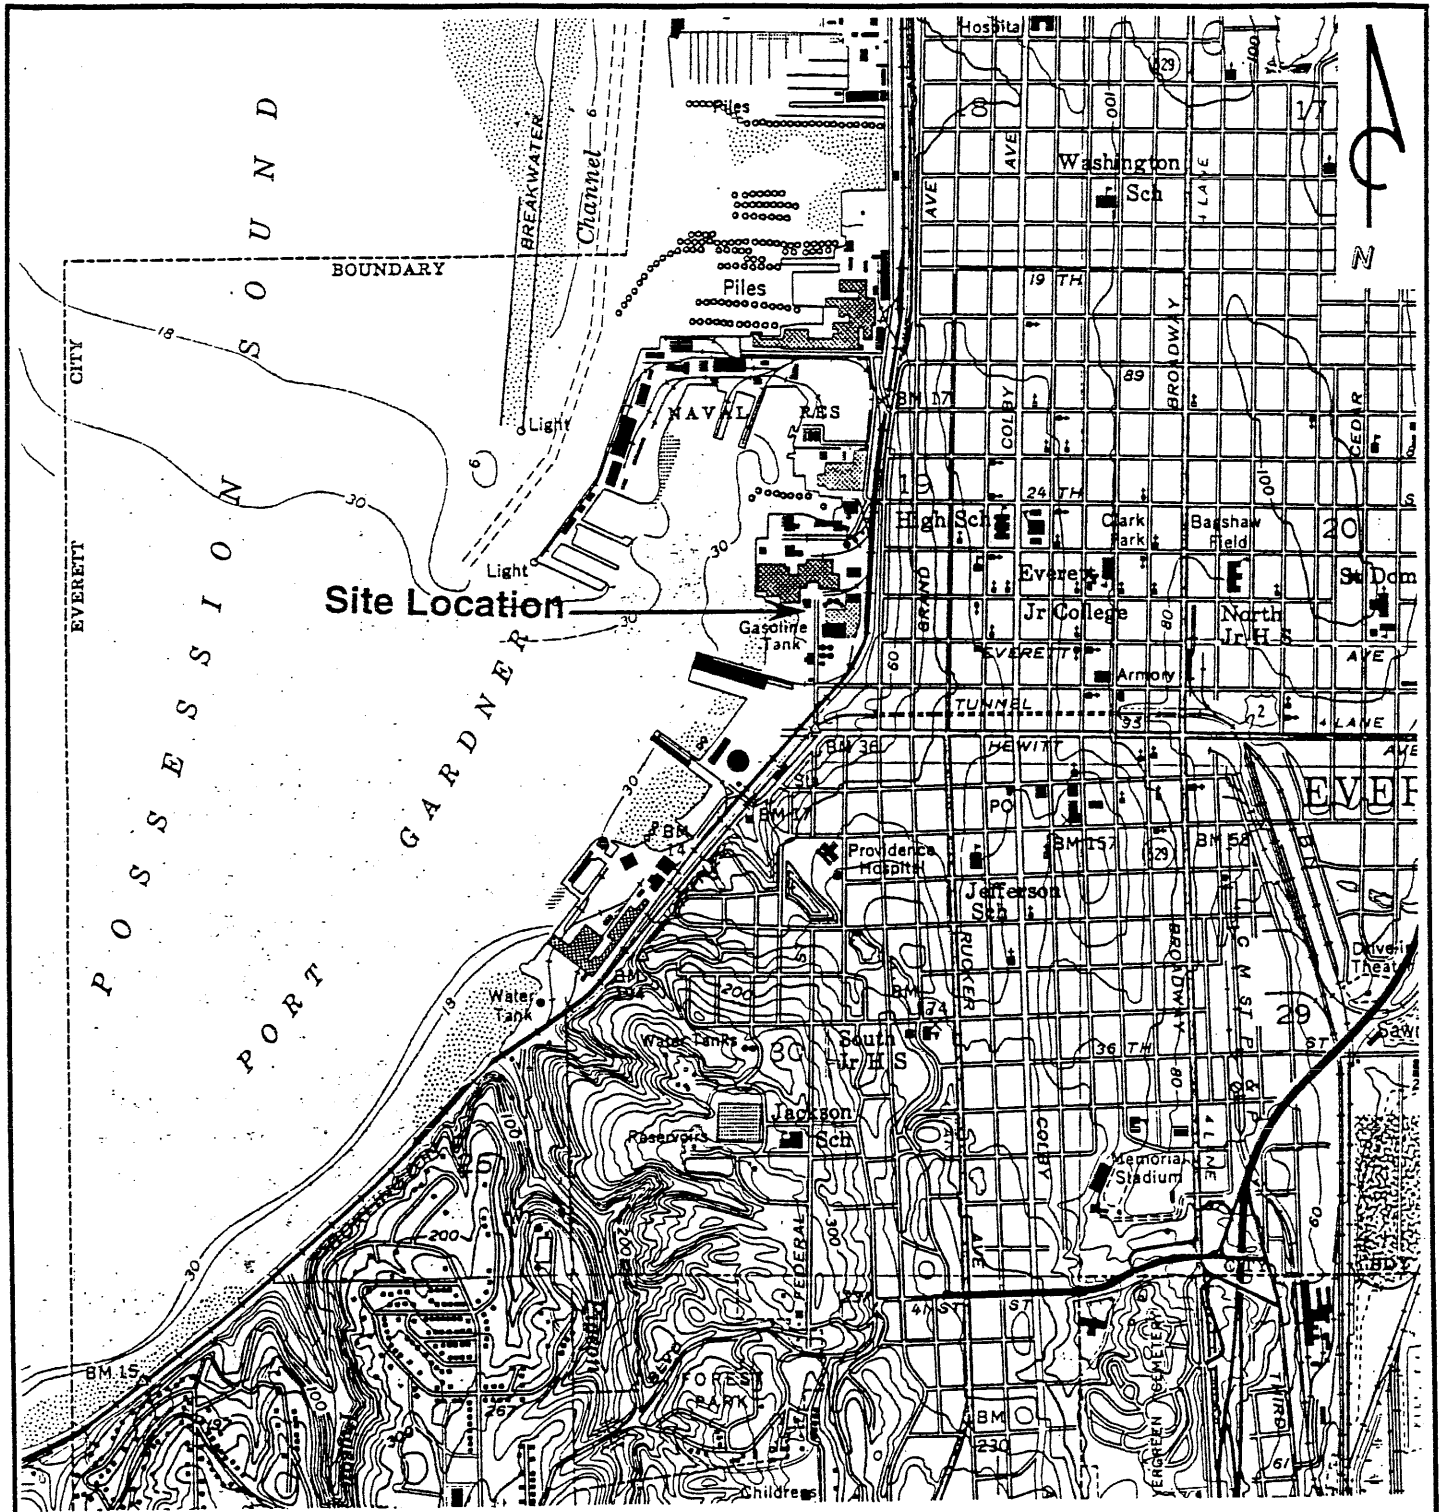

REFERENCE:

USGS 7.5 MIN. TOPOGRAPHIC MAP
 TITLED: Everett, Washington
 DATED: 1953 REVISED: 1968 and 1973
 COUNTY: Snohomish

SCALE: 1 to 24,000 (1 Inch = Approximately 2000 Feet)



MAP LOCATION




PACIFIC
 ENVIRONMENTAL
 GROUP, INC.

FORMER BULK FUEL FACILITIES
 2600 Federal Avenue
 Everett, Washington

SITE LOCATION MAP


FIGURE:
1
 PROJECT:
 520-165.1A

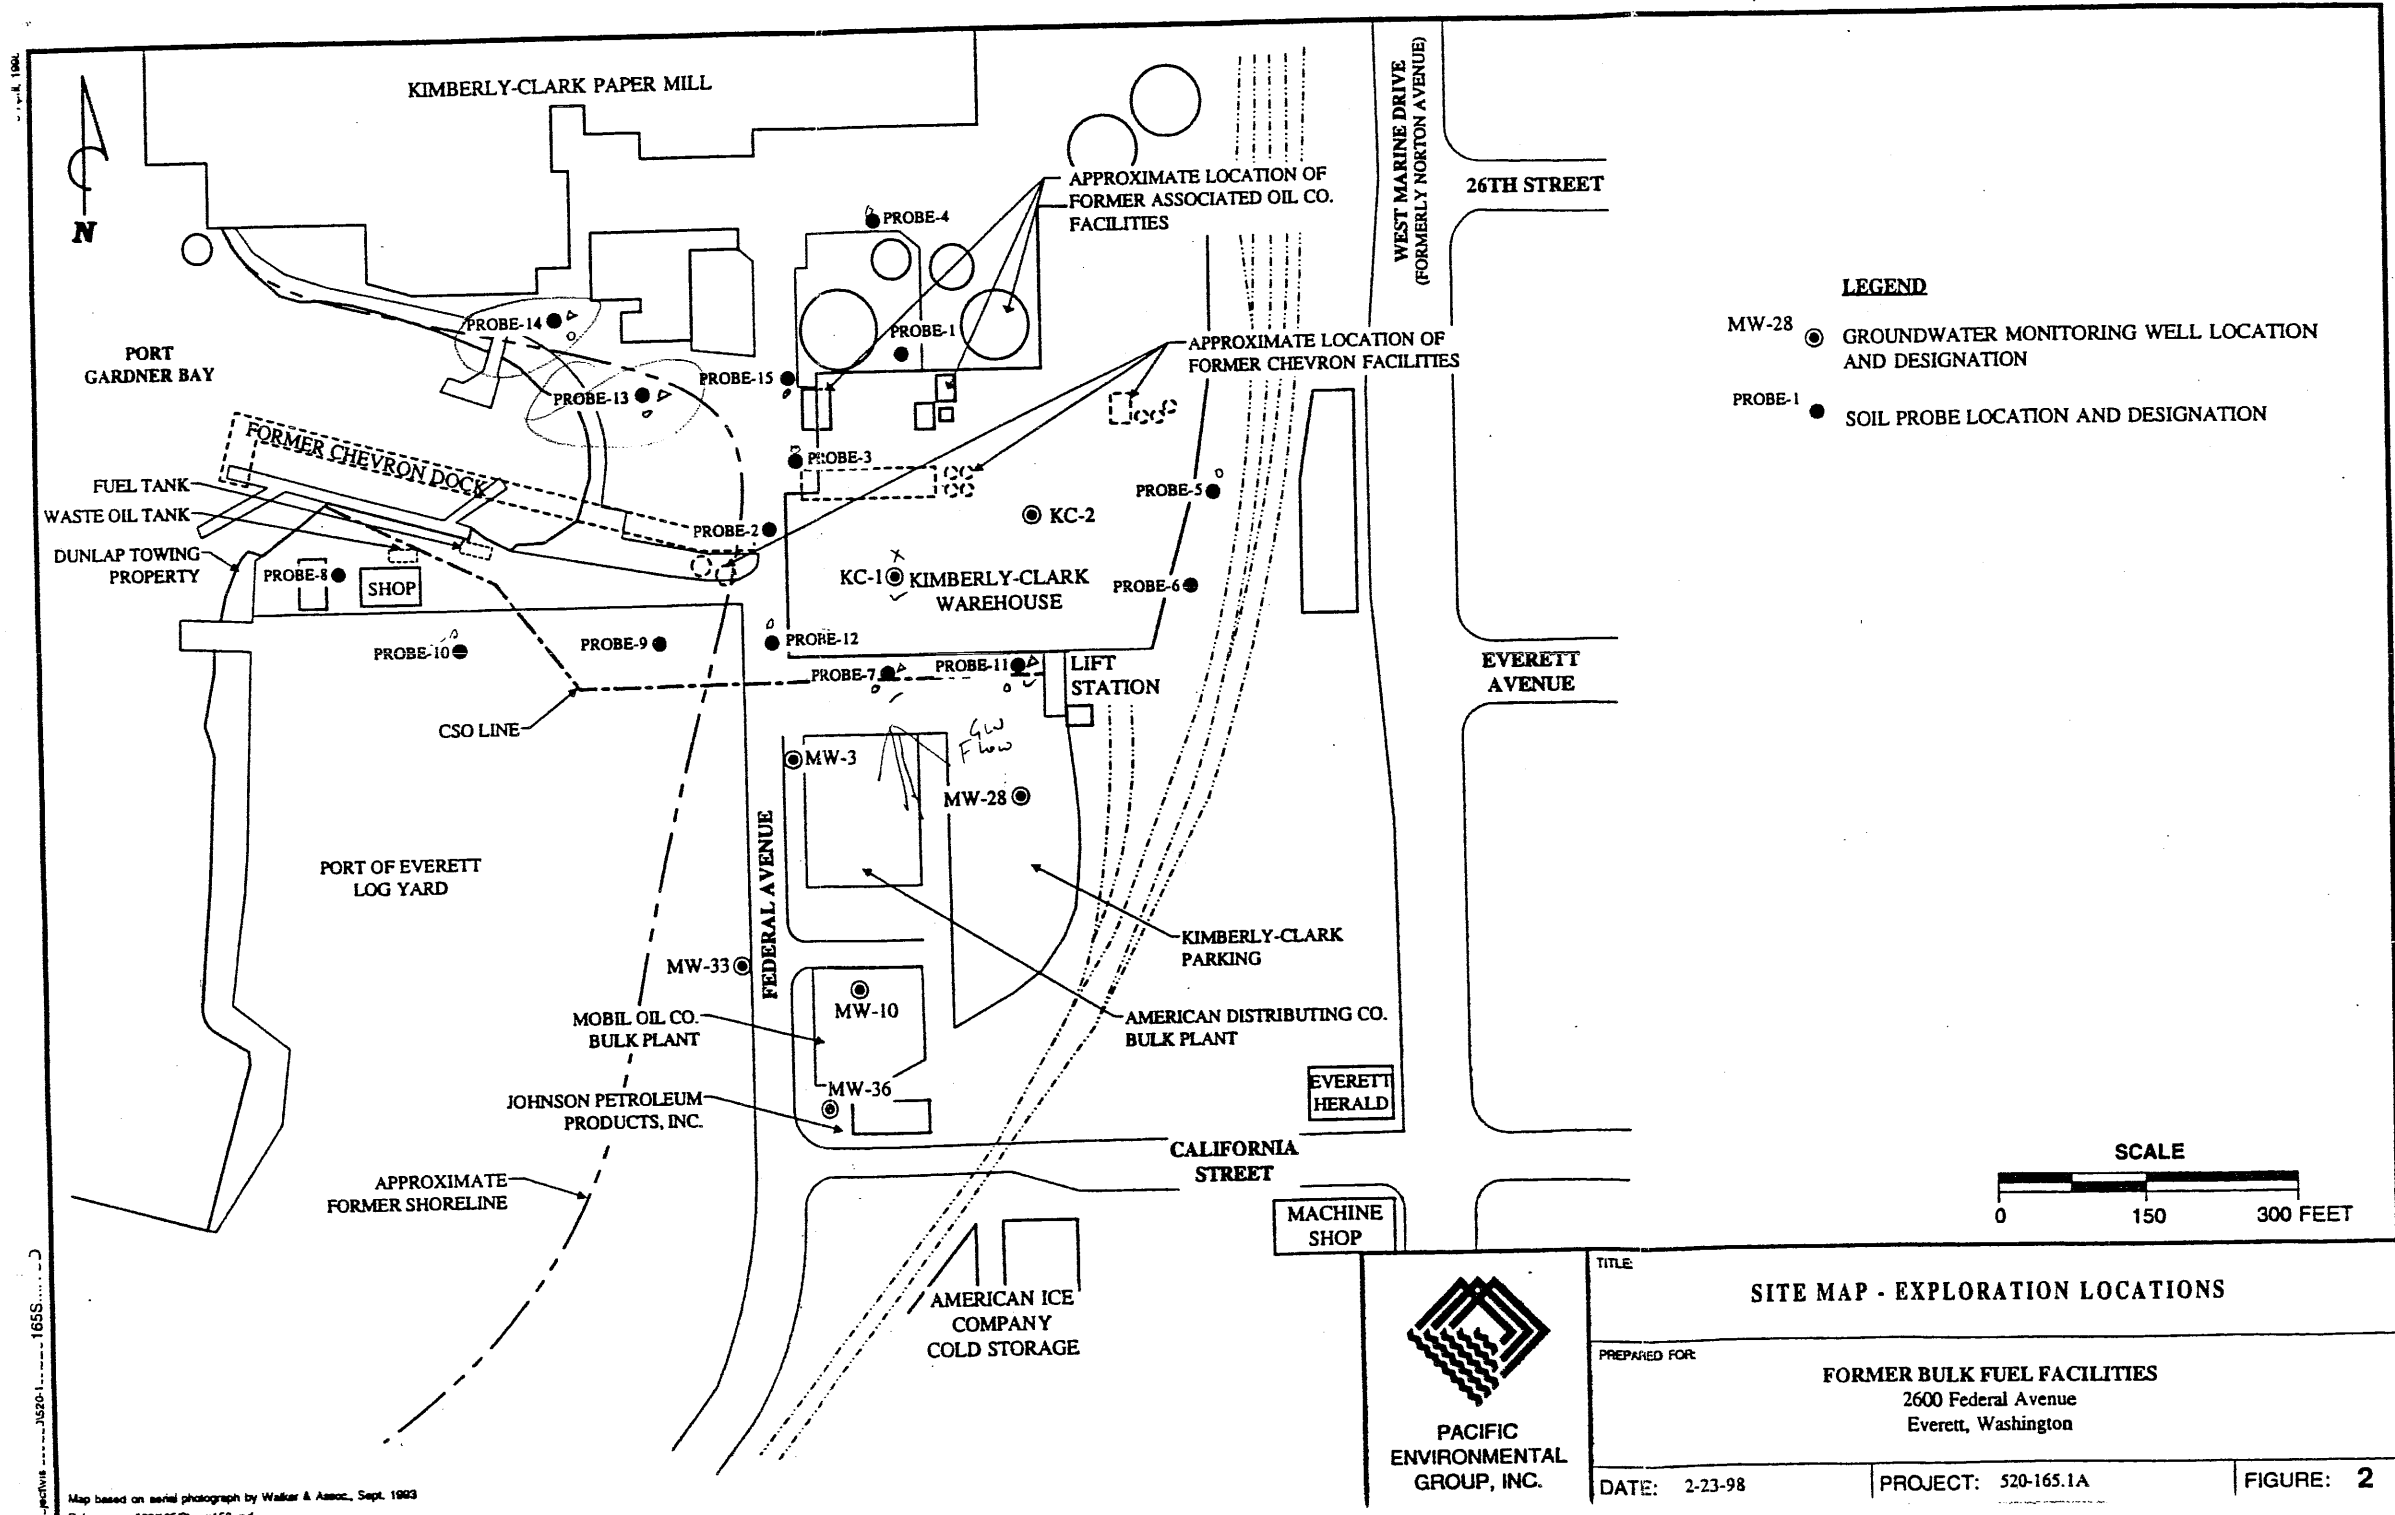


Map based on aerial photograph by Walker & Assoc., Sept. 1983

1655
 3520-1

9 April 1998

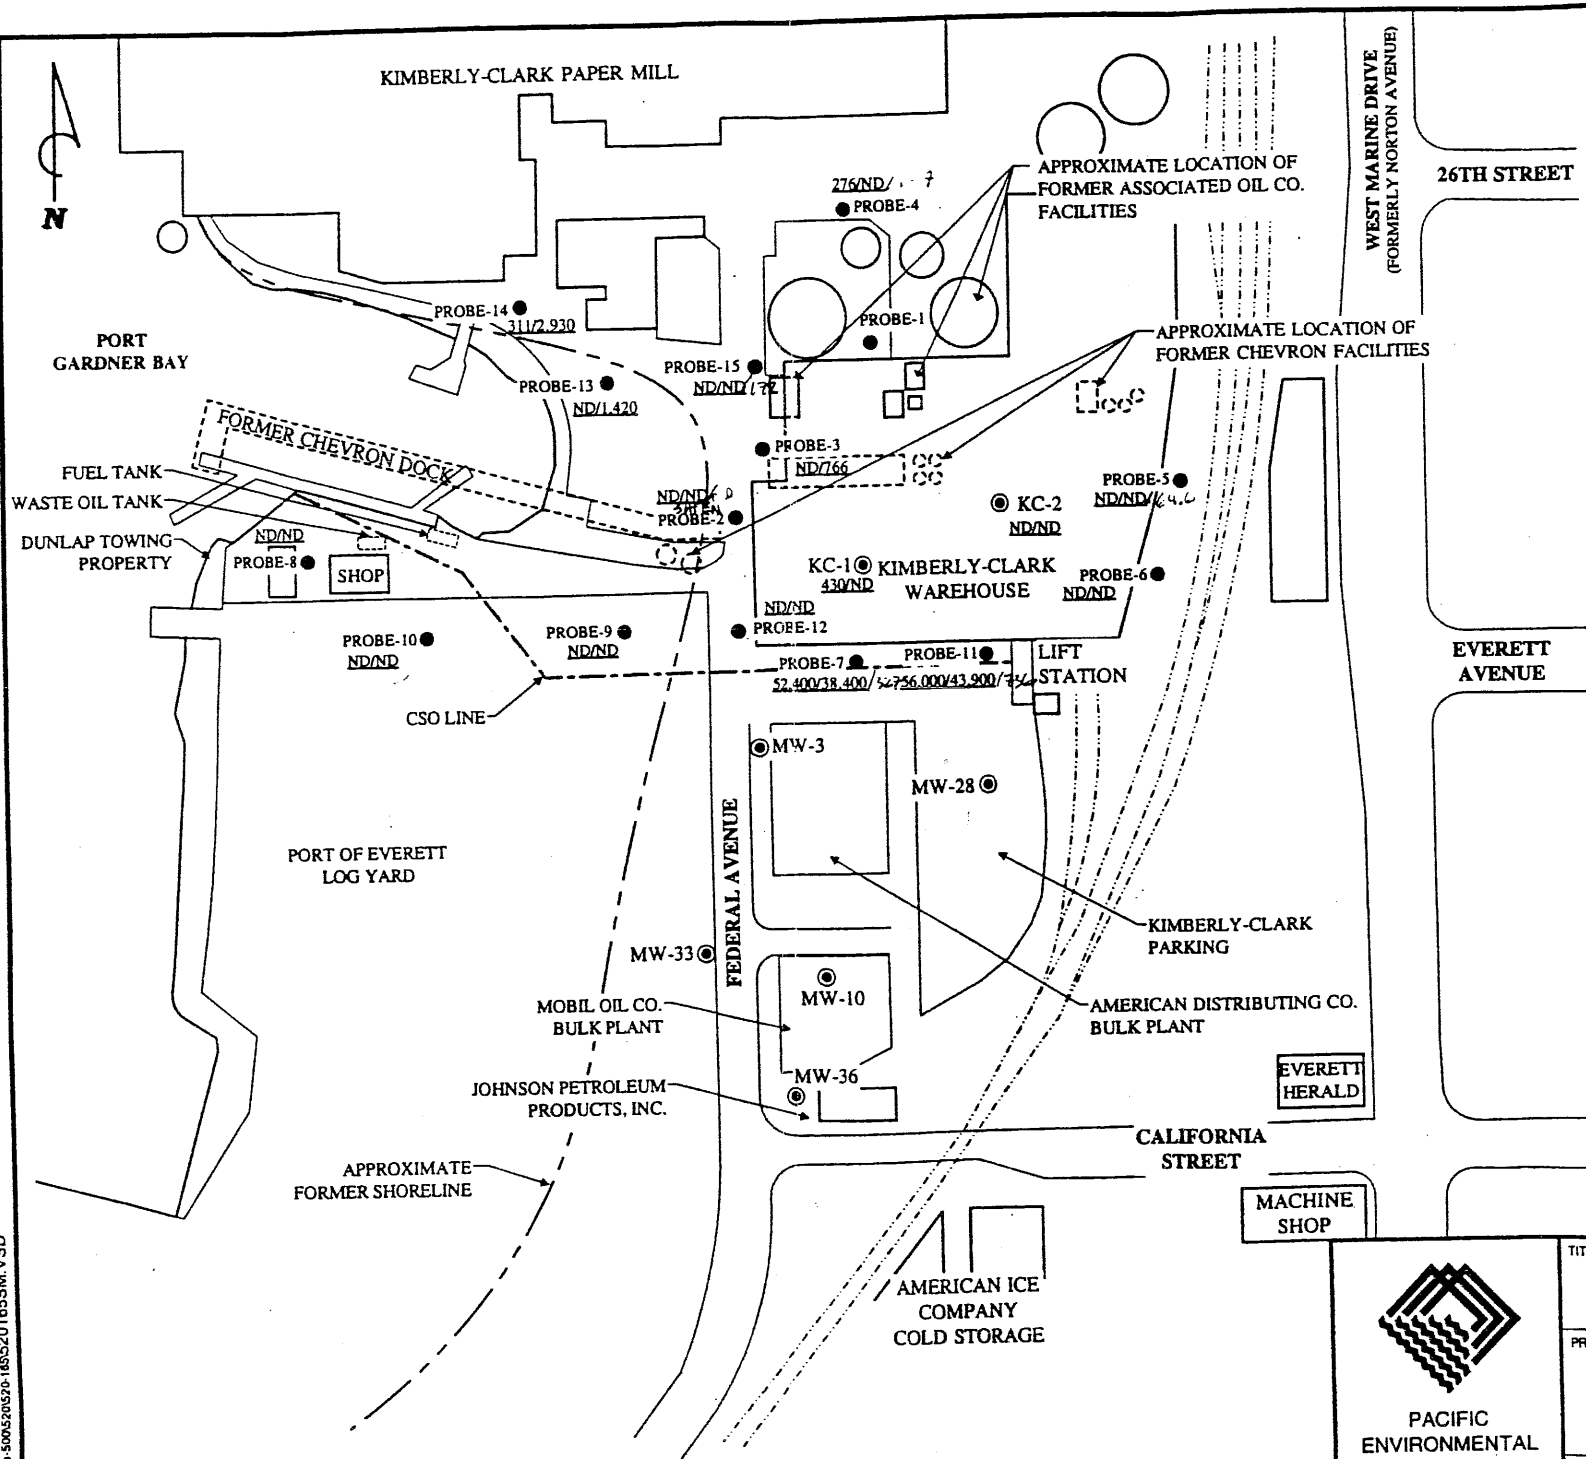

- LEGEND**
- MW-28 ● GROUNDWATER MONITORING WELL LOCATION AND DESIGNATION
 - PROBE-1 ● SOIL PROBE LOCATION AND DESIGNATION
 - ND/766 TPH-DIESEL/TPH-OIL CONCENTRATIONS IN GROUNDWATER, IN PARTS PER BILLION
 - ND NOT DETECTED



I:\projects\500520165\520165SM.VSD

Map based on aerial photograph by Walker & Assoc., Sept. 1993
Reference: 520165Stamp150.vsd



| | | |
|---|---------------------|------------------|
| TITLE SITE MAP - GROUNDWATER SAMPLE CONCENTRATIONS | | |
| PREPARED FOR: FORMER BULK FUEL FACILITIES 2600 Federal Avenue Everett, Washington | | |
| DATE: 2-23-98 | PROJECT: 520-165.1A | FIGURE: 3 |

APPENDIX E

Addendum Sampling and Analysis Plan



**ADDENDUM TO DRAFT FOCUSED FEASIBILITY
STUDY SAMPLING AND ANALYSIS WORK PLAN
ExxonMobil / ADC Property, Ecology Site ID 2728
2717/2731 Federal Avenue
Everett, Washington**

Submitted to:

ExxonMobil Environmental Services
East Providence Terminal
1001 Wampanoag Trail
Riverside, Rhode Island 02915

and

American Distributing Company
13618 45th Avenue NE
Marysville, Washington 98271

Submitted by:

AMEC Earth & Environmental, Inc.
11810 North Creek Parkway North
Bothell, Washington 98011

February 10, 2010

AMEC Project No. 0-915-15716-D

TABLE OF CONTENTS

| | | <u>Page</u> |
|------|--|-------------|
| 1.0 | INTRODUCTION..... | 1 |
| 1.1 | Property History..... | 1 |
| 2.0 | OBJECTIVES..... | 1 |
| 3.0 | PROJECT ORGANIZATION AND RESPONSIBILITIES..... | 2 |
| 4.0 | DATA QUALITY OBJECTIVES..... | 2 |
| 5.0 | PRE-FIELD ACTIVITIES..... | 5 |
| 6.0 | FIELD PROCEDURES..... | 5 |
| 6.1 | Field Health and Safety Procedures..... | 5 |
| 6.2 | Field Preparation..... | 6 |
| 6.3 | Utility Survey..... | 6 |
| 6.4 | Calibration of Field Equipment..... | 6 |
| 6.5 | Soil Borings..... | 6 |
| 6.6 | Soil Sample Collection..... | 7 |
| 6.7 | Soil Sample Analyses..... | 8 |
| 6.8 | Groundwater Sample Collection..... | 9 |
| 6.9 | Groundwater Sample Analyses..... | 9 |
| 6.10 | Sample Containers, Preservation and Storage..... | 9 |
| 6.11 | Equipment Decontamination..... | 9 |
| 6.12 | Investigation Derived Waste Management..... | 10 |
| 7.0 | DOCUMENTATION..... | 11 |
| 7.1 | Field Logbook..... | 11 |
| 7.2 | Labeling..... | 11 |
| 7.3 | Sample Chain of Custody..... | 12 |
| 8.0 | DATA VALIDATION..... | 12 |
| 9.0 | QUALITY CONTROL..... | 13 |
| 9.1 | Field Quality Control Samples..... | 13 |
| 9.2 | Laboratory Quality Control Samples..... | 13 |
| 9.3 | Field Variances..... | 13 |
| 9.4 | Data Management..... | 13 |
| 10.0 | REFERENCES..... | 14 |

LIST OF TABLES

| | |
|---------|--|
| Table 1 | Method Detection and Reporting Limits in Soil Samples |
| Table 2 | Method Detection and Reporting Limits in Groundwater Samples |
| Table 3 | Proposed Total Boring Depth and Soil and Groundwater Samples |
| Table 4 | Sample Containers, Preservation and Storage |

LIST OF FIGURES

| | |
|----------|--|
| Figure 1 | Site Location Map |
| Figure 2 | Proposed Storm Water Upgrade Soil Boring Locations |
| Figure 3 | Clearance Distance in Vicinity of Proposed Borings |

LIST OF ATTACHMENTS

| | |
|---------------|---|
| Attachment A1 | Boring Logs for MW-A1 and MW-A2 |
| Attachment A2 | Site-Specific Health and Safety Plan |
| Attachment A3 | City of Everett Street Use Permit Documentation |
| Attachment A4 | Field Documentation Forms |

ACRONYMS AND ABBREVIATIONS

| | |
|------------|---|
| ADC | American Distributing Company |
| AMEC | AMEC Earth & Environmental, Inc. |
| bgs | below ground surface |
| BTEX | benzene, toluene, ethylbenzene, and xylenes |
| COC | chain-of-custodies |
| CSS | Colorado silica sand |
| DQIs | data quality indicators |
| DQOs | data quality objectives |
| Ecology | Washington State Department of Ecology |
| EDB | ethylene dibromide |
| EDC | 1,2-dichloroethane |
| EPA | U.S. Environmental Protection Agency |
| ExxonMobil | ExxonMobil Oil Corporation |
| FFS | Focused Feasibility Study |
| HASP | Health and Safety Plan |
| HSA | hollow stem auger |
| IDW | investigation derived waste |
| mg/kg | milligram per kilograms |
| mg/L | milligram/liter |
| MDLs | method detection limits |
| MS/MSD | matrix spike/matrix spike duplicate |
| mV | millivolt |
| PAHs | polycyclic aromatic hydrocarbons |
| PID | photoionization detector |
| PPE | personal protective equipment |
| ppm | parts per million |
| PVC | polyvinyl chloride |
| Property | ExxonMobil/ADC Property |
| QA | quality assurance |
| QC | quality control |
| RPD | relative percent difference |
| SAP | Sampling and Analysis Plan |
| SD | standard deviation |
| TPH-D | total petroleum hydrocarbons–diesel |
| TPH-O | total petroleum hydrocarbons–oil |
| TPH-G | total petroleum hydrocarbons–gasoline |
| VOCs | volatile organic compounds |
| WAC | Washington Administrative Code |
| WP | Work Plan |

1.0 INTRODUCTION

AMEC Earth & Environmental, Inc., (AMEC) has prepared this Addendum to the October 2009 Draft Final Focused Feasibility Study (FFS) Sampling and Analysis (SAP) Work Plan (WP) on behalf of ExxonMobil Oil Corporation (ExxonMobil) and the American Distributing Company (ADC). This Addendum outlines additional soil and groundwater characterization activities that will be conducted to the north and west of the ExxonMobil/ADC Property (the Property) located at 2717 and 2731 Federal Avenue in Everett, Washington (Figure 1). The City of Everett (the City) is planning to upgrade the storm sewer line that will result in trenching within Everett Avenue and Federal Avenue. In advance of trenching, samples of the soil and groundwater will be collected from borings to determine soil and groundwater disposal options. This Addendum addresses the specific field sampling activities related to the borings, chemical analyses, and quality assurance (QA) procedures associated with borings along the utility alignment.

1.1 Property History

Historically, total petroleum hydrocarbons as diesel (TPH-D), oil (TPH-O), and gasoline (TPH-G), benzene, toluene, ethylbenzene, xylenes, polycyclic aromatic hydrocarbons (PAHs), and lead were found in soil and groundwater beneath the Property and beneath properties to the west, north, and east. Petroleum contamination has resulted from past releases from former operations at the ExxonMobil and ADC Parcels and other similar businesses in the area.

2.0 OBJECTIVES

The objective of the soil and groundwater characterization beneath Everett Avenue and Federal Avenue is to collect sufficient analytical data for disposal classification. Elements of this addendum are based on the Washington Administrative Code (WAC) Ecology Model Toxics Control Act (MTCA) Cleanup Regulations WAC 173-340-820 and City of Everett Waste Water discharge regulations. The proposed location for the disposal of soil from the utility excavation is the CEMEX facility in Everett. The soil and groundwater sampling will include the following activities:

1. Advance five borings (three along Everett Avenue and two along Federal Avenue [Figure 2]) to evaluate the concentration of chemicals in soil and groundwater. The borings will be advanced at each location using a hollow stem auger (HSA) drill rig to the total depth of the proposed trench at the location of each boring. Two of the borings will be terminated at a minimum depth of 20 feet below ground surface (bgs) to provide soil lithology information for the City's geotechnical engineer.
2. Collect continuous samples from the borings using a standard penetration test (SPT) and a split spoon (SS).

3. Collect two to three composite soil samples from each boring for laboratory analyses. The first composite will be from the top four feet and the second from the lower four feet. Discreet samples for volatile organic compounds (VOC) analysis will be collected from the upper four feet and from the SPT.
4. Collect “grab” water samples from each boring. If sheen or product is encountered, an additional water sample will be collected from just below the water table (a foot or two below).
5. Soil samples will be analyzed for CEMEX acceptance criteria and “grab” groundwater samples will be analyzed for the City of Everett sanitary sewer discharge criteria. The soil and groundwater samples will be performed on a one-week turn-around schedule.

3.0 PROJECT ORGANIZATION AND RESPONSIBILITIES

The project is organized as follows:

ExxonMobil and ADC are the owners of the Property.

AMEC Earth & Environmental, Inc. (AMEC) is the environmental consultant for this project.

- Gary Dupuy (phone number 206-342-1777) and Meg Strong (phone number 425-368-0966) are the client managers for the project.
- Leah Vigoren (phone number 206-838-8470) is the project manager and is responsible for project management. Technical and administrative elements are included in her project management responsibilities.
- Anastasia Speransky (phone number 206-838-1776) is the task manager for the project and quality assurance manager for this project, which includes data quality objectives, and quality assurance/quality control (QA/QC) objectives as well as health and safety.

Cascade Drilling, Inc. in Woodinville, Washington, is the drilling contractor for the project.

Test America, Inc., in Nashville, Tennessee, is responsible for managing analyses of the samples collected. The laboratory is also responsible for sample preparation and ensuring that the QA/QC results from the laboratory are valid.

The geotechnical engineer will be provided by the City of Everett.

4.0 DATA QUALITY OBJECTIVES

Data Quality Objectives (DQOs) is a quality management tool developed by the U.S. Environmental Protection Agency (EPA) that is used to facilitate the planning of data collection activities. The DQO process provides a systematic procedure for defining criteria in the data collection design. The primary reference for the formal DQO process is EPA’s guidance document (EPA 1994). The DQO process consists of the following seven key steps.

1. State the problem.
2. Identify the decision.
3. Identify the inputs to the decision.
4. Define the boundaries of the study.
5. Develop a decision rule.
6. Specify tolerable limits on decision errors.
7. Optimize the design for obtaining data.

DQOs are qualitative and quantitative statements, developed using the DQO process, that are intended to clarify study objectives, define an appropriate type of data, and specify tolerable levels of potential decision errors that will be used as the basis for establishing the quality and quantity of data needed to support decisions.

Data Quality Indicators (DQI) (accuracy, precision, completeness, representativeness, comparability, and method detection limits) refer to quality control criteria established for various aspects of data gathering, sampling, or analysis activity. In defining DQIs specifically for the project, the level of uncertainty associated with each measurement is determined.

Accuracy is the degree of agreement of a measurement with a known or true value. To determine accuracy, a laboratory or field value is compared to a known or true concentration. Accuracy is determined by such quality control (QC) indicators as: matrix spikes (MS), surrogate spikes, laboratory control samples (blind spikes) and performance samples.

Precision is the degree of mutual agreement between or among independent measurements of a similar property (usually reported as a standard deviation [SD] or relative percent difference [RPD]). This indicator relates to the analysis of duplicate laboratory or field samples. An RPD of $\leq 50\%$ for water and $\leq 50\%$ for soil, depending upon the chemical being analyzed, is generally acceptable. Typically field precision is assessed by field duplicates and laboratory precision is assessed using laboratory duplicates, matrix spike duplicates, or laboratory control sample duplicates).

Completeness is expressed as percent of valid usable data actually obtained compared to the amount that was expected. Due to a variety of circumstances, sometimes either not all samples scheduled to be collected can be collected or else the data from samples cannot be used (for example, samples lost, bottles broken, instrument failures, laboratory errors, etc.). The minimum percent of completed analyses defined in this section depends on how much information is needed for decision making. Generally, completeness percent goals increase when the fewer the number of samples are collected per event or the more critical the data are for decision making. Goals in the 90 to 95% range are typical.

Representativeness is the expression of the degree to which data accurately and precisely represent a characteristic of an environmental condition or a population. It relates both to the

area of interest and to the method of taking the individual sample. The idea of representativeness should be incorporated into discussions of sampling design. Representativeness is best assured by a comprehensive statistical sampling design, but it is recognized that this is usually outside the scope of most one-time events. Most one-time event SAPs focus on issues related to judgmental sampling and why certain areas are included or not included and the steps being taken to avoid either false positives or false negatives.

Comparability expresses the confidence with which one data set can be compared to another. The use of methods from EPA or “Standard Methods” or from some other recognized sources allows the data to be compared facilitating evaluation of trends or changes in a site, a river, groundwater, etc. Comparability also refers to the reporting of data in comparable units so direct comparisons are simplified (e.g., this avoids comparison of milligram/liter (mg/L) for nitrate reported as nitrogen to mg/L of nitrate reported as nitrate, or parts per million (ppm) vs. mg/L discussions).

Detection Limit(s) (usually expressed as method detection limits [MDLs] or Quantitation Limit[s]) for all analytes or compounds of interest for all analyses requested is presented in Tables 1 and 2. These limits should be related to any decisions that will be made as a result of the data collection effort. A critical element to be addressed is how these limits relate to any regulatory or action levels that may apply.

Data Review and Management

Data management will commence during the field investigation. Each soil and groundwater sample collected will be recorded in a bound field book which will include a description of the location, depth, matrix, sample ID, and date and time of collection. Once data has returned from the laboratory, the electronic deliverables will be reviewed to ensure the receipt of all requested analytes and again cross-checked with chain-of-custodies (COCs). Data will be tabulated in electronic spreadsheets and again checked to ensure proper entry before use in reporting.

Assessment Oversight

The project manager will ensure that sample methods and accurate documentation are being practiced. Quality assurance (QA) systems will be emplaced at regular intervals during the data management process as described above. Finally, a peer review process by a senior technical staff will be conducted on the final reporting.

Corrective Actions

Corrective actions, if necessary, shall be completed. If acceptance criteria were not met and a corrective action was not successful or corrective action was not performed, data will be flagged appropriately. Requirements and procedures for documenting the need for corrective actions are described in this section.

Items requiring corrective action in the laboratory shall be documented by the use of a corrective action report. The QA coordinator or any other laboratory member can initiate the corrective action report request in the event QC results exceed acceptability limits, or upon identification of some other laboratory problem. Corrective actions can include reanalysis of the sample or samples affected, re-sampling and analysis, or a change in procedures, depending upon the severity of the problem.

5.0 PRE-FIELD ACTIVITIES

AMEC will coordinate the field activities and contract a private utility locating service in addition to contacting the underground utilities location center (Call Before You Dig). In addition, AMEC will update an existing site-specific Health and Safety Plan (HASP) (Attachment A2).

Site access for the borings on Everett Avenue which is owned by Kimberly Clark will be obtained by the City of Everett. AMEC will prepare and submit to the City the traffic control plan and right of way access applications for the work (Attachment A3).

6.0 FIELD PROCEDURES

This section presents the field investigation procedures for the soil and groundwater sampling effort. The field investigation will consist of drilling soil borings and collecting soil and groundwater samples. The proposed soil boring locations are illustrated on Figure 2. The proposed soil boring depths and specifications are listed in Table 3.

6.1 Field Health and Safety Procedures

AMEC field personnel will adhere to the health and safety procedures detailed in the *Site-Specific Health and Safety Plan*. City staff must follow their own Health and Safety Plan.

The hospital closest to the Site is Providence Hospital. An emergency contact list and a map illustrating the emergency route to Providence Hospital are located in the *Health and Safety Plan*.

It is anticipated that all fieldwork will be performed using Level D modified personal protective equipment (PPE). At a minimum, each on-site worker will be required to wear safety footwear (steel-toed boots), hard hat, hearing protection, eye protection, and a high visibility safety vest. In addition, AMEC and AMEC's contractors will be required to wear hand protection (e. g. leather and/or nitrile gloves). PPE will be upgraded whenever there is a potential for direct contact with contaminated soil or groundwater. Changes in the required PPE will be based on changed work conditions and field observations. PPE upgrades may consist of the following:

- Tyvek Coveralls – if a splash transfer is considered likely;
- Additional PPE upgrades that may be required, depending on breathing zone levels of petroleum hydrocarbons detected.

Eating, drinking, chewing gum or tobacco, smoking, or any practice that involves hand-to mouth contact increases the probability of contaminant ingestion and is prohibited in any area where the possibility of contamination exists.

Potential physical hazards that may be encountered include heat stress, slips, trips, and falls.

The AMEC field team will have current certifications for first aid, and a cell phone will be available at all times while personnel are in the field. All emergency response services will be reached by calling 911, from a land line if available.

6.2 Field Preparation

A Right of Way permit will be prepared and submitted to the City of Everett. The Traffic Control Plan is included in Attachment A3.

6.3 Utility Survey

AMEC will arrange a meeting with the City of Everett to mark the boring locations prior to initiation of field activities. During the markings of the borings, AMEC will identify all aboveground and overhead power lines. Proposed boring locations that are within 25 feet of an overhead power line will be moved until clearance is achieved. AMEC will also oversee a geophysical survey conducted by a private utility locator to identify subsurface utilities within 25 feet of the proposed soil boring locations. The presence of below-grade utilities will be identified, and their inferred locations will be marked on the ground surface at the site. In addition, subsurface activity locations may be reviewed with the City, if available at the time. During the utility location by the private contractor, the area noted as the former underground fuels lines will be specifically investigated in an attempt to identify the position of the pipes.

6.4 Calibration of Field Equipment

Calibration of a photo-ionization detector (PID) will occur daily at the beginning of field activities. Calibration results and times will be recorded in the field notes.

Calibration instructions for the PID are included with the equipment manuals enclosed in the equipment cases. In general, the PID will be used to screen soil for the presence of lighter end petroleum hydrocarbons, such as gasoline and benzene.

6.5 Soil Borings

Three soil borings (CE-1 through CE-3) will be advanced along Everett Avenue and two soil borings (CE-4 and CE-5) will be advanced along Federal Avenue (Figure 2). The borings will be advanced at each location using a HSA drill rig. Soil borings CE-1, CE-3, and CE-4 will be terminated at the total depth of the proposed trench at the location of each boring (approximately 8 feet bgs at each location). Soil borings CE-2 and CE-5 will be terminated at a minimum depth of 20 feet bgs to provide soil lithology information for the City. Proposed soil boring depths and specifications are listed in Table 3.

Per ExxonMobil Standard Operation Procedures (SOPs), 4-foot subsurface clearance will be performed by hand augering and vactor truck. The auger with round edges will be turned slowly and not forced through the soil. All soil boring locations are subject to change based on observed conditions in the field (aboveground and belowground utilities, existing equipment, etc.).

6.6 Soil Sample Collection

The purpose of the soil sampling is to characterize soil for proper disposal so that the City can direct load onto a truck during trenching. The first four feet generated during the hand augering for utility clearance will be composited to form the first sample. The second composite sample will be generated by blending continuous discreet soil samples collected by SPT from four to eight feet. Discrete samples for VOC and gasoline analysis will be taken from the composited upper sample and from the SPT.

The City of Everett's geotechnical engineer will log the lithology and obtain samples for grain size distribution analysis. AMEC's field representative will examine relevant chemical sample information (e.g., visual and olfactory observation and PID measurement) and will collect soil samples for laboratory analyses.

The guideline for the soil samples to be collected is as follows: In each boring, AMEC will collect two composite soil samples from two sampling intervals (1) the interval from the ground surface to 4 feet bgs using a hand auger and (2) from 4 feet bgs to the bottom of the boring (trench depth – approximately 8 feet). For composite soil samples, soil from each interval will be placed into a heavy 1-quart freezer Ziploc bag and mixed. Gravel and vegetation will be removed from the composite sample. If a discrete layer of asphaltic pavement is encountered, it will be excluded from the sample and its presence noted on the boring log. Composite samples will be collected in three 4-ounce soil jars. Samples will be labeled and chilled on ice in a cooler for delivery under proper chain-of-custody protocol to a Washington-certified analytical laboratory. It is assumed that AMEC will collect two to three discrete soil samples and two to three composite soil sample per boring for laboratory analyses.

Two discrete soil samples will be either collected from the composite sample between zero and four feet bgs and one the SPT. Selection of the sampling location will be based on (1) the interval that exhibited the highest VOC vapor concentration, as measured with a PID and/or (2) intervals of petroleum hydrocarbon staining or odors and/or (3) heavy contamination such as free product is encountered. If VOCs are not detected and no staining or odor is observed, the discreet samples will be collected from a the composite material and the other from below the water table. Discreet soil samples will be collected using a soil core syringe and inserted into a pre-tared 40 milliliter volatile organic analyses (VOA) vial in accordance with EPA Method 5035 sampling methodologies. In addition, a discrete soil sample will be collected in one 4-ounce soil jars for moisture analysis.

Samples for laboratory analyses below the proposed trench depth will not be collected except to assess lithology. To prevent cross contamination, any equipment repeatedly in contact with the soil will be decontaminated before and after each individual sampling attempt.

6.7 Soil Sample Analyses

The soil sample analytical program presented below is based on requirements of the disposal facilities (e. g. CEMEX).

A total of 11 discrete soil samples will be submitted to analytical laboratory for the following analyses:

- Gasoline range TPH, using Ecology method NWTPH as gasoline (NWTPH-Gx),
- All 11 samples will be analyzed for benzene, toluene, ethylbenzene, and total xylenes (BTEX) and up to 3 of the 11 samples will be selected and submitted for volatile organic compounds (VOCs) by EPA Method 8260B. The three samples will be selected based on visual or olfactory indications of hydrocarbons.

A total of 11 composite soil samples will be submitted to analytical laboratory for the following analyses:

- RCRA eight metals (Ag, As, Ba, Cd, Cr, Hg, Pb, Se) by U. S. Environmental Protection Agency (EPA) Method 200/6000/7000 Series.
- In addition, it is likely that a significant number of the soils may exceed the lower MTCA Method A soil cleanup limit of 19 milligrams per kilogram (mg/kg) for total chromium. A note will be placed on each chain-of-custody directing the laboratory to automatically perform a follow-up hexavalent chromium analysis using EPA Method 7196A for any sample whose total chromium result exceeds 19 mg/kg. We estimate that two samples will be requested to be analyzed for hexavalent chromium.
- If any soil analytical result (in mg/kg) is equal to or greater than 20 times the maximum concentration for the hazardous waste toxicity characteristics listed in 40 CFR 261.24 (in milligrams per liter [mg/L]), then the sample may be analyzed using Toxicity Characteristic Leaching Procedure (TCLP) using U. S. EPA Methods 1311 and 6010 series. (Sample volume will be held for TCLP analysis at the laboratory. We will direct the laboratory to provide notification prior to issuance of the laboratory report so that hold times would be met).
- Diesel and heavy oil range Total Petroleum Hydrocarbons (TPH), using Ecology Method Northwest Total Petroleum Hydrocarbon as diesel and lube oil (NWTPH-Dx). All NWTPH–Dx samples will be prepared in the analytical laboratory using silica gel acid wash to eliminate non-petroleum hydrocarbon interferences.
- Low-level polycyclic aromatic hydrocarbons (PAHs) by EPA method 8270D SIM.

Soil sample methods, required sample containers, preservation requirements, and holding times are provided in Table 4.

Soil samples will be submitted to Ecology-certified Test America, Inc. analytical laboratory located in Nashville, Tennessee for one-week turn around analytical time.

6.8 Groundwater Sample Collection

To collect a “grab” groundwater sample, a temporary 2-inch-diameter, flush-threaded Schedule 40 polyvinyl chloride (PVC) with a 5-foot-long slotted screen will be installed in each boring. The well screens will be installed to straddle the water table. Sand (10/20 CSS) will be placed in the annular space surrounding the screens to minimize turbidity. The sand pack will extend to a height of at least 1 foot above the top of the screen.

Following placing of a screen, water from the temporary well will be pumped using a submersible pump to minimize the amount of suspended solids, and a “grab” water sample will be collected either with a disposable bailer or peristaltic pump. AMEC will record the volume of water removed. The purged groundwater will be contained in 55-gallon drums and stored at the Property pending the analytical results and the City’s construction schedule.

6.9 Groundwater Sample Analyses

The groundwater sample analytical program presented below is based on the chemicals likely to be in groundwater from past uses of the Property that may be required to be tested for the holder to discharge water into Port Gardner Bay. For the City of Everett, this includes stormwater that runs through the City’s storm drain system as well as treated water discharged from Everett’s Water Pollution Control Facility. To comply with the City’s discharge regulations, five “grab” groundwater samples from the borings will be analyzed for:

- RCRA 8 metals (Ag, As, Ba, Cd, Cr, Hg, Pb, Se) by EPA Method 6010B/7470A (reporting limit less than 1 microgram per liter),
- Corrosives (pH) by field testing, and
- TPH and BTEX.

Groundwater samples will be submitted to Ecology-certified Test America, Inc. analytical laboratory located in Nashville, Tennessee for one-week turn around analytical time.

In addition, Gene Bennett, a City of Everett discharge expert, will be available at 425-257-8249 for the water discharge questions.

6.10 Sample Containers, Preservation and Storage

Soil and groundwater samples will be collected and placed into precleaned sample containers provided by the analytical laboratory in accordance with Table 4. Upon collection, sample containers will be sealed, labeled, chilled to 4°C in a cooler with ice, and maintained with AMEC’s custody until delivery to the project analytical laboratory, Test America, Inc., in Nashville, Tennessee.

6.11 Equipment Decontamination

Decontamination of sampling equipment will be performed to maintain data quality, to prevent cross contamination, and to prevent the potential introduction of contaminants into previously

unimpacted areas. Reusable sampling equipment, including the drill rig, down-hole drilling equipment, and stainless-steel materials, will be decontaminated prior to each sampling event. General decontamination procedures for nondedicated soil and groundwater sampling equipment and accessories are as follows.

- Physically remove soils using a nonphosphate detergent solution.
- Rinse with noncontaminated tap water.
- Rinse with deionized water.
- Rinse with Isopropyl alcohol.
- Air dry.

6.12 Investigation Derived Waste Management

Investigation Derived Waste (IDW) generated during the course of the field investigation will be labeled and securely stored on the Property in 55-gallon drums approved by the U.S. Department of Transportation. Drums will be stored at a designated location. The various waste streams will include the following:

- Potentially contaminated liquids, including fluids derived from purging and equipment decontamination water;
- Potentially contaminated solids, principally soil cuttings; and
- Personal protective equipment (PPE).

Each drum will be labeled with standardized IDW drum labels to indicate its contents, date of collection, location from which the IDW originated, and other pertinent information. In addition, all drums will also be labeled with indelible paint sticks or pens. AMEC will maintain an inventory of the drums. The purged groundwater and soil cuttings will be stored at the Property pending the analytical results and the City's construction schedule. PPE will be placed in a separate 55-gallon drum and disposed off-site at an appropriate facility.

7.0 DOCUMENTATION

The integrity of data obtained from samples collected during the field investigation depends on proper sample management and handling. Proper sample management includes sample labeling, which includes assignment of a specific identification number and affixing proper identification and markings to the collected samples. Proper handling includes proper packing and transport of the sample containers.

7.1 Field Logbook

The field logbook serves as the primary record of field activities. Entries shall be made chronologically and in sufficient detail to allow the writer or a knowledgeable reviewer to reconstruct the applicable events. The field logbook shall be bound with consecutively numbered and water repellent pages.

At a minimum, the following information will be recorded in either the field logbook or a separate sample log sheet during the collection of each sample:

- Sample location and description;
- Sampler's name(s);
- Date and time of sample collection;
- Type of sample (soil or groundwater);
- Type of sampling equipment used;
- Field instrument readings and calibration; and
- Field observations and details related to analysis or integrity of samples (e.g., weather conditions, noticeable odors, colors, etc.).

7.2 Labeling

Each sample container sent to the lab will have a unique sample identification label. The following information will be included on the sample label:

- Project name and location;
- Project number;
- Sample identification number;
- Date and time of collection; and
- Initials of the sampler.

Each soil sample will be named by the boring number and depth (or depth interval) of sample collection in feet. For example, a discrete soil sample collected from soil boring CE-1 at a depth of 6 feet will have a sample designation as "CE-1-6." A composite soil sample from soil boring CE-2 at a depth interval from the surface to the soil/water interface that was encountered at 3.5

feet bgs will have a sample designation as “CE-2-0-3.5.” “Grab” groundwater samples will be named by the boring location, and identified as a grab sample with the date of sample collection. For example, a “grab” groundwater sample collected from boring CE-1 on February 22, 2010, would be named “CE1-G022210.”

Duplicate samples will be sent to the laboratory blindly. However, the location of the sample will not be revealed to the laboratory. Instead, duplicate samples will be named sequentially as Dup-1 and Dup-2. The location of the duplicate sample collection will be recorded in the field notebook.

7.3 Sample Chain of Custody

COC forms will be completed at the end of each sampling day. The completed COC form(s) and samples will be kept in the possession of the field team until relinquishing the samples to the laboratory or courier service. One copy of the completed COC form will be kept by the field team, and the original COC form will be stored in a resealable plastic bag and transported in the sample container with the laboratory samples. Custody seals will be placed along the seal of each sample container in order to prevent tampering with the samples. A copy of the COC form is included in Attachment A4.

8.0 DATA VALIDATION

Data validation is the procedure of reviewing data against a known set of criteria to verify data validity prior to its use. Data validation procedures have been developed by the US EPA to standardize the validation process for analytical results for both water-quality and soil-quality investigations and are documented as the *US EPA Contract Laboratory Program National Functional Guidelines for Superfund Organic Methods Data Review*, US EPA, Office of Solid Waste and Emergency Response, Washington, D.C., Publication 9240.1-48, US EPA-540/R-08-01 (US EPA 2008). The Functional Guidelines are intended to be used as a guide for evaluation of data generated under statements of work for organic and inorganic analyses associated with the US EPA Contract Laboratory Program (CLP). The Functional Guidelines also provide general data validation guidelines that can be applied to data generated by non-CLP analytical methods.

One hundred percent (100%) of the analytical data for soil and groundwater samples will be validated using EPA Stage 4 data validation level. Stage 4 validation includes an examination of sample and QC raw data and instrument printouts to check for technical, calculation, analyte identification, analyte quantitation, and transcription or reduction errors. At a minimum 10% of reported results on summary forms should be confirmed by recalculation. The data validation staff will review field documents and laboratory data report packages, and if needed, apply data qualifiers to the data. The data reviewer will determine if the project data quality objectives have been met, and will calculate the data completeness for the project.

9.0 QUALITY CONTROL

This Addendum has been prepared to provide instructions and guidance to ensure the sample chemical data collected in support of the site soil and groundwater sampling results are scientifically valid. The sections below outline methods and processes to meet these objectives.

9.1 Field Quality Control Samples

To evaluate quality control (QC), a blind field duplicate sample will be collected at a frequency of 5 percent of the samples for each matrix (soil and groundwater).

Two trip blank vials provided by the laboratory will be placed into the cooler designated to store samples to be analyzed for VOCs to evaluate the potential for cross-contamination. Field duplicates are replicate samples collected at the same location during the same sampling session (roughly at the same time). The field duplicate samples will be collected in the same container types and handled and analyzed in the same manner, as all other soil and groundwater samples. The field duplicates will be analyzed for the same analytes as the primary sample.

9.2 Laboratory Quality Control Samples

Laboratory QC samples are analyzed as part of standard laboratory practice. The laboratory monitors the precision and accuracy of the results of its analytical procedures through analysis of QC samples. In part, laboratory QC samples consist of Matrix Spike/Matrix Spike Duplicate (MS/MSD) samples for organic analyses, and MS/MSD for inorganic analyses. The term "matrix" refers to use of the actual media collected in the field (e.g., routine soil and water samples). Laboratory QC samples are an aliquot (subset) of the field sample. They are not separate samples, but a special designation of an existing sample. The laboratory QC samples will be analyzed for the same analytes as the standard samples.

9.3 Field Variances

As conditions in the field may vary, it may become necessary to implement minor modifications to the sampling as presented in this Addendum. When appropriate, ExxonMobil, ADC, and the City of Everett will be notified and a verbal (followed by a written verification) approval will be obtained before implementing the changes. Modifications to the approved plan will be documented in the sampling project report.

9.4 Data Management

Data management will commence during the field investigation. Each soil and groundwater sample collected will be recorded on field logs, which will include a description of the location, depth, matrix, sample ID, and date and time of collection. All data submittals will be consistent with Ecology Policy 840 (dated March 31, 2008) Environmental Information Management (EIM) submittal requirement format. Once data have been provided by the laboratory, the electronic

deliverables will be reviewed to ensure the receipt of all requested analytes and again cross-checked with COCs.

10.0 REFERENCES

AMEC Earth & Environmental, Inc. (AMEC), 2009. *Draft Final Focused Feasibility Study Work Plan for ExxonMobil / ADC Property, Ecology ID 2728, 2717/2731 Federal Avenue, Everett, Washington, Bothell, Washington, October 2.*

U.S. Environmental Protection Agency (EPA), 1994. *Guidance of the Data Quality Objectives Process*, EPA QA/G-4. EPA/600/R-96/055, EPA Office of Research and Development, Washington, D.C. September.

Puls, R.W. and Barcelona, M.J., 1996. *Low-Flow (Minimal Drawdown) Groundwater Sampling Procedures*, U.S. EPA /540/S-95/504

Washington State Department of Ecology (Ecology), 2001. *Model Toxics Control Act Cleanup Regulation*, Chapter 173-340 WAC. Publication No. 94-06

TABLES

Table 1. Method Detection and Reporting Limits for Soil Samples

| Specific Method | Analyte | MDL | MRL | Units |
|-----------------|-----------------------------|----------|---------|-------|
| SW846 8260B | Acetone | 0.0250 | 0.0500 | mg/kg |
| SW846 8260B | Benzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Bromobenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Bromochloromethane | 0.00102 | 0.00200 | mg/kg |
| SW846 8260B | Bromodichloromethane | 0.000400 | 0.00200 | mg/kg |
| SW846 8260B | Bromoform | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Bromomethane | 0.000640 | 0.00200 | mg/kg |
| SW846 8260B | 2-Butanone | 0.0170 | 0.0500 | mg/kg |
| SW846 8260B | sec-Butylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | n-Butylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | tert-Butylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Carbon disulfide | 0.000670 | 0.00500 | mg/kg |
| SW846 8260B | Carbon Tetrachloride | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Chlorobenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Chlorodibromomethane | 0.000380 | 0.00200 | mg/kg |
| SW846 8260B | Chloroethane | 0.000420 | 0.00500 | mg/kg |
| SW846 8260B | Chloroform | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Chloromethane | 0.00100 | 0.00200 | mg/kg |
| SW846 8260B | 2-Chlorotoluene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 4-Chlorotoluene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dibromo-3-chloropropane | 0.00340 | 0.00500 | mg/kg |
| SW846 8260B | 1,2-Dibromoethane (EDB) | 0.000520 | 0.00200 | mg/kg |
| SW846 8260B | Dibromomethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,4-Dichlorobenzene | 0.000720 | 0.00200 | mg/kg |
| SW846 8260B | 1,3-Dichlorobenzene | 0.000430 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dichlorobenzene | 0.000430 | 0.00200 | mg/kg |
| SW846 8260B | Dichlorodifluoromethane | 0.00160 | 0.00200 | mg/kg |
| SW846 8260B | 1,1-Dichloroethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dichloroethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | cis-1,2-Dichloroethene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,1-Dichloroethene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | trans-1,2-Dichloroethene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,3-Dichloropropane | 0.000450 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dichloropropane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 2,2-Dichloropropane | 0.000780 | 0.00200 | mg/kg |
| SW846 8260B | cis-1,3-Dichloropropene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | trans-1,3-Dichloropropene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,1-Dichloropropene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Ethylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Hexachlorobutadiene | 0.000630 | 0.00500 | mg/kg |
| SW846 8260B | 2-Hexanone | 0.0170 | 0.0500 | mg/kg |
| SW846 8260B | Isopropylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | p-Isopropyltoluene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Methyl tert-Butyl Ether | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Methylene Chloride | 0.00200 | 0.0100 | mg/kg |
| SW846 8260B | 4-Methyl-2-pentanone | 0.00290 | 0.0500 | mg/kg |
| SW846 8260B | Naphthalene | 0.00170 | 0.00500 | mg/kg |
| SW846 8260B | n-Propylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Styrene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,1,1,2-Tetrachloroethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,1,2,2-Tetrachloroethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Tetrachloroethene | 0.000400 | 0.00200 | mg/kg |
| SW846 8260B | Toluene | 0.000400 | 0.00200 | mg/kg |

Table 1. Method Detection and Reporting Limits for Soil Samples

| | | | | |
|------------------|--------------------------------------|----------|---------|-------|
| SW846 8260B | 1,2,3-Trichlorobenzene | 0.000920 | 0.00200 | mg/kg |
| SW846 8260B | 1,2,4-Trichlorobenzene | 0.00102 | 0.00200 | mg/kg |
| SW846 8260B | 1,1,2-Trichloroethane | 0.00111 | 0.00500 | mg/kg |
| SW846 8260B | 1,1,1-Trichloroethane | 0.000400 | 0.00200 | mg/kg |
| SW846 8260B | Trichloroethene | 0.000830 | 0.00200 | mg/kg |
| SW846 8260B | Trichlorofluoromethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,2,3-Trichloropropane | 0.00103 | 0.00200 | mg/kg |
| SW846 8260B | 1,3,5-Trimethylbenzene | 0.000400 | 0.00200 | mg/kg |
| SW846 8260B | 1,2,4-Trimethylbenzene | 0.000420 | 0.00200 | mg/kg |
| SW846 8260B | Vinyl chloride | 0.000820 | 0.00200 | mg/kg |
| SW846 8260B | o-Xylene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | m,p-Xylene | 0.000670 | 0.00300 | mg/kg |
| SW846 8260B | Xylenes, total | 0.00130 | 0.00500 | mg/kg |
| SW846 8260B | Diisopropyl Ether | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dichloroethene (total) | 0.00144 | 0.00200 | mg/kg |
| SW846 8260B | 1,1,2-Trifluorotrchloroethane | 0.000590 | 0.00200 | mg/kg |
| | | | | |
| SW846 8270D SIM | Acenaphthene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | Acenaphthylene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Anthracene | 0.000700 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (a) anthracene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (a) pyrene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (b) fluoranthene | 0.00160 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (g,h,i) perylene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (k) fluoranthene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | Chrysene | 0.000600 | 0.00333 | mg/kg |
| SW846 8270D SIM | Dibenz (a,h) anthracene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Fluoranthene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Fluorene | 0.000500 | 0.00333 | mg/kg |
| SW846 8270D SIM | Indeno (1,2,3-cd) pyrene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | 1-Methylnaphthalene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | 2-Methylnaphthalene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Naphthalene | 0.000700 | 0.00333 | mg/kg |
| SW846 8270D SIM | Phenanthrene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Pyrene | 0.000300 | 0.00333 | mg/kg |
| | | | | |
| NWTPH-Dx | TPH - Diesel Range by NWTPH-Dx (SGT) | 2.00 | 4.00 | mg/kg |
| NWTPH-Dx | TPH - Oil Range by NWTPH-Dx (SGT) | 2.00 | 4.00 | mg/kg |
| | | | | |
| NWTPH-Gx | TPH - NWTPH-Gx | 0.500 | 5.00 | mg/kg |
| | | | | |
| SW846 1311/6010B | Arsenic TCLP SW 6010B | 0.0400 | 0.100 | mg/L |
| SW846 1311/6010B | Barium TCLP SW 6010B | 0.0100 | 0.100 | mg/L |
| SW846 1311/6010B | Cadmium TCLP SW 6010B | 0.00600 | 0.0100 | mg/L |
| SW846 1311/6010B | Chromium TCLP SW 6010B | 0.0260 | 0.0500 | mg/L |
| SW846 1311/6010B | Lead TCLP SW 6010B | 0.0210 | 0.0500 | mg/L |
| SW846 1311/6010B | Selenium TCLP SW 6010B | 0.0390 | 0.100 | mg/L |
| SW846 1311/6010B | Silver TCLP SW 6010B | 0.0280 | 0.0500 | mg/L |
| SW846 1311/7470A | Mercury TCLP 7470A | 0.00100 | 0.0100 | mg/L |
| | | | | |
| SW846 6010B | Arsenic Total EPA 6010B | 0.700 | 1.00 | mg/kg |
| SW846 6010B | Barium Total EPA 6010B | 0.100 | 2.00 | mg/kg |
| SW846 6010B | Cadmium Total EPA 6010B | 0.200 | 1.00 | mg/kg |
| SW846 6010B | Chromium Total EPA 6010B | 0.500 | 1.00 | mg/kg |

Table 1. Method Detection and Reporting Limits for Soil Samples

| | | | | |
|-------------|-----------------------------------|--------|-------|-------|
| SW846 6010B | Lead Total EPA 6010B | 0.400 | 1.00 | mg/kg |
| SW846 6010B | Selenium Total EPA 6010B | 0.700 | 2.00 | mg/kg |
| SW846 6010B | Silver Total EPA 6010B | 0.500 | 1.00 | mg/kg |
| SW846 7471A | Mercury 7471A | 0.0400 | 0.100 | mg/kg |
| | | | | |
| SW846 7196A | Chromium, Hexavalent by EPA 7196A | 1.70 | 2.00 | mg/kg |

Notes:

TPH = Total Petroleum Hydrocarbon
EPA = U. S. Environmental Protection Agency
mg/kg = milligram per kilogram
mg/L = milligram per liter
MDL = method detection limit
MRL = method reporting limit

Table 2. Method Detection and Reporting Limits for Groundwater Samples

| Specific Method | Analyte | MDL | MRL | Units |
|------------------------|--------------------------|------------|------------|--------------|
| SW846 8260B | Benzene | 0.410 | 1.00 | ug/L |
| SW846 8260B | Ethylbenzene | 0.350 | 1.00 | ug/L |
| SW846 8260B | Toluene | 0.350 | 1.00 | ug/L |
| SW846 8260B | o-Xylene | 0.330 | 1.00 | ug/L |
| SW846 8260B | m,p-Xylene | 0.400 | 2.00 | ug/L |
| | | | | |
| NWTPH-Dx | Diesel | 28.0 | 100 | ug/L |
| NWTPH-Dx | Motor Oil | 28.0 | 100 | ug/L |
| | | | | |
| NWTPH-Gx | GRO (C4-C12) NW | 40.0 | 100 | ug/L |
| | | | | |
| SW846 6010B | Arsenic Total EPA 6010B | 0.00360 | 0.0100 | mg/L |
| SW846 6010B | Barium Total EPA 6010B | 0.00100 | 0.0100 | mg/L |
| SW846 6010B | Cadmium Total EPA 6010B | 0.000600 | 0.00100 | mg/L |
| SW846 6010B | Chromium Total EPA 6010B | 0.00260 | 0.00500 | mg/L |
| SW846 6010B | Lead Total EPA 6010B | 0.00210 | 0.00500 | mg/L |
| SW846 6010B | Selenium Total EPA 6010B | 0.00390 | 0.0100 | mg/L |
| SW846 6010B | Zinc Total EPA 6010B | 0.00500 | 0.0500 | mg/L |
| | | | | |
| SW846 7470A | Mercury Total 7470A | 0.000100 | 0.000200 | mg/L |
| | | | | |

Notes:

TPH = Total Petroleum Hydrocarbon

EPA = U. S. Environmental Protection Agency

mg/L = milligram per liter

µ/L = microgram per liter

MDL = method detection limit

MRL = method reporting limit

Table 3 Soil and Groundwater Samples

| Boring Number | City of Everett Trench Station Number | Trench Depth (ft bgs) | Drilling Method | Boring Depth (ft bgs) | Depth of Sampling (ft bgs) | Number of Soil Samples | Number of Groundwater Samples |
|----------------------|--|------------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|--------------------------------------|
| CE-1 | 20+02 | 7.9 | HSA | 8 | 8 | 2 | 1 |
| CE-2 | 18+00 | 7.5 | HSA | 20 | 8 | 3 | 1 |
| CE-3 | 17+00 | 7.6 | HSA | 8 | 8 | 2 | 1 |
| CE-4 | 15+50 | 6.75 | HSA | 7 | 7 | 2 | 1 |
| CE-5 | 14+00 | 8 | HSA | 20 | 8 | 2 | 1 |
| Duplicate samples | | | | | | 2 | 1 |
| Total Samples | | | | | | 13 | 6 |

Notes:

Duplicate samples will be collected from intervals exhibiting evidence of potential contamination, such as staining or odor.

ft bgs = feet below ground surface

HSA = hollow-stem auger


Table 4 Sample Containers, Preservation and Storage

| Analysis | Method | Sample Container | Number of Containers | Preservation and Storage | Holding Times |
|---|-----------------|--|----------------------|-----------------------------|---------------|
| Soil | | | | | |
| Gasoline Range Organics | NWTPH-Gx | 40-mL vial (VOA) w/MeOH | 1 | 4° C | 14 days |
| Diesel Range Organics ¹ | NWTPH-Dx | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 14 days |
| Volatile Organic Compounds | EPA 8260B | 40-mL vial (VOA) w/stir bar ² | 2 | 4° C | 14 days |
| Polycyclic Aromatic Hydrocarbons | EPA 8270D | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 14 days |
| Metals | EPA 6010/6020 | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 6 months |
| Mercury (Hg)/Hexavalent Chromium (CrVI) | EPA 7471/7196 | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 28 days |
| Water | | | | | |
| Gasoline Range Organics | NWTPH-Gx | 40-mL vial (VOA) w/HCl | 1 | HCl pH<2, 4° C | 14 days |
| Diesel Range Organics ¹ | NWTPH-Dx | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 14 days |
| BTEX | EPA 8260B | 40-mL vial (VOA) w/HCl | 2 | 4° C | 14 days |
| Metals (total) | EPA 200.7/200.8 | 500-mL HDPE | 1 | HNO ₃ pH<2, 4° C | 6 months |
| Mercury (Hg) | EPA 7470 | 500-mL HDPE | 1 | 4° C | 28 days |
| pH | EPA 150.1/9040 | 60-mL HDPE | 1 | 4° C | ASAP |

Notes:

1. Silica gel cleanup will be performed on samples
 2. Sample volume = 5 ounces
- NW TPH = Northwest Total Petroleum Hydrocarbon
 EPA = U. S. Environmental Protection Agency
 CWM jar = Clear, wide-mouth glass jar
 HCl = Hydrochloric acid
 MeOH = Methanol
 BTEX = benzene, toluene, ethylbenzene, total xylene
 NaOH = sodium hydroxide
 HNO₃ = Nitric Acid
 HDPE - High Density Polyethylene
 PTFE = teflon
 VOA = volatile organic analysis
 mL = milliliter

FIGURES

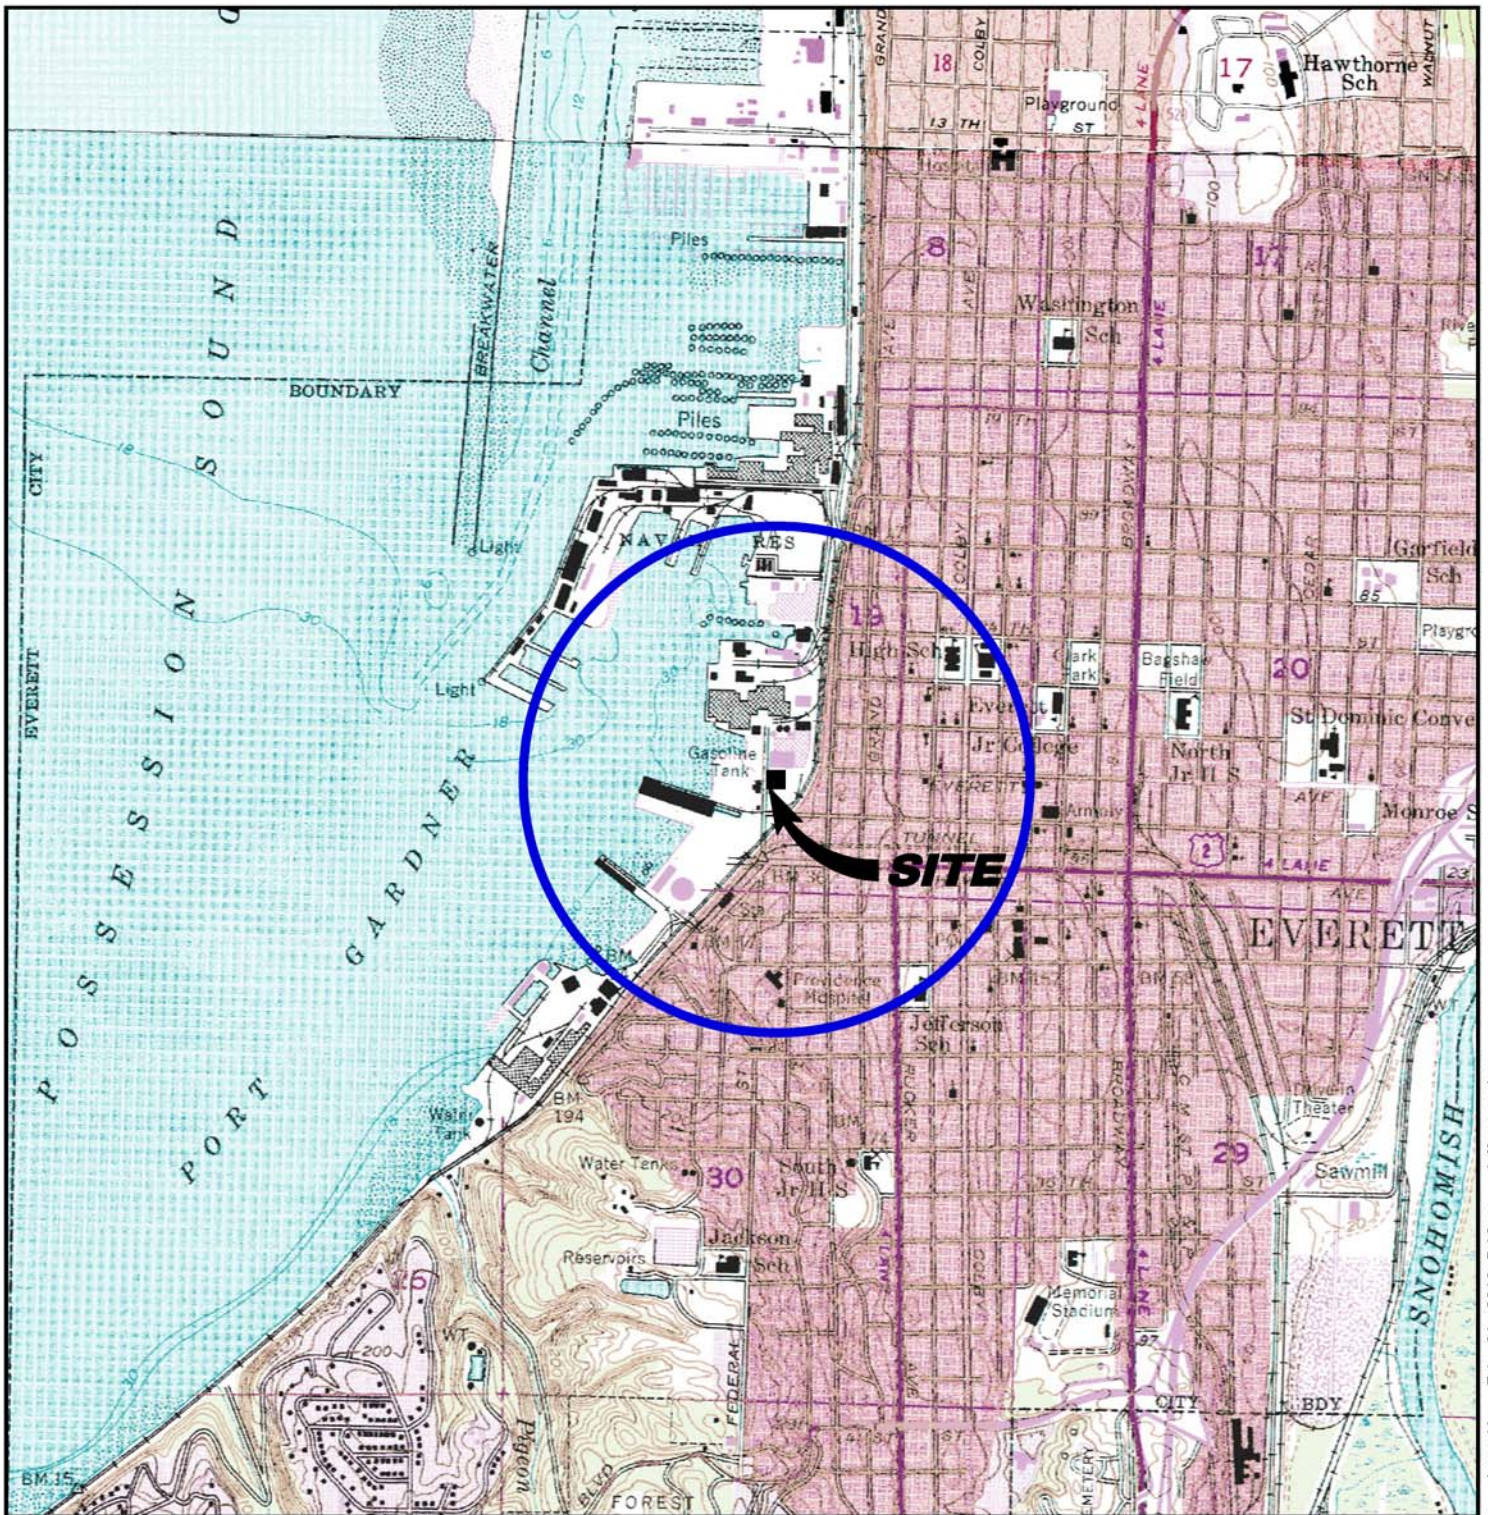

EXPLANATION



1/2-MILE RADIUS CIRCLE

SOURCE: USGS Quad Topo of Everett and Marysville, Photorevised 1973.



0 2000 4000 Feet

SCALE: 1:24,000

AMEC Earth & Environmental

11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201



CLIENT LOGO

CLIENT

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**

PROJECT **EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728**

DWN BY: JRS

DATUM: NONE

DATE: FEBRUARY 2010

TITLE **SITE LOCATION MAP**

CHK'D BY: AS


REV. NO.:

PROJECT NO:
0-915-15716-D

PROJECTION:
NONE

SCALE:
AS SHOWN

FIGURE No.
1

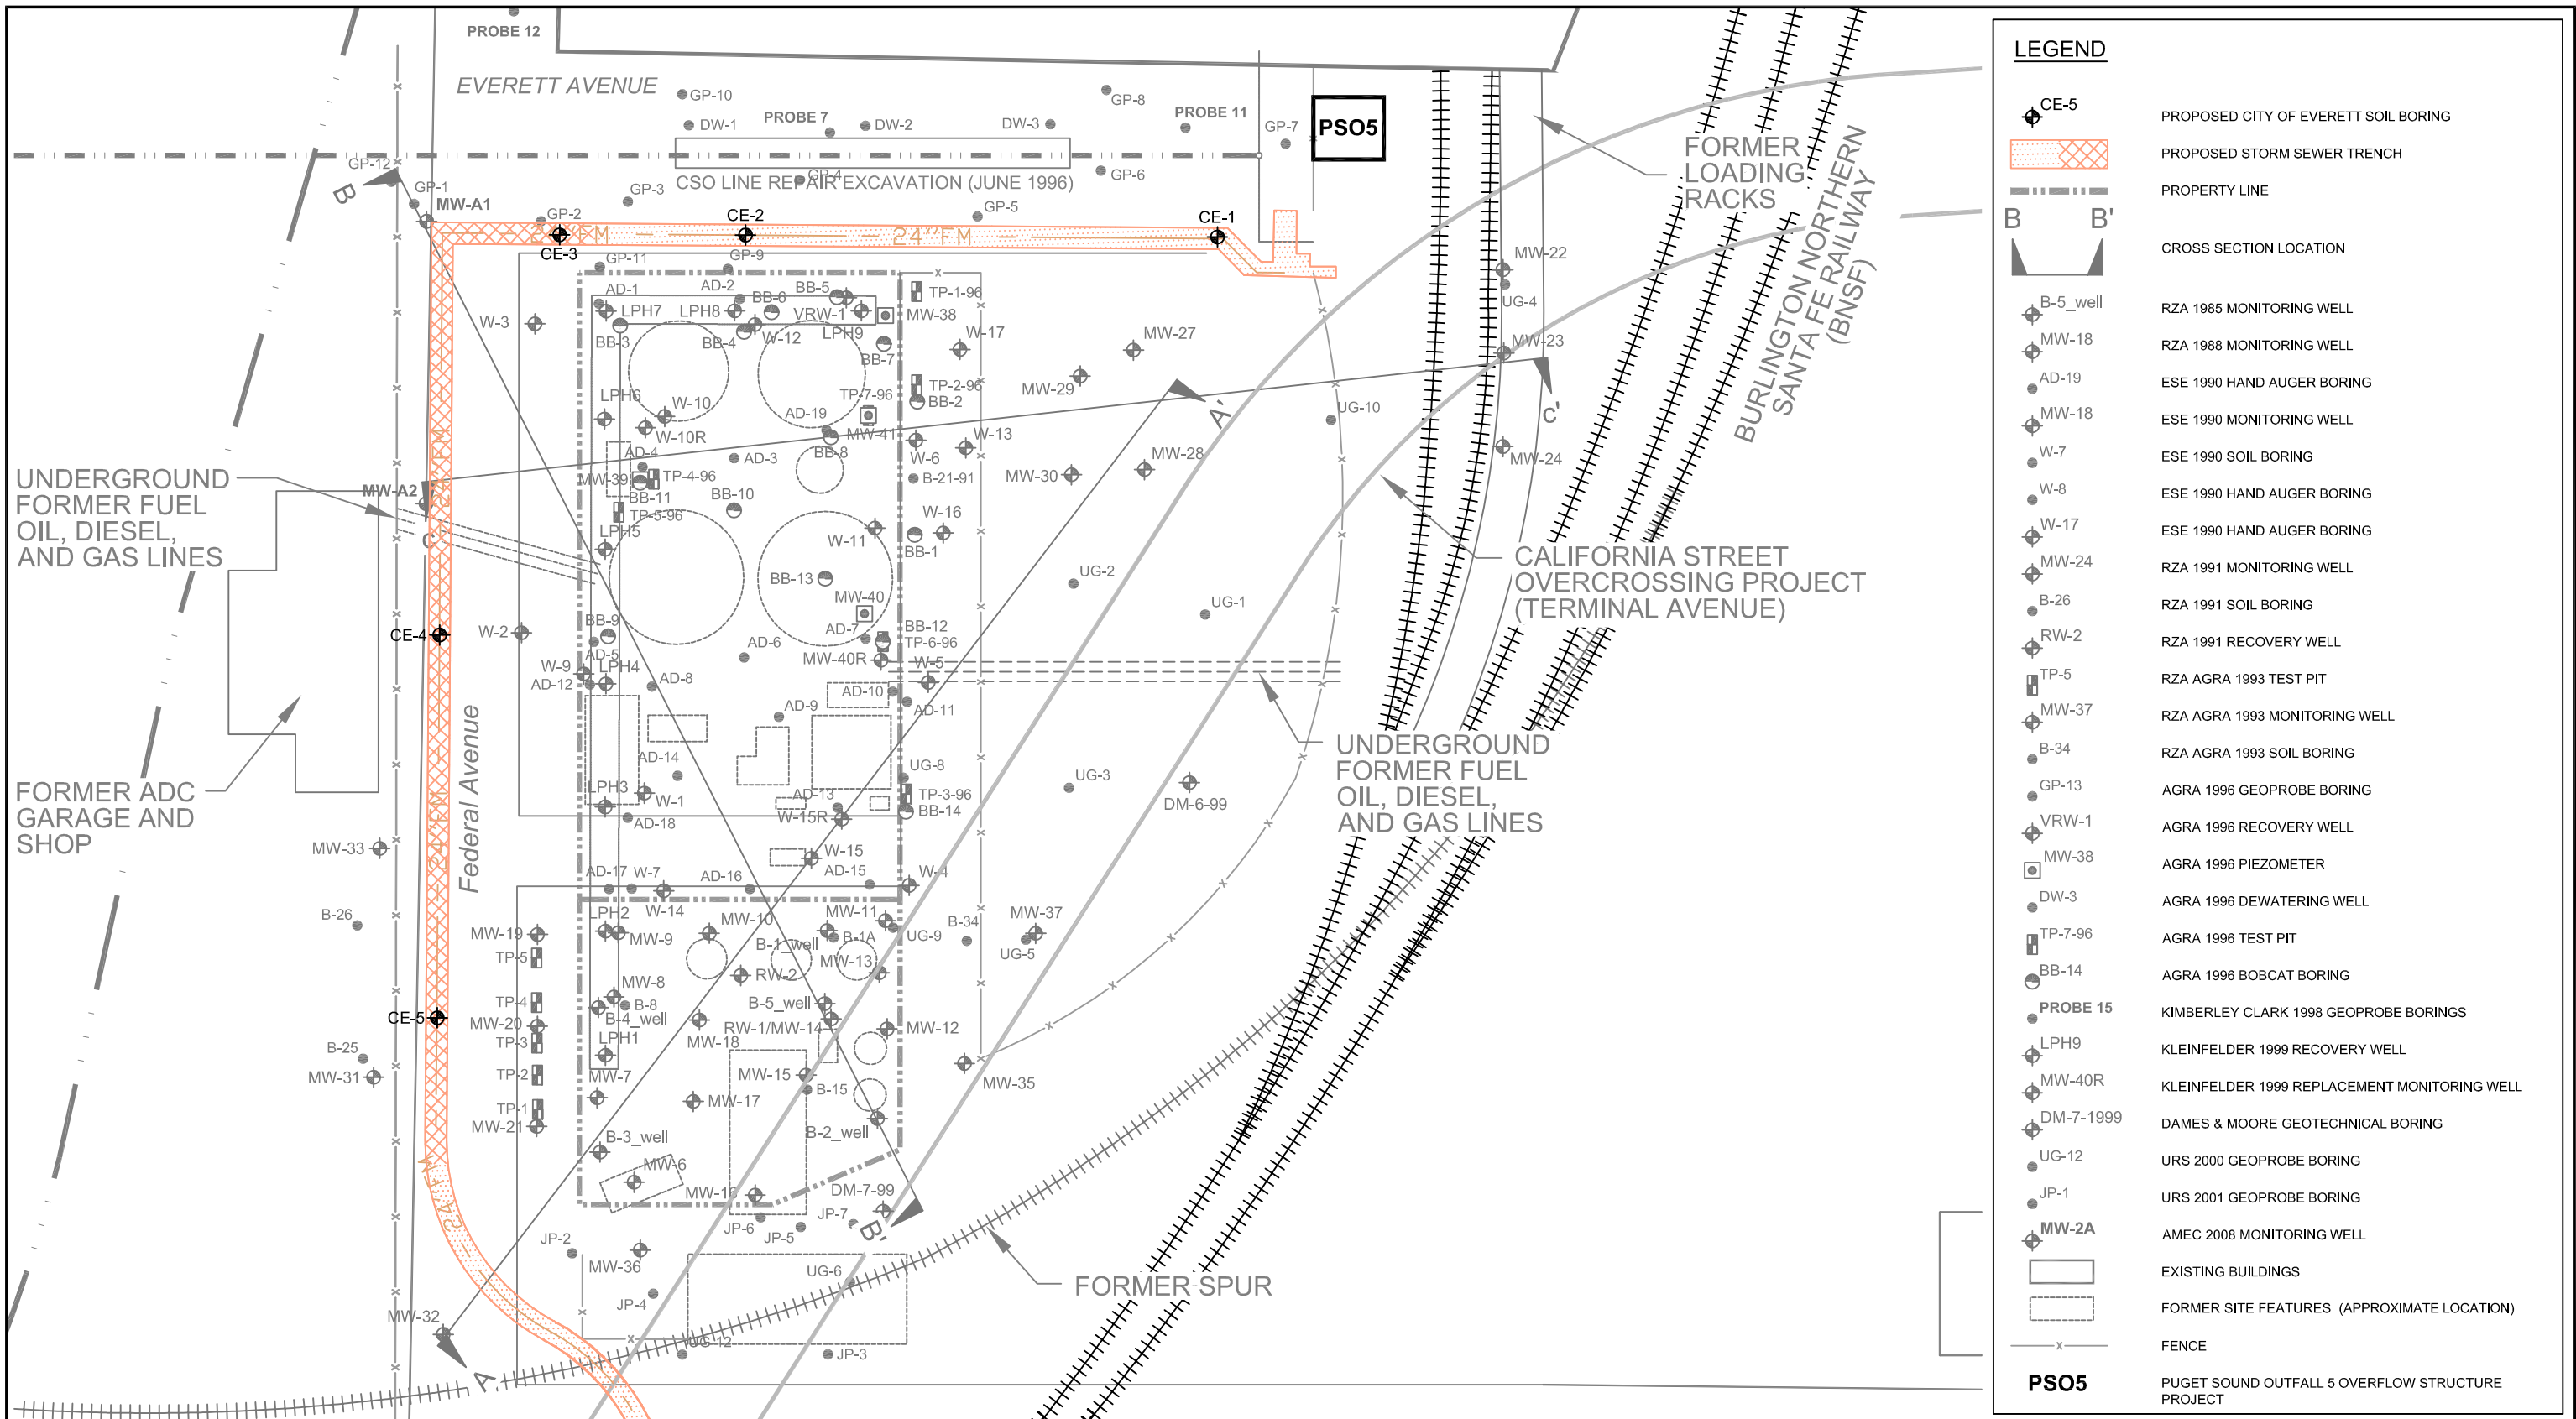

| LEGEND | |
|--------|--|
| | PROPOSED CITY OF EVERETT SOIL BORING |
| | PROPOSED STORM SEWER TRENCH |
| | PROPERTY LINE |
| | CROSS SECTION LOCATION |
| | RZA 1985 MONITORING WELL |
| | RZA 1988 MONITORING WELL |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 MONITORING WELL |
| | ESE 1990 SOIL BORING |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 HAND AUGER BORING |
| | RZA 1991 MONITORING WELL |
| | RZA 1991 SOIL BORING |
| | RZA 1991 RECOVERY WELL |
| | RZA AGRA 1993 TEST PIT |
| | RZA AGRA 1993 MONITORING WELL |
| | RZA AGRA 1993 SOIL BORING |
| | AGRA 1996 GEOPROBE BORING |
| | AGRA 1996 RECOVERY WELL |
| | AGRA 1996 PIEZOMETER |
| | AGRA 1996 DEWATERING WELL |
| | AGRA 1996 TEST PIT |
| | AGRA 1996 BOBCAT BORING |
| | KIMBERLEY CLARK 1998 GEOPROBE BORINGS |
| | KLEINFELDER 1999 RECOVERY WELL |
| | KLEINFELDER 1999 REPLACEMENT MONITORING WELL |
| | DAMES & MOORE GEOTECHNICAL BORING |
| | URS 2000 GEOPROBE BORING |
| | URS 2001 GEOPROBE BORING |
| | AMEC 2008 MONITORING WELL |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |
| | PUGET SOUND OUTFALL 5 OVERFLOW STRUCTURE PROJECT |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.


CLIENT LOGO

CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

DWN BY: JRS / BRJ
 CHK'D BY: AS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'


PROJECT
EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728
 TITLE
PROPOSED STORM SEWER UPGRADE SOIL BORINGS

DATE: FEBRUARY 2010
 PROJECT NO: 0-915-15716-D
 REV. NO.: 1
 FIGURE No. 2



AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201



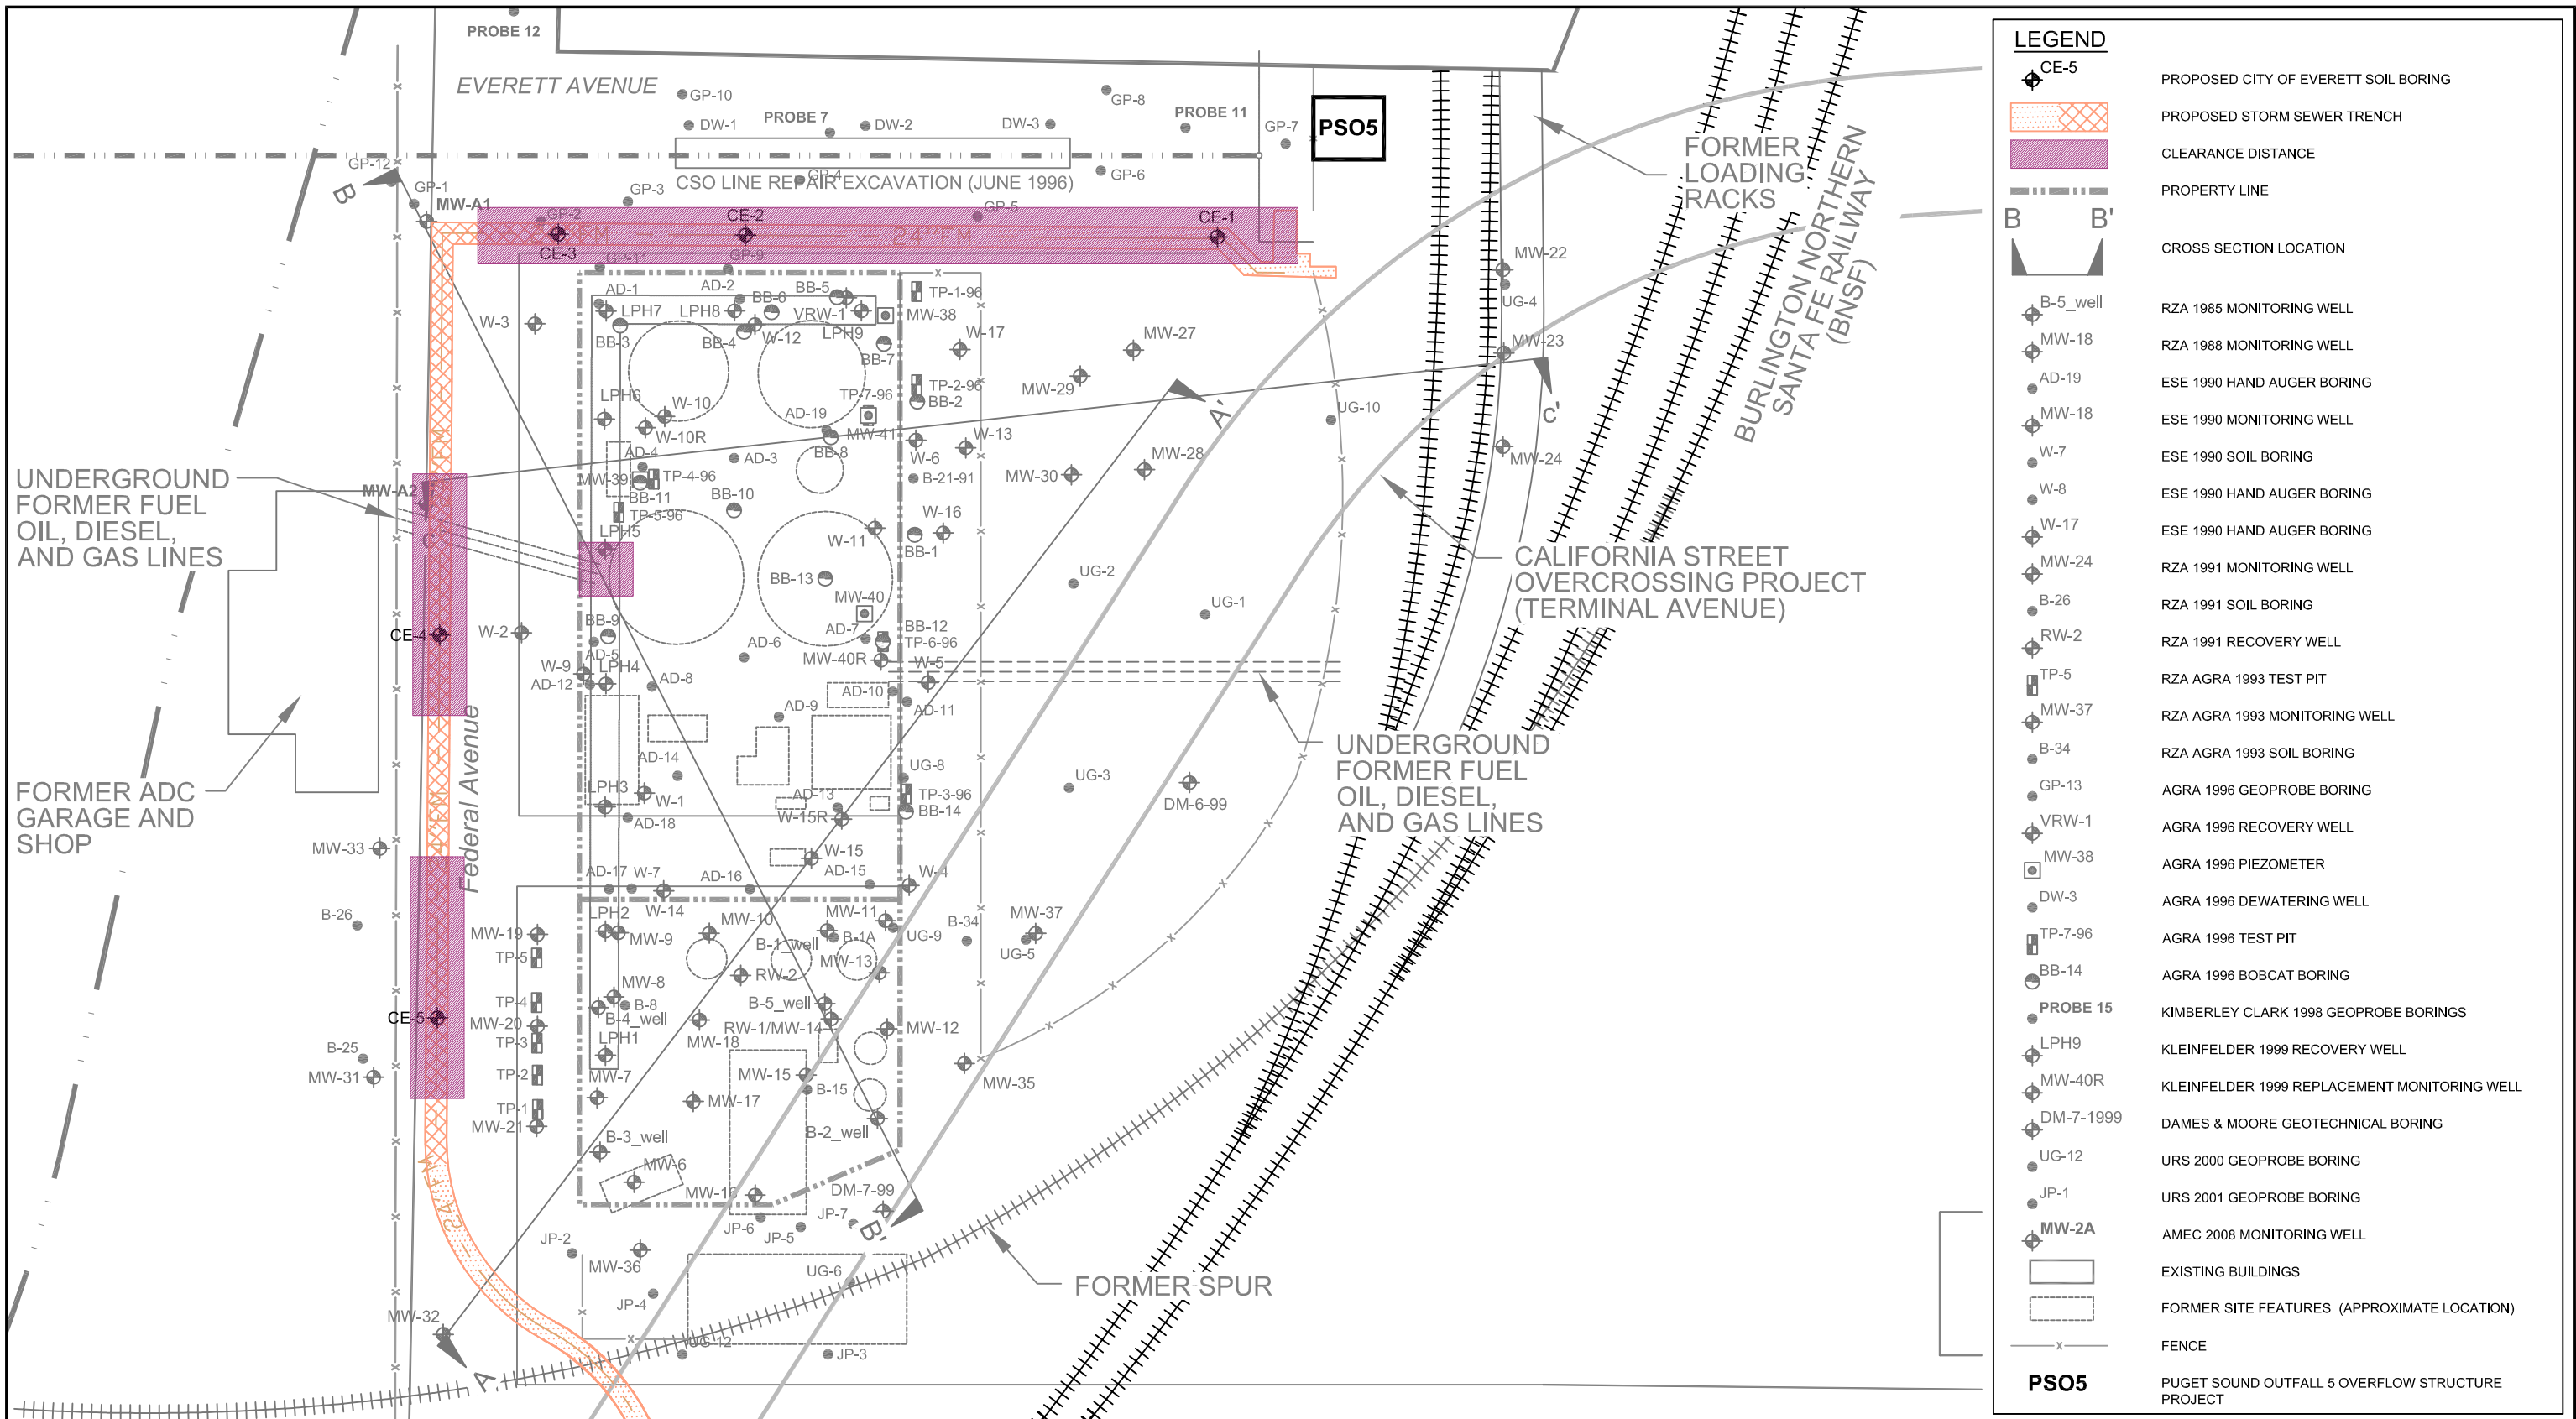

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

amec

DWN BY: JRS / BRJ
CHK'D BY: AS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: 1" = 60'

PROJECT: EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE: CLEARANCE DISTANCE IN VICINITY OF PROPOSED BORINGS

DATE: FEBRUARY 2010
PROJECT NO: 0-915-15716-D
REV. NO.: 1
FIGURE No. 3

0 60 120
SCALE IN FEET

ATTACHMENT A1

Boring Logs for MW-A1 and MW-A2

| O DEPTH (ft bgs) | GRAPHIC LOG | USCS SYMBOL | SOIL DESCRIPTION | SAMPLE | BLOW COUNT SPT N VALUE | VOLATILE READING (ppm) | GROUNDWATER | FIELD AND LABORATORY TESTING | WELL SCHEMATIC |
|------------------|-------------|-------------|---|--------|---------------------------|---------------------------|-------------|--|--|
| 0 | | | Surface: 0.2 feet of asphalt over 1.6 feet of gray fine to medium angular moist, (crushed rock base course) A vac-truck was utilized from 0 to 5 feet below the ground surface to ensure utilities were cleared. | | | | | | Flush mount in cement seal Hydrated bentonite chip seal |
| 5 | | SP | Medium dense, moist, brown, fine to coarse SAND with some silt and trace fine gravel Moist to wet, wood; possibly a large block | | 22 | 0.0 | | | 2-inch PVC casing in 2/12 silica sand filter pack 2-inch PVC 10 slot screen in 2/12 silica sand filter pack |
| | | SP | Loose, wet, brown, fine to medium SAND with trace silt and petroleum odor Becomes saturated and gray at 8.3 feet Water appeared viscous and sediments appeared to have a metallic luster from 8.3 to 9 feet Becomes medium dense at 9.5 feet | | 6 | 0.0 | | A1_S-1_020408 Sheen Test None Observed A1_S-2_020408 | |
| 10 | | | Becomes gray and brown, with some fine gravel and trace silt and no odor observed at 10.4 feet Cobbles in sampler shoe | | 21 | 0.0 | | | |
| | | GP-GM | Medium dense, saturated, dark gray, fine GRAVEL with some fine to medium sand and silt, light to medium sheen | | | 0.0 | | | |
| | | SP | Medium dense, saturated, gray fine to medium SAND with trace silt and fine gravel and occasional organics (wood splinters) Approximatley 0.01 foot thick layers of wood splinters at 13, 14, and 15 feet | | 16 | 0.0 | | Sheen Test Light Observed | |
| 15 | | | Becomes loose, with petroleum odor and no visible gravel at 14.5 feet | | 14 | 0.0 | | | 2/12 silica sand Bentonite chips |
| | | | Approximatley 0.1 foot thick layer of stiff, moist, brown, SILT with numerous organics / organic SILT (plant fragments, wood fibers, roots) at 18 feet | | 14 | 0.0 | | Sheen Test Light Observed | |
| 20 | | | | | 24 | 0.0 | | Sheen Test None Observed | |
| | | ML | Very stiff, moist, brown, SILT with trace fine to coarse sand and numerous organics / organic SILT with trace fine to coarse sand | | 20 | 0.0 | | | |
| 25 | | SP | Becomes with occasional organics (roots) at 25 feet Medium dense, saturated, gray, fine to medium SAND with trace silt | | 17 | 0.0 | | | |
| 30 | | | Exploration terminated at 26.5 feet below the existing ground surface. | | | | | | |

| | |
|--|---|
| BORING METHOD: HSA | ELEVATION REFERENCE: NA |
| BOREHOLE DIAMETER: 8 (in) | GROUND SURFACE ELEVATION: NA |
| DRILL RIG: CME | CASING ELEVATION: NA |
| CONTRACTOR: Cascade Drilling, Inc./Scott | START CARD/TAG ID: /BAB238 |
| LOGGED BY: LME | DRILLING DATES: 02/04/2008 - 02/04/2008 |

REMARKS:

ENVR+WELL-BORING FEDERALAVENUE.GPJ AMEC PORTLAND.GDT 3/17/08

ExxonMobil / American Distributing Company
7-915-15716-B

AMEC Earth and Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, Washington
USA 98034
Tel (425) 820-4669
Fax (425) 821-3914



LOG OF BORING MWA1
PAGE 1 OF 1

| DEPTH (ft bgs) | GRAPHIC LOG | USCS SYMBOL | SOIL DESCRIPTION | SAMPLE | BLOW COUNT SPT N VALUE | VOLATILE READING (ppm) | GROUNDWATER | FIELD AND LABORATORY TESTING | WELL SCHEMATIC |
|----------------|-------------|-------------|--|--------|---------------------------|---------------------------|-------------|--------------------------------------|--|
| 0 | | | Surface: moist, dark gray, angular fine to medium gravel (crushed rock) A vac-truck was utilized from 0 to 5 feet below the ground surface to ensure utilities were cleared. Approximatley 2 feet of wood with creosote odor (appeared to be blocks of wood treated with creosote) | | | | | | Flush mount in cement seal Hydrated bentonite chip seal |
| 5 | | SP | Very loose, moist, black, fine to medium SAND with some silt and numerous organics (wood splinters) | | 5 | 0.0 | ▼ | A2_S-1_020408 Sheen Test Light | 2-inch PVC casing in 2/12 silica sand filter pack 2-inch PVC 10 slot screen in 2/12 silica sand filter pack |
| | | SP | Very loose, moist, brown, fine to medium SAND with trace silt | | | | | Observed A2_S-2_020408 | |
| | | ML | Stiff, wet to saturated, blue-gray, sandy SILT with slight petroleum odor and light sheen | | | | | | |
| | | OL/ML | Stiff, moist, dark brown to black, organic SILT / SILT with numerous organics (roots, plant fragments) and petroleum odor | | 11 | 0.0 | ▼ | | |
| | | SM | Loose, wet to saturated, silty, fine to medium SAND with trace fine gravel and petroleum odor and light sheen | | | | | | |
| | | ML | Stiff, moist, brown, SILT with some clay and numerous organics (roots) | | 25 | 0.0 | | Sheen Test None Observed | |
| 10 | | SP | Loose, moist to wet, gray, fine to medium SAND with trace silt and scattered organics (roots) | | | | | | |
| | | SP | Medium dense, saturated, gray, fine to medium SAND with trace silt | | 17 | 0.0 | | | |
| 15 | | | Becomes with occasional organics (roots, plant fragments) at 15 feet Tip of sampler shoe contained wet, brown, organic SILT / SILT with numerous organics (roots, plant fragments) | | 11 | 0.0 | | Sheen Test None Observed | 2/12 silica sand Bentonite chips |
| | | | | | 14 | 0.0 | | | |
| 20 | | | | | 16 | 0.0 | | Sheen Test None Observed | |
| | | OL/ML | Stiff, moist, brown, organic stratified SILT with some clay and trace fine to medium sand / stratified SILT with some clay and trace fine to medium sand and numerous organics (roots, plant fragments) | | | | | | |
| | | SP | Medium dense, saturated, gray, fine to medium SAND with trace silt and occasional organics (roots, plant fragments) Becomes no visible organics at 22 feet | | 25 | 0.0 | | | |
| 25 | | | | | 25 | 0.0 | | Sheen Test None Observed | |
| 30 | | | Exploration terminated at 26.5 feet below the existing ground surface. | | | | | | |

BORING METHOD: HSA

ELEVATION REFERENCE: NA

BOREHOLE DIAMETER: 8 (in)

GROUND SURFACE ELEVATION: NA

DRILL RIG: CME

CASING ELEVATION: NA

CONTRACTOR: Cascade Drilling, Inc./Scott

START CARD/TAG ID: /BAB237

LOGGED BY: LME

DRILLING DATES: 02/04/2008 - 02/04/2008

REMARKS:

ENVR+WELL-BORING FEDERAL AVENUE GPJ AMEC PORTLAND.GDT 3/17/08

ExxonMobil / American Distributing Company

7-915-15716-B

AMEC Earth and Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, Washington
USA 98034
Tel (425) 820-4669
Fax (425) 821-3914



**LOG OF BORING
MWA2**

PAGE 1 OF 1

ATTACHMENT A2

Site-Specific Health and Safety Plan

SITE SPECIFIC HEALTH AND SAFETY PLAN

Project Name: ExxonMobil/ADC Property, Ecology Site ID 2728
Project Location: 2717/2731 Federal Avenue, Everett, Washington
Project Number: 9-91-51571-6C

THIS SITE SPECIFIC HEALTH AND SAFETY PLAN APPLIES ONLY TO AMEC PERSONNEL.

All site personnel must have completed the 8-hour ExxonMobil LPS Training prior to undertaking any field work at the site.

A PRE-ENTRY BRIEFING MUST BE HELD PRIOR TO INITIATING ANY SITE ACTIVITY AND AT OTHER TIMES AS NECESSARY TO ENSURE EMPLOYEES ARE APPRAISED OF THE SITE HEALTH AND SAFETY PLAN.

SAFETY PERSONNEL:

| | |
|---------------------------------|--|
| Health and Safety Coordinators: | Leah Vigoren and Anastasia Speransky |
| Project Engineers: | Leah Vigoren |
| Project Managers: | Meg Strong and Gary Dupuy |
| Site Safety Coordinator (SSC): | Leah Vigoren |
| Client Contact: | Joe Abel: ExxonMobil Environmental Services (EMES) |

EMERGENCY CONTACTS:

Hospital / Emergency Room: **Providence Medical Center** **425-258-7555**

Map showing shortest route to Hospital is attached to this document.

| | |
|--|----------------|
| Fire: | 911 |
| Police: | 911 |
| Poison Control Center: | 1-800-222-1222 |
| Emergency Water Shut-off: Everett | 1-425-257-8821 |
| Electric Utility: Snohomish County PUD | 1-877-783-1000 |
| Washington State Patrol: | 911 |

| | |
|--|------------------|
| Health and Safety Coordinator: Leah Vigoren (Cell Phone: 206-351-9449) | 206-342-1760 (w) |
| Project Manager: Meg Strong (Cell Phone: 425-864-2096) | 425-368-0966 (w) |

AMEC Earth & Environmental, Inc.
11810 North Creek Parkway
Bothell, Washington
USA 98011
(425) 368-1000 Phone
(425) 368-1001 Facsimile

SITE HISTORY

The approximate 1-acre site was purchased by ExxonMobil's historic predecessors in 1922, and was utilized as a petroleum bulk storage distribution facility between 1922 and 1974. In 1974, the then Mobile Company sold two thirds of the site (northern portion) to A.P. Miller (Miller), for use by the American Distributing Company (ADC). In 1987, Mobile discontinued petroleum storage and dispensing operations on their portion of the site and removed all storage tanks and ancillary equipment. In 1990, petroleum distribution was discontinued on the ADC parcel, and some improvements and tanks were removed from the parcel. Since then, the site has been turned into a parking lot and is leased to the Kimberly Clark facility located to the north of the site. Activities that have occurred on the site since this time have been environmental investigations and remedial activities to address petroleum impacts to soil and groundwater.

In 1985, site characterization activities were initiated to define the nature and extent of petroleum impacts beneath the site. Between 1988 and 1996, a variety of Interim Remedial Action Measures (IRAMs) were implemented to address the free product. In 1998, a Remedial Investigation/Focused Feasibility Study (RI/FFS) was performed in coordination of the Washington State Department of Ecology (Ecology) under the Consent Order. Remedial Action Objectives (RAOs) were developed for the site based on the RI data and baseline human health risk assessment. The remedy selected to achieve RAOs included the following.

- 1) Construction of an interceptor trench along the down gradient margins of the site (entire western and northern boundaries) to mitigate the off-site migration of the light non-aqueous phase liquid (LNAPL) present on the shallow water table.
- 2) Placement of low-permeability cap across the entire site surface
- 3) Ongoing removal and disposal of recovered LNAPL from site monitoring wells and interceptor trench; and
- 4) Quarterly groundwater monitoring.

In addition, the City of Everett is planning to upgrade the storm sewer line that will result in trenching within Everett Avenue and Federal Avenue. In advance of trenching, samples of the soil and groundwater will be collected from borings to determine soil and groundwater disposal options. This HASP addresses the specific field sampling activities related to the advancement of the soil borings and soil and groundwater sampling.

ORGANIZATIONAL STRUCTURE

Project Manager(s):

Gary Dupuy (phone number 206-342-1777) and Meg Strong (phone number 425-368-0966) are the client managers for the project. Responsibilities include remaining in contact with regulatory agencies such as the Department of Ecology, overseeing the Project and ensuring client satisfaction from commencement to closeout.

Site Safety and Health Supervisor:

Leah Vigoren (phone number 206-838-8470) is the Project Manager and Health and Safety Coordinators (HSC). Primarily the duties of the HSC entail coordination with the Project Manager for preparation of site health and safety plans, assessment of chemical hazards and selection of safety / monitoring equipment.

Anastasia Speransky (phone number 206-838-1776) is the field geologist and is the Site Safety Coordinator (SSC). The SSC has the responsibility of implementing the Site Health and Safety Plan while at the Site. The SSC / HSC will be involved with the Project Manager in preparation of the Site Health and Safety Plan. If the plan is not being implemented or if unanticipated situations arise, the SSC / HSC may stop all proceedings and see that all personnel depart the site. The SSC / HSC will have charge of all instruments and see to their proper use and function.

Field Technicians:

Joseph C. Petrick is the Field Technician whose responsibilities include collecting soil and groundwater samples, keeping field records (I.e. Daily Field Logs) describing field activities, observations and site events. Supplying daily reports and reporting all incidents to the Project Engineer.

Subcontractor

Drilling company "Cascade Drilling, Inc." is responsible for the advancement of soil borings on the site.

ON SITE TASKS

Soil and groundwater will be characterized beneath Everett Avenue and Federal Avenue for disposal classification. Elements of this addendum are based on the Washington Administrative Code (WAC) Ecology Model Toxics Control Act (MTCA) Cleanup Regulations WAC 173-340-820 and City of Everett Waste Water discharge regulations.

The soil and groundwater sampling will include the following activities:

1. Advance five borings (three along Everett Avenue and two along Federal Avenue [Figure 2]) to evaluate the concentration of chemicals in soil and groundwater. The borings will be advanced at each location using a hollow stem auger (HSA) drill rig to the total depth of the proposed trench at the location of each boring. Two of the borings will be terminated at a minimum depth of 20 feet below ground surface (bgs) to provide soil lithology information for the City's geotechnical engineer.
2. Collect continuous samples from the borings using a standard penetration test (SPT) and a split spoon (SS).
3. Collect two to three composite soil samples from each boring for laboratory analyses. The first composite will be from the top four feet and the second from the lower four feet. Discreet samples for volatile organic compounds (VOC) analysis will be collected from the upper four feet and at regular intervals to the base of the boring. In areas where heavy contamination such as free product is observed a separate sample will be collected.
4. Collect "grab" water samples from each boring. If sheen or product is encountered, an additional water sample will be collected from just below the water table (a foot or two below).
5. Soil samples will be analyzed for CEMEX acceptance criteria and "grab" groundwater samples will be analyzed for the City of Everett sanitary sewer discharge criteria. The soil and groundwater samples will be performed on a one-week turn-around schedule.

SAFETY & HEALTH HAZARDS ANALYSIS

a) Physical Hazards

Physical hazards that may be encountered during site activities include noise, manual lifting, powerful moving parts and weather related hazards (cold, heat stress, wind). Hard hats, safety glasses, hearing protection and steel-toed boots will be required for all personnel working in the vicinity of heavy equipment.

Identified hazards may be mitigated by using safe work practices at all times. The SSC has total responsibility for ensuring that all AMEC personnel on-site perform work tasks in a safe and sensible manner. If at any time the SSC determines that safe work practices are not followed, the tasks will be suspended and corrective actions will be taken.

Because of the potential of explosion hazard presented during groundwater monitoring (i.e., W-2) **SMOKING WILL NOT BE ALLOWED WITHIN 50 FEET OF THE WORK ZONE.**

The following are all additional site related hazards:

- 1) **Traffic**
 - a. Cones will be set out around the work area and safety reflective vests will be worn.
 - b. All drilling will be conducted with the traffic control.
- 2) **Personnel or property damage from vehicle movement.**
 - a. When moving vehicles the following precautions must be taken
 - b. Equipment must be stowed and secured
 - c. A spotter must be used due to the presence of blind spots in the driver's field of vision.
 - d. The spotter must identify any surface obstruction / anomalies
 - e. Audible warning signals and hand signals must be used.
 - f. Operator must yield to pedestrians.
- 3) **Personal injury from handling heavy objects.**
 - a. Use proper lifting techniques; keeping back straight and lift with arms and legs; keep load near body; avoid reaching.
 - b. Do not attempting to lift anything that weighs more than 60 pounds.
 - c. Use mechanical equipment such as a cart to carry / lift large, heavy or awkward loads.
- 4) **Slips, trips and falls.**
 - a. Scan area prior to start of work.
 - b. Group all equipment and waste in one designated area.
 - c. Return tools not in use to storage.
- 5) **Pinch points on drum and well covers.**
 - a. Personnel will wear leather gloves when working with well and drum covers.
- 6) **Broken Glassware**
 - a. Personnel will use bubble wrap and blue ice when transporting samples in glass containers.
 - b. Personnel will not overtighten caps on glass bottles.

b) Chemical Hazards

Chemical hazards that could possibly be encountered include Gasoline, BTEX, hydrogen sulfide (H₂S), and methane (CH₄). The nature of this project precludes continuous exposure to any potential contaminant.

Per past anecdotal evidence, monitoring well (MW) 30 occasionally has contained small amounts of hydrogen sulfide gas. In addition, during installation, well (W) 2 contained methane gas exceeding the lower explosive limit (LEL). AMEC will conduct air monitoring using a photoionization detector (PID) during drilling and sampling.

- 1) **Personal Injury from chemical contact / exposure / inhalation.**
 - a. Inspect soil cuttings before handling with PID.
 - b. AMEC personnel will place themselves upwind during drilling.

c) Biological Hazards

The project site is a flat graded parking lot which eliminates biological hazards.

TRAINING

All AMEC personnel will review the site specific Health and Safety plan before accessing the site. Personnel onsite will also have current 40-Hour Hazardous Waste Operations and Emergency Response (HAZWOPER) Certification.

Certificates of HAZWOPER completion will be maintained at the Bothell office and will be available to regulatory personnel upon request. All Personnel shall carry current 40-hour HAZWOPER training cards or appropriate paperwork while working onsite. The SSC / HSC shall be first aid and CPR trained.

In addition all site personnel must have completed the **8 hour ExxonMobil LPS Training** prior to undertaking any field work.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

AMEC will wear Level D PPE which consists of steel-toed, chemical resistant rubber boots, inner glove of PVC or latex, outer gloves of Nitrile or equivalent, safety glasses, Tyvek coveralls, and a hard hat. During construction activities, minimal PPE hearing protection will consist of soft foam ear-bud style plugs.

MEDICAL SURVEILLANCE

Evidence of a current physical examination in the form of a letter from an examining physician will be maintained at the Bothell office and will be available to regulatory personnel upon request.

Air Monitoring

Air monitoring will be conducted during drilling and soil sampling activities. AMEC will conduct initial air monitoring using a photoionization detector (PID). PID utilizes ultraviolet light to ionize gas molecules and is commonly employed in the detection of volatile organic compounds (VOCs). AMEC will ensure that the concentrations of VOCs are less than 5 parts per million (ppm) in breathing zone prior to proceeding with sampling. Each well will be continuously monitored during sampling. The PID will alarm if VOC concentrations exceed the levels required for breathing.

AMEC will calibrate the PID both pre and post site visits using Isobutylene calibration gas with compatible regulator.

Decontamination

Disposable PPE will be stored in a secured 55-gallon drum onsite. A certified waste transporter and disposal company will be contacted to transport the drum for disposal in accordance with local, State, and Federal regulations at an offsite facility.

Site Control

AMEC personnel will be provided with a site map and be required to review the Health and Safety plan prior to entry into the site. A copy of this HASP shall be on hand at all times with emergency contact numbers and directions to the nearest medical facilities easily accessible. When necessary, cones, caution tape or a suitable alternative will be used to deny public access to the work area. Cones will also be used to define an exclusion zone redirecting motorists and pedestrians away from the work area.

In all emergencies AMEC is to document the action taken and notify the HSC, Project Manager and client official of the event and subsequent response.

In the Event of an Injury

If an injury is life-threatening, follow steps 1 through 8 below. If the injury is not life threatening, perform necessary first aid and consider the need for decontamination prior to transport. The SSC shall be first aid and CPR trained.

- 1) Perform first aid necessary to determine victim(s) medical status
- 2) Call emergency transport.
- 3) Give specific directions to location of emergency
- 4) Give phone from which you are calling;
- 5) Tell emergency services what happened. Inform that victim(s) may be wearing contaminated clothing.
- 6) Inform emergency services how many persons need help.
- 7) Inform emergency services what is being done for the victim(s)
- 8) Stay on telephone until told to hang up.

Transport to hospital, if possible.

Work Permits

Copies of the permits will be available onsite during drilling activities. Cascade Drilling will obtain start cards required for drilling from the Washington State Department of Ecology.

Security

No unauthorized persons will be allowed in the work zone. Unauthorized persons are those without appropriate training, without proof of medical surveillance, and those with no business on the site.

Confined Space Entry Procedures

AMEC will not be entering confined spaces at the Site.

Spill Containment Program

The site specific accidental spill / release action plan consists of the following:

- 1) Pick up, isolate, or contain spill;
- 2) Evacuate area, if necessary;
- 3) Contact emergency agencies, if necessary.

Incident Reporting Requirements

In all emergencies, document action taken and notify the HSC / SSC, Project Manager and client officials of occurrences.


AMEC will report all incidents and Near Loss Incidents (NLI) to the ExxonMobil contact within 24 hours of the occurrence along with a written report and the launching of an accident investigation.

EMERGENCY MEDICAL ROUTE DIRECTIONS

2717 Federal Avenue, Everett, WA 98201

1. Head south on Federal Avenue towards Terminal Avenue.
2. Turn left at Terminal Avenue.
3. Continue on Everett Avenue/WA-529.
4. Turn left on Grand Avenue.
5. Turn right at 14th Street.
6. Turn left at Colby Avenue.

1321 Colby Avenue, Everett, WA 98201

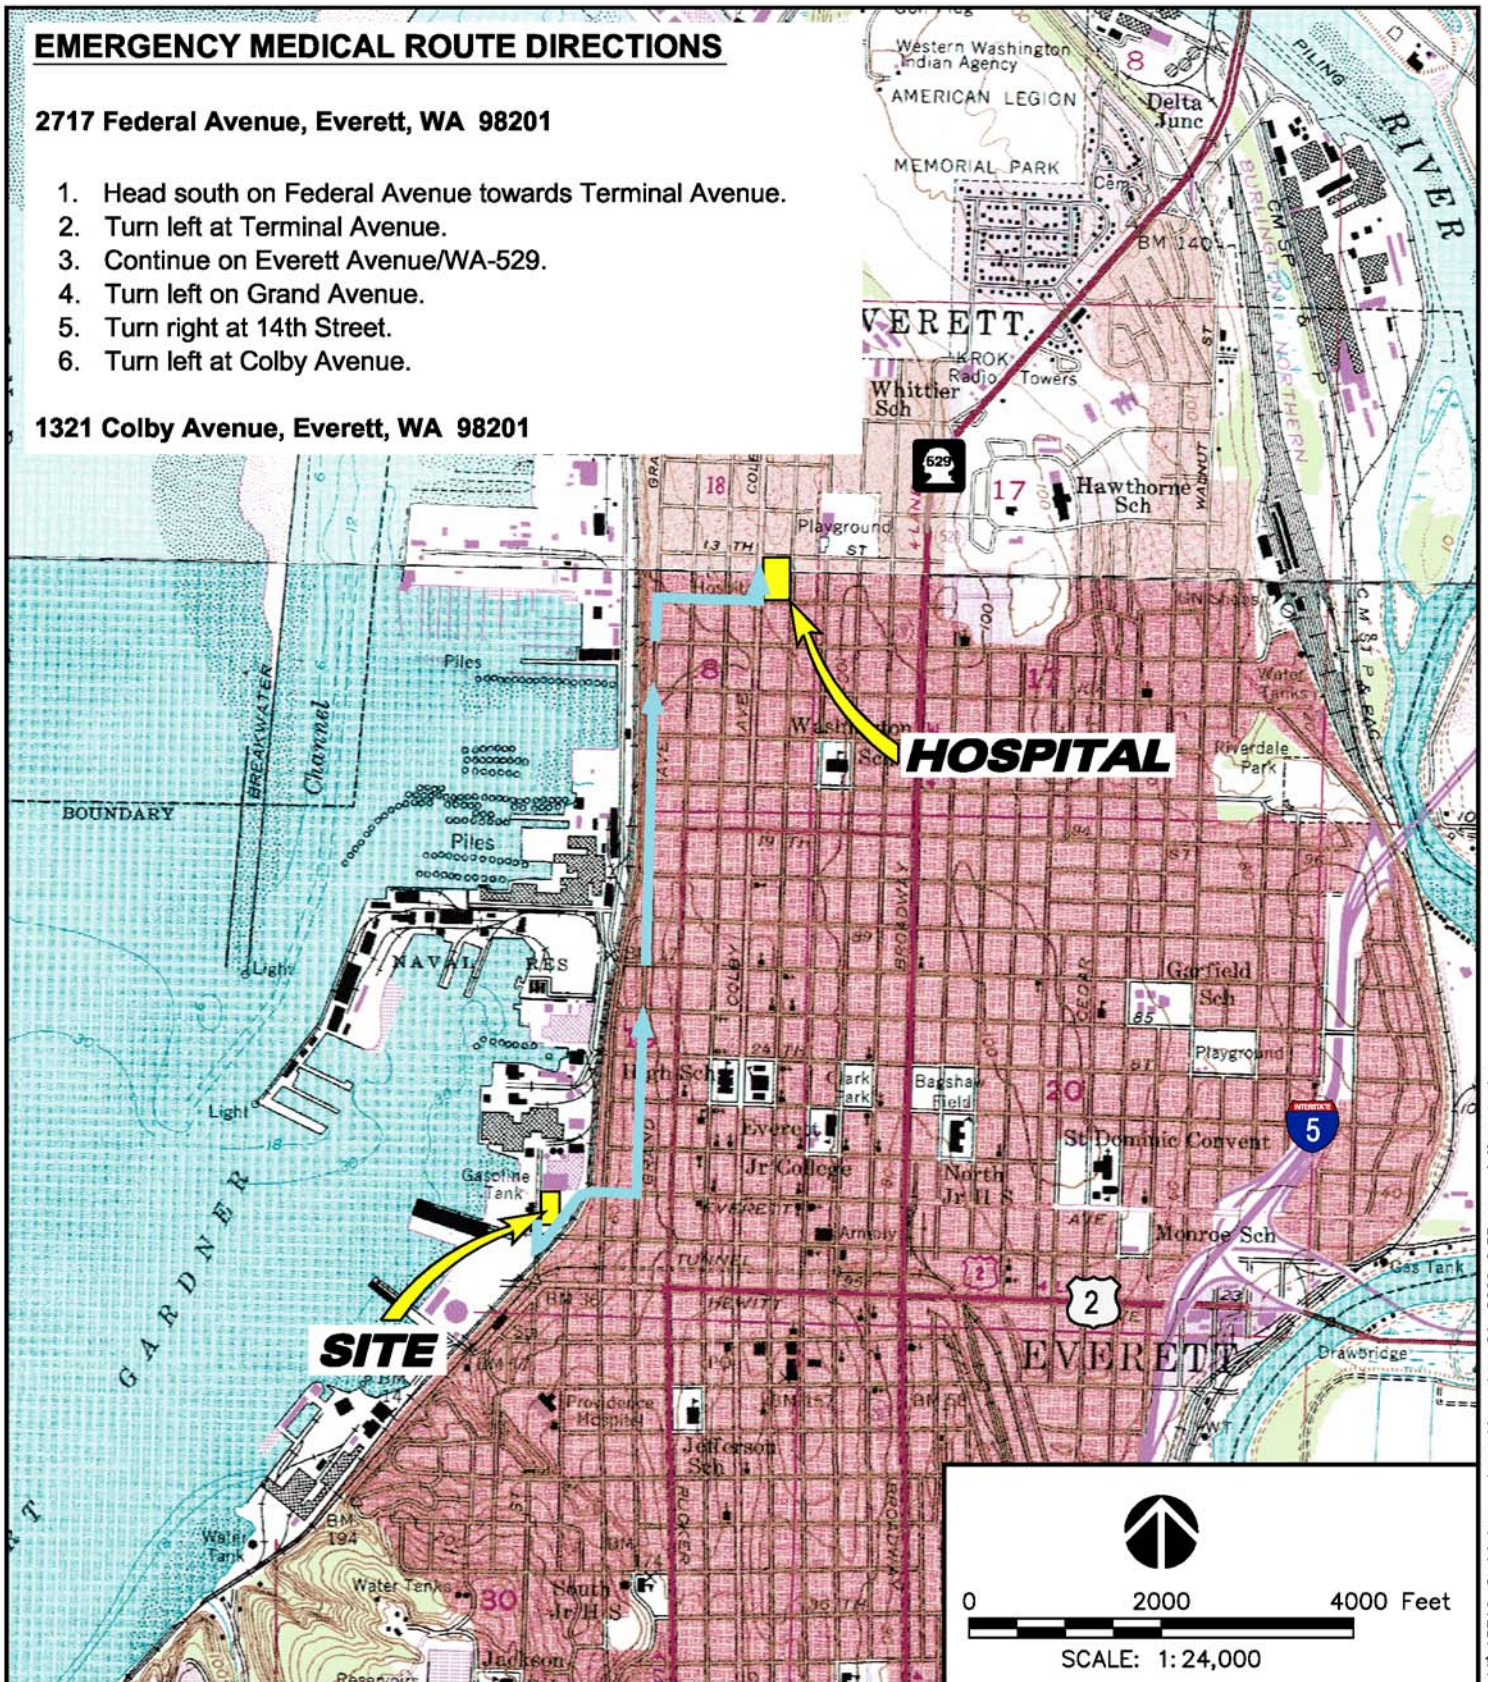

AMEC Earth & Environmental

11335 N.E. 122nd Way, Suite 100
Kirkland, WA, U.S.A. 98034-6918



CLIENT LOGO

CLIENT

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**

PROJECT: EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728

DWN BY:

JRS

DATUM:

NAD83

DATE: JUNE 2009

TITLE

EMERGENCY MEDICAL ROUTE

CHK'D BY:

AS

REV. NO.:

PROJECT NO:
9-915-15716-C

PROJECTION:
WA STATE PLANE

SCALE:
AS SHOWN

FIGURE No.

ATTACHMENT A3

Street Use Permit Documentation



**APPLICATION for
PUBLIC WORKS PERMIT**
PUBLIC WORKS DEPARTMENT
3200 Cedar Street
Everett, WA 98201 425 - 257-8810

Date 02/03/2010

Owner Name: City of Everett

Applicant Name: AMEC E&E / A. Spencovsky

Mailing Address: 3200 Cedar St.,
Everett, WA 98201

Mailing Address: 600 University St.
Suite 1020, Seattle, WA
98101

Phone Number: 425-257-8810


Phone Number: (206) 342-1760

Description of Work: Advance 5 soil borings (3 along Everett Ave ROW,
2- along Federal Av. ROW) for the City of Everett
utility upgrade work. See ATTACHED map
(A drawing or plans may be needed to illustrate work to be done) for boring
location

Site Address: 2717/2731 Federal Av, Everett, WA

Comments from Inspector during initial inspection:

Approved for issuance by: _____ Date: _____

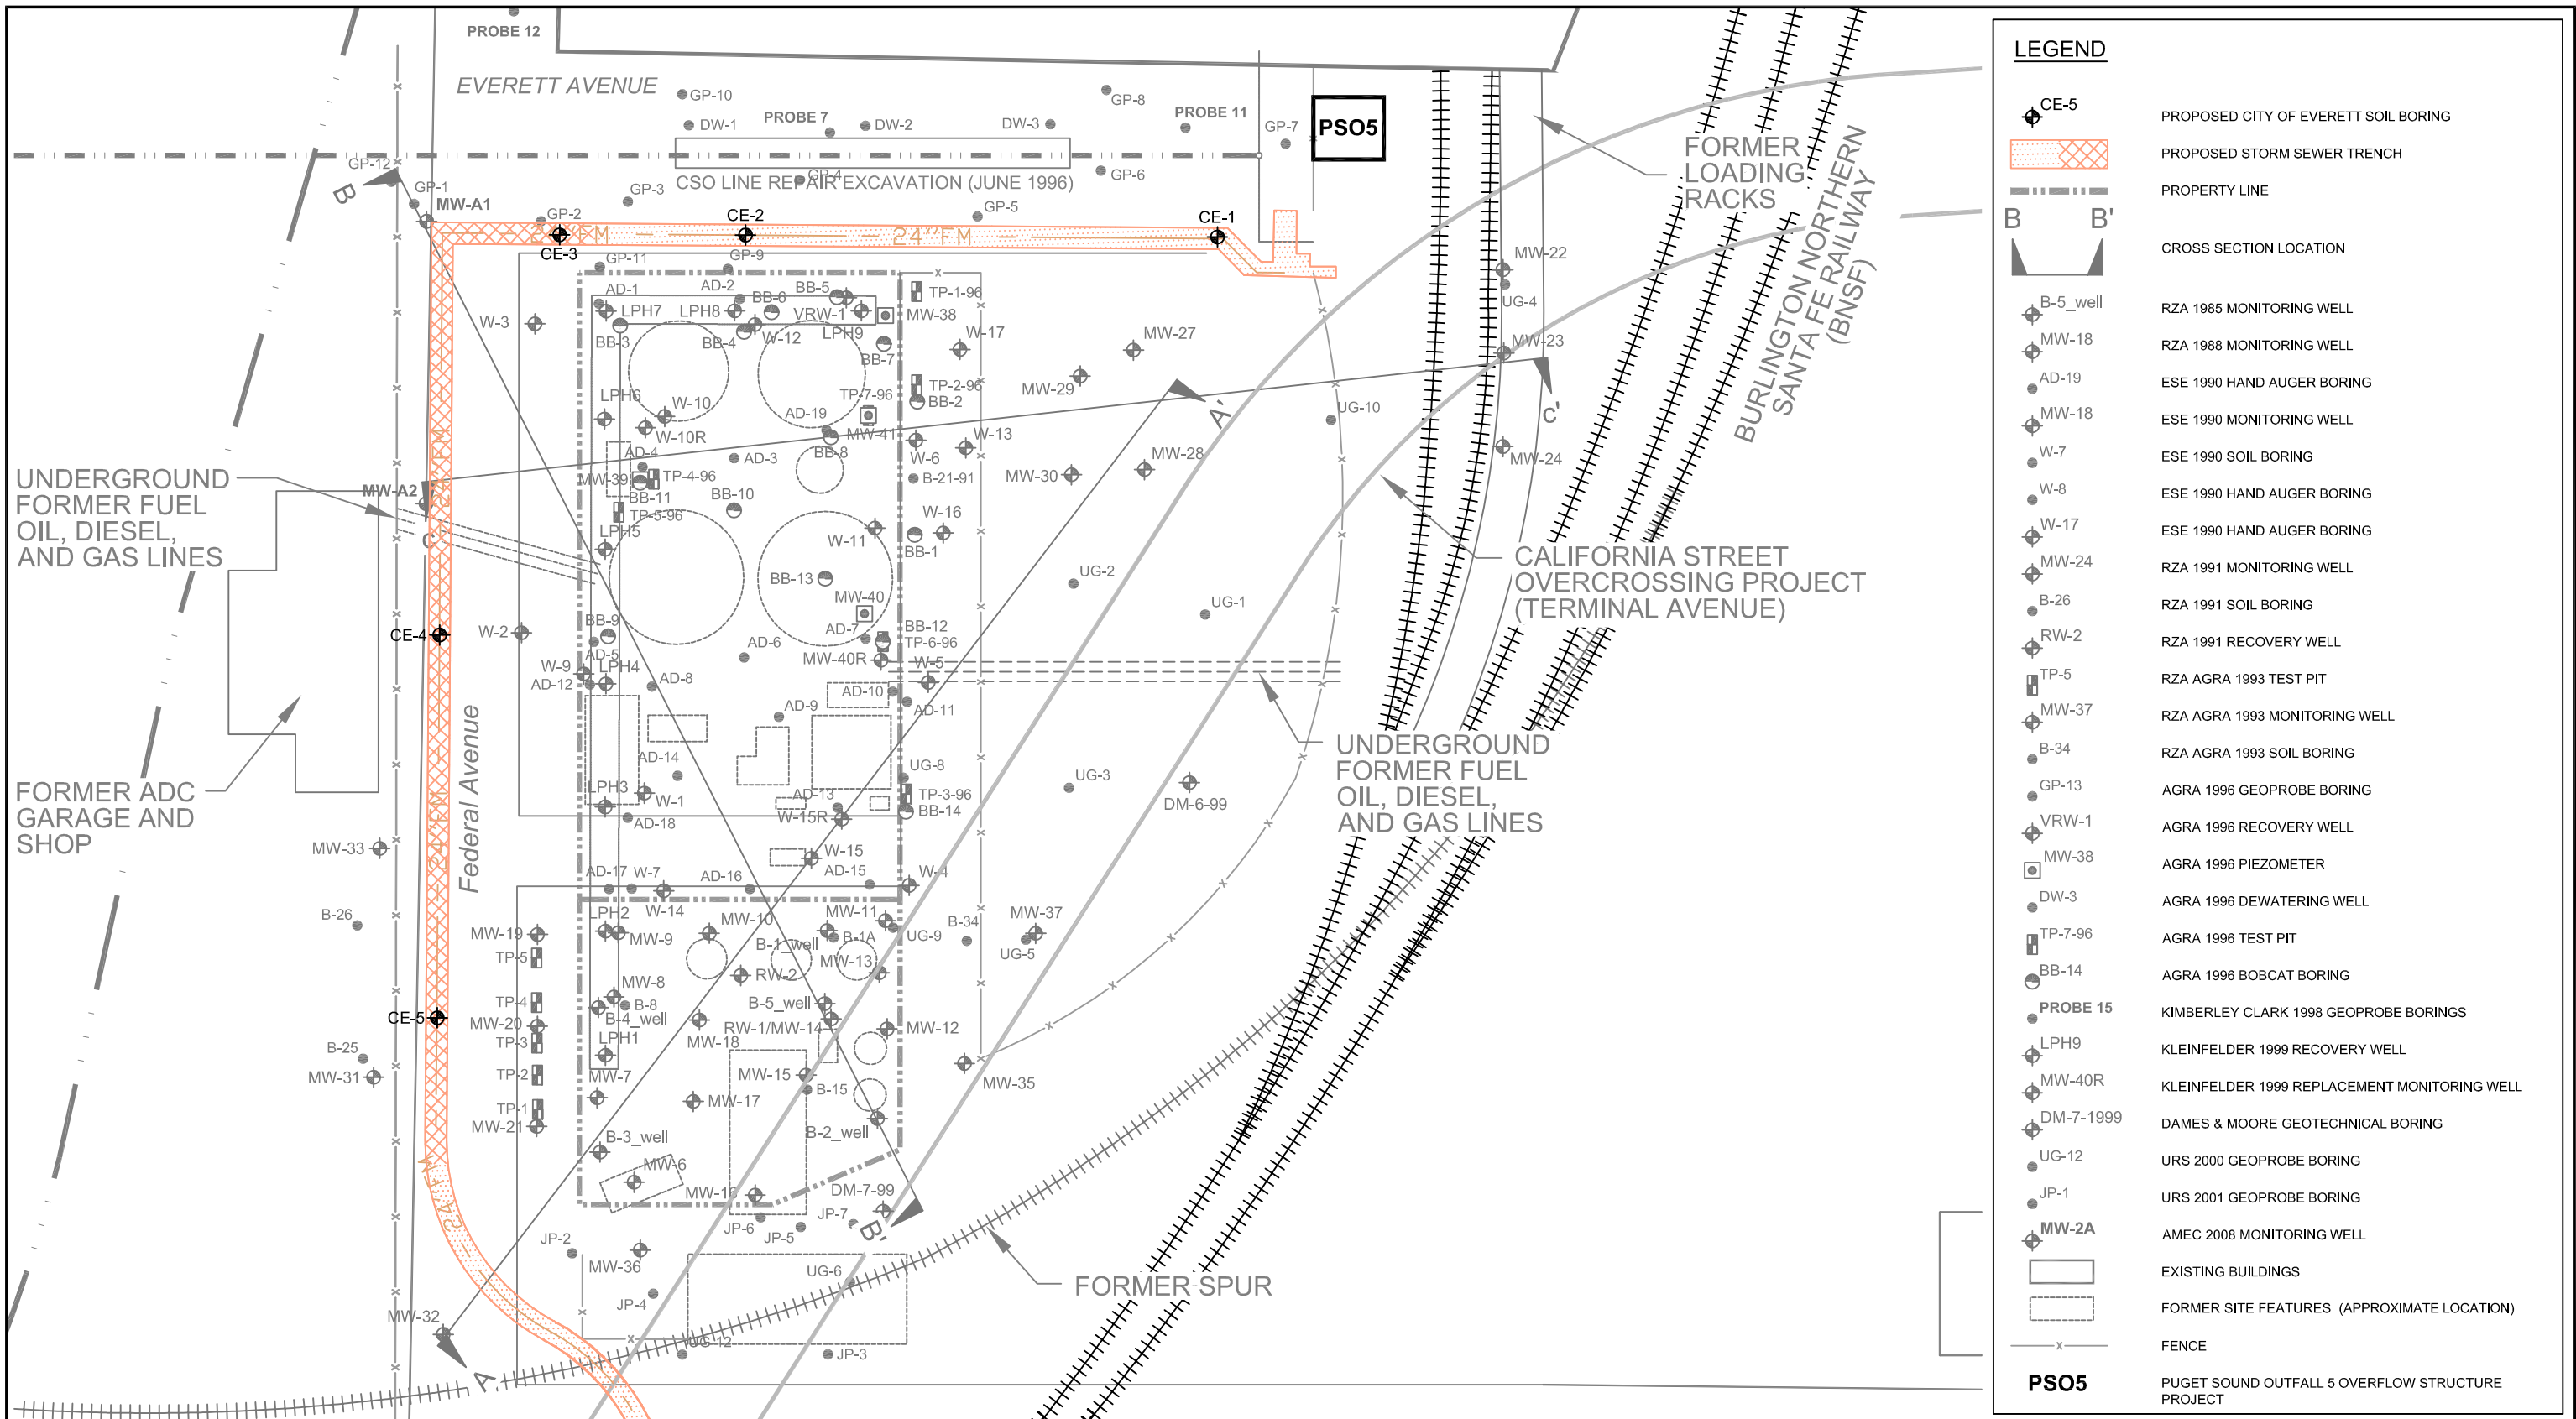

| LEGEND | |
|--------|--|
| | PROPOSED CITY OF EVERETT SOIL BORING |
| | PROPOSED STORM SEWER TRENCH |
| | PROPERTY LINE |
| | CROSS SECTION LOCATION |
| | RZA 1985 MONITORING WELL |
| | RZA 1988 MONITORING WELL |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 MONITORING WELL |
| | ESE 1990 SOIL BORING |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 HAND AUGER BORING |
| | RZA 1991 MONITORING WELL |
| | RZA 1991 SOIL BORING |
| | RZA 1991 RECOVERY WELL |
| | RZA AGRA 1993 TEST PIT |
| | RZA AGRA 1993 MONITORING WELL |
| | RZA AGRA 1993 SOIL BORING |
| | AGRA 1996 GEOPROBE BORING |
| | AGRA 1996 RECOVERY WELL |
| | AGRA 1996 PIEZOMETER |
| | AGRA 1996 DEWATERING WELL |
| | AGRA 1996 TEST PIT |
| | AGRA 1996 BOBCAT BORING |
| | KIMBERLEY CLARK 1998 GEOPROBE BORINGS |
| | KLEINFELDER 1999 RECOVERY WELL |
| | KLEINFELDER 1999 REPLACEMENT MONITORING WELL |
| | DAMES & MOORE GEOTECHNICAL BORING |
| | URS 2000 GEOPROBE BORING |
| | URS 2001 GEOPROBE BORING |
| | AMEC 2008 MONITORING WELL |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |
| | PUGET SOUND OUTFALL 5 OVERFLOW STRUCTURE PROJECT |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201





DWN BY: JRS / BRJ
 CHK'D BY: AS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'

PROJECT
EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728

TITLE
PROPOSED STORM SEWER UPGRADE
SOIL BORINGS

DATE: FEBRUARY 2010
 PROJECT NO: 0-915-15716-D
 REV. NO.: 1
 FIGURE No. 2



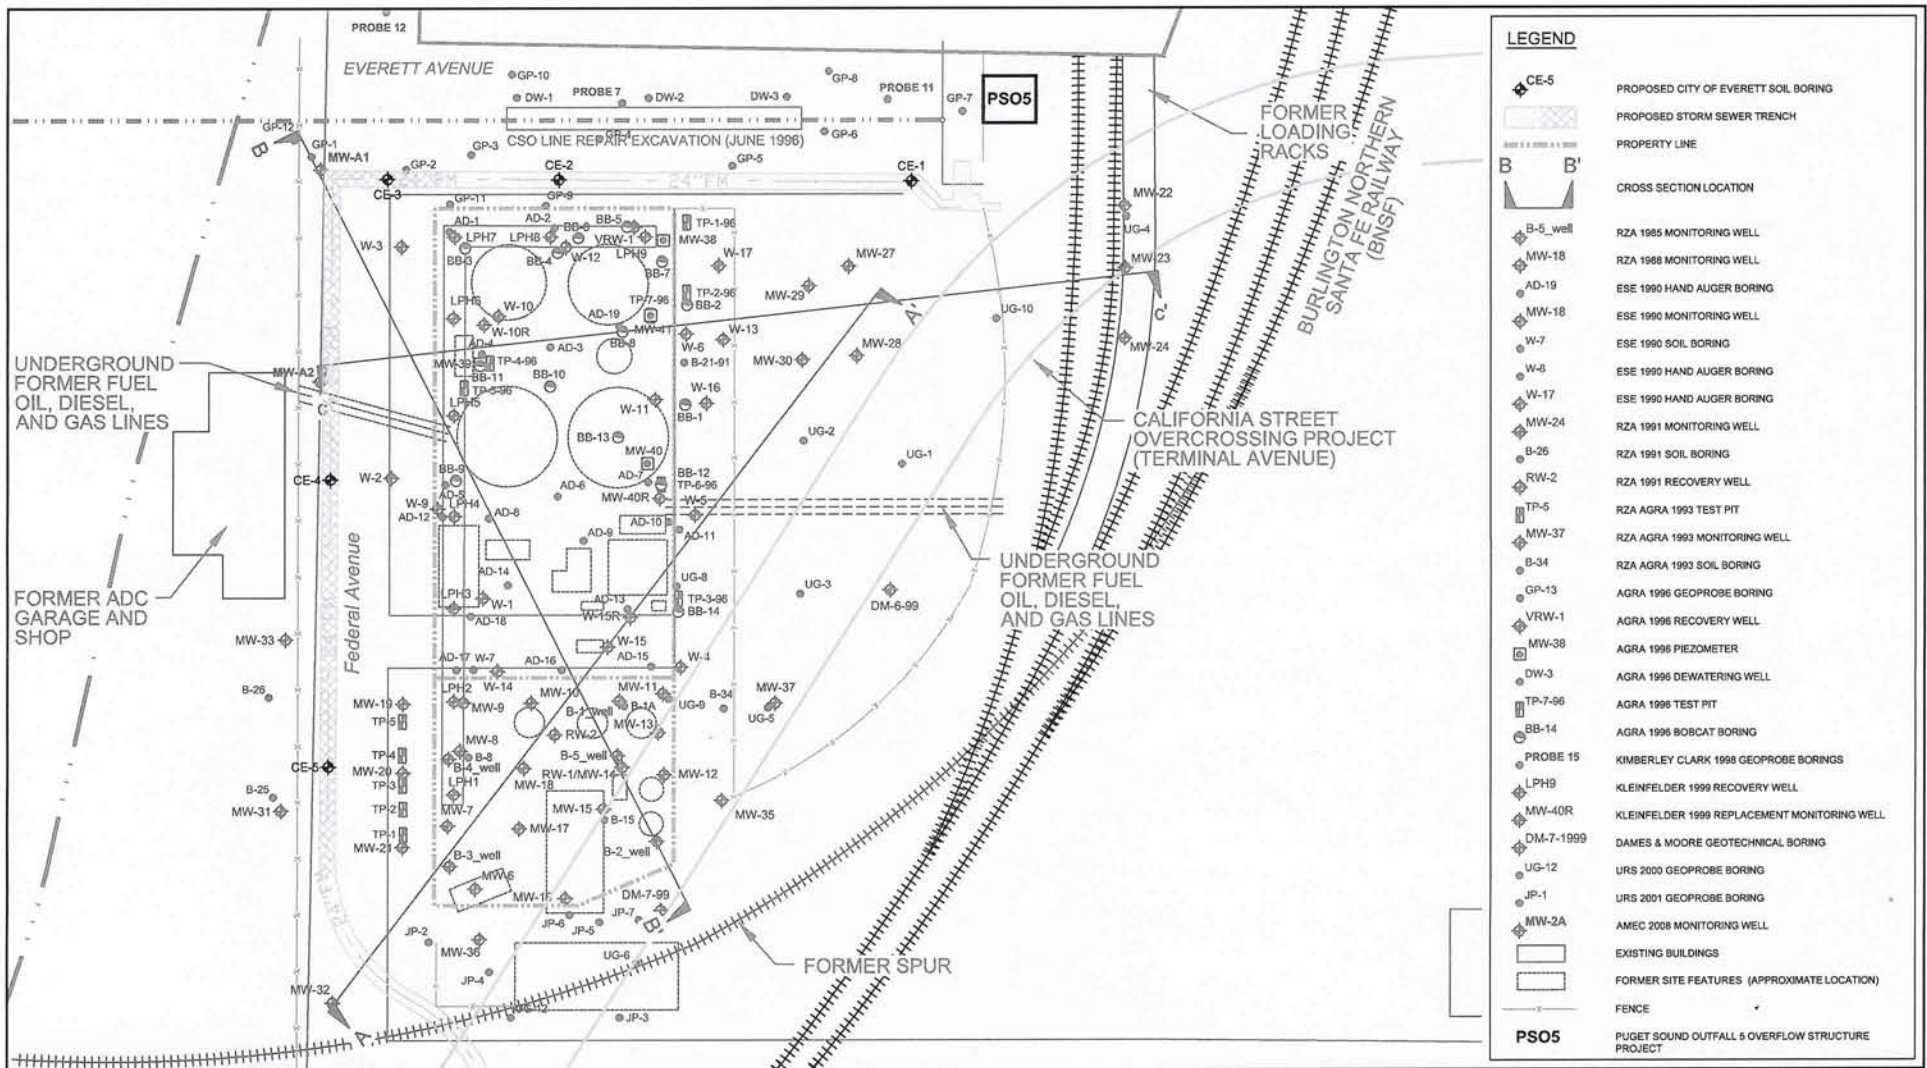

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

0 60 120
SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

| | |
|-------------|-----------|
| DWN BY: | JRS / BRJ |
| CHKD BY: | AS/MS |
| DATUM: | NONE |
| PROJECTION: | NONE |
| SCALE: | 1" = 60' |

| | |
|---------|---|
| PROJECT | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 |
| TITLE | PROPOSED STORM SEWER UPGRADE SOIL BORINGS |

| | |
|--------------|---------------|
| DATE: | FEBRUARY 2010 |
| PROJECT NO.: | 0-915-15716-D |
| REV. NO.: | 1 |
| FIGURE No.: | 2 |


GENERAL NOTES

1. HUMAN FLAGGER IS REQUIRED TO OPERATE EACH AFAD IN USE. THE HUMAN FLAGGER SHALL BE SAFELY LOCATED OUT OF THE LANE OF TRAFFIC TO COMPLETELY OPERATE THE DEVICE WHILE MAINTAINING VISUAL CONTACT WITH THE TRAFFIC.
2. NIGHTWORK REQUIRES ADDITIONAL ROADWAY LIGHTING AT FLAGGING STATIONS. REFER TO WSDOT STD. SPECIFICATIONS FOR ADDITIONAL DETAILS.
3. RECOMMEND EXTENDING CHANNELIZING DEVICE TAPER ACROSS SHOULDER.
4. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
5. SIGN SEQUENCE IS THE SAME FOR BOTH DIRECTIONS OF TRAVEL ON THE ROADWAY.
6. WHEN USED, THE DOWNSTREAM TAPER DEVICE SPACING SHOULD BE 20' O.C.
7. DEVICES ALONG CENTERLINE ARE RECOMMENDED.
8. FOR ADDITIONAL AFAD INFORMATION REFER TO CONTRACT SPECIFICATIONS.
9. AFAD LOCATION SHOWN IS TYPICAL FOR WIDE SHOULDER AREA. ACTUAL LOCATION MAY NEED TO BE IN LANE. PLACEMENT OF AFAD SHALL BE SUCH THAT THE GATE ARM DOES NOT ENCRUSH INTO ADJACENT LANE.

| LONGITUDINAL BUFFER SPACE = B | |
|-------------------------------|--|
| SPEED MPH | 25 30 35 40 45 50 55 60 65 70 |
| LENGTH (feet) | 85 200 250 300 350 425 495 570 645 720 |

| PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE | |
|---|-----------------------------------|
| TYPICAL PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE | STANDARD STOPPING DISTANCE (feet) |
| MINIMUM WEIGHT 6,000 LBS. | 30 MIN. |
| MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH FLAT ROLL ETC. | 100 MAX. |

| ROLL AHEAD STOPPING DISTANCE ASSUMES DIRT PAVEMENT | |
|--|--|
| A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF THE PROTECTIVE VEHICLE IS A WORK VEHICLE OR A PERSONNEL VEHICLE. THE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED. REFER TO CHAPTER 5.5 FOR ADDITIONAL INFORMATION. | |

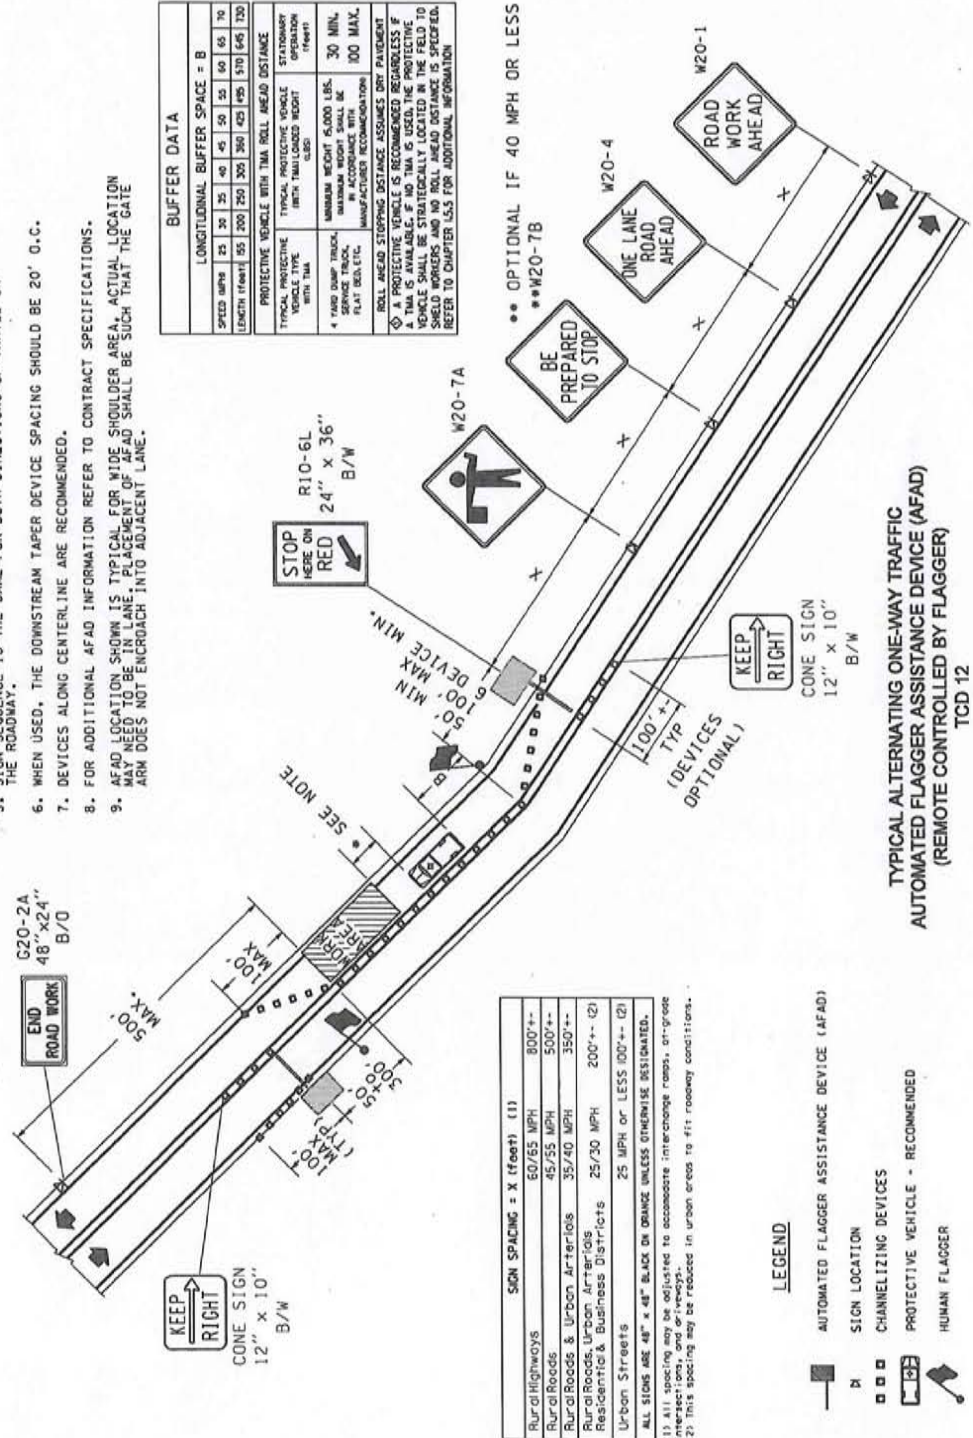

| ROADWAY TYPE | SIGN SPACING = X (feet) (1) |
|--|-----------------------------|
| Rural Highways | 60/65 MPH 800'+ |
| Rural Roads | 45/55 MPH 500'+ |
| Rural Roads & Urban Arterials | 35/40 MPH 350'+ |
| Rural Roads, Urban Arterials, Residential & Business Districts | 25/30 MPH 200'+ (2) |
| Urban Streets | 25 MPH or LESS 100'+ (2) |

ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade

(2) This spacing may be reduced in urban areas to fit roadway conditions.

LEGEND

- AUTOMATED FLAGGER ASSISTANCE DEVICE (AFAD)
- SIGN LOCATION
- CHANNELIZING DEVICES
- PROTECTIVE VEHICLE - RECOMMENDED
- HUMAN FLAGGER

TYPICAL ALTERNATING ONE-WAY TRAFFIC
 AUTOMATED FLAGGER ASSISTANCE DEVICE (AFAD)
 (REMOTE CONTROLLED BY FLAGGER)
 TCD 12


| LONGITUDINAL BUFFER SPACE = B | |
|-------------------------------|--|
| SPEED MPH | 25 30 35 40 45 50 55 60 65 70 |
| LENGTH (feet) | 55 200 250 305 360 425 495 570 645 730 |

| PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE | TYPICAL PROTECTIVE VEHICLE OPERATION (feet) |
|---|---|
| 4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC. | MINIMUM WEIGHT 15,000 LBS. MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION |
| ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT | 30 MIN. 100 MAX. |

| CHANNELIZING DEVICE SPACING (FEET) | |
|------------------------------------|---------------|
| MPH | TAPER TANGENT |
| 50 / 65 | 40 80 |
| 35 / 45 | 30 60 |
| 25 / 30 | 20 40 |

| SIGN SPACING = X (FEET) (1) | |
|-------------------------------|--|
| RURAL HIGHWAYS | 80 / 65 MPH 800'± 45 / 65 MPH 500'± |
| RURAL ROADS & URBAN ARTERIALS | 35 / 40 MPH 350'± 25 / 30 MPH 200'± (2) |
| URBAN STREETS | 25 MPH OR LESS 100'± (2) |

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

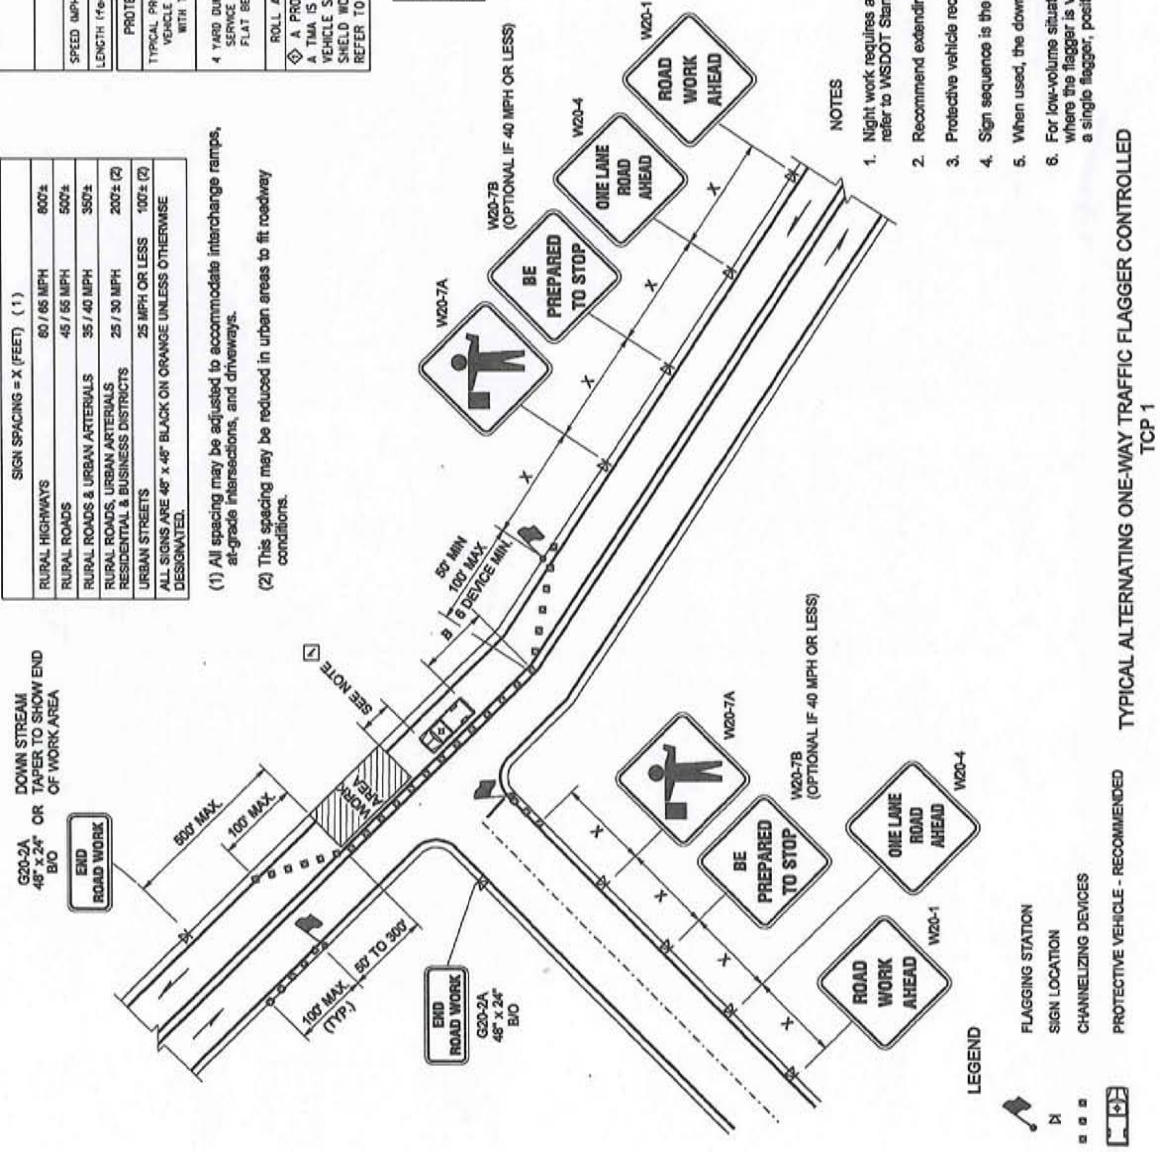

- NOTES**
- Night work requires additional roadway lighting at flagging stations, refer to WSDOT Standard Specifications for additional details.
 - Recommend extending channelizing device taper across shoulder.
 - Protective vehicle recommended - may be a work vehicle.
 - Sign sequence is the same for both directions of travel on the roadway.
 - When used, the downstream taper device spacing should be 20' O.C.
 - For low-volume situations with short work zones on straight roadways where the flagger is visible to road users approaching from both directions, a single flagger, positioned to be visible from both directions may be used.

TYPICAL ALTERNATING ONE-WAY TRAFFIC FLAGGER CONTROLLED TCP 1

ATTACHMENT A4

Field Documentation Forms

**AMEC Earth & Environmental, Inc.**11810 North Creek Parkway N
Bothell, Washington 98011Tel (425) 368-1000
Fax (425) 368-1001**DAILY FIELD REPORT**

| | | | |
|---|---------------------------------------|------------------------------------|------------------|
| PROJECT NAME Mobil/ADC Everett Facility | | PROJECT NO. 9915-15716-0 | FIELD REPORT NO. |
| ADDRESS 2717/2731 Federal Avenue | | DATE | PAGE OF |
| CITY OR COUNTY Everett, WA | PERMIT NO. | ARRIVAL TIME | DEPARTURE TIME |
| CLIENT ExxonMobil | AMEC PROJECT MANAGER/PHONE NO. | | |
| GENERAL CONTRACTOR | AMEC FIELD REPRESENTATIVE/ MOBILE NO. | | |
| SUBCONTRACTOR | WEATHER | | |
| TYPE OF WORK PERFORMED | | | |
| EQUIPMENT USED | | | |

COMMENTS

| |
|--|
| |
|--|

Seattle

11720 North Creek Parkway N
 Suite 400
 Bothell, WA 98011
 phone 425.420.9200 fax 425.420.9210

Chain of Custody Record



TestAmerica Laboratories, Inc.

| | | | | |
|-------------------------------------|---------------------------------------|-----------------------------------|-----------------|---------------------|
| Client Contact | Project Manager: Leah Vigoren | Site Contact: Leah Vigoren | Date: | COC No: |
| AMEC Earth & Environmental, Inc. | Tel/Fax: (206) 838-8470 | Lab Contact: | Carrier: | _____ of _____ COCs |
| 600 University Street Suite 1020 | Analysis Turnaround Time | | Filtered Sample | Job No. |
| Seattle, WA 98101 | Calendar (C) or Work Days (W) _____ | | | |
| (206) 342-1760 Phone | TAT if different from Below _____ | | | |
| (206) 342-1761 FAX | <input type="checkbox"/> 2 weeks | <input type="checkbox"/> 1 week | | |
| Project Name: ExxonMobil/ADC | <input type="checkbox"/> 2 days | <input type="checkbox"/> 1 day | SDG No. | |
| Site: Everett | | | | |
| P O # 9915-15716C | | | | |

| Sample Identification | Sample Date | Sample Time | Sample Type | Matrix | # of Cont. | | Sample Specific Notes: |
|-----------------------|-------------|-------------|-------------|--------|------------|--|------------------------|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

| | | | | | |
|--|--|--|--|--|--|
| Preservation Used: 1= Ice, 2= HCl; 3= H2SO4; 4=HNO3; 5=NaOH; 6= Other _____ | | | | | |
| Possible Hazard Identification <input type="checkbox"/> Non-Hazard <input type="checkbox"/> Flammable <input type="checkbox"/> Skin Irritant <i>Poison B</i> <input type="checkbox"/> Unknown <input type="checkbox"/> | | | | Sample Disposal (A fee may be assessed if samples are retained longer than 1 month) <input type="checkbox"/> Return To Client <input type="checkbox"/> Disposal By Lab <input type="checkbox"/> Archive For _____ Months | |

Special Instructions/QC Requirements & Comments: Send electronic data to leah.vigoren@amec.com

| | | | | | |
|------------------|----------|------------|--------------|----------|------------|
| Relinquished by: | Company: | Date/Time: | Received by: | Company: | Date/Time: |
| | | | | | |
| Relinquished by: | Company: | Date/Time: | Received by: | Company: | Date/Time: |
| | | | | | |
| Relinquished by: | Company: | Date/Time: | Received by: | Company: | Date/Time: |
| | | | | | |

APPENDIX F

Simplified Terrestrial Ecological Evaluation

Table 749-1

Simplified Terrestrial Ecological Evaluation-Exposure Analysis Procedure

| Estimate the area of contiguous (connected) <u>undeveloped land</u> on the site or within 500 feet of any area of the site to the nearest 1/2 acre (1/4 acre if the area is less than 0.5 acre). | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--------------|--------|--------------|---|-----|---|-----|---|-----|---|-----|---|-----|---|-----|----|-----|----|-------------|----|---|
| 1) From the table below, find the number of points corresponding to the area and enter this number in the field to the right. | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Area (acres)</th> <th>Points</th> </tr> </thead> <tbody> <tr><td>0.25 or less</td><td>4</td></tr> <tr><td>0.5</td><td>5</td></tr> <tr><td>1.0</td><td>6</td></tr> <tr><td>1.5</td><td>7</td></tr> <tr><td>2.0</td><td>8</td></tr> <tr><td>2.5</td><td>9</td></tr> <tr><td>3.0</td><td>10</td></tr> <tr><td>3.5</td><td>11</td></tr> <tr><td>4.0 or more</td><td>12</td></tr> </tbody> </table> | Area (acres) | Points | 0.25 or less | 4 | 0.5 | 5 | 1.0 | 6 | 1.5 | 7 | 2.0 | 8 | 2.5 | 9 | 3.0 | 10 | 3.5 | 11 | 4.0 or more | 12 | 8 |
| Area (acres) | Points | | | | | | | | | | | | | | | | | | | | | |
| 0.25 or less | 4 | | | | | | | | | | | | | | | | | | | | | |
| 0.5 | 5 | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 6 | | | | | | | | | | | | | | | | | | | | | |
| 1.5 | 7 | | | | | | | | | | | | | | | | | | | | | |
| 2.0 | 8 | | | | | | | | | | | | | | | | | | | | | |
| 2.5 | 9 | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | 10 | | | | | | | | | | | | | | | | | | | | | |
| 3.5 | 11 | | | | | | | | | | | | | | | | | | | | | |
| 4.0 or more | 12 | | | | | | | | | | | | | | | | | | | | | |
| 2) Is this an <u>industrial</u> or <u>commercial</u> property? If yes, enter a score of 3. If no, enter a score of 1 | | 3 | | | | | | | | | | | | | | | | | | | | |
| 3) ^a Enter a score in the box to the right for the habitat quality of the site, using the following rating system ^b . High=1, Intermediate=2, Low=3 | | 3 | | | | | | | | | | | | | | | | | | | | |
| 4) Is the undeveloped land likely to attract wildlife? If yes, enter a score of 1 in the box to the right. If no, enter a score of 2. ^c | | 2 | | | | | | | | | | | | | | | | | | | | |
| 5) Are there any of the following soil contaminants present: Chlorinated dioxins/furans, PCB mixtures, DDT, DDE, DDD, aldrin, chlordane, dieldrin, endosulfan, endrin, heptachlor, benzene hexachloride, toxaphene, hexachlorobenzene, pentachlorophenol, pentachlorobenzene? If yes, enter a score of 1 in the box to the right. If no, enter a score of 4. | | 4 | | | | | | | | | | | | | | | | | | | | |
| 6) Add the numbers in the boxes on lines 2-5 and enter this number in the box to the right. If this number is larger than the number in the box on line 1, the simplified evaluation may be ended. | | 12 | | | | | | | | | | | | | | | | | | | | |

Notes for Table 749-1

^a It is expected that this habitat evaluation will be undertaken by an experienced field biologist. If this is not the case, enter a conservative score of (1) for questions 3 and 4.

^b **Habitat rating system.** Rate the quality of the habitat as high, intermediate or low based on your professional judgment as a field biologist. The following are suggested factors to consider in making this evaluation:

Low: Early successional vegetative stands; vegetation predominantly noxious, nonnative, exotic plant species or weeds. Areas severely disturbed by human activity, including intensively cultivated croplands. Areas isolated from other habitat used by wildlife.

High: Area is ecologically significant for one or more of the following reasons: Late-[successional](#) native plant communities present; relatively high species diversity; used by an uncommon or rare species; [priority habitat](#) (as defined by the Washington Department of fish and Wildlife); part of a larger area of habitat where size or fragmentation may be important for the retention of some species.

Intermediate: Area does not rate as either high or low.

^c Indicate "yes" if the area attracts wildlife or is likely to do so. Examples: Birds frequently visit the area to feed; evidence of high use b mammals (tracks, scat, etc.); habitat "island" in an industrial area; unusual features of an area that make it important for feeding animals; heavy use during seasonal migrations.

[\[Area Calculation Aid\]](#) [\[Aerial Photo with Area Designations\]](#) [\[TEE Table 749-1\]](#) [\[Index of Tables\]](#)

[\[Exclusions Main\]](#) [\[TEE Definitions\]](#) [\[Simplified or Site-Specific?\]](#) [\[Simplified Ecological Evaluation\]](#) [\[Site-Specific Ecological Evaluation\]](#) [\[WAC 173-340-7493\]](#)

[\[TEE Home\]](#)

APPENDIX G

Schedule



Appendix G

ExxonMobil / ADC Property, Ecology Site ID 2728 Work Schedule 2717/2731 Federal Avenue, Everett, Washington

The potential liable parties (PLPs) shall perform the actions identified in this work plan and required under the Agreed Order according to the schedule presented below. Days are calendar days; if due dates fall on a weekend or holiday, deliverables will be submitted to Ecology on the next business day. Note, when Ecology provides comments in red-line strikeout format (i.e., comments made directly within the electronic version of the document), the PLPs may respond to those comments directly within the electronic document.

1.0 REMEDIAL INVESTIGATION FIELD WORK

FFS Field Work – Activities associated with the FFS shall be initiated within 15 days of Ecology's execution of the final Agreed Order. Analytical sampling data collected as part of the FFS shall be provided to Ecology within 45 days after receipt of the validated data. The initial analytical data gathered as part of the FFS shall be compiled for Ecology in the form of a technical memo. The technical memo should discuss the field activities and associated analytical results in addition to preliminary cleanup levels, the extent of contamination (plotted on maps), and any data gaps that need to be filled to define the nature and extent of contamination. Note that the preliminary cleanup levels may be different than the screening levels identified in this work plan based on a better understanding of the conceptual site model for the Site (e.g., it may be shown that contaminants in site soil and/or groundwater may not be impacting surface water).

The data and results associated with the tidal study shall be presented in the form of a technical memo to Ecology within 30 days after completion the tidal study field work. The data and results of the tidal study may be included in the technical memo described in the paragraph above, or as a separate document.

Information provided in the technical memo(s) described above will be used to make a determination with regard to whether additional investigation is required to define the full nature and extent of contamination (see next bullet).

Additional field FFS activities (if needed) – Additional field FFS activities may be required to adequately delineate the nature and extent of contamination at the Site, and/or to conduct pilot testing of a remedial alternative. The scope, schedule, and submittal requirements for additional field FFS activities shall be developed by the PLPs, and shall be submitted to Ecology for review and concurrence.

Environmental Data Submittals – All sampling data (including all historic data) shall be submitted to Ecology in both printed and electronic formats in accordance with Ecology's Toxics Cleanup Program Policy 840 (Data Submittal Requirements) and/or any subsequent procedures specified by Ecology for data submittal. Policy 840 is presented in Exhibit C of this Agreed Order. Historic data, in addition to new data collected as part of the initial or first phase of the FFS, shall be supplied to Ecology in electronic format (i.e., EIM and the PLPs original database format) 45 days after the new data has been validated. Data collected as part of any additional FFS field sampling activities shall also be supplied to Ecology in electronic format (i.e., EIM) 45 days after the data has been validated.

2.0 FFS REPORT SUBMITTAL

First Draft FFS Report – The first draft FFS report shall be due to Ecology 120 calendar days after receipt by the PLPs Project Manager of all final analytical data collected during the FFS. The first draft will then undergo a 30-day review period by Ecology.

Second Draft FFS Report – The second draft FFS report shall address any comments/suggestions submitted by Ecology. The second draft FFS report shall be due 60 days after Ecology provides its comments. The draft final version will undergo a 20-day review period by Ecology.

Draft Final FFS Report – The draft final FFS report shall be due 30 days after receipt of Ecology comments on the second draft FFS report.

Final FFS Report – The final FFS report shall be submitted to Ecology 45 days after Ecology's final review and comments. The final FFS will be included in the public comment period conducted for the Cleanup Action Plan (see 3. below)

3.0 CLEANUP ACTION PLAN (CAP) SUBMITTAL

Draft CAP – The draft CAP shall be submitted to Ecology 60 days after the draft final FFS Report is finalized and ready for public comment. This draft CAP will then undergo a 30-day review period by Ecology.

Draft Final CAP – The draft final CAP shall address comments submitted by Ecology on the draft CAP. This draft final CAP shall be due 60 days after submittal of Ecology comments of the draft CAP. The draft final CAP will undergo a 30-day public comment period under a second Agreed Order or Consent Decree before it becomes a final document. The comment period for the draft final FFS report will be combined with the comment period for the draft CAP/second Agreed Order or Consent Decree.

APPENDIX H

List of applicable or relevant and appropriate requirements

Appendix H


Applicable or Relevant and Appropriate Requirements (ARARs)

The starting point for ARARs is the MTCA cleanup levels and regulations that address implementation of a cleanup under MTCA (Chapter 173.105D RCW; Chapter 173-340 WAC).

Other potential ARARs may include the following:

1. State Water Pollution Control Act (Chapter 90.48 RCW).
2. Applicable surface water quality criteria published in the water quality standards for surface waters of the State of Washington, Chapter 173-201A WAC.
3. Applicable surface water quality criteria published under Section 304 of the Clean Water Act.
4. Applicable surface water quality criteria published under National Toxics Rule (40 C.F.R. Part 131).
5. Washington State Hazardous Waste Management Act (Chapter 70.105 RCW, and State Dangerous Waste Regulation (Chapter 173-303).
6. Solid Waste Management-Reduction and Recycling (Chapter 70.95 RCW).
7. Minimum Standards for Construction and Maintenance of Wells (Chapter 173-160 RCW).
8. Washington Clean Air Act (Chapter 70.94 WAC).
9. Puget Sound Clean Air Agency Regulations (<http://www.pscleanair.org>).
10. Occupational Safety and Health Act (OSHA), 29 CFR Subpart 1910.120.
11. Washington Industrial Safety and Health Act (WISHA).
12. Shoreline Management Act (Chapter 90.58 and Chapter 173-14-28 WAC)
13. Archaeological and Cultural Resources Act (Chapter 43.53 RCW)

JOB NO.: 9-915-15716-C | DWG DATE: 3-27-2009 10:50am | SCALE: 1"=60' | DESIGN BY: JRS | FILE NAME: 15716-C-01.dwg

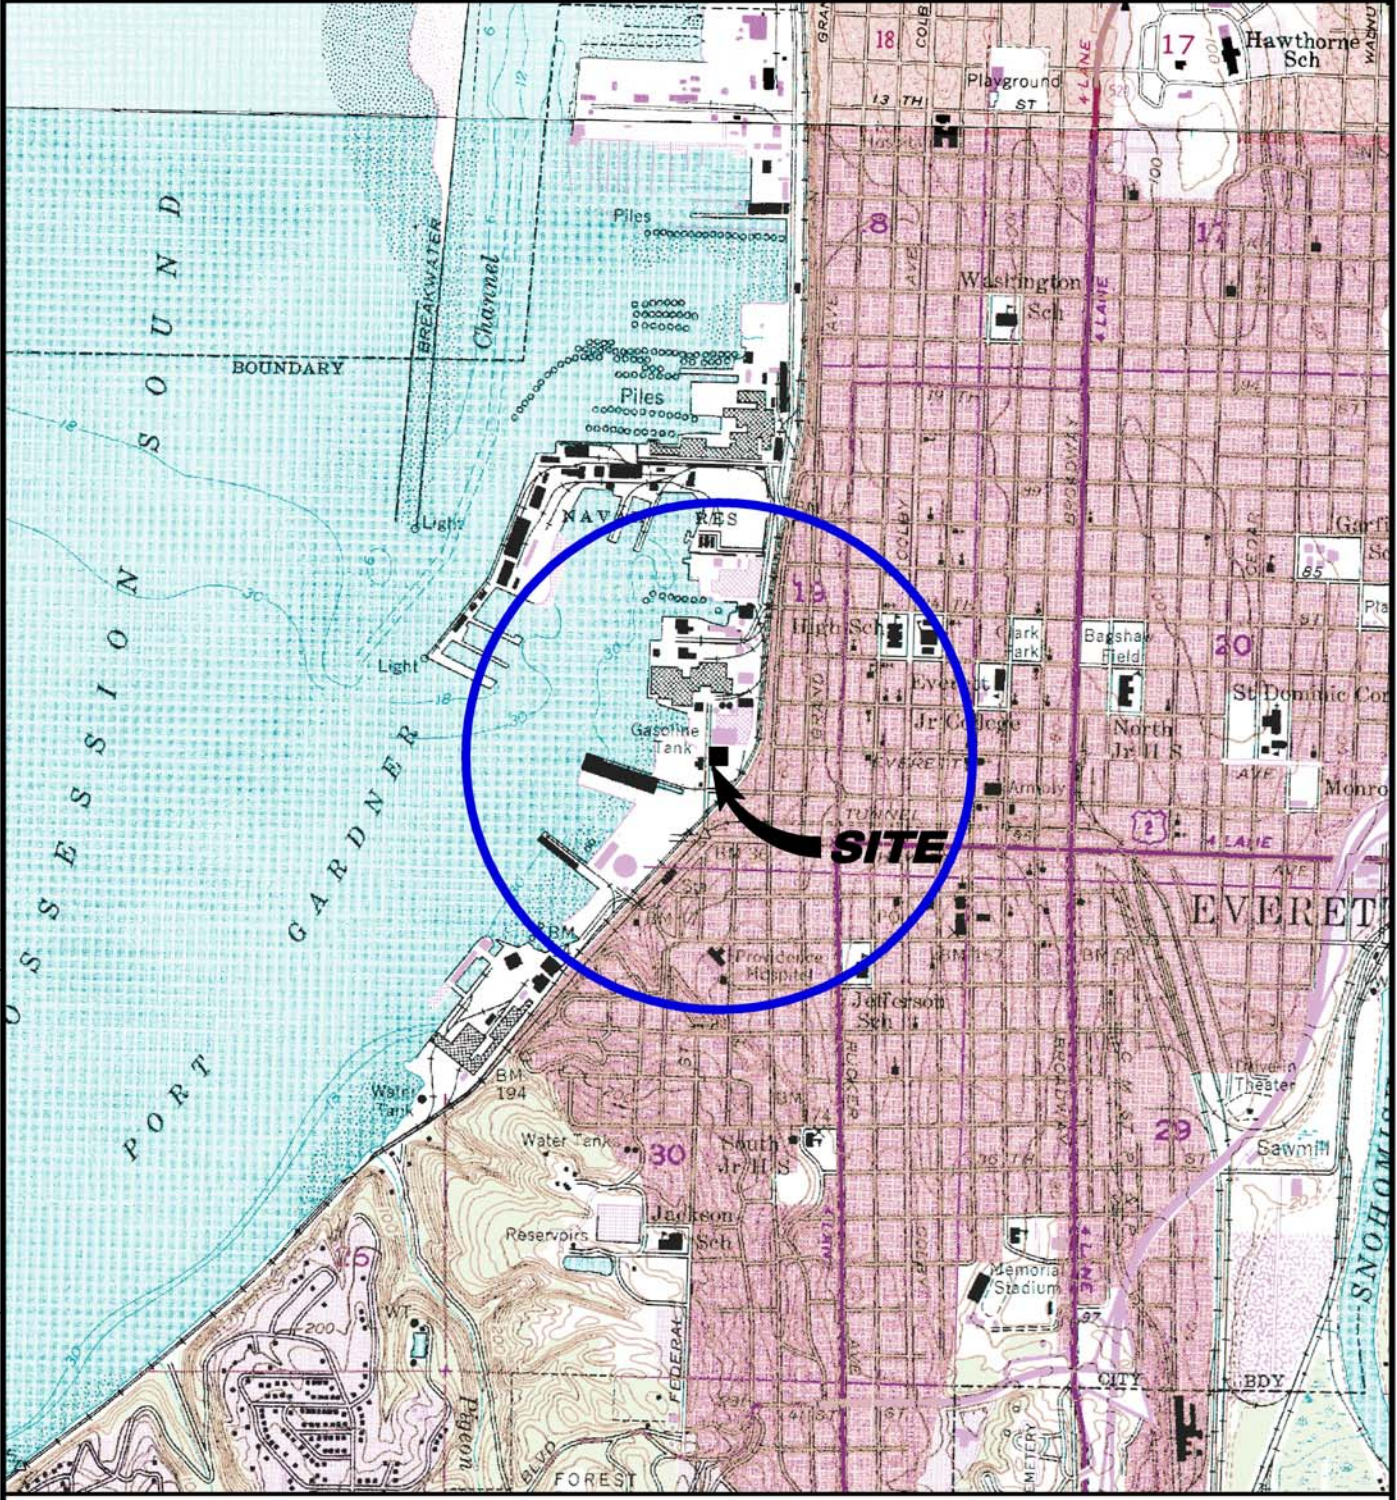

EXPLANATION



1/2-MILE RADIUS CIRCLE



0 2000 4000 Feet

SCALE: 1:24,000

SOURCE: USGS Quad Topo of Everett and Marysville, Photorevised 1973.



AMEC EARTH & ENVIRONMENTAL, INC.
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

SITE LOCATION MAP

EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728
2717/2731 FEDERAL AVENUE
EVERETT, WASHINGTON


FIGURE

1




SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

| | | | | | | | | | |
|-------------|---------|---|--|-------------|----------|---------|-----------------------------------|-------------|---------------|
| CLIENT LOGO | CLIENT: | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | | DWN BY: | JRS | PROJECT | EXXONMOBIL/ADC PROPERTY | DATE: | FENRUARY 2010 |
| | | AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | | CHK'D BY: | AS | | ECOLOGY SITE ID 2728 | PROJECT NO: | 9-915-15716-C |
| | | | | DATUM: | NONE | TITLE | PLAN OF THE PROPERTY AND VICINITY | REV. NO.: | |
| | | | | PROJECTION: | NONE | | | FIGURE No. | 2 |
| | | | | SCALE: | AS SHOWN | | | | |

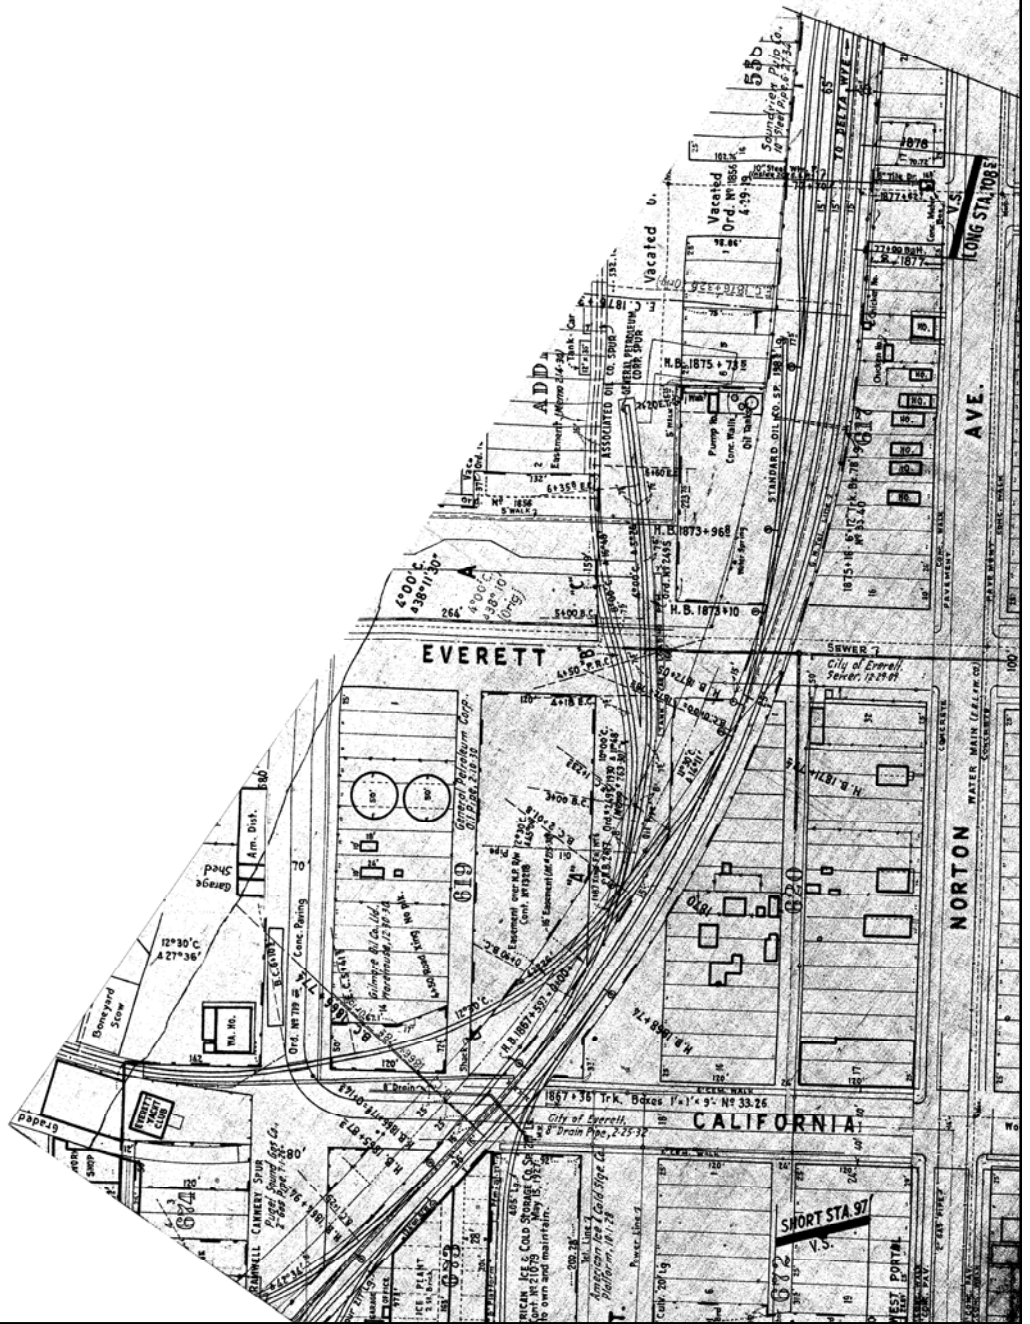

Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:
**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728

DWN BY: BRJ **DATUM:** NAD83 **DATE:** AUGUST 2009


CHKD BY: AIS/MS **REV. NO.:** 1 **PROJECT NO.:** 9-915-15716C

TITLE: 1930 GREAT NORTHERN RAILWAY EVERETT MAP


PROJECTION: WA SP North **SCALE:** 1 inch = 200 feet **FIGURE No.:** FIGURE 3

LEGEND


- Above Ground Tanks (ASTs) in 1930 Map
- Buildings in 1930 Map
- Taxlot Parcels

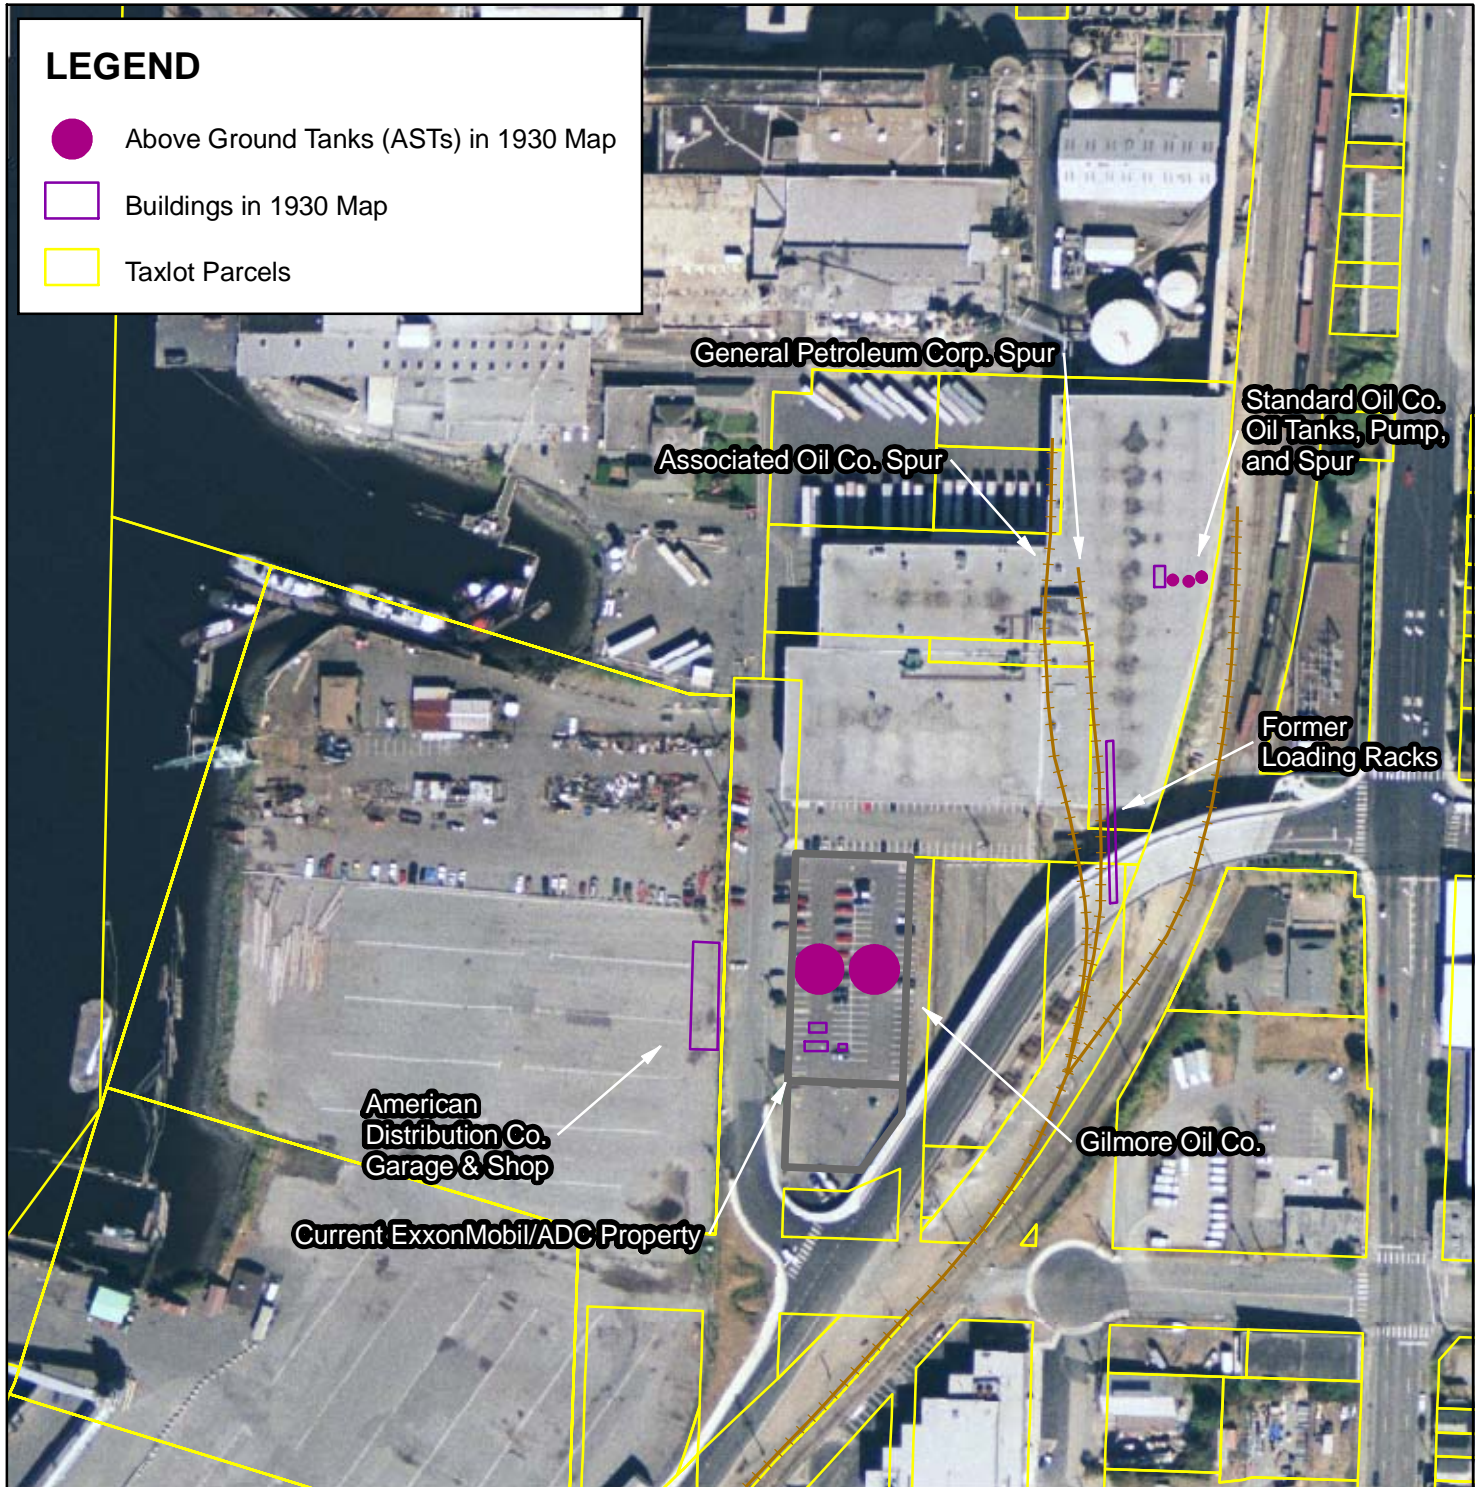


Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



| | | | | | |
|---|--|-------------------------|--------------------------|--|--|
| AMEC Earth & Environmental 11820 North Creek Parkway North Bothell, Washington 98011 | | | | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING CO. | |
| PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | | DWN BY: BRJ | DATUM: NAD83 | DATE: AUGUST 2009 | |
| TITLE: FEATURES SEEN IN 1930 GREAT NORTHERN RAILWAY EVERETT MAP OVER 2003 AERIAL | | CHKD BY: AIS/MS | REV. NO.: 1 | PROJECT NO.: 9-915-15716C | |
| | | PROJECTION: WA SP North | SCALE: 1 inch = 200 feet | FIGURE No.: FIGURE 4 | |

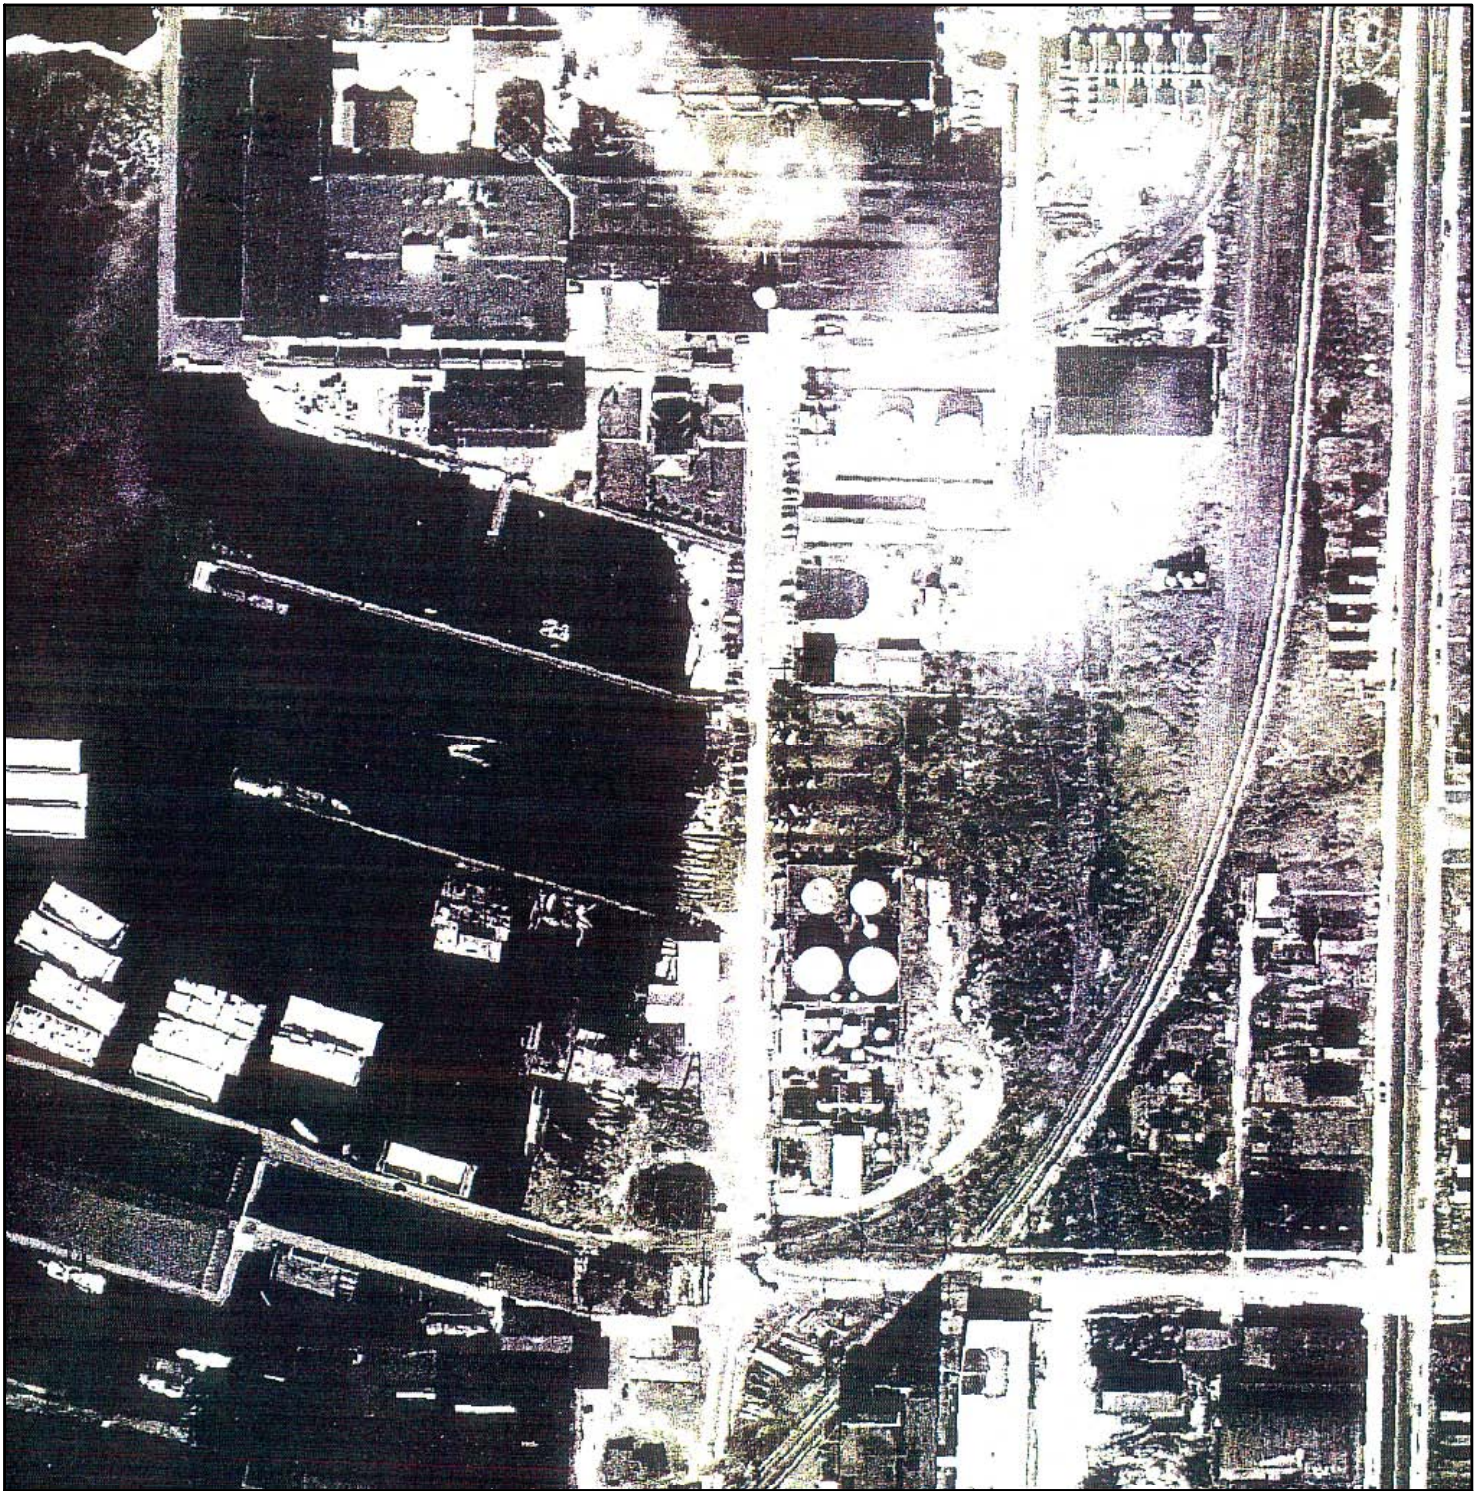

Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ

DATUM: NAD83

DATE: AUGUST 2009

CHK'D BY: AIS/MS

REV. NO.: 1

PROJECT NO.: 9-915-15716C

TITLE: **AERIAL 1947**


PROJECTION: WA SP North

SCALE: 1 inch = 200 feet


FIGURE No.: **FIGURE 5**

LEGEND


- Above Ground Tanks (ASTs) in 1947 Aerial
- Buildings in 1947 Aerial
- Taxlot Parcels

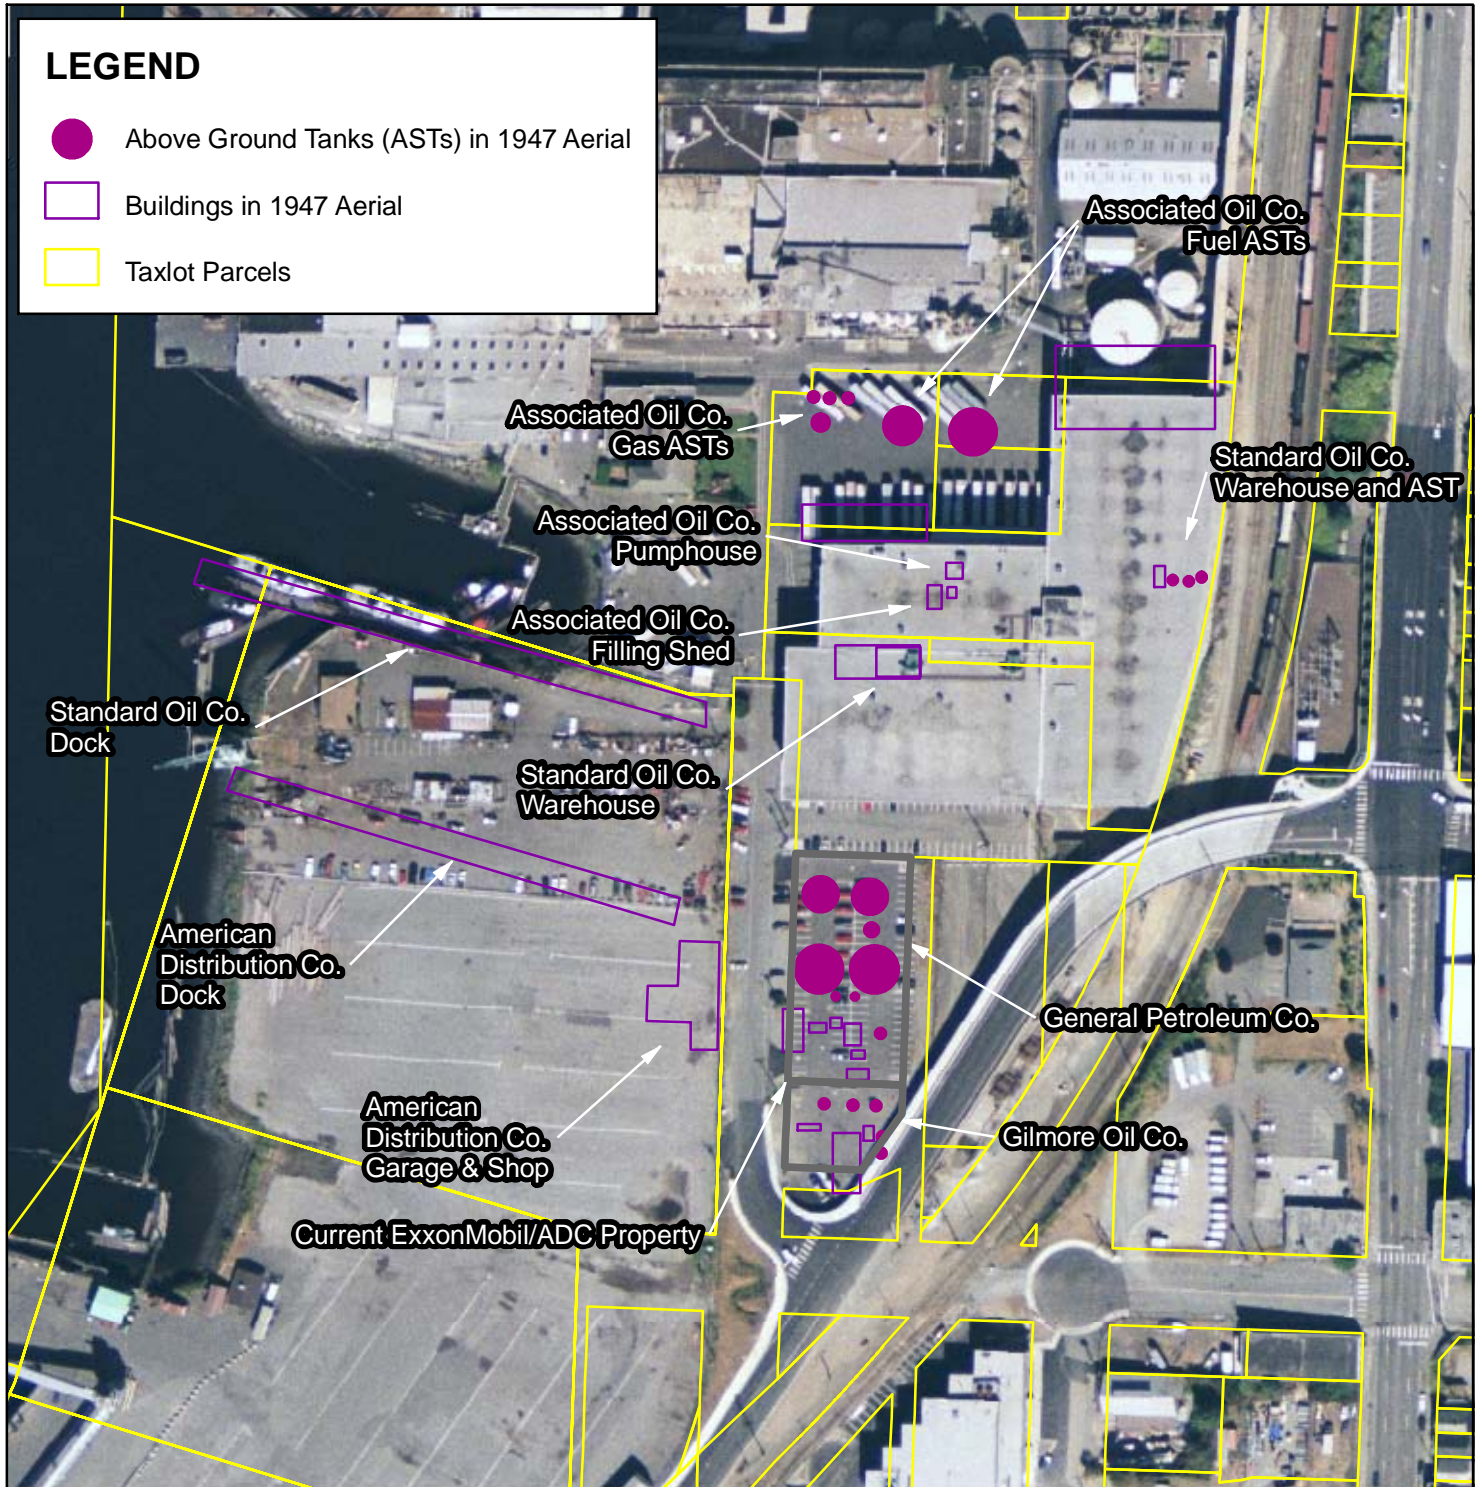


Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



| | | | | | |
|---|--|-------------------------|--------------------------|--|--|
| AMEC Earth & Environmental 11820 North Creek Parkway North Bothell, Washington 98011 | | | | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING CO. | |
| PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | | DWN BY: BRJ | DATUM: NAD83 | DATE: AUGUST 2009 | |
| TITLE: FEATURES SEEN IN 1947 AERIAL OVER 2003 AERIAL | | CHKD BY: AIS/MS | REV. NO.: 1 | PROJECT NO.: 9-915-15716C | |
| | | PROJECTION: WA SP North | SCALE: 1 inch = 200 feet | FIGURE No.: FIGURE 6 | |

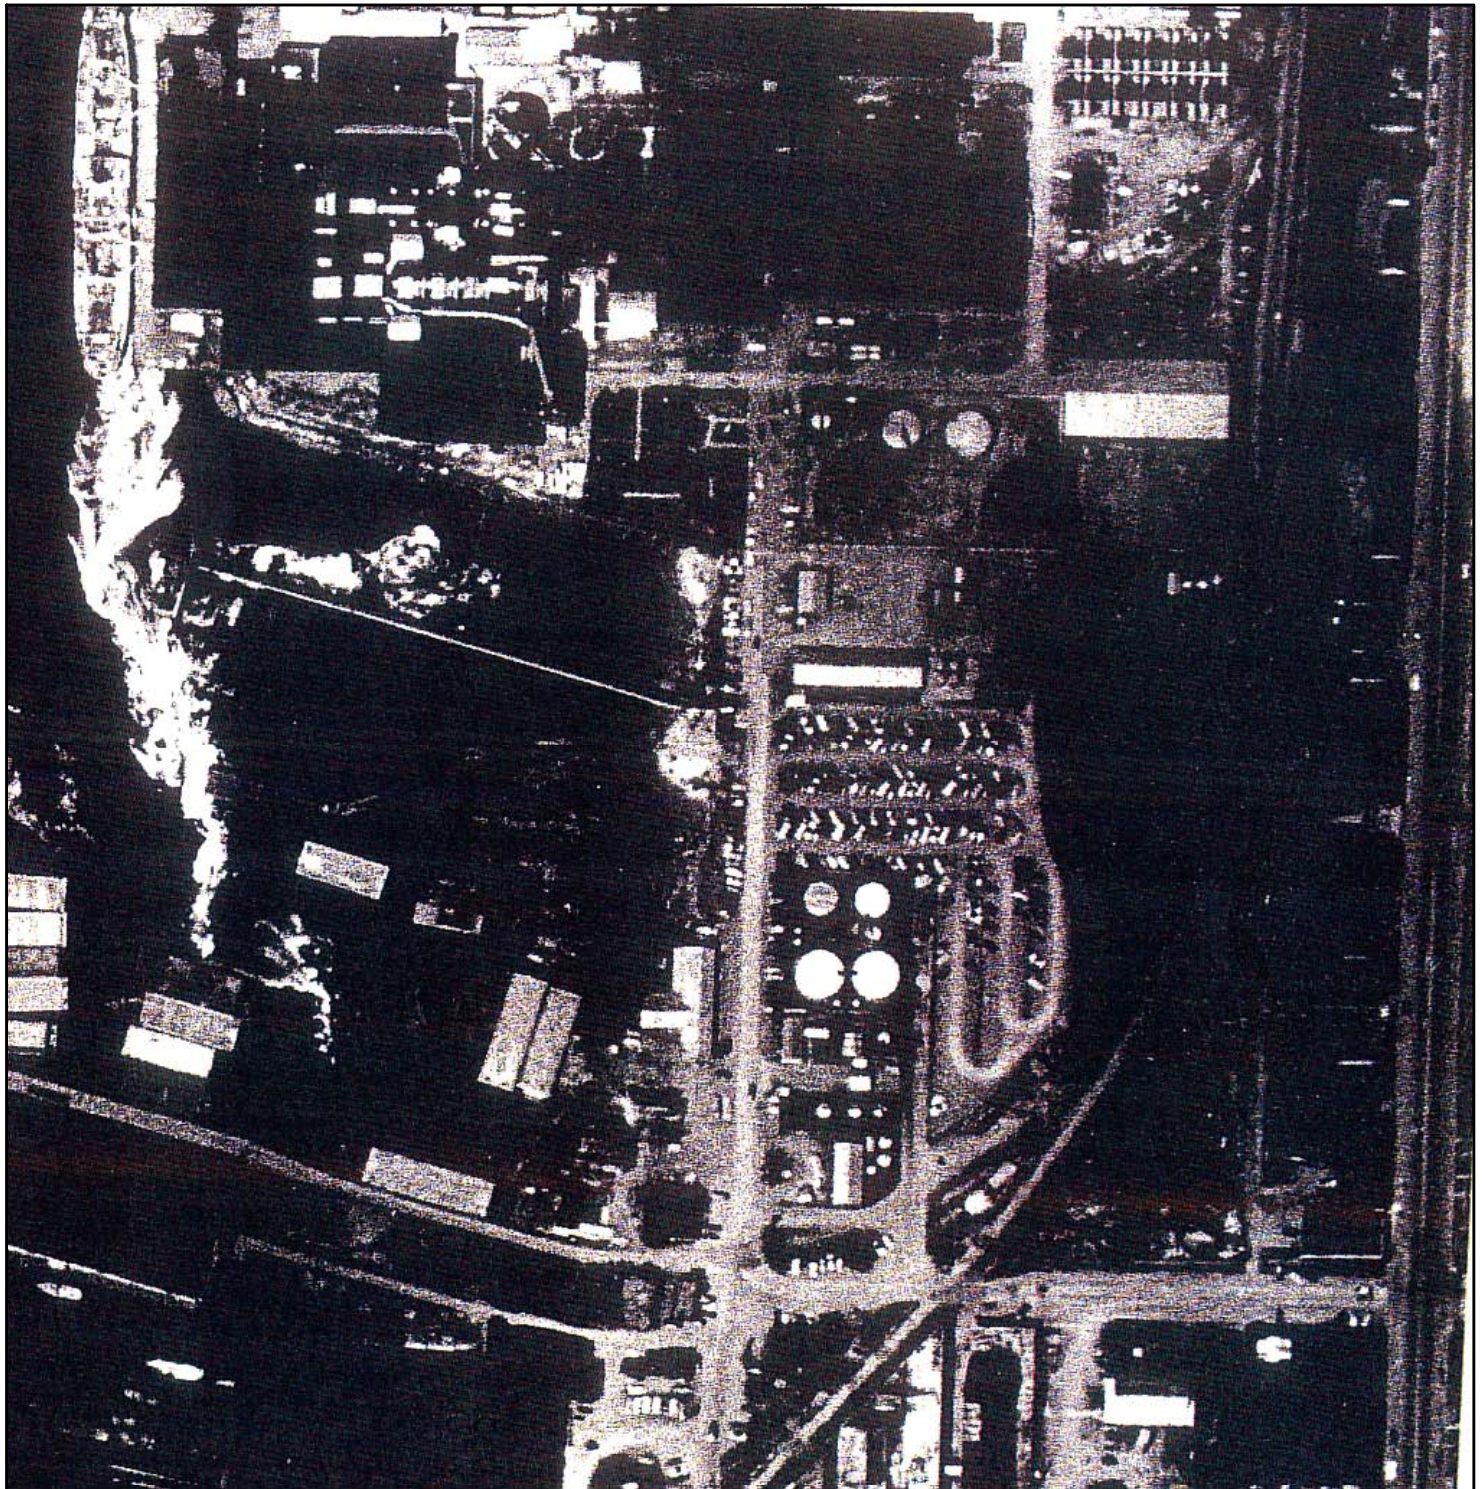

Note:
 Parcels layer from **Snohomish County**, <ftp://ftp.snoco.org>
 2003 aerial from **Washington Department of Transportation**



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: **BRJ**

DATUM: **NAD83**

DATE: **AUGUST 2009**

CHK'D BY: **AIS/MS**

REV. NO.: **1**

PROJECT NO.: **9-915-15716C**

TITLE: **AERIAL 1955**


PROJECTION: **WA SP North**

SCALE: **1 inch = 200 feet**


FIGURE No.: **FIGURE 7**

LEGEND


- Above Ground Tanks (ASTs) in 1955 Aerial
- Buildings in 1955 Aerial
- Taxlot Parcels

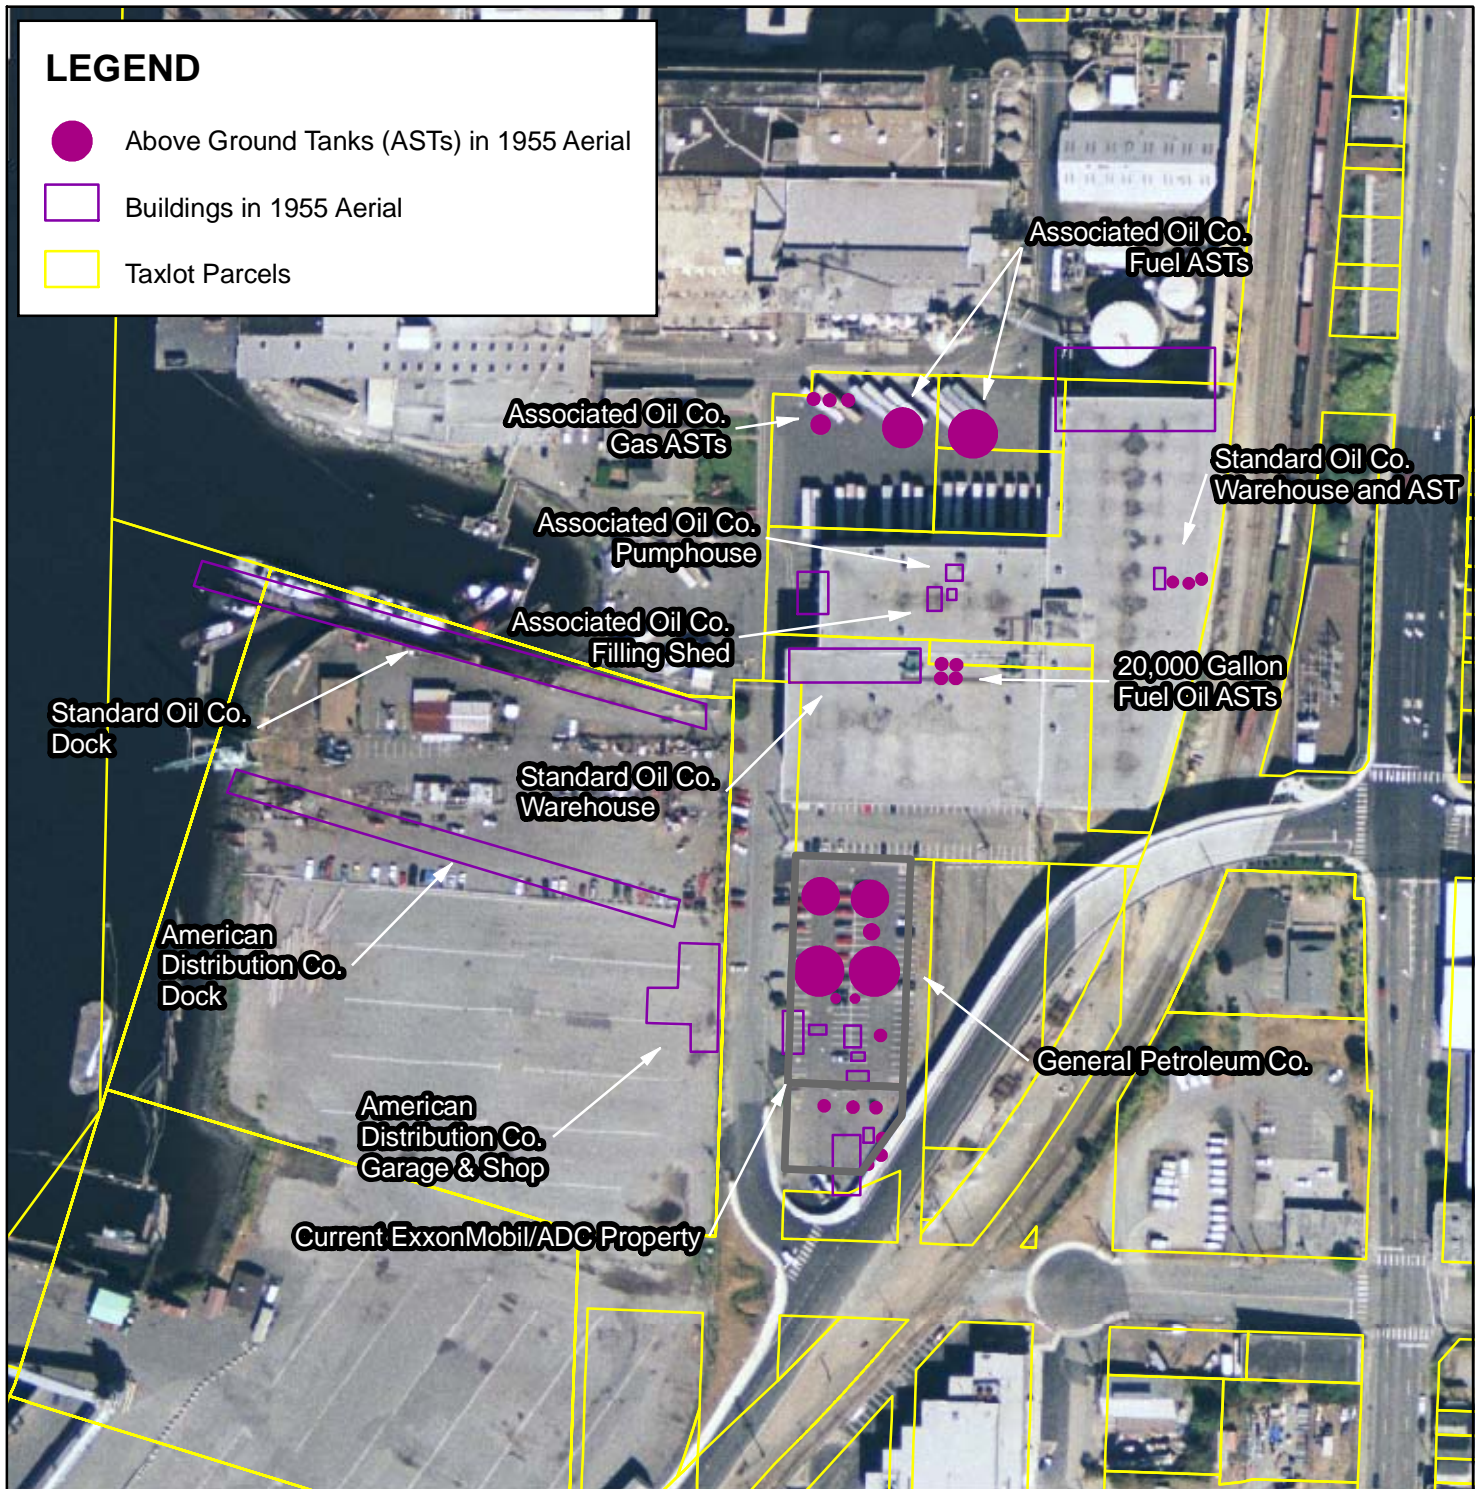


Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



| | | | | | |
|---|--|-------------------------|--------------------------|--|--|
| AMEC Earth & Environmental 11820 North Creek Parkway North Bothell, Washington 98011 | | | | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING CO. | |
| PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | | DWN BY: BRJ | DATUM: NAD83 | DATE: AUGUST 2009 | |
| TITLE: FEATURES SEEN IN 1955 AERIAL OVER 2003 AERIAL | | CHKD BY: AIS/MS | REV. NO.: 1 | PROJECT NO.: 9-915-15716C | |
| | | PROJECTION: WA SP North | SCALE: 1 inch = 200 feet | FIGURE No.: FIGURE 8 | |

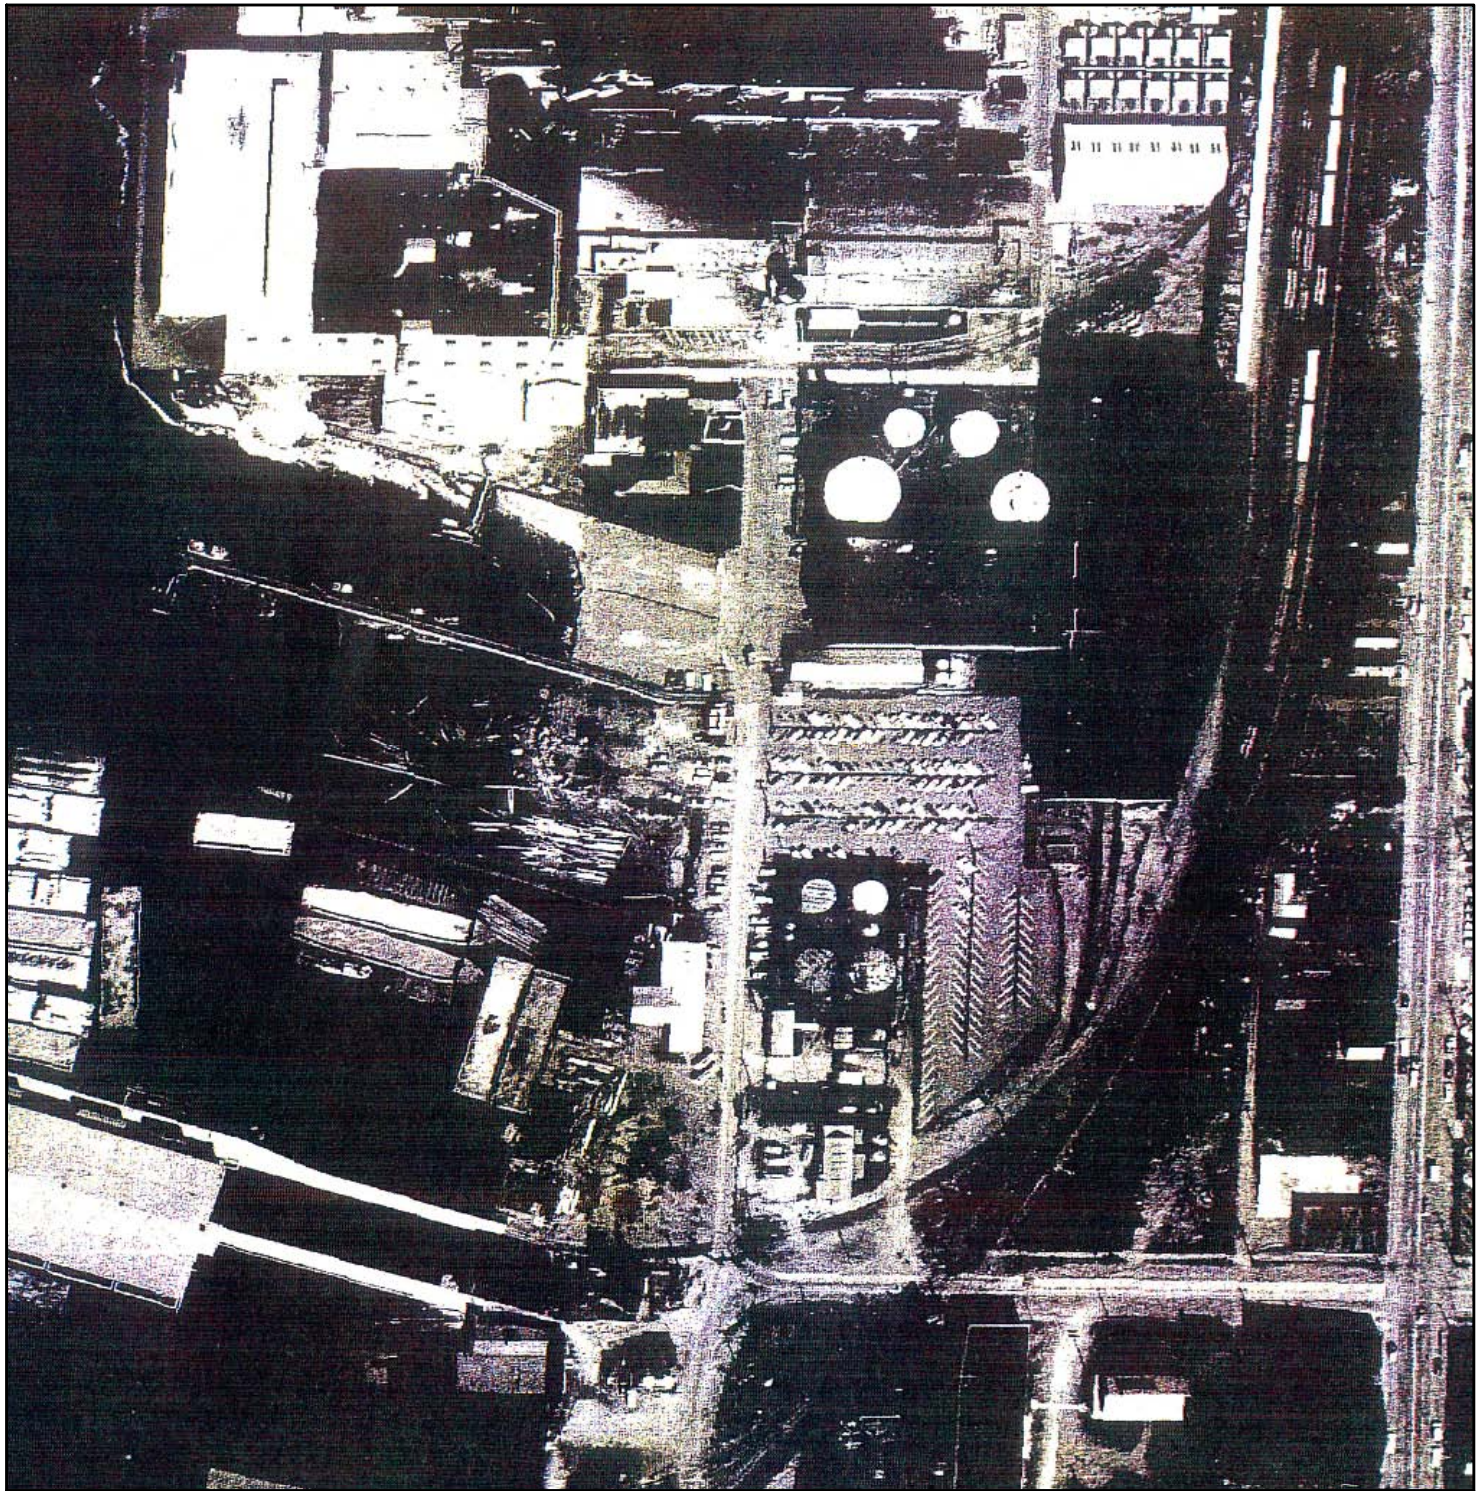

Note:
 Parcels layer from **Snohomish County**, <ftp://ftp.snoco.org>
 2003 aerial from **Washington Department of Transportation**



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

| | | |
|----------------|-----------------|----------------------|
| DWN BY: BRJ | DATUM: NAD83 | DATE: AUGUST 2009 |
|----------------|-----------------|----------------------|


| | | |
|---------------------|----------------|------------------------------|
| CHK'D BY: AIS/MS | REV. NO.: 1 | PROJECT NO.: 9-915-15716C |
|---------------------|----------------|------------------------------|

TITLE: **AERIAL 1967**


| | | |
|----------------------------|-----------------------------|--------------------------------|
| PROJECTION: WA SP North | SCALE: 1 inch = 200 feet | FIGURE No.: FIGURE 9 |
|----------------------------|-----------------------------|--------------------------------|

LEGEND


- Above Ground Tanks (ASTs) in 1967 Aerial
- Buildings in 1967 Aerial
- Taxlot Parcels

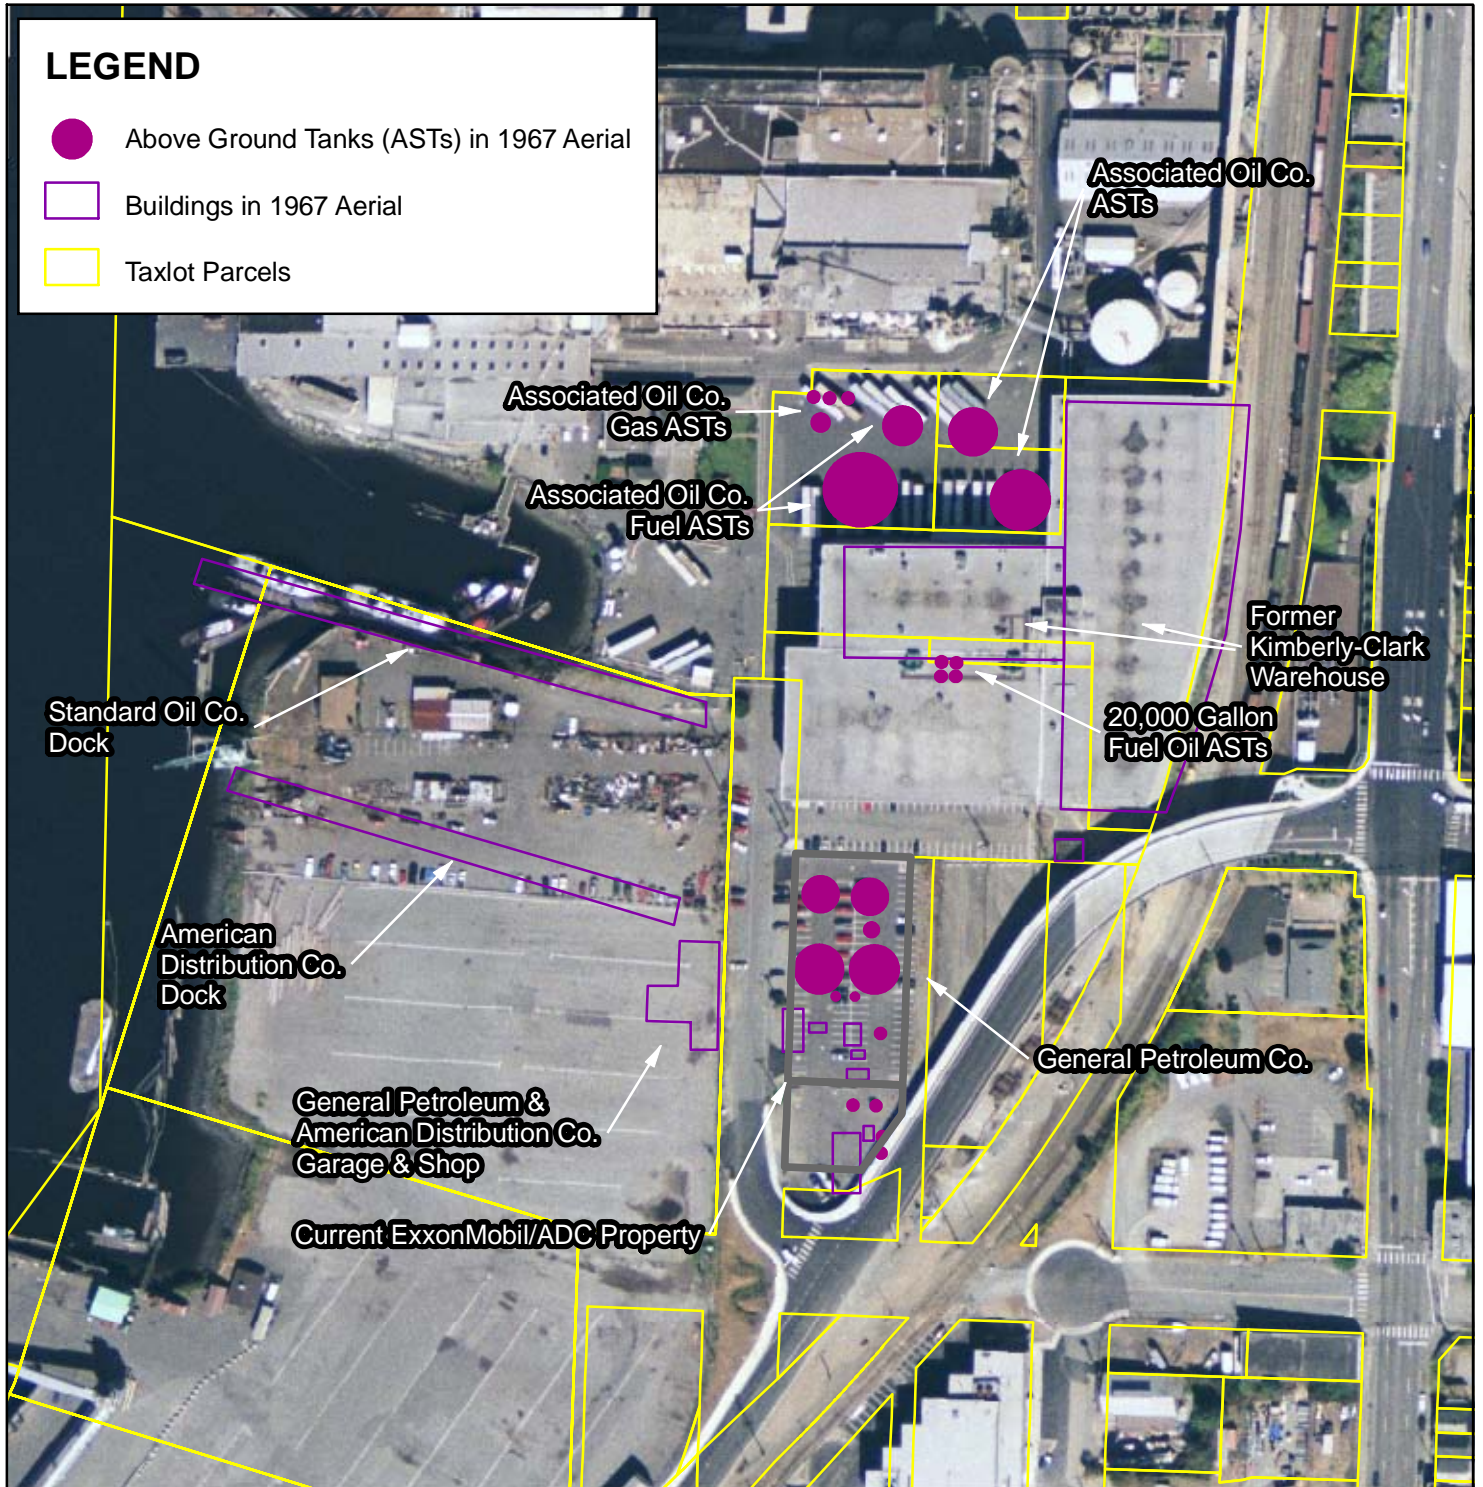


Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



| | | | | | |
|---|--|-------------------------|--------------------------|--|--|
| AMEC Earth & Environmental 11820 North Creek Parkway North Bothell, Washington 98011 | | | | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING CO. | |
| PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | | DWN BY: BRJ | DATUM: NAD83 | DATE: AUGUST 2009 | |
| TITLE: FEATURES SEEN IN 1967 AERIAL OVER 2003 AERIAL | | CHKD BY: AIS/MS | REV. NO.: 1 | PROJECT NO.: 9-915-15716C | |
| | | PROJECTION: WA SP North | SCALE: 1 inch = 200 feet | FIGURE No.: FIGURE 10 | |

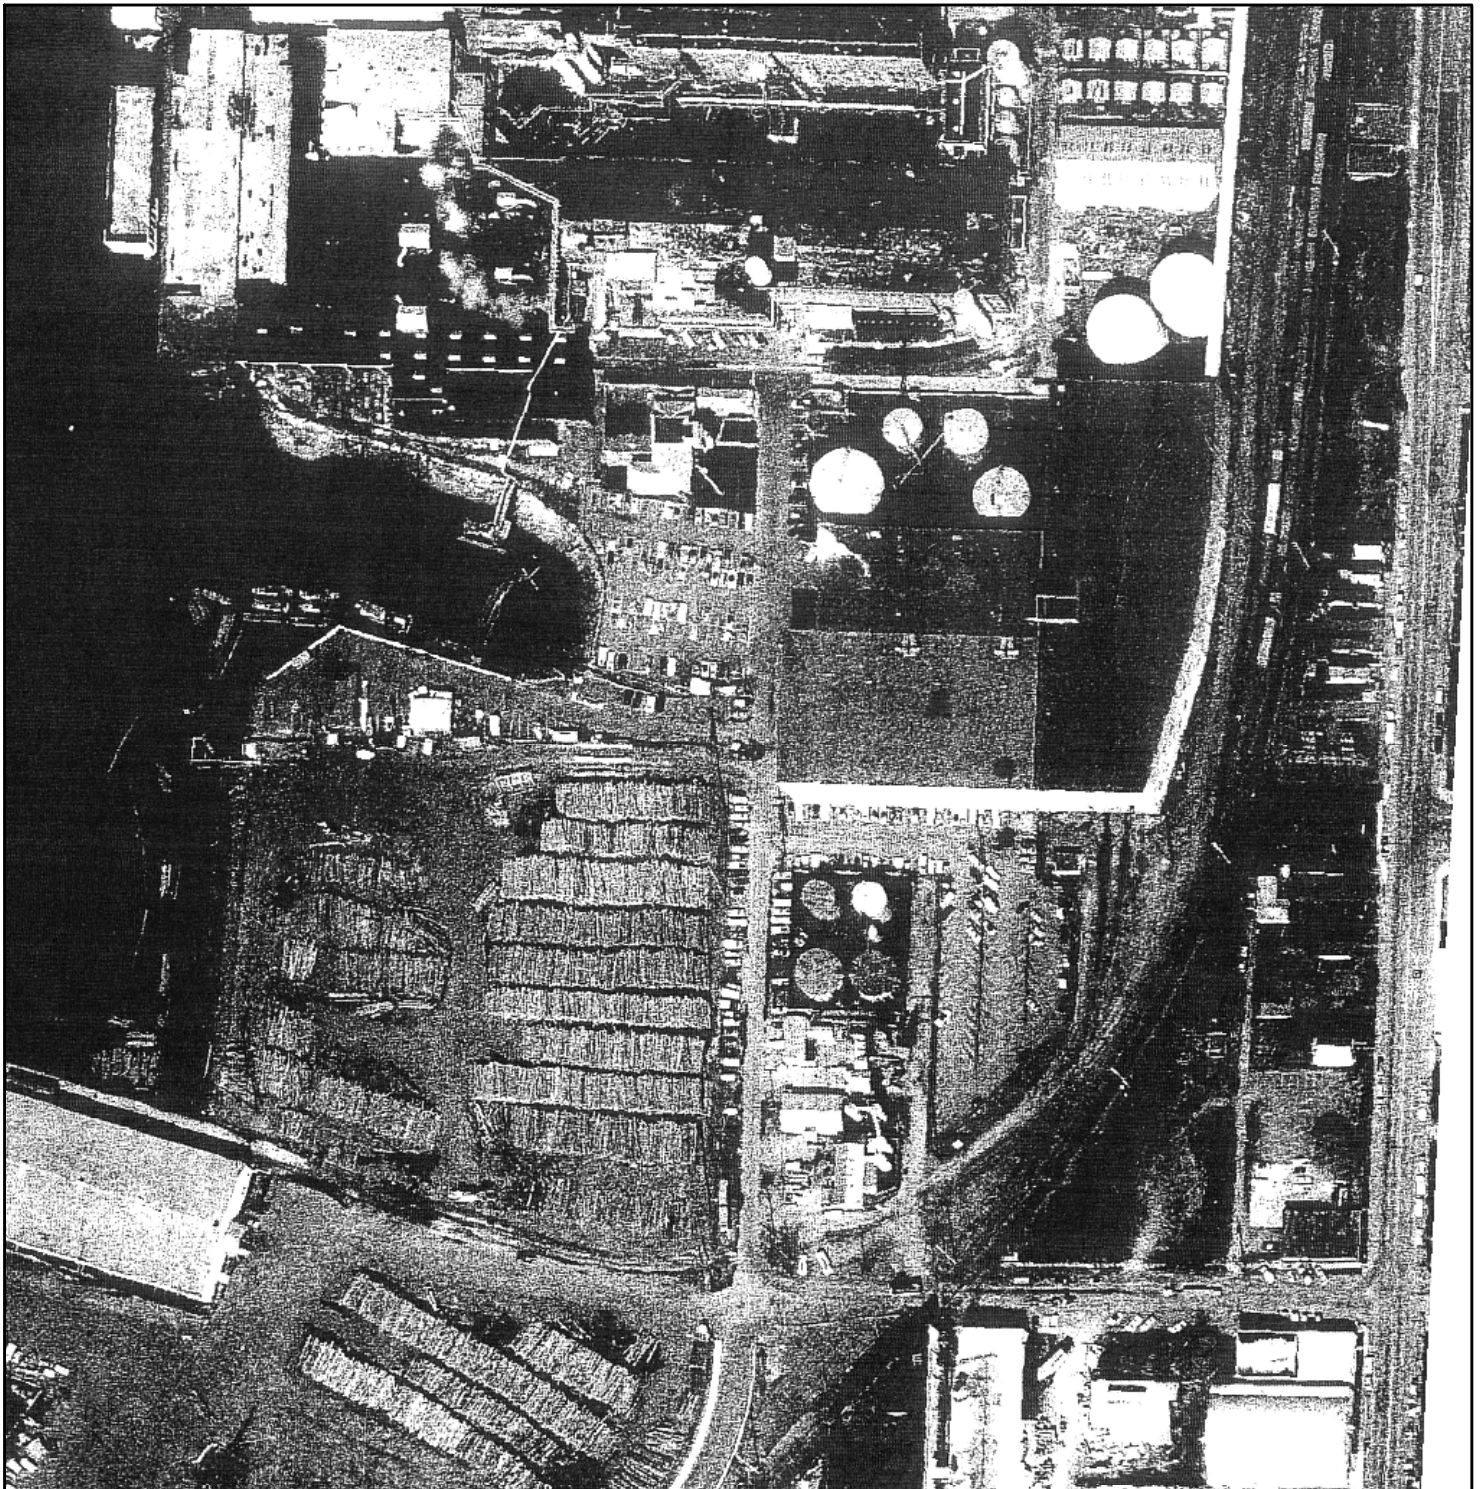

Note:
 Parcels layer from Snohomish County, ftp://ftp.snoco.org
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ

DATUM: NAD83

DATE: AUGUST 2009

CHK'D BY: AIS/MS

REV. NO.: 1

PROJECT NO.: 9-915-15716C

TITLE: **AERIAL 1976**


PROJECTION: WA SP North

SCALE: 1 inch = 200 feet


FIGURE No.: **FIGURE 11**

LEGEND

- Above Ground Tanks (ASTs) in 1976 Aerial
- Buildings in 1976 Aerial
- Taxlot Parcels

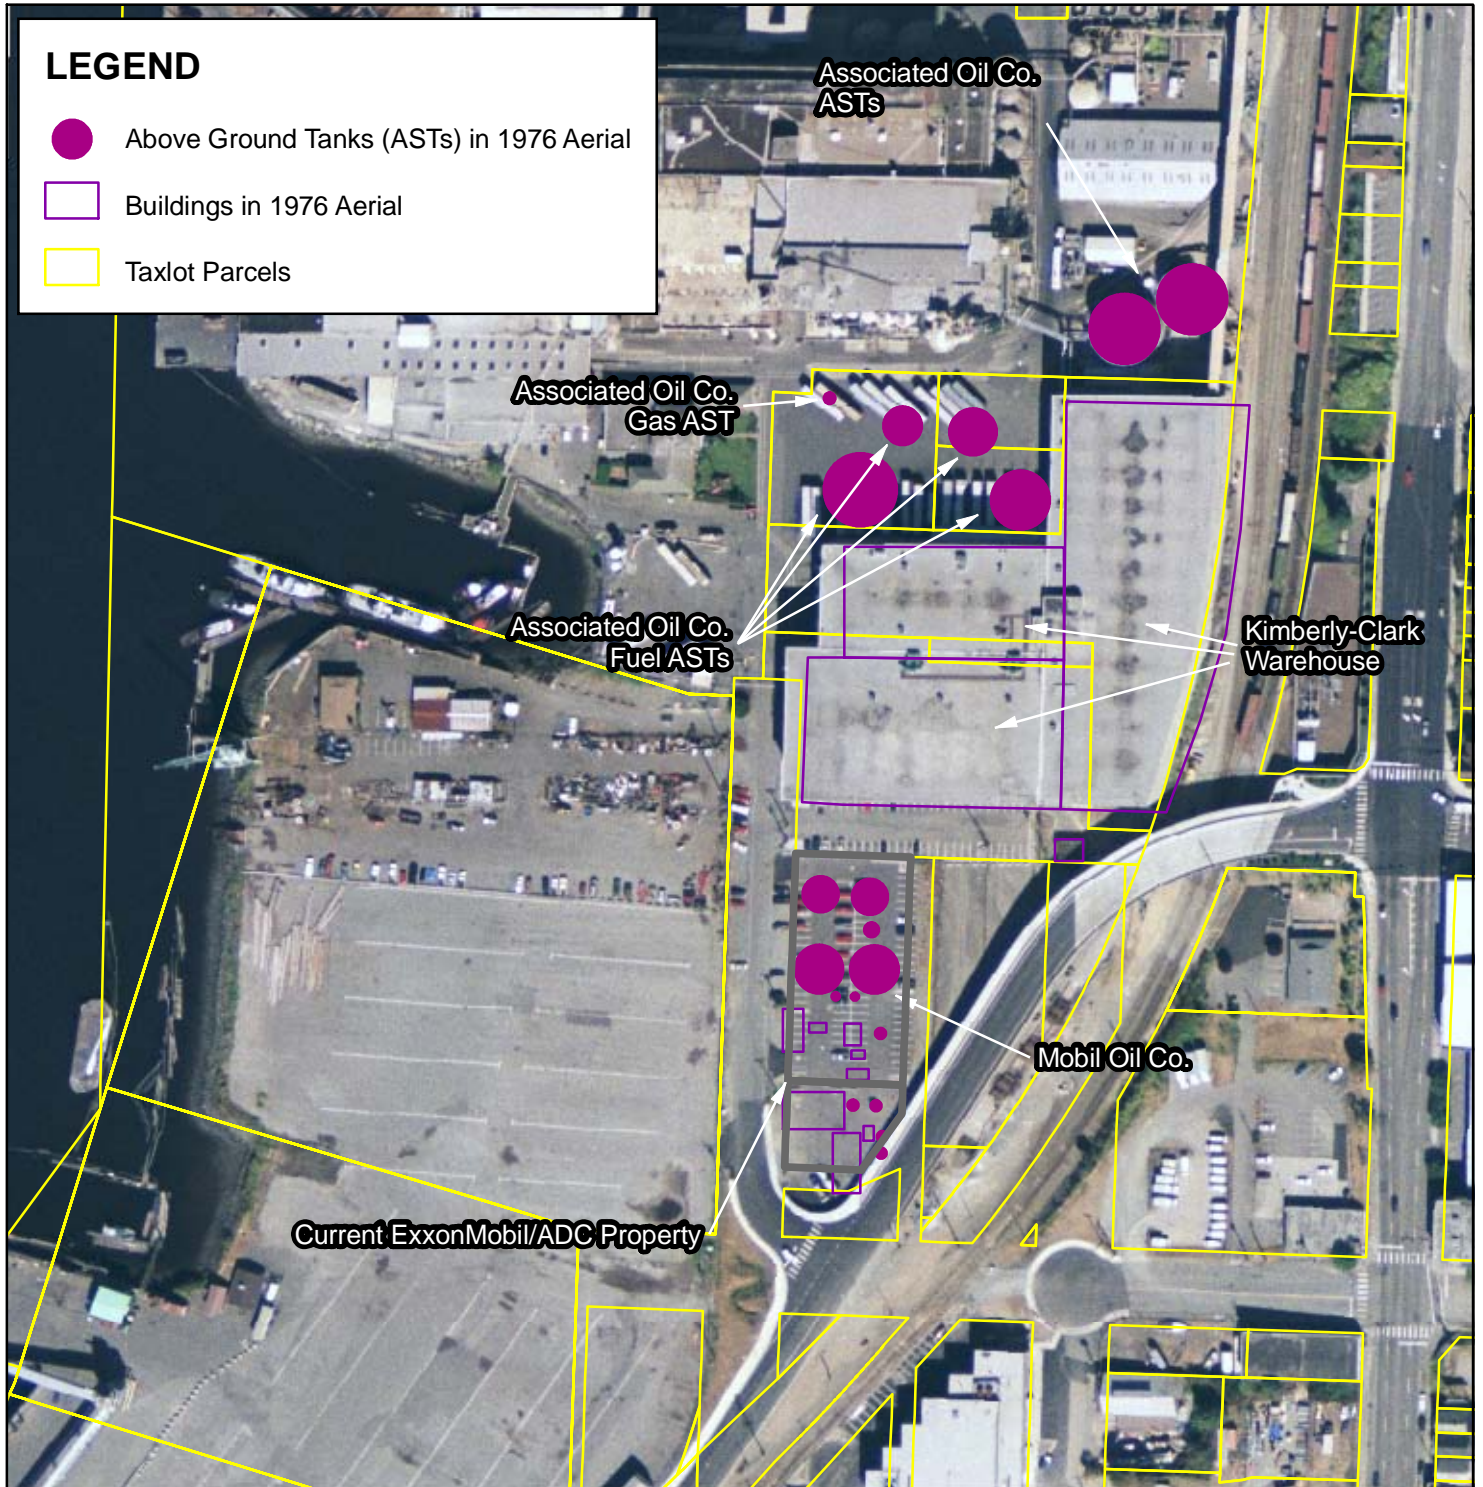

Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:
**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ DATUM: NAD83 DATE: AUGUST 2009


CHKD BY: AIS/MS REV. NO.: 1 PROJECT NO.: 9-915-15716C

TITLE: **FEATURES SEEN IN
 1976 AERIAL
 OVER 2003 AERIAL**

PROJECTION: WA SP North SCALE: 1 inch = 200 feet FIGURE No.: **FIGURE 12**



Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:

**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**

PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ

DATUM: NAD83

DATE: AUGUST 2009

CHK'D BY: AIS/MS

REV. NO.: 1

PROJECT NO.: 9-915-15716C




TITLE: **AERIAL 1993**


PROJECTION: WA SP North

SCALE: 1 inch = 200 feet


FIGURE No.: **FIGURE 13**

LEGEND

-  Above Ground Tanks (ASTs) in 1993 Aerial
-  Buildings in 1993 Aerial
-  Taxlot Parcels

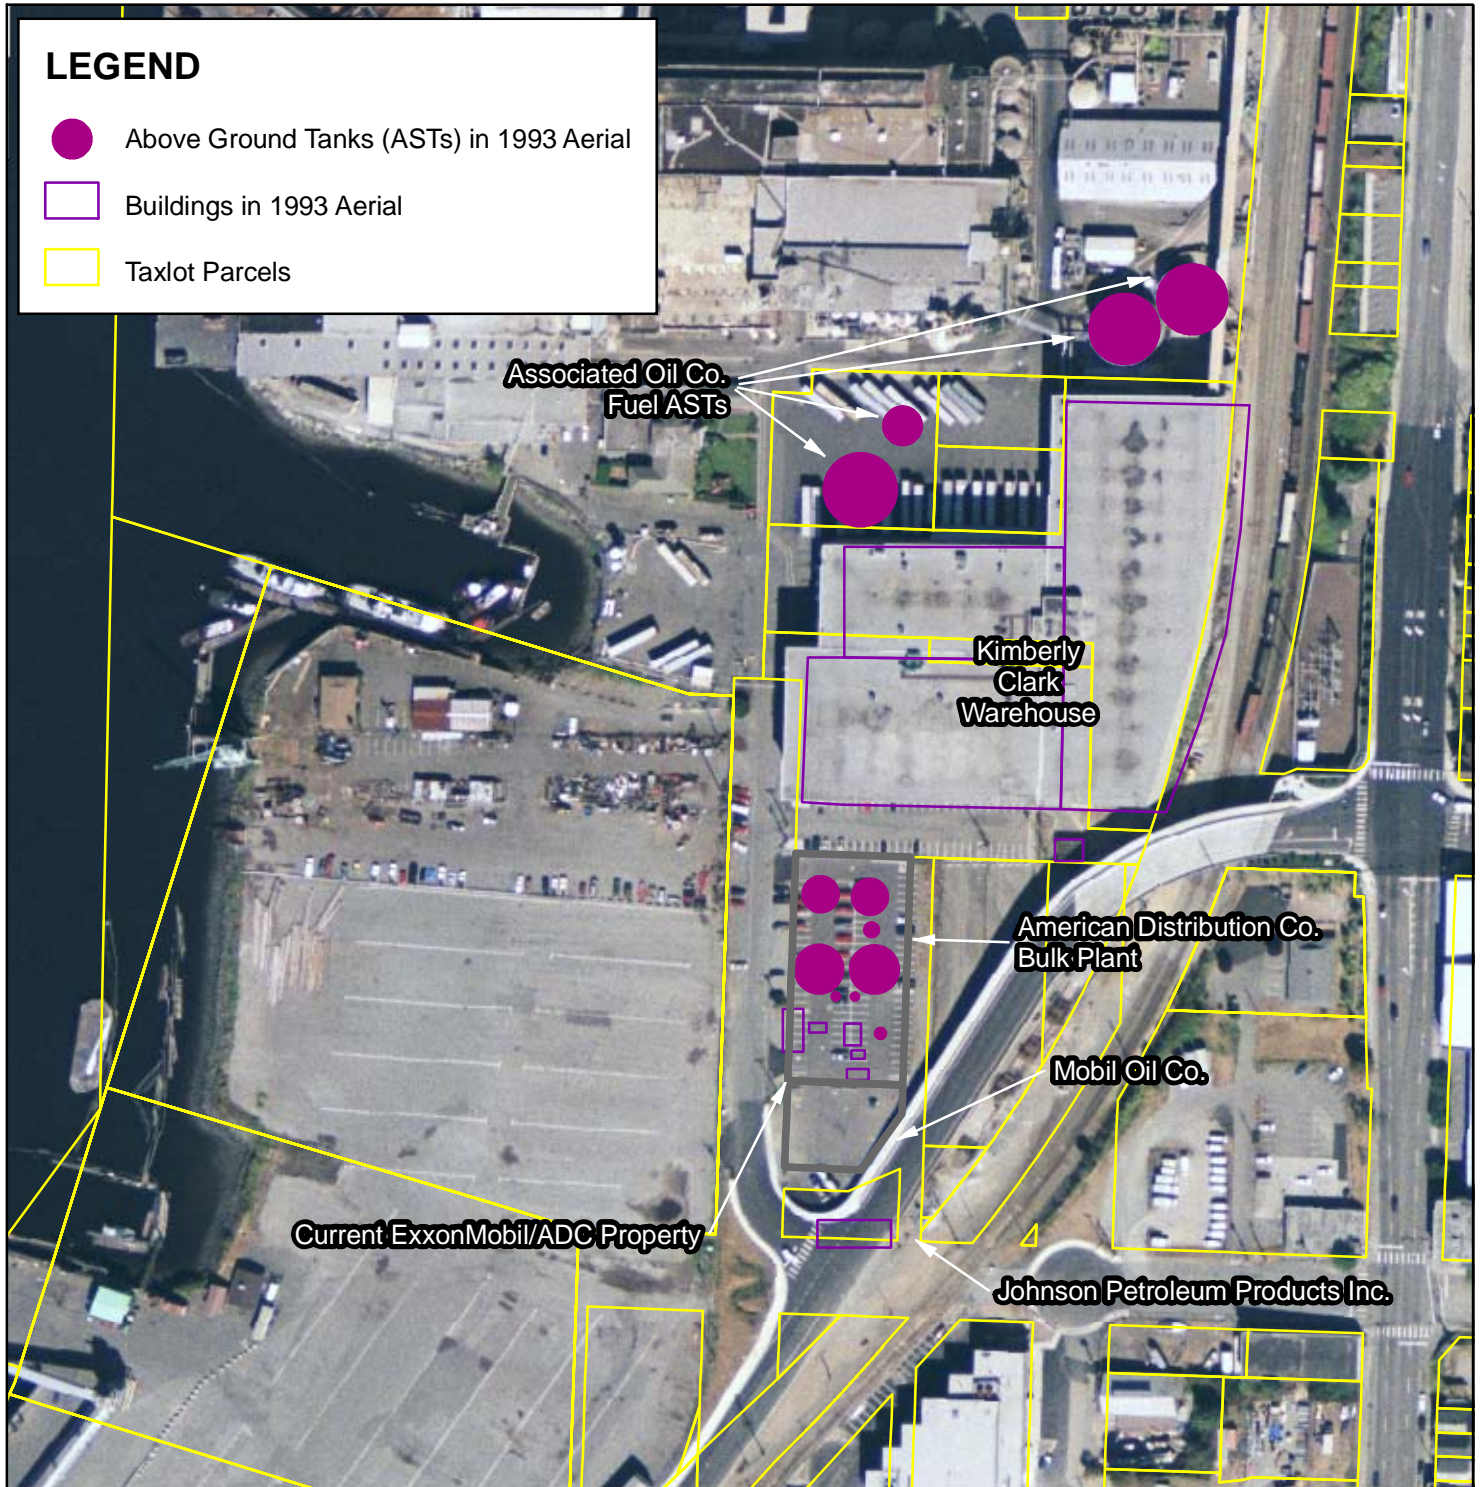

Note:
 Parcels layer from Snohomish County, <ftp://ftp.snoco.org>
 2003 aerial from Washington Department of Transportation



AMEC Earth & Environmental
 11820 North Creek Parkway North
 Bothell, Washington 98011



CLIENT:
**EXXONMOBIL
 AND AMERICAN
 DISTRIBUTING CO.**


PROJECT: **EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

DWN BY: BRJ DATUM: NAD83 DATE: AUGUST 2009

CHKD BY: AIS/MS REV. NO.: 1 PROJECT NO.: 9-915-15716C

TITLE: **FEATURES SEEN IN
 1993 AERIAL
 OVER 2003 AERIAL**

PROJECTION: WA SP North SCALE: 1 inch = 200 feet FIGURE No.: **FIGURE 14**

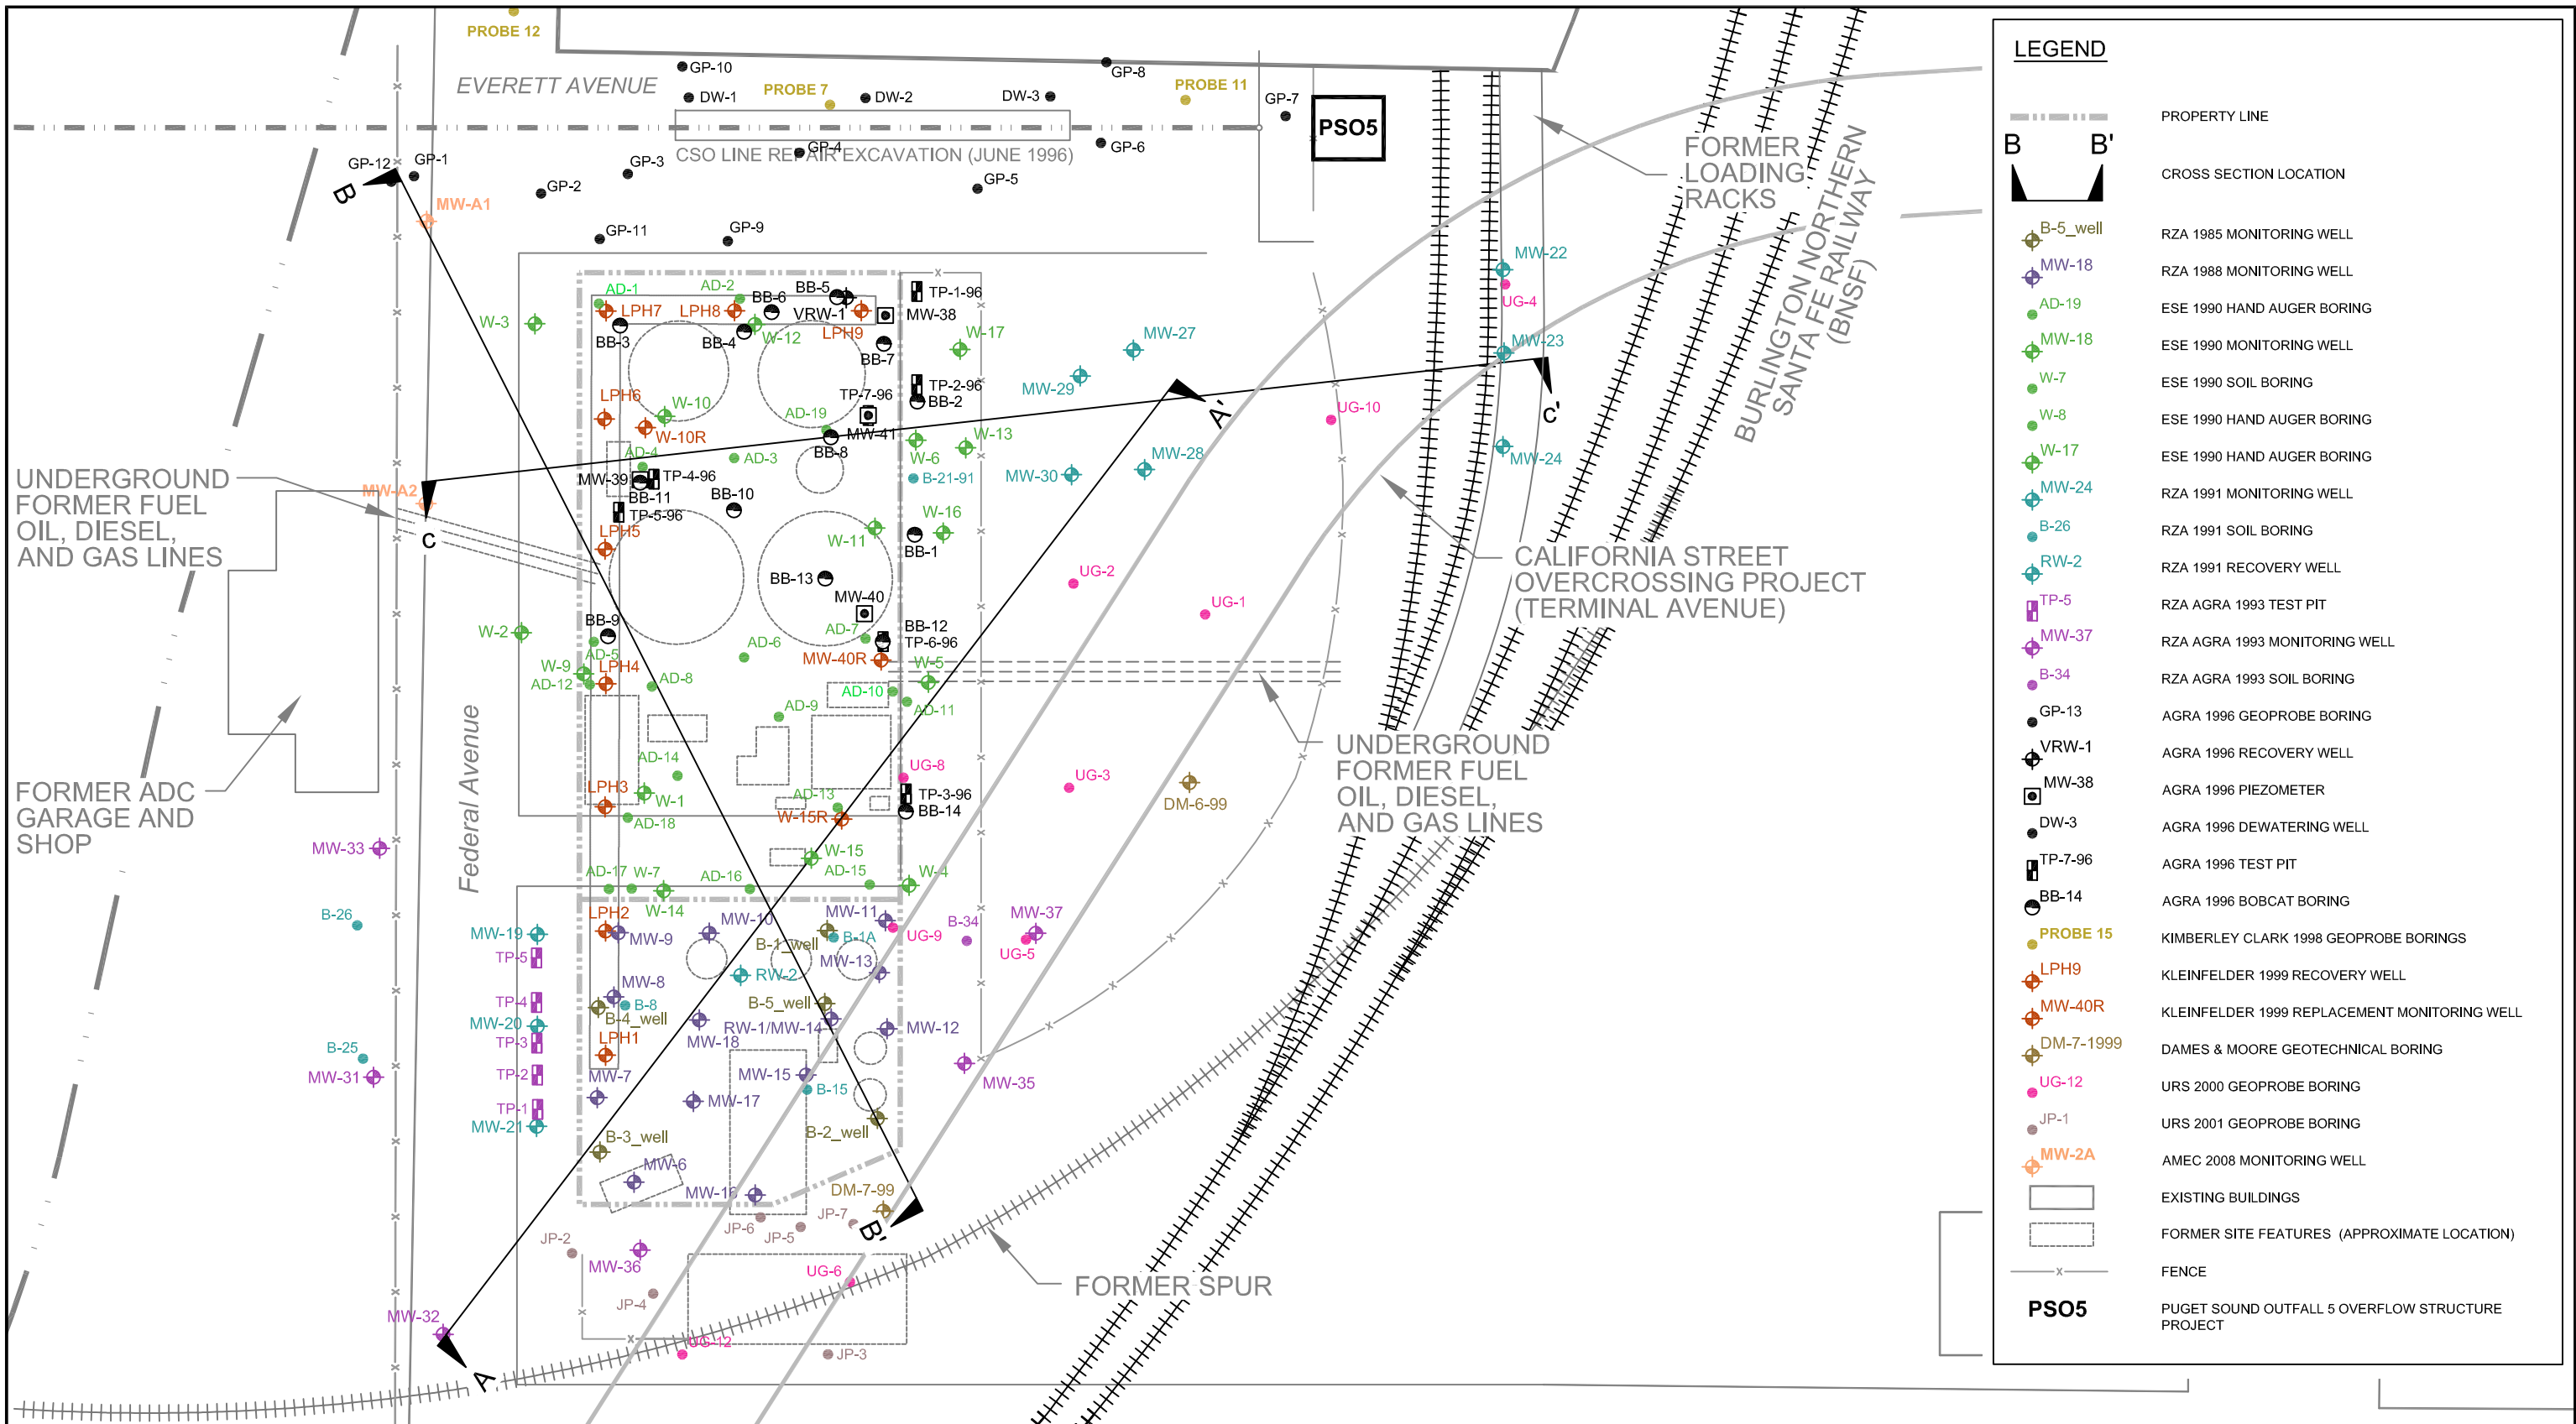

| LEGEND | |
|--------|--|
| | PROPERTY LINE |
| | CROSS SECTION LOCATION |
| | RZA 1985 MONITORING WELL |
| | RZA 1988 MONITORING WELL |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 MONITORING WELL |
| | ESE 1990 SOIL BORING |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 HAND AUGER BORING |
| | RZA 1991 MONITORING WELL |
| | RZA 1991 SOIL BORING |
| | RZA 1991 RECOVERY WELL |
| | RZA AGRA 1993 TEST PIT |
| | RZA AGRA 1993 MONITORING WELL |
| | RZA AGRA 1993 SOIL BORING |
| | AGRA 1996 GEOPROBE BORING |
| | AGRA 1996 RECOVERY WELL |
| | AGRA 1996 PIEZOMETER |
| | AGRA 1996 DEWATERING WELL |
| | AGRA 1996 TEST PIT |
| | AGRA 1996 BOBCAT BORING |
| | KIMBERLEY CLARK 1998 GEOPROBE BORINGS |
| | KLEINFELDER 1999 RECOVERY WELL |
| | KLEINFELDER 1999 REPLACEMENT MONITORING WELL |
| | DAMES & MOORE GEOTECHNICAL BORING |
| | URS 2000 GEOPROBE BORING |
| | URS 2001 GEOPROBE BORING |
| | AMEC 2008 MONITORING WELL |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |
| | PUGET SOUND OUTFALL 5 OVERFLOW STRUCTURE PROJECT |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO


CLIENT:

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

| | |
|----------------------|---|
| DWN BY: JRS / BRJ | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 |
| CHK'D BY: AS/MS | |
| DATUM: NONE | |
| PROJECTION: NONE | |
| SCALE: 1" = 60' | TITLE HISTORICAL EXPLORATIONS AND LOCATIONS OF GEOLOGIC CROSS SECTIONS A-A', B-B', AND C-C' |


| |
|------------------------------|
| DATE: AUGUST 2009 |
| PROJECT NO: 9-915-15716-C |
| REV. NO.: 1 |
| FIGURE No. 15 |

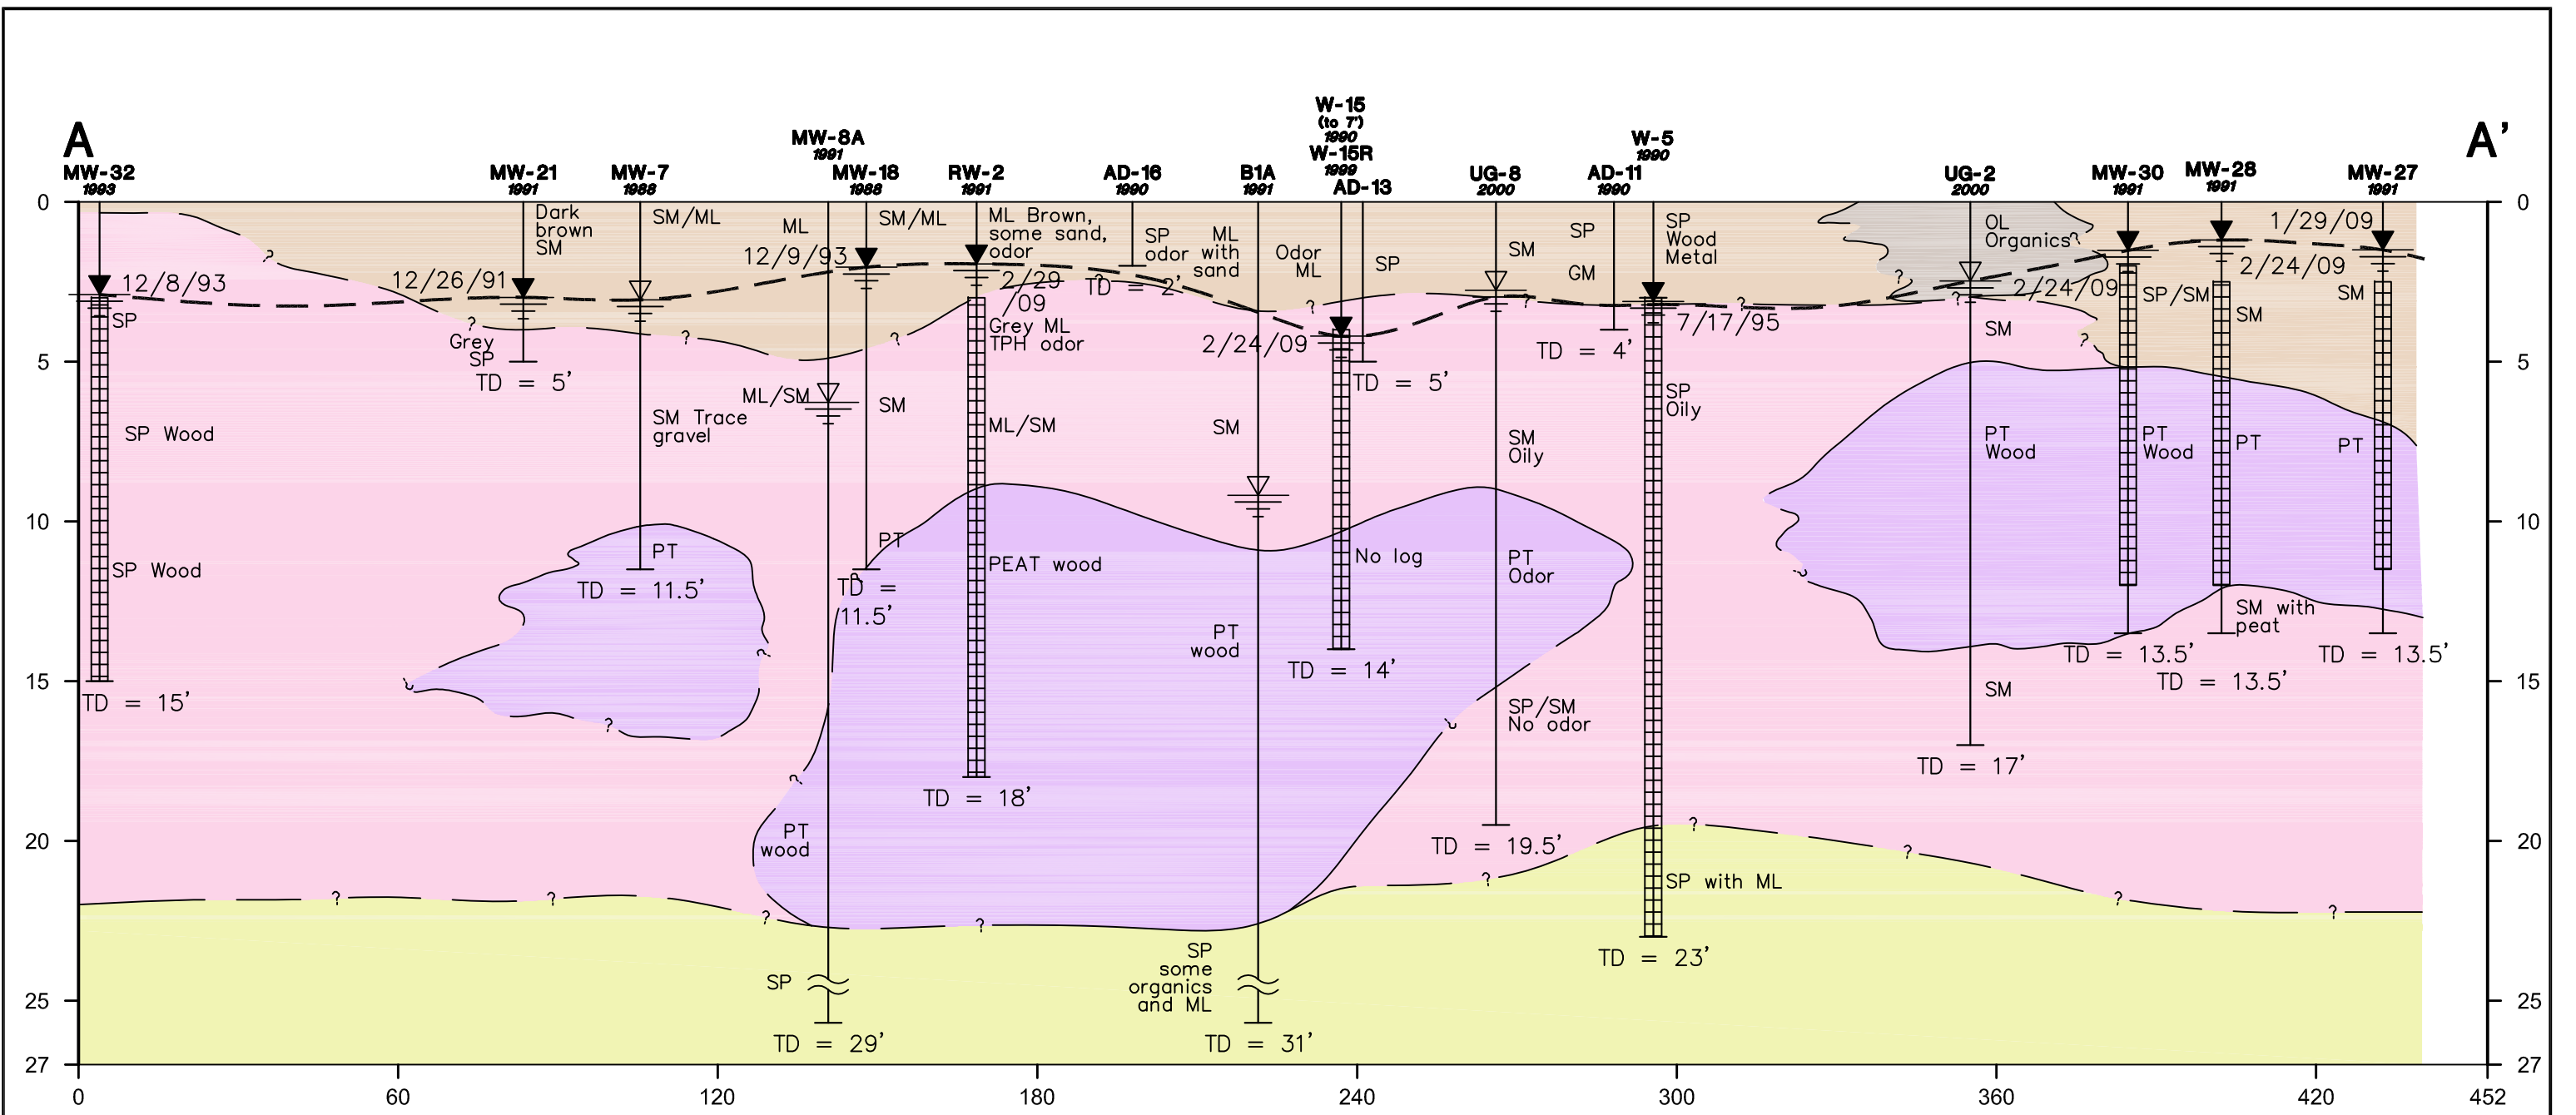

LEGEND


| | | | | | | | | |
|-------------|----------------------------|--------------------------|------------------------------|--|----------------------|----------------------------------|----------------------|--------------------------------|
| FILL | MARSHLAND MATERIALS | TRANSITIONAL BEDS | 12/26/91 | Static water level measured after drilling and date measured | AD-16 1990 | Boring number and year installed | MW-30 1991 | Well number and year installed |
| SM/SP | SM/SP | ML | Water level during drilling | Water level during drilling | TD = 2' | Total depth in feet | Screen interval | TD = 15' |
| SM/SP | PT | SP | Unconfined groundwater table | Unconfined groundwater table | | | | |
| OL | ML | | | | | | | |
| | GP/GM | | | | | | | |

| | | | | | |
|---|--------------------|--|--|--|---|
| <p>SCALE IN VERTICAL FEET</p> <p>SCALE IN HORIZONTAL FEET</p> | <p>CLIENT LOGO</p> | <p>CLIENT:</p> <p align="center">EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY</p> | <p>DWN BY: JRS</p> <p>CHK'D BY: AS</p> <p>DATUM: NONE</p> <p>PROJECTION: NONE</p> <p>SCALE: AS SHOWN</p> | <p>PROJECT</p> <p align="center">EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728</p> | <p>DATE: AUGUST 2009</p> <p>PROJECT NO: 9-915-15716-C</p> |
| | | <p>AMEC Earth & Environmental</p> <p>11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201</p> | <p>TITLE</p> <p align="center">GEOLOGIC CROSS SECTION A-A'</p> | <p>REV. NO.:</p> <p>FIGURE No. 16</p> | |

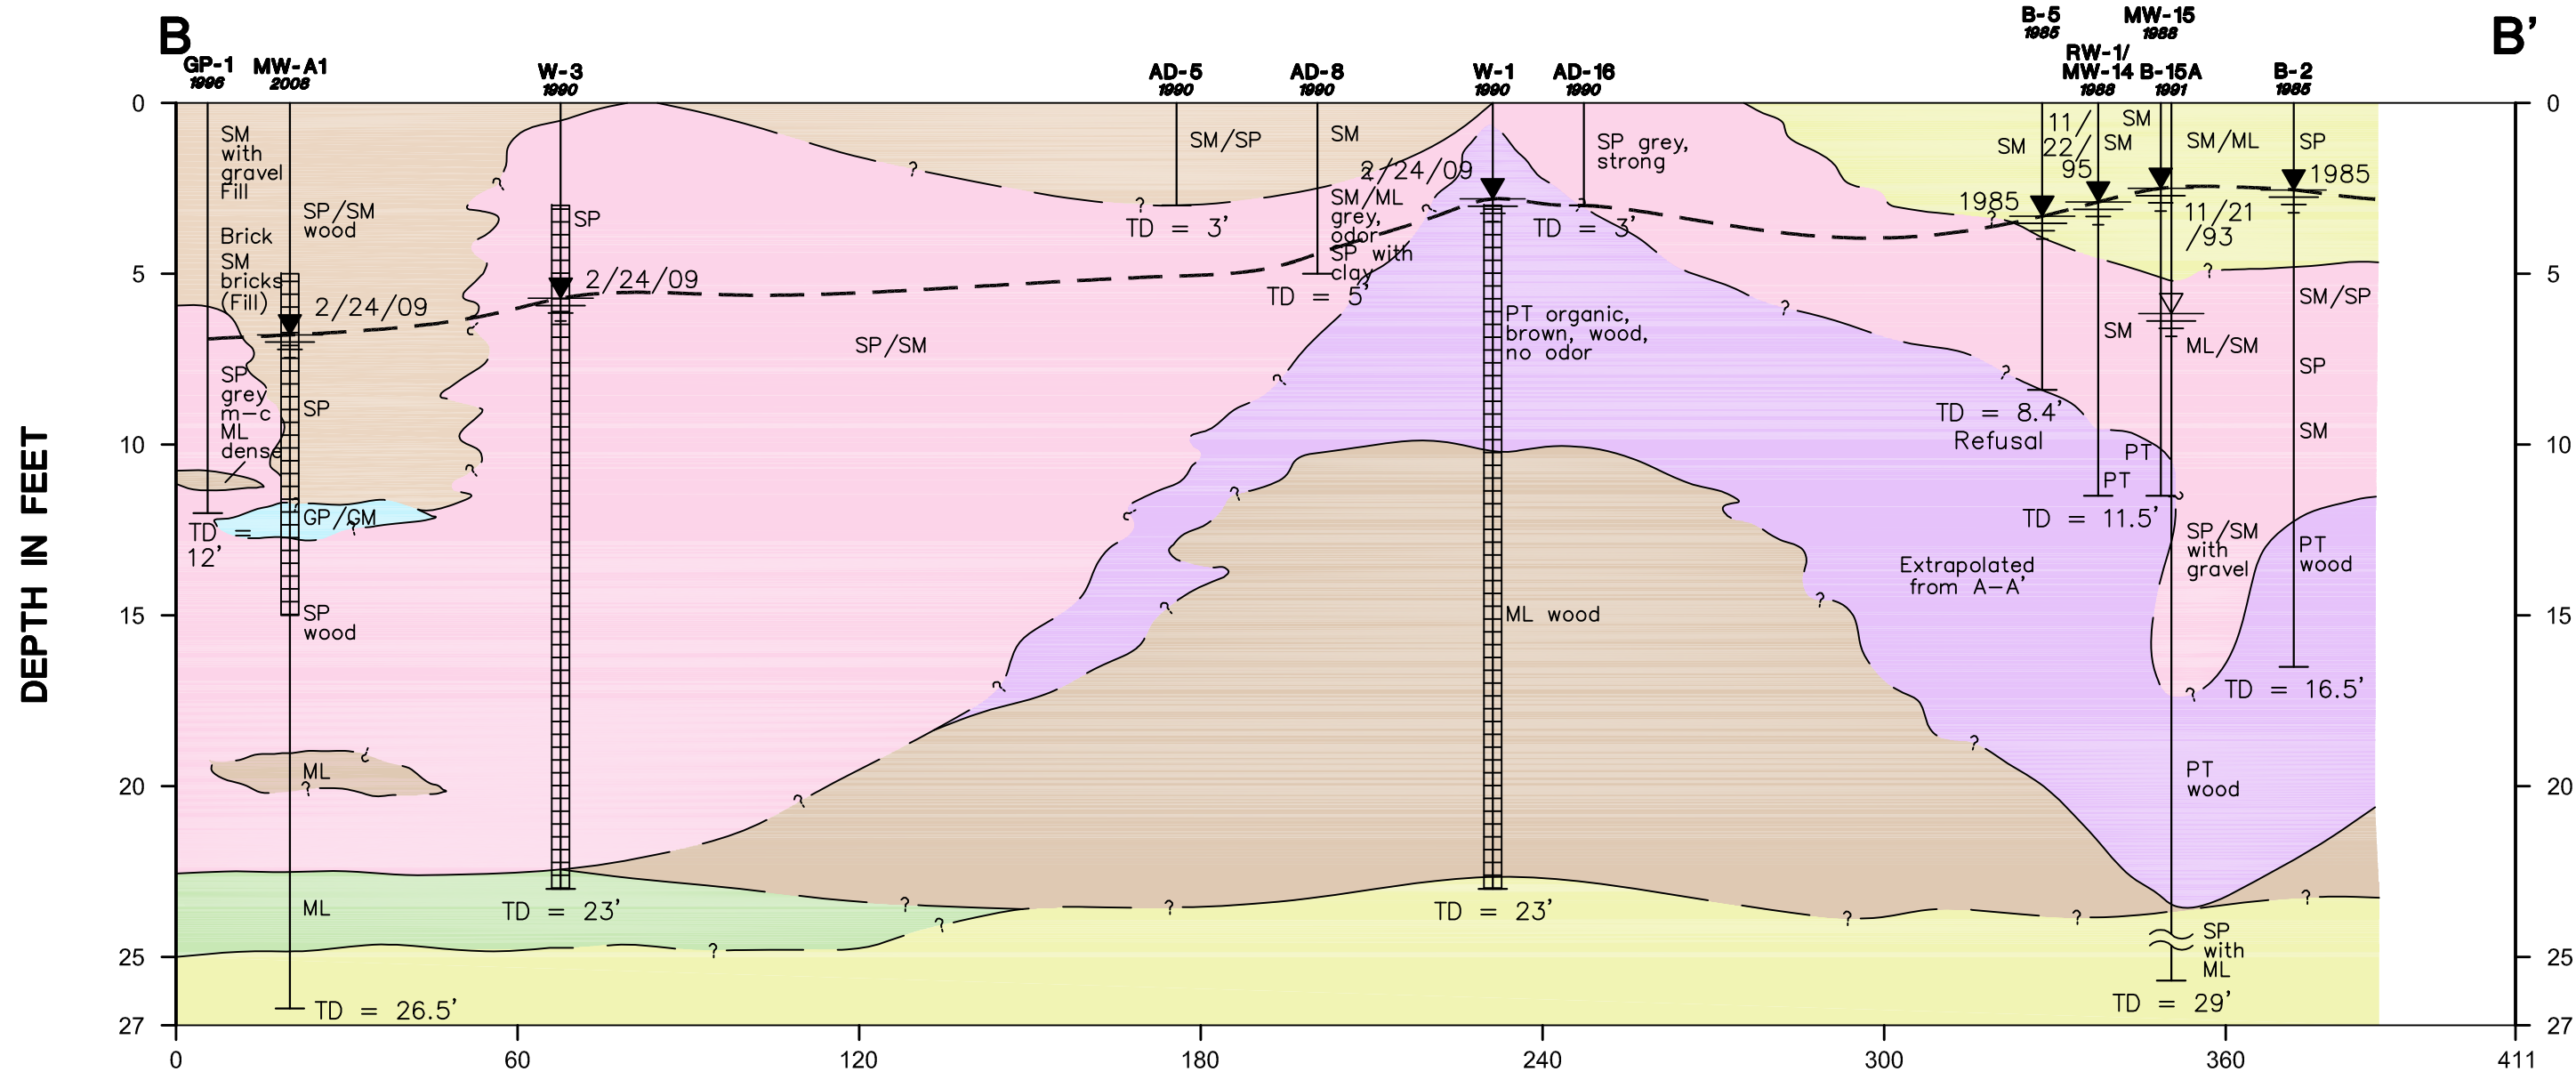


LEGEND

| | | | | | | | | |
|---------------------------------|--------------------------------|--------------------------|------------------------------|--|------------------------------|----------------------------------|-------------------|--------------------------------|
| FILL | MARSHLAND MATERIALS | TRANSITIONAL BEDS | 12/26/91 | Static water level measured after drilling and date measured | AD-8 1990 | Boring number and year installed | MW-A1 2008 | Well number and year installed |
| SM/SP Brown silty SAND and SAND | SM/SP Grey silty SAND and SAND | ML SILT with organics | Water level during drilling | TD = 5' Total depth in feet | TD = 23' Total depth in feet | Screen interval | | |
| OL Organic SILT | PT PEAT with wood | SP Dense coarse SAND | Unconfined groundwater table | | | | | |
| ML SILT | GP/GM Silty GRAVEL/GRAVEL | | | | | | | |



| | | | | | | | | |
|-------------|---|--|-------------|----------|----------|---|--------------|---------------|
| CLIENT LOGO | CLIENT: | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | DWN BY: | JRS | PROJECT: | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: | AUGUST 2009 |
| | AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | | CHK'D BY: | AS | TITLE: | GEOLOGIC CROSS SECTION B-B' | PROJECT NO.: | 9-915-15716-C |
| | | | DATUM: | NONE | | | REV. NO.: | |
| | | | PROJECTION: | NONE | | | FIGURE No. | 17 |
| | | | SCALE: | AS SHOWN | | | | |

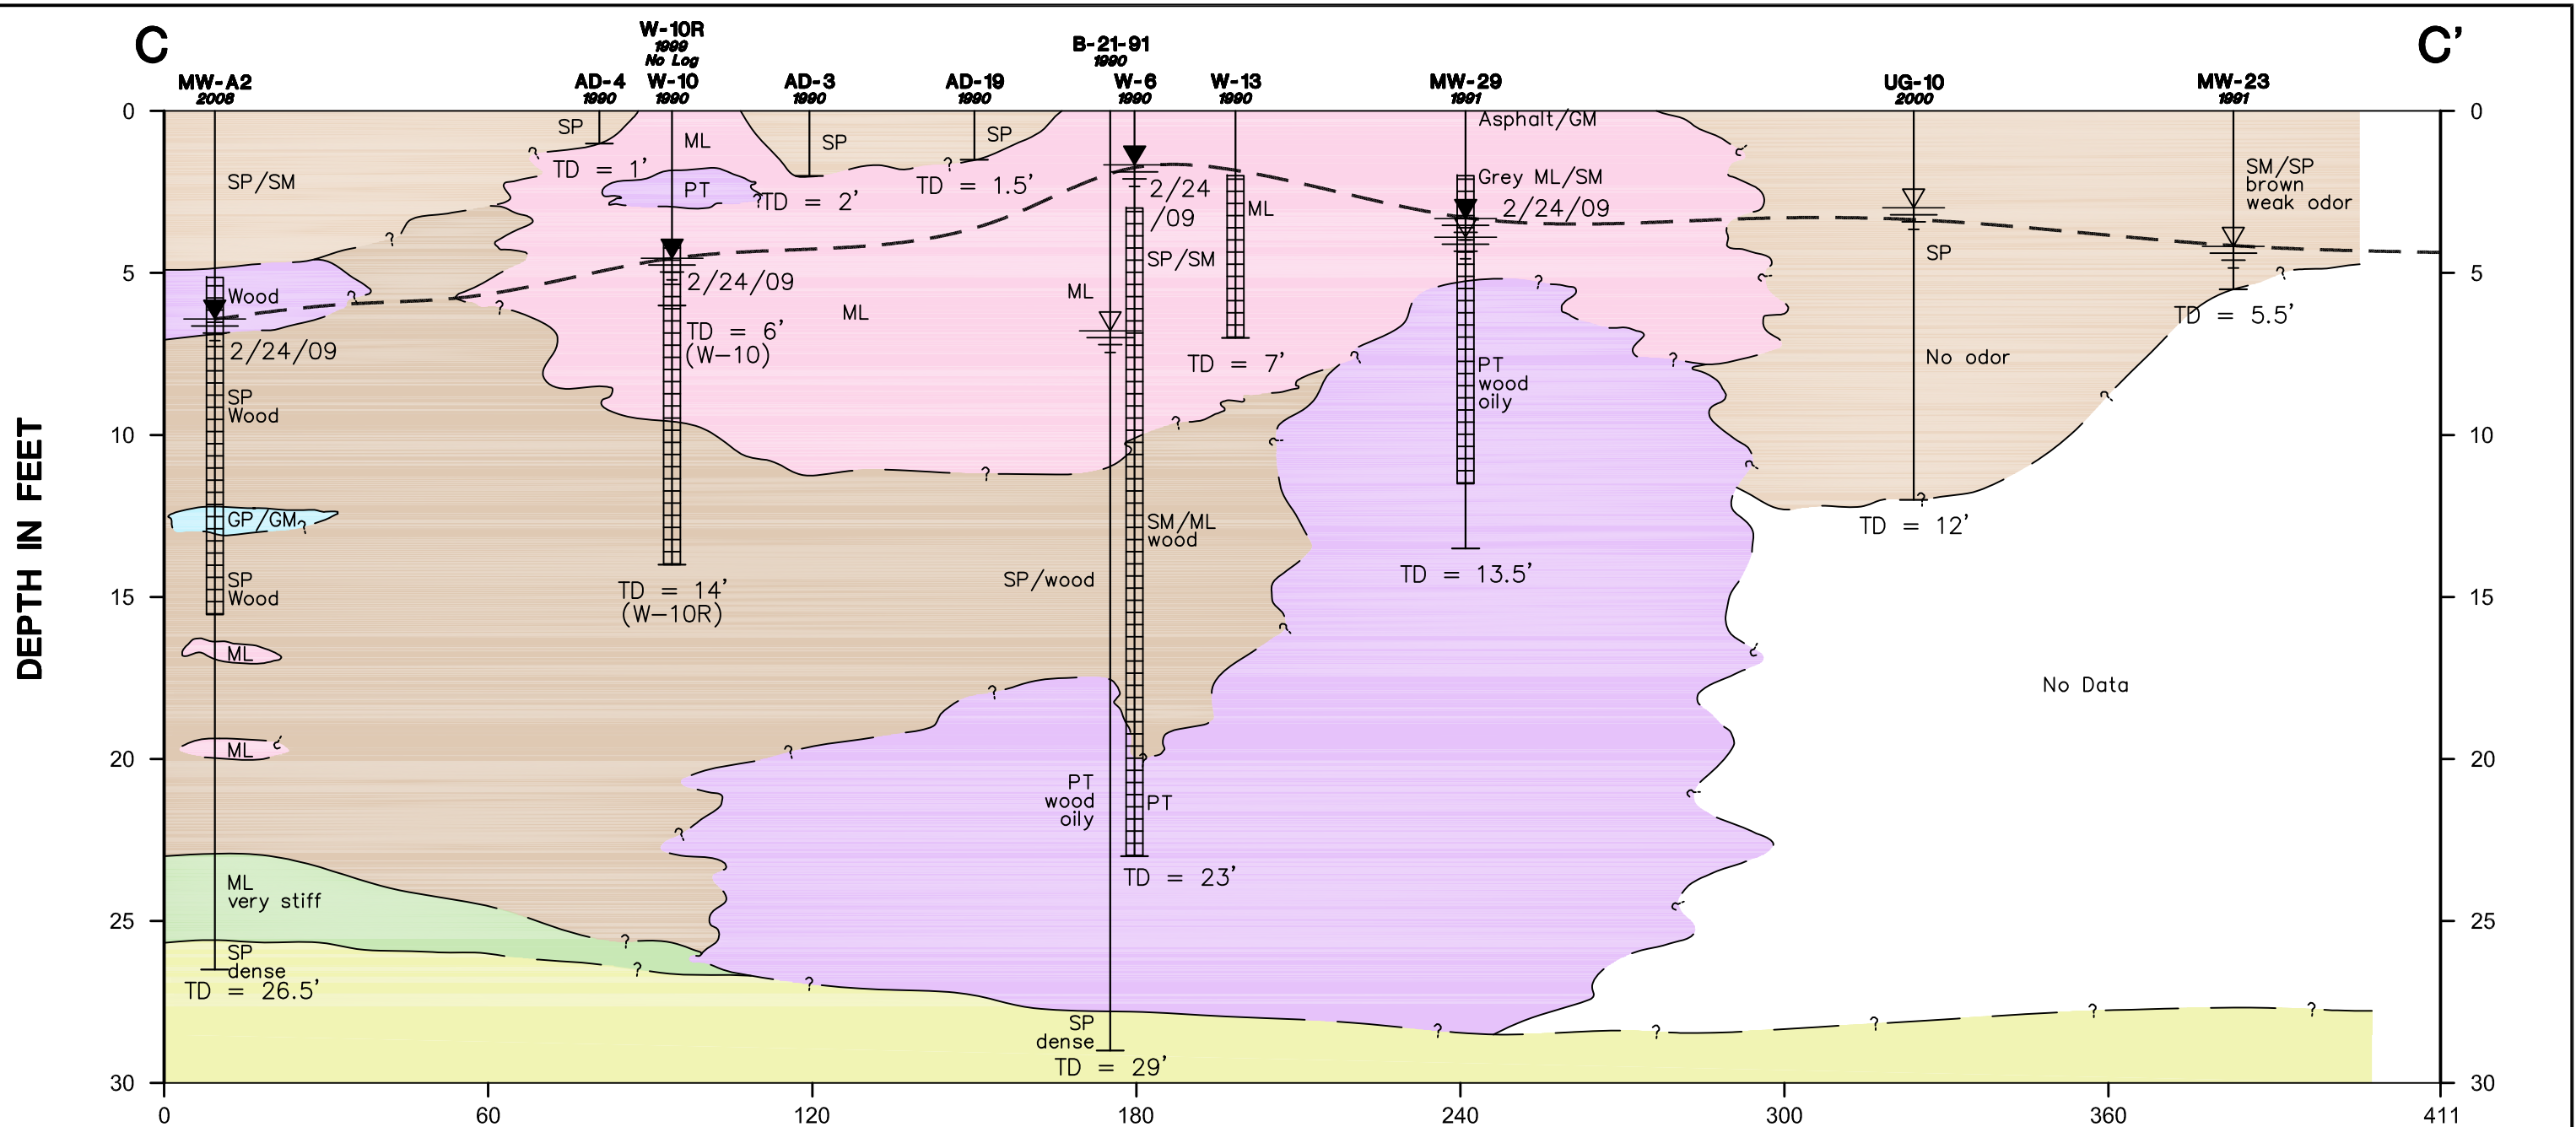

LEGEND



| | | | | | | | | |
|---------------------------------|--------------------------------|--------------------------|----------|--|------------------|----------------------------------|-------------------|--------------------------------|
| FILL | MARSHLAND MATERIALS | TRANSITIONAL BEDS | 12/26/91 | Static water level measured after drilling and date measured | AD-4 1990 | Boring number and year installed | MW-A2 2008 | Well number and year installed |
| SM/SP Brown silty SAND and SAND | SM/SP Grey silty SAND and SAND | ML SILT with organics | | Water level during drilling | | | | |
| OL Organic SILT | PT PEAT with wood | SP Dense coarse SAND | | Unconfined groundwater table | | | | |
| | ML SILT | | | | | | | |
| | GP/GM Silty GRAVEL/GRAVEL | | | | | | | |

TD = 1' Total depth in feet TD = 26' Total depth in feet

| | | | | | |
|--|---|---------|------------------|---|---------------------------|
| SCALE IN VERTICAL FEET SCALE IN HORIZONTAL FEET | CLIENT LOGO | CLIENT: | DWN BY: JRS | PROJECT: | DATE: AUGUST 2009 |
| | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | | CHK'D BY: AS | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | PROJECT NO: 9-915-15716-C |
| | | | DATUM: NONE | TITLE: | REV. NO.: |
| | | | PROJECTION: NONE | GEOLOGIC CROSS SECTION C-C' | FIGURE No. 18 |
| | | | SCALE: AS SHOWN | | |

MW22 MW23 MW24

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

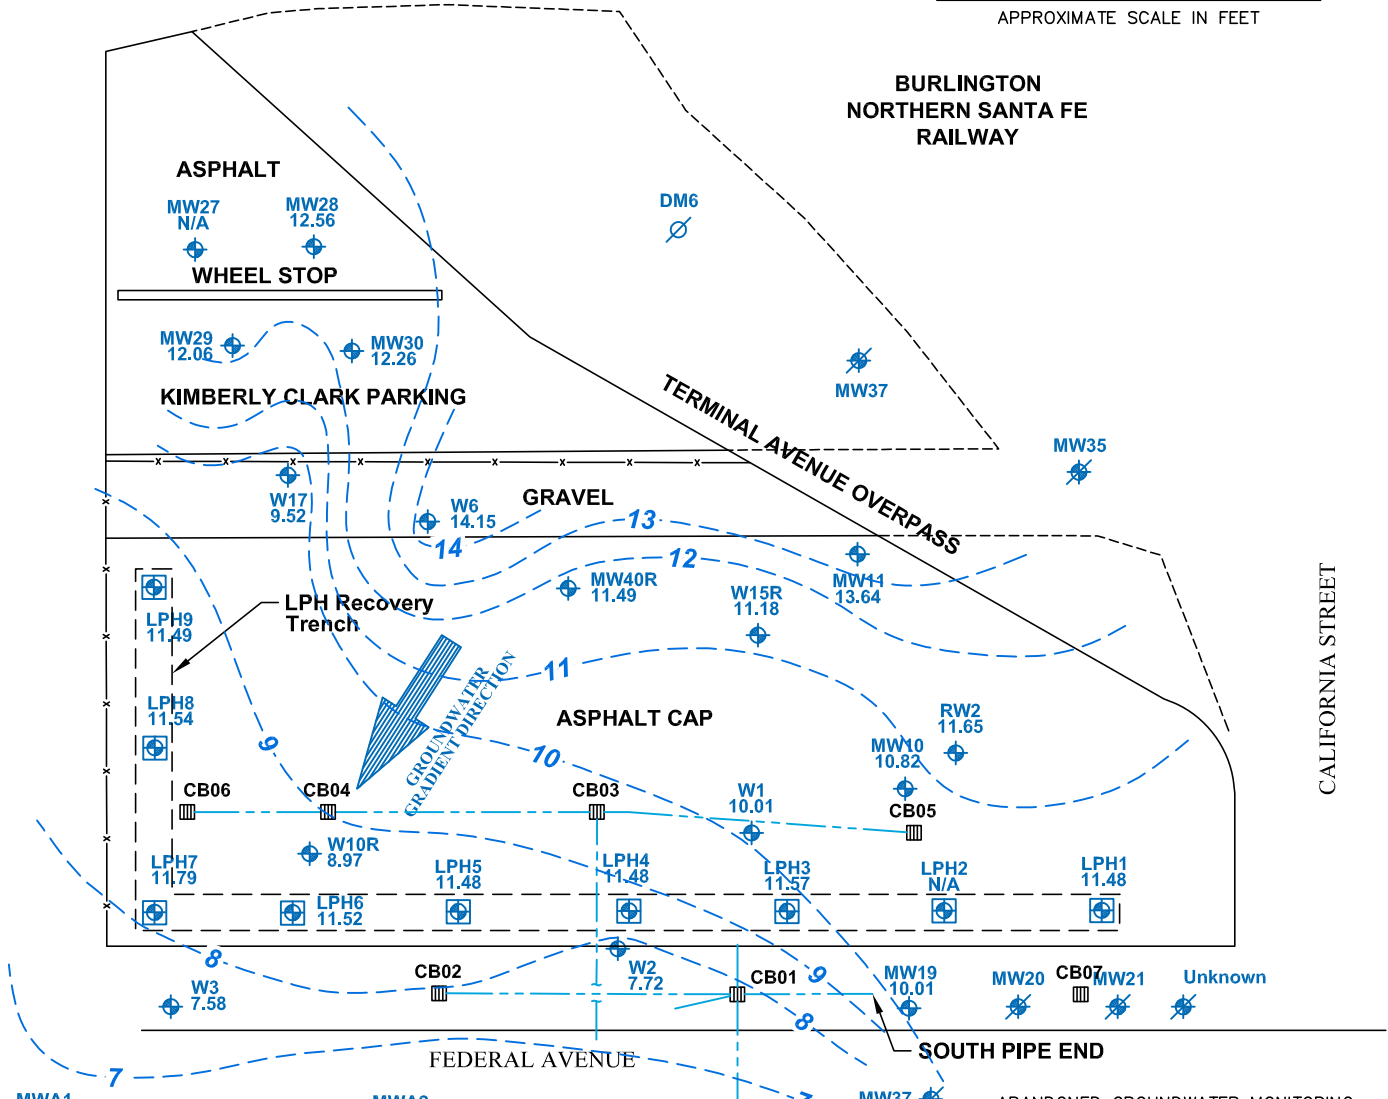

EXPLANATION

- MW2 GROUNDWATER MONITORING WELL
- 12.56 GROUNDWATER ELEVATION (FEET ABOVE MEAN SEA LEVEL, FEBRUARY 24, 2009)
- NM NOT MEASURED
- NE NOT ESTABLISHED
- - - - - INFERRED GROUNDWATER ELEVATION CONTOUR LINE (FEET ABOVE MEAN SEA LEVEL)
- INFERRED GROUNDWATER FLOW DIRECTION

- ABANDONED GROUNDWATER MONITORING WELL
- LPH RECOVERY WELL
- ABANDONED PIEZOMETER
- FORMERLY MW18
- NOT AVAILABLE
- x - FENCE
- CATCH BASIN
- STORM DRAIN LINE

NOTE: Groundwater elevations in LPH wells were not used in contouring.

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201





CLIENT LOGO CLIENT
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

| | | | | | | | |
|---------|---|-------------|-------|-----------|----------|-------------|---------------|
| PROJECT | EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728 | DWN BY: | JRS | DATUM: | NONE | DATE: | AUGUST 2009 |
| TITLE | GROUNDWATER ELEVATION AND FLOW DIRECTION ON FEBRUARY 24, 2009 | CHK'D BY: | AS/MS | REV. NO.: | | PROJECT NO: | 9-915-15716-C |
| | | PROJECTION: | NONE | SCALE: | AS SHOWN | FIGURE No. | 19 |

C:\91\15000\15716-C - Exxon Mobil\15716-C-19.dwg - Layout1 - Aug. 17, 2009 10:20am - jeffrey.sanders

MW22 MW23 MW24

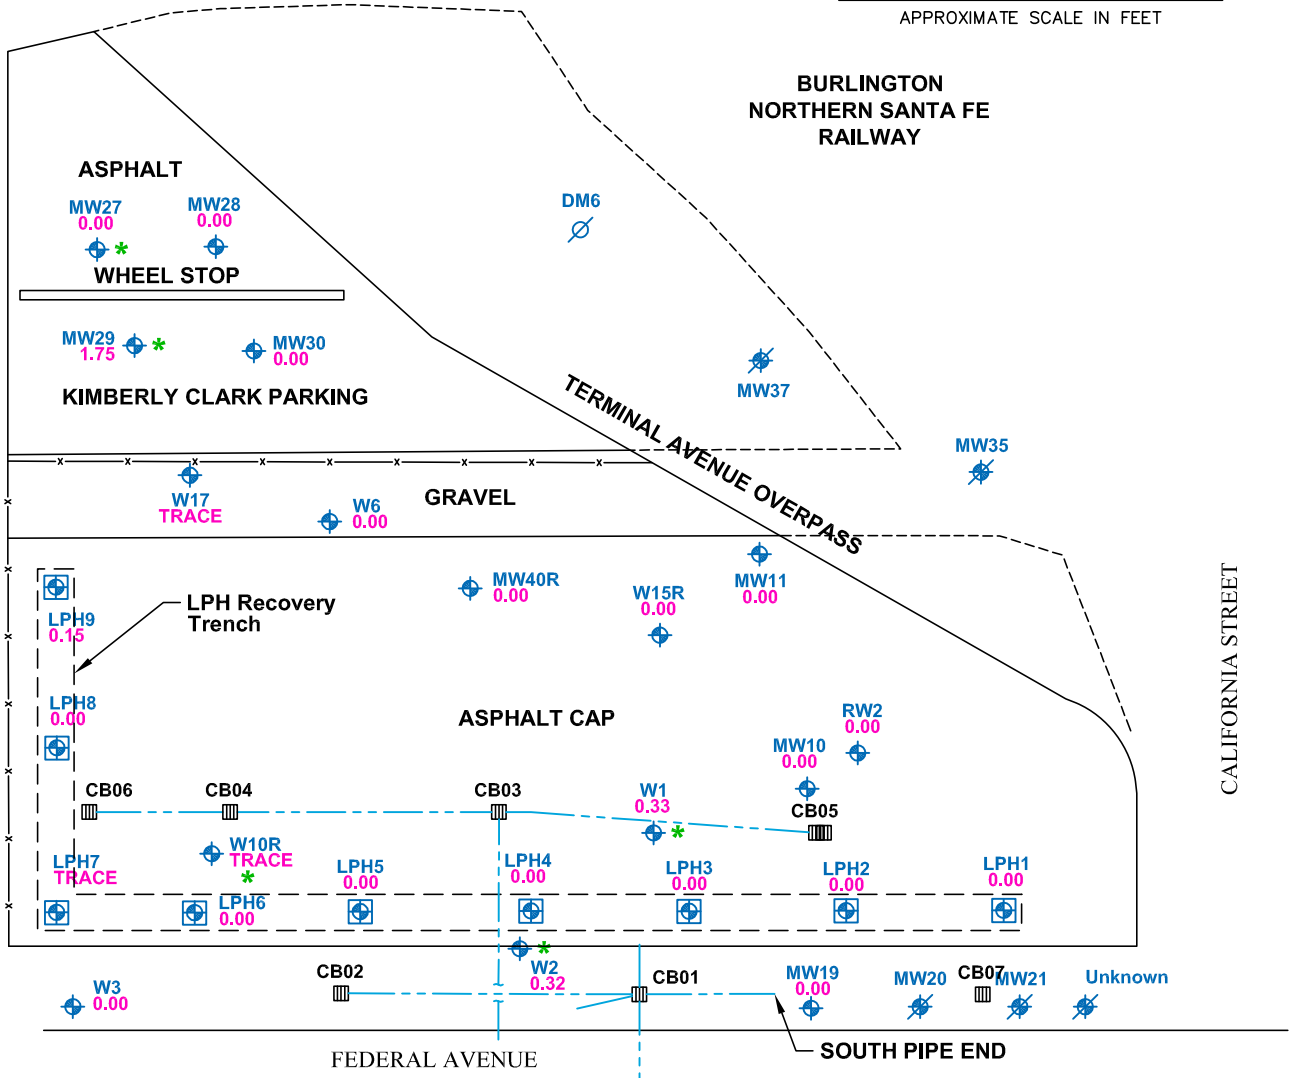

MWA1
0.00

MWA2
0.00

EXPLANATION

- MW2 GROUNDWATER MONITORING WELL
- 1.75 AVERAGE LIQUID-PHASE PETROLEUM HYDROCARBON (LPH) THICKNESS IN FEET*
- * OLEOPHILIC SOCK
- MW37 ABANDONED GROUNDWATER MONITORING WELL
- LPH9 LPH RECOVERY WELL

- DM6 ABANDONED PIEZOMETER
- RW2 FORMERLY MW18
- x- FENCE
- CATCH BASIN
- - - STORM DRAIN LINE

* Values averaged from data collected September 2008 to February 2009.

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

AMEC Earth & Environmental

11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201



CLIENT LOGO

CLIENT

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**

PROJECT **EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728**

DWN BY:

JRS

DATUM:

NONE

DATE:

JUNE 2009

TITLE **AVERAGE LPH THICKNESS
FROM SEPTEMBER 2008 TO FEBRUARY 2009**

CHK'D BY:

AS/MS

REV. NO.:

PROJECT NO:
9-915-15716-C

PROJECTION:

NONE

SCALE:


AS SHOWN

FIGURE No.

20

C:\91\15000\15716-C - Exxon Mobil\15716-C-12.dwg - Layout1 - Jun. 05, 2009 9:09am - jeffrey.sanders


SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.



| | | | | | |
|---------|---------|---------|---------|---------|---------|
| 8/28/08 | 2/12/09 | 8/28/08 | 2/12/09 | 8/28/08 | 2/12/09 |
| 134 | 145 | 314 | 239 | ND | 280 |
| 2,850 | 2,080 | 2,100 | 1,400 | 27,900 | 444 |
| 2,600 | 414 | 1,840 | 364 | 23,800 | 323 |
| ND | ND | ND | ND | ND | ND |
| ND | ND | ND | ND | ND | ND |
| ND | ND | ND | ND | ND | ND |
| ND | ND | ND | ND | ND | ND |

**BURLINGTON
NORTHERN SANTA FE
RAILWAY**

| | |
|---------|---------|
| 8/28/08 | 2/12/09 |
| 1,070 | 855 |
| 10,600 | 3,110 |
| 8,990 | 959 |
| 4.91 | 3.65 |
| 1.2 | 3.39 |
| 2.29 | 1.25 |
| 5.97 | 6.4 |

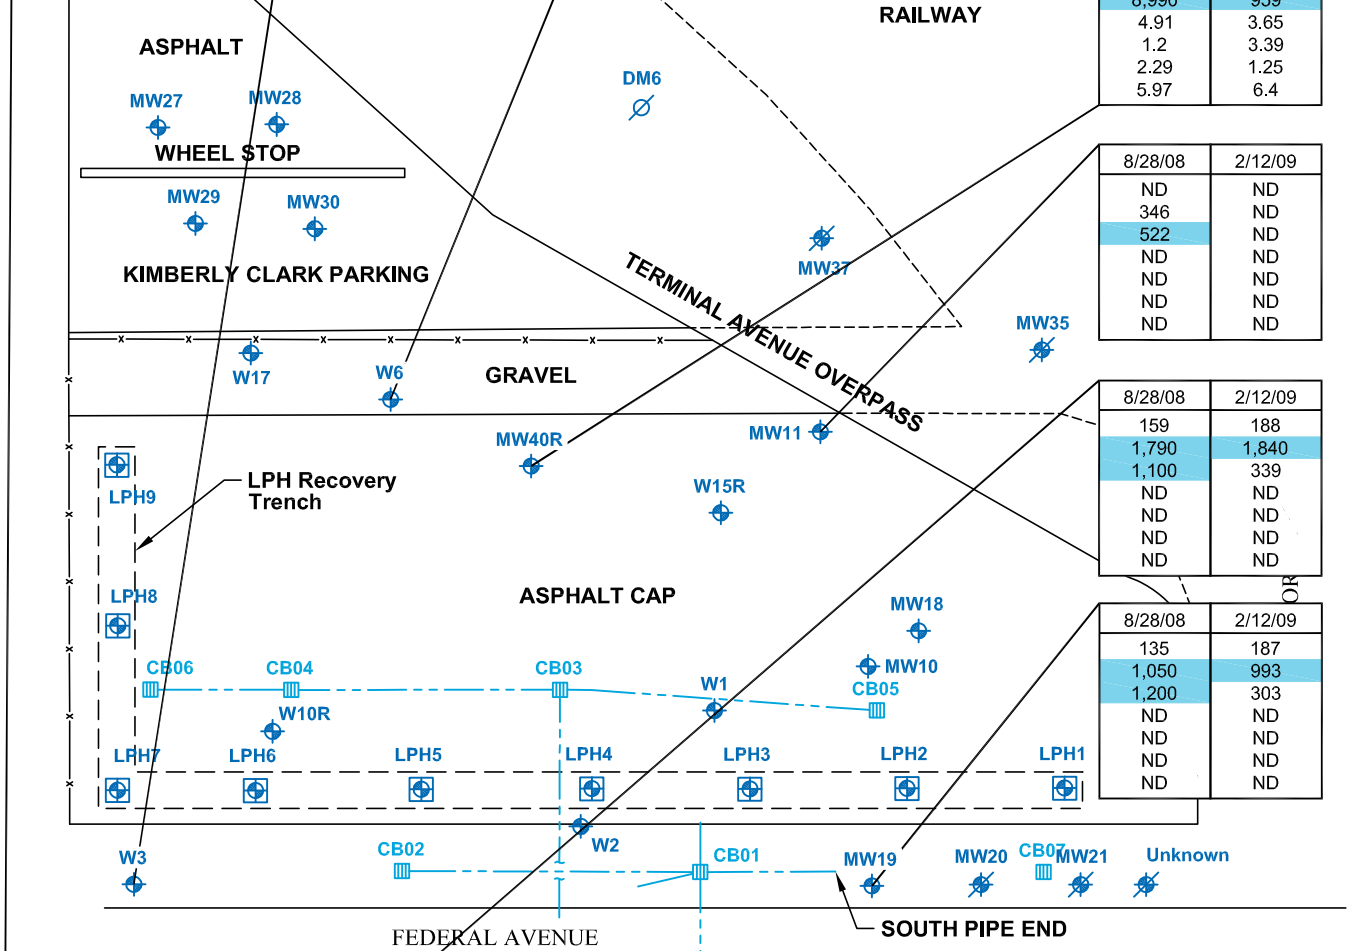

| | |
|---------|---------|
| 8/28/08 | 2/12/09 |
| ND | ND |
| 346 | ND |
| 522 | ND |
| ND | ND |
| ND | ND |
| ND | ND |
| ND | ND |

| | |
|---------|---------|
| 8/28/08 | 2/12/09 |
| 159 | 188 |
| 1,790 | 1,840 |
| 1,100 | 339 |
| ND | ND |
| ND | ND |
| ND | ND |
| ND | ND |

| | |
|---------|---------|
| 8/28/08 | 2/12/09 |
| 135 | 187 |
| 1,050 | 993 |
| 1,200 | 303 |
| ND | ND |
| ND | ND |
| ND | ND |
| ND | ND |

EXPLANATION

- MW2 GROUNDWATER MONITORING WELL
- MW37 ABANDONED GROUNDWATER MONITORING WELL
- LPH9 LPH RECOVERY WELL
- DM6 ABANDONED PIEZOMETER
- FENCE
- CATCH BASIN
- STORM DRAIN LINE

| | |
|---------|--|
| 2/12/09 | SAMPLE DATE |
| 855 | TOTAL PETROLEUM HYDROCARBONS AS GASOLINE |
| 3,110 | TOTAL PETROLEUM HYDROCARBONS AS DIESEL |
| 959 | TOTAL PETROLEUM HYDROCARBONS AS OIL |
| 3.65 | BENZENE |
| 3.39 | TOLUENE |
| 1.25 | ETHYLBENZENE |
| 6.4 | TOTAL XYLENES |
| | ABOVE MTCA A CLEANUP LEVEL |
| ND | NOT DETECTED |

AMEC Earth & Environmental

11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201



CLIENT LOGO

CLIENT

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**


PROJECT **EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728**

DWN BY: JRS DATUM: NONE DATE: AUGUST 2009

TITLE **GROUNDWATER SAMPLE
ANALYTICAL RESULTS
AUGUST 2008 & FEBRUARY 2009**

CHK'D BY: AS/MS REV. NO.: PROJECT NO: 9-915-15716-C
PROJECTION: NONE SCALE: AS SHOWN FIGURE No. **21**

G:\91\15000\15716-C - Exxon Mobil\15716-C-16.dwg - Layout1 - Aug. 17, 2009 11:14am - jeffrey.sanders

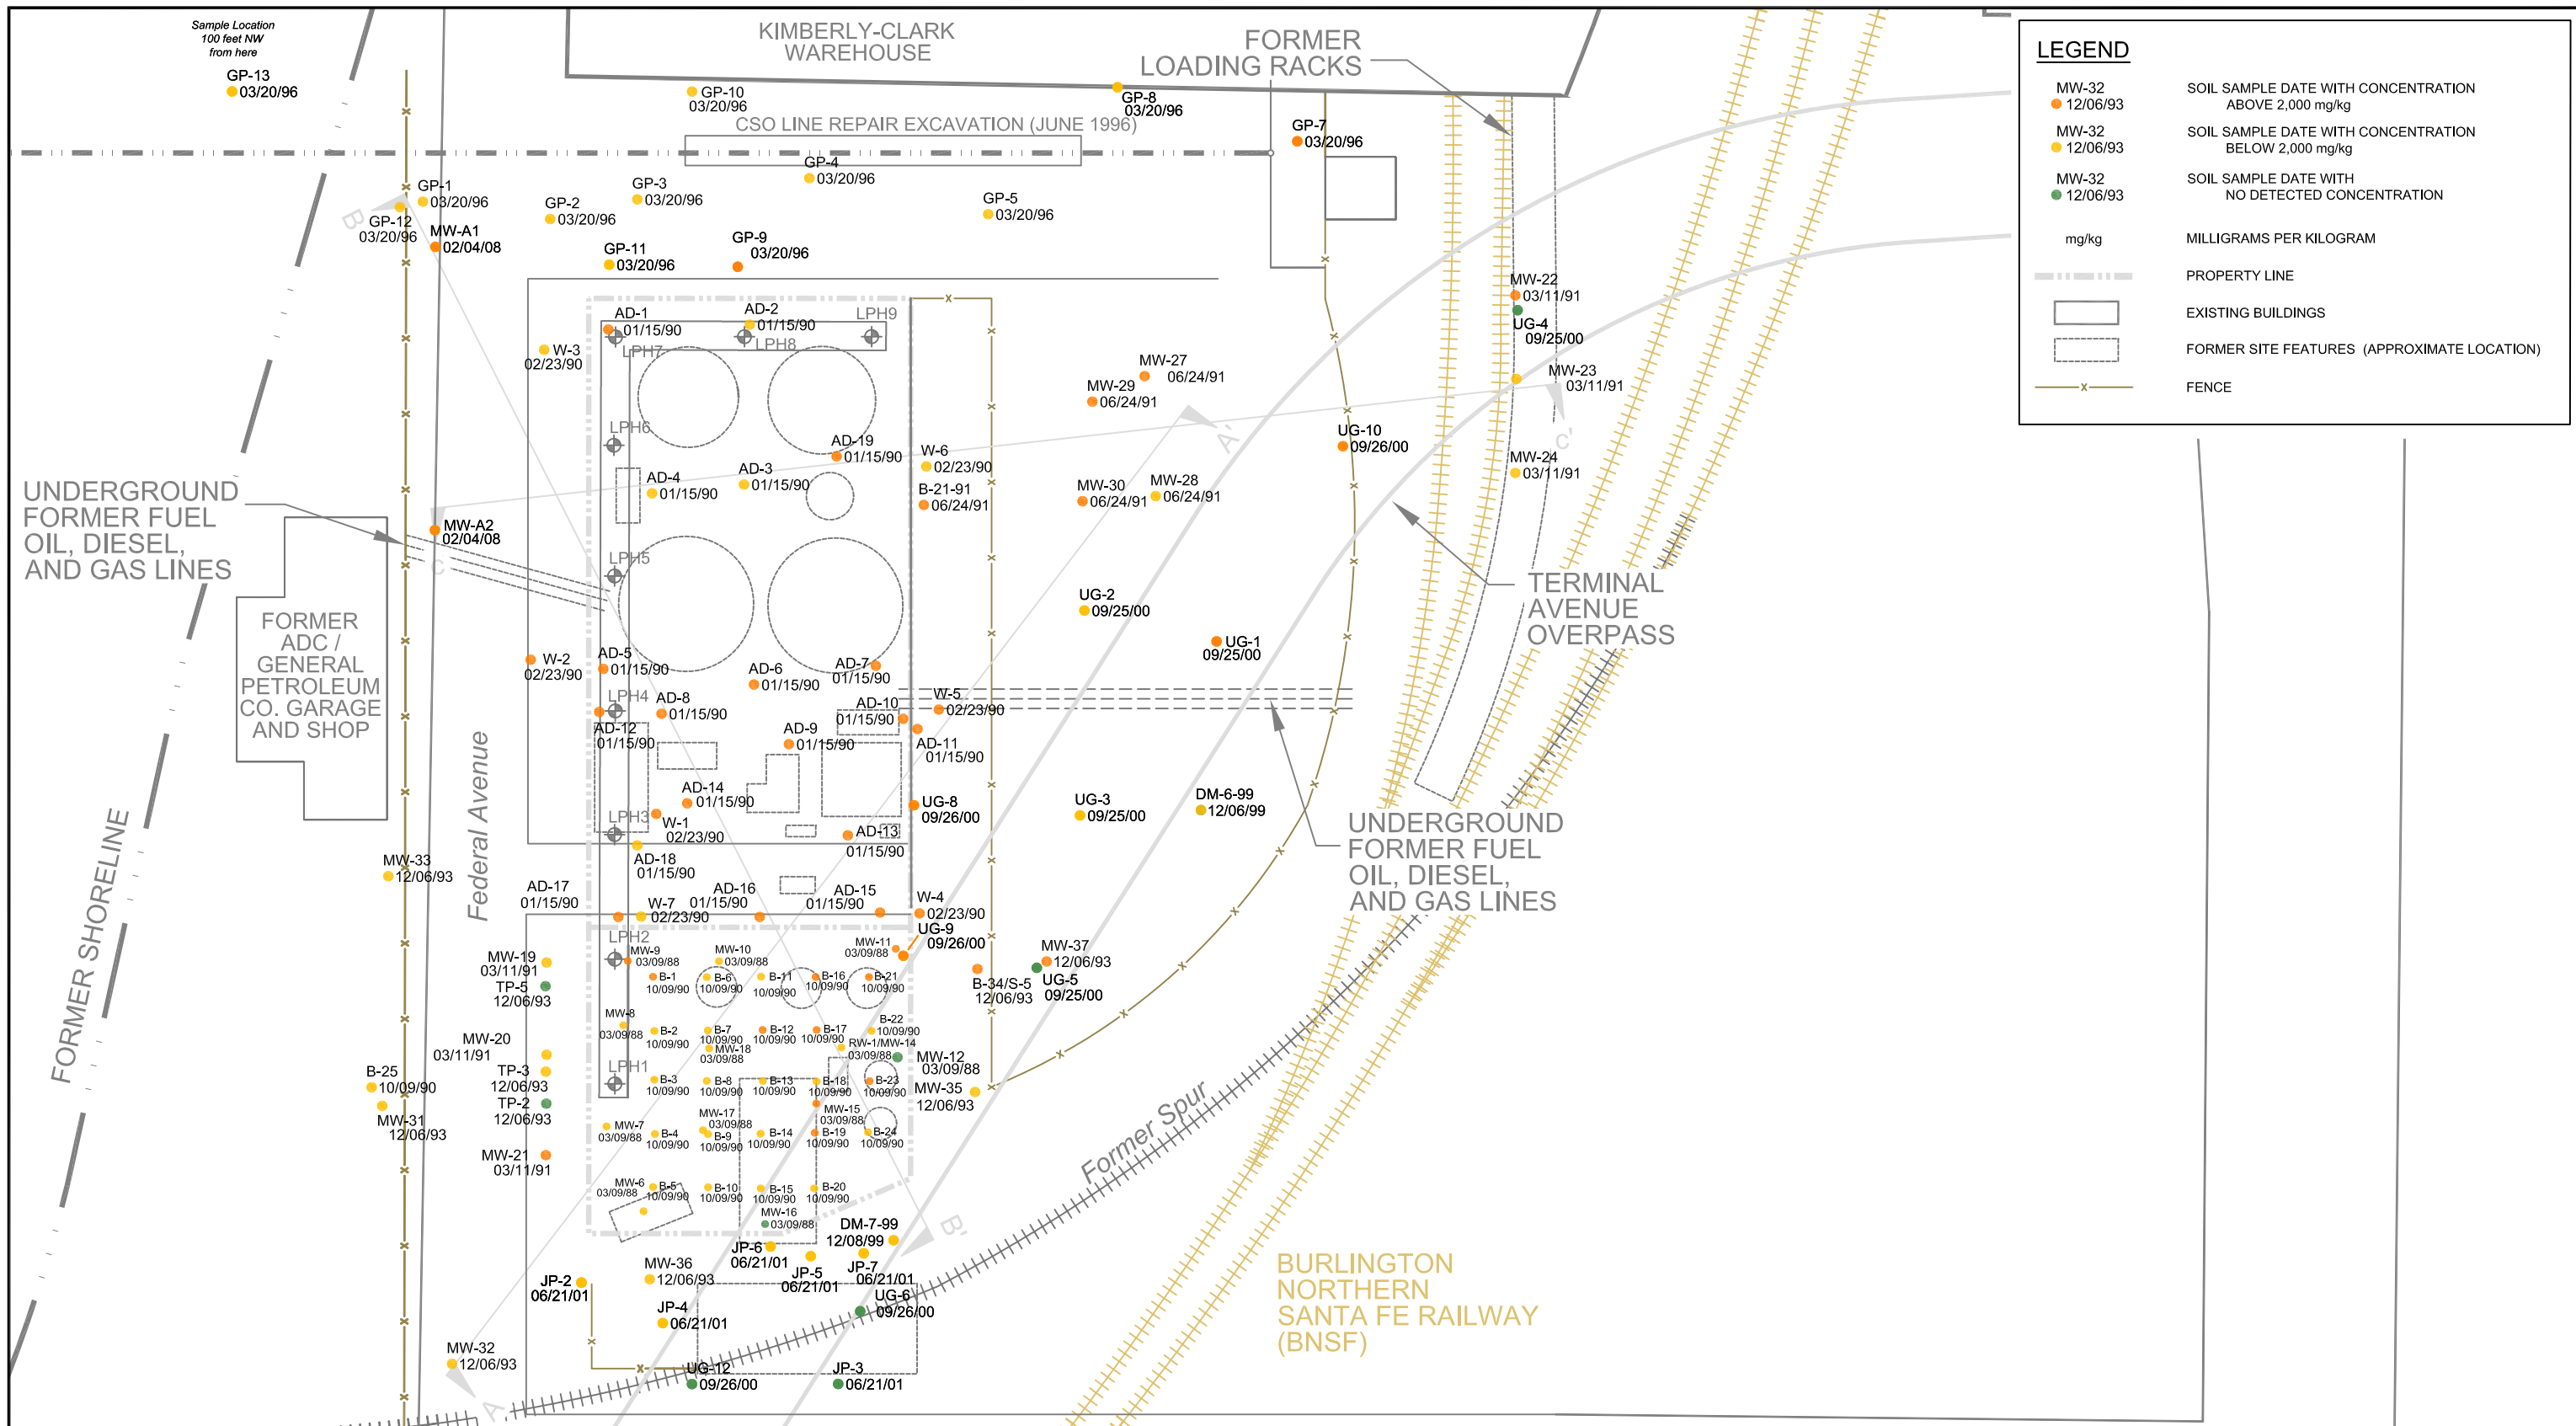

| LEGEND | |
|---------------------|---|
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION ABOVE 2,000 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION BELOW 2,000 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| mg/kg | MILLIGRAMS PER KILOGRAM |
| --- | PROPERTY LINE |
| ▭ | EXISTING BUILDINGS |
| ▭ | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| -x- | FENCE |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
CHK'D BY: AIS
DATUM: NONE
PROJECTION: NONE
SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728**

TITLE

**HORIZONTAL DISTRIBUTION
OF TPH-DIESEL, TPH-OIL,
AND UNDIFFERENTIATED TPH IN SOIL**


DATE: AUGUST 2009
PROJECT NO: 9-915-15716-C
REV. NO.: 1
FIGURE No. 22

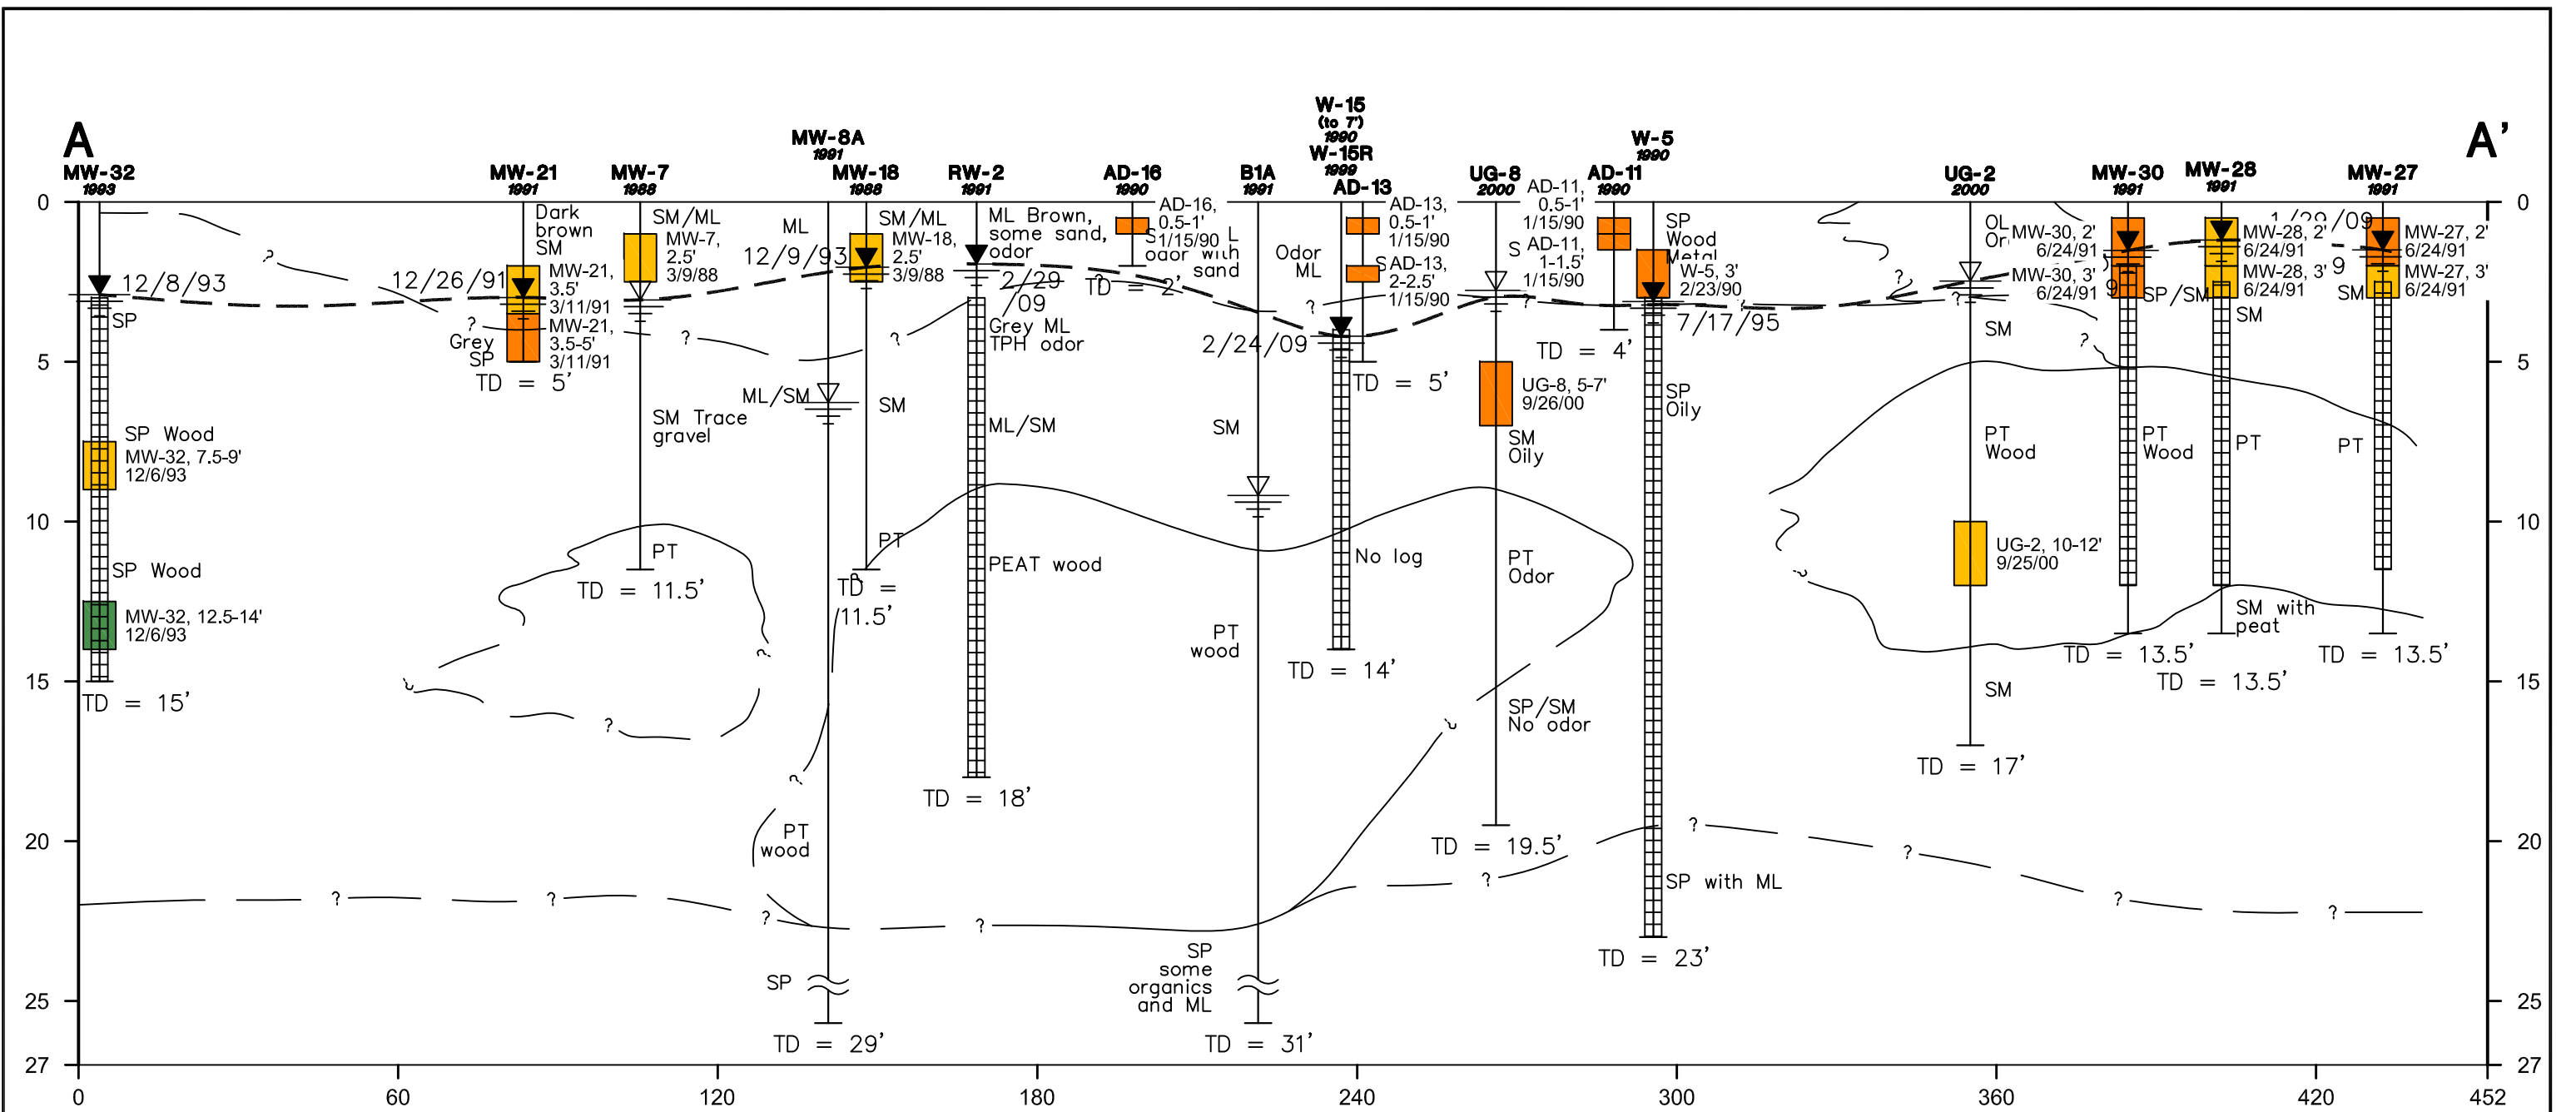

LEGEND

- 12/26/91: Static water level measured after drilling and date measured
- Water level during drilling
- Unconfined groundwater table
- AD-16 1990: Boring number and year installed
- MW-30 1991: Well number and year installed
- TD = 2': Total depth in feet
- TD = 15': Total depth in feet
- TPH-D or TPH (Undifferentiated):
 - Orange: Detected ≥ 2,000 mg/kg
 - Yellow: Detected < 2,000 mg/kg
 - Green: Not detected
- mg/kg: Milligram per kilogram
- UG-2, 10-12' 9/25/00: Sample depth and date collected

| | | | | | | |
|---|--------------------|---|--|--|---|--|
| <p>SCALE IN VERTICAL FEET</p> <p>SCALE IN HORIZONTAL FEET</p> | <p>CLIENT LOGO</p> | <p>CLIENT:</p> <p align="center">EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY</p> | | <p>DWN BY: JRS</p> | <p>PROJECT</p> <p align="center">EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728</p> | <p>DATE:</p> <p align="center">AUGUST 2009</p> |
| | | <p>AMEC Earth & Environmental</p> <p>11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201</p> | | <p>CHK'D BY: AS</p> | | <p>PROJECT NO:</p> <p align="center">9-915-15716-C</p> |
| <p>DATUM: NONE</p> | | | | <p>TITLE</p> <p align="center">VERTICAL DISTRIBUTION OF TPH-D OR TPH (UNDIFFERENTIATED) IN SOIL: CROSS SECTION A-A'</p> | <p>REV. NO.:</p> | |
| <p>PROJECTION: NONE</p> | | | | <p>SCALE: AS SHOWN</p> | <p>FIGURE No.</p> <p align="right">23</p> | |

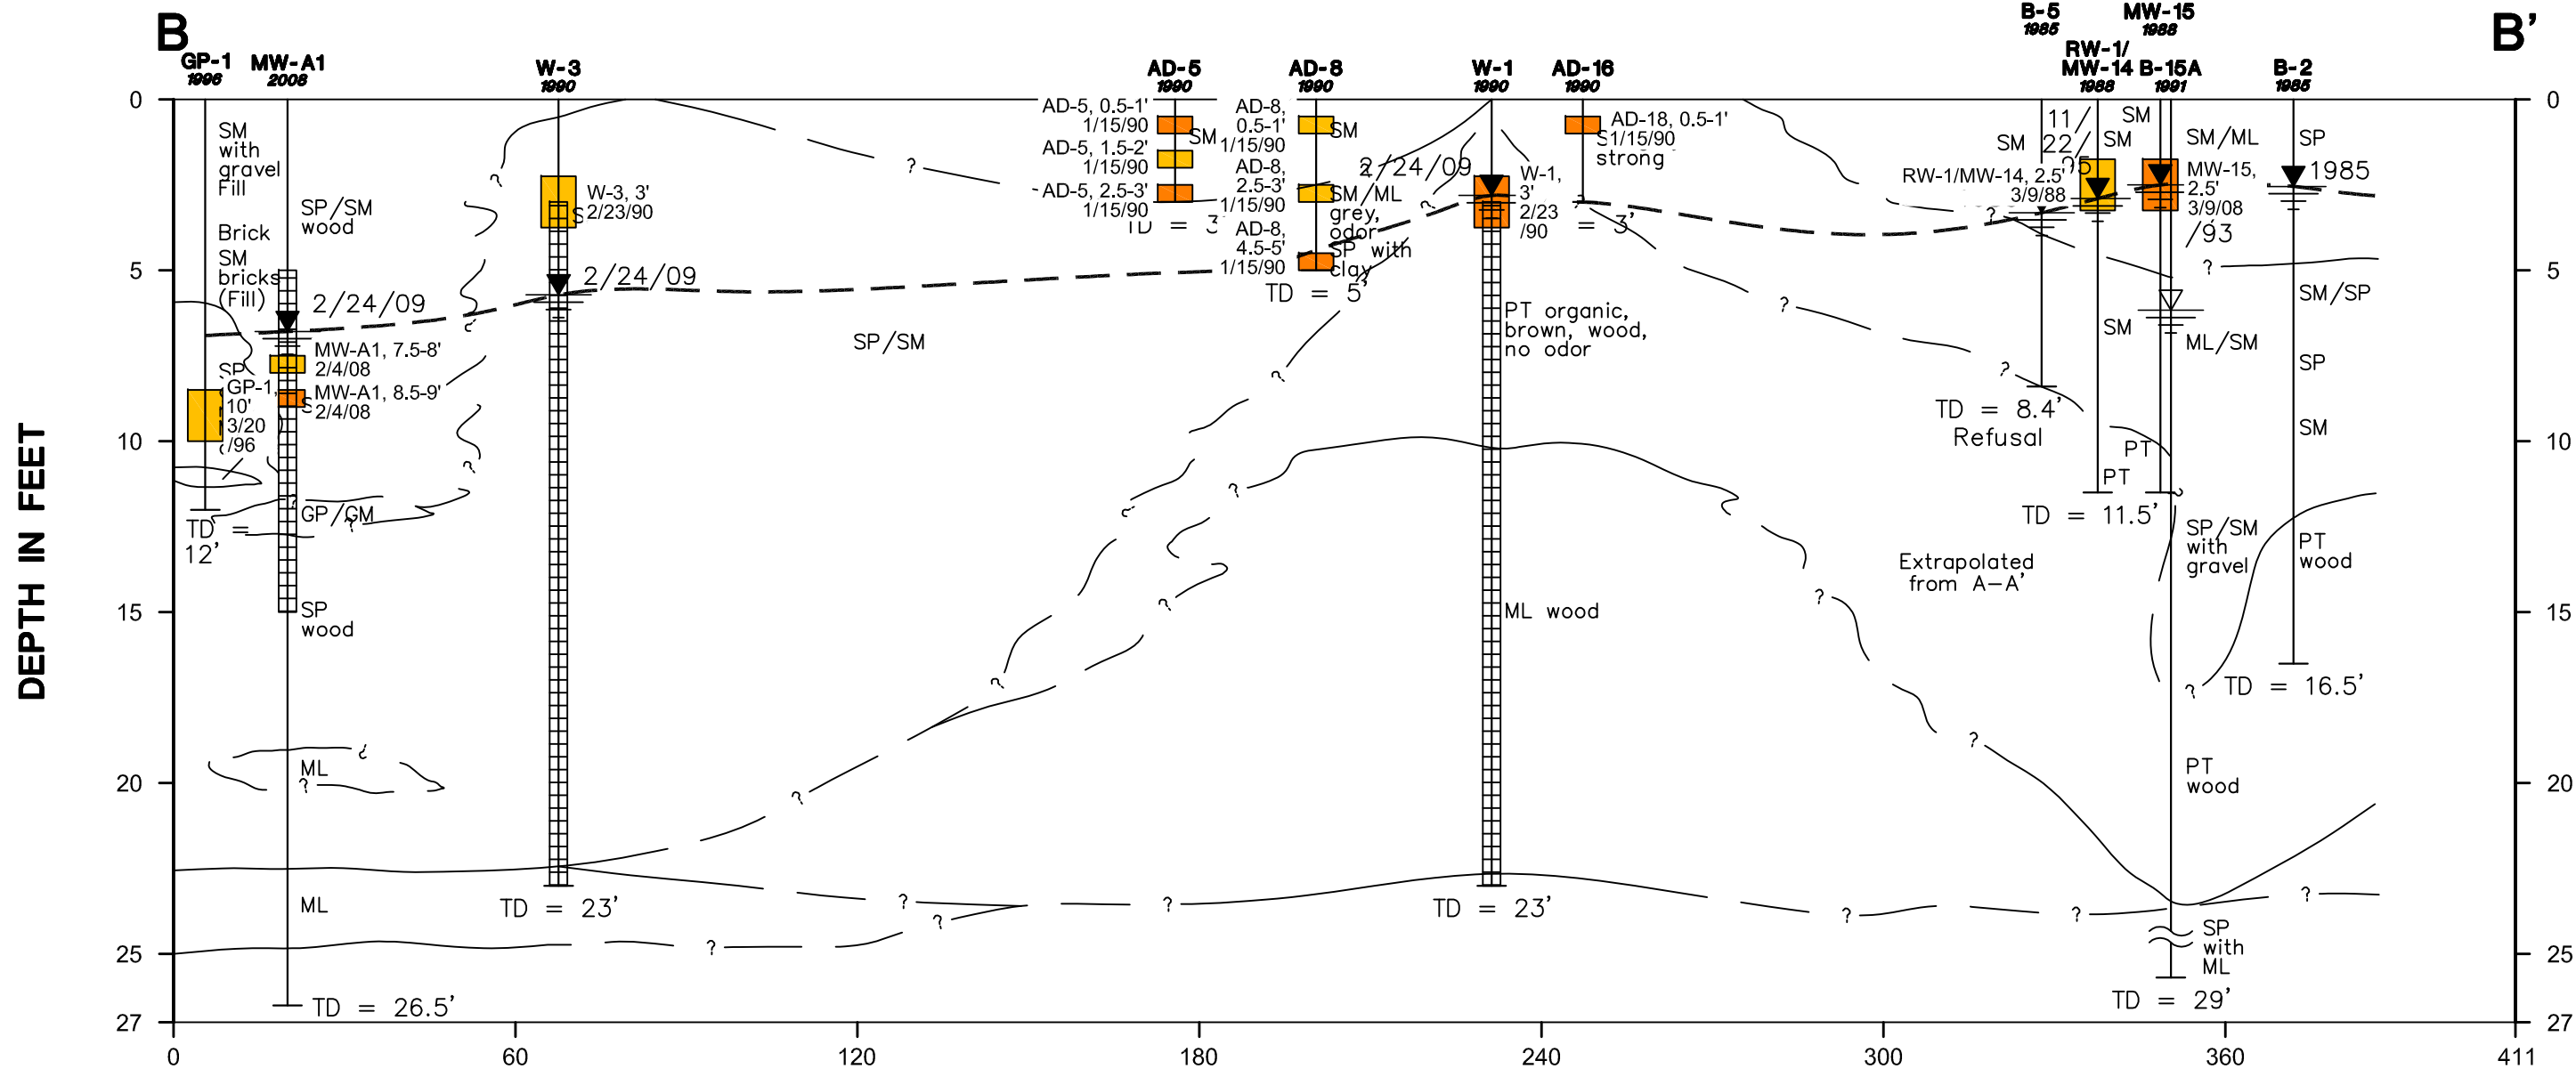

LEGEND

12/26/91
 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-5 1990 Boring number and year installed
 TD = 3' Total depth in feet

MW-A1 2008 Well number and year installed
 TD = 23' Total depth in feet

TPH-D or TPH (Undifferentiated)


Detected ≥ 2,000 mg/kg

Detected < 2,000 mg/kg

Not detected

mg/kg Milligram per kilogram

AD-18, 0.5-1' 1/15/90 Sample depth and date collected



CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY


AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS
 CHK'D BY: AS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: AS SHOWN

PROJECT: EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728

TITLE: **VERTICAL DISTRIBUTION OF TPH-D OR TPH (UNDIFFERENTIATED) IN SOIL: CROSS SECTION B-B'**

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.:
 FIGURE No. 24

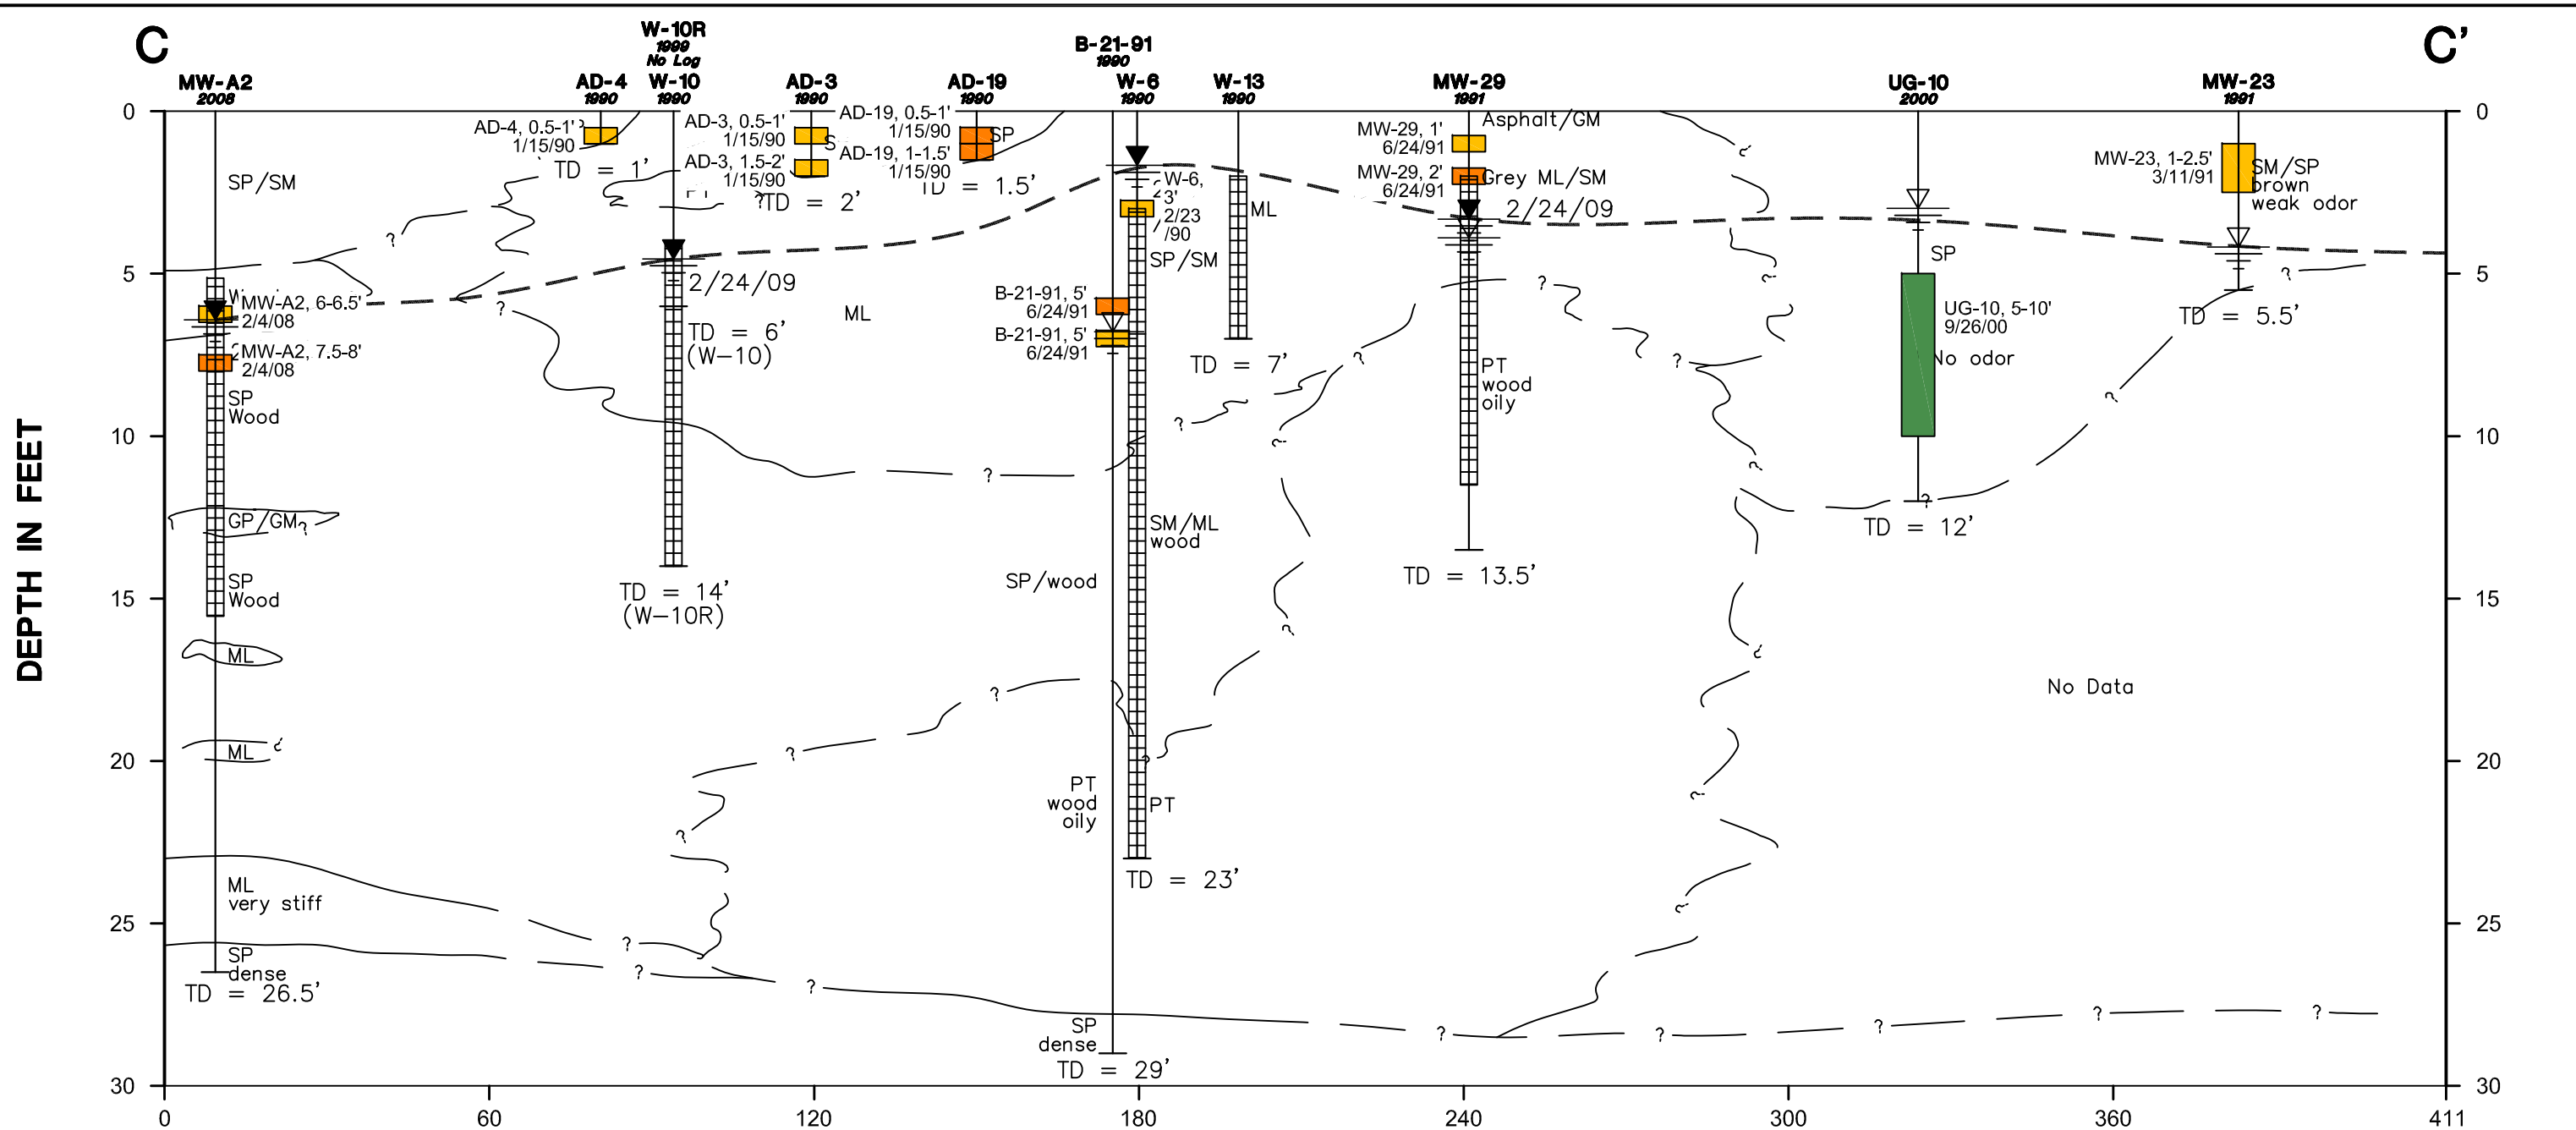

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-4 1990 Boring number and year installed

TD = 1' Total depth in feet

MW-A2 2008 Well number and year installed

Screen interval


TD = 26' Total depth in feet

TPH-D or TPH (Undifferentiated)

- Detected $\geq 2,000$ mg/kg
- Detected $< 2,000$ mg/kg
- Not detected

mg/kg Milligram per kilogram

UG-10, 5-10' 9/26/00 Sample depth and date collected

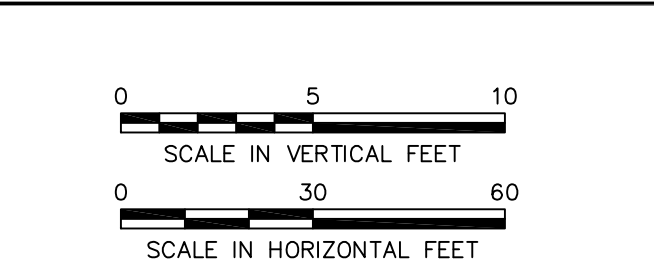

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF TPH-D OR TPH (UNDIFFERENTIATED) IN SOIL: CROSS SECTION C-C'

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. **25**

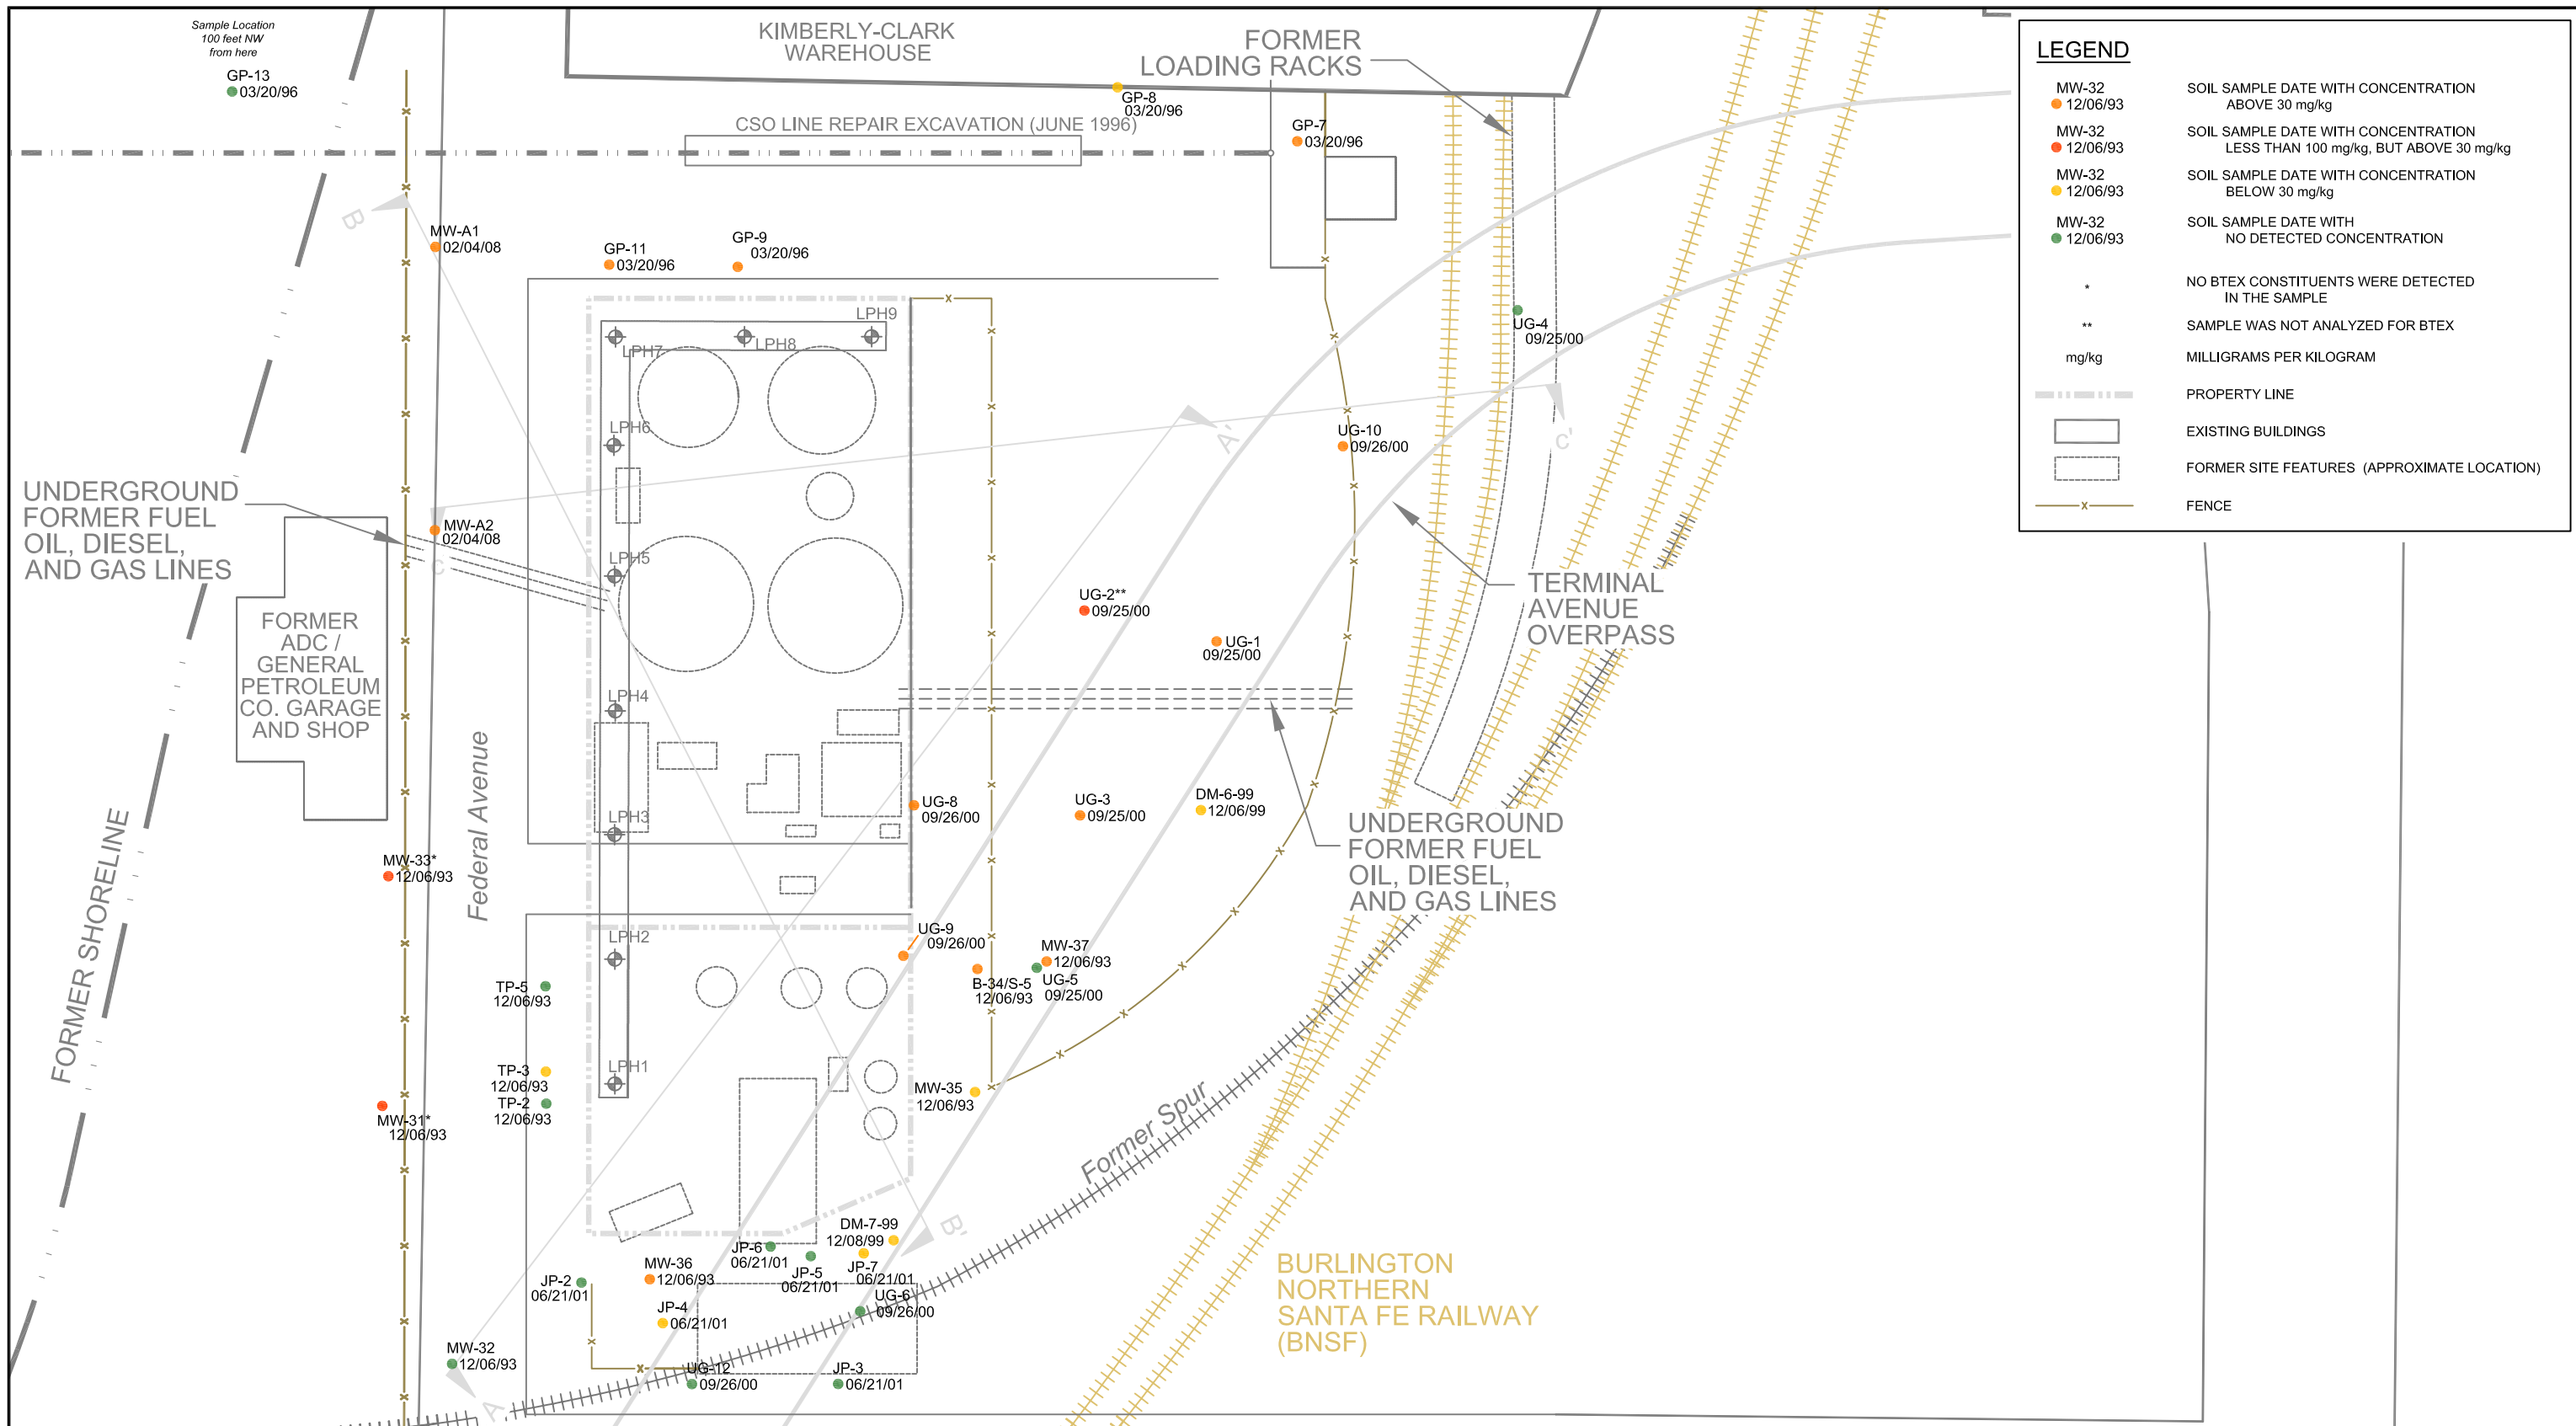

| LEGEND | |
|---------------------|---|
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION ABOVE 30 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION LESS THAN 100 mg/kg, BUT ABOVE 30 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION BELOW 30 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| . | NO BTEX CONSTITUENTS WERE DETECTED IN THE SAMPLE |
| ** | SAMPLE WAS NOT ANALYZED FOR BTEX |
| mg/kg | MILLIGRAMS PER KILOGRAM |
| --- | PROPERTY LINE |
| [Solid Box] | EXISTING BUILDINGS |
| [Dashed Box] | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| -x- | FENCE |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:


EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

| | |
|-------------|-----------|
| DWN BY: | JRS / BRJ |
| CHK'D BY: | AMS |
| DATUM: | NONE |
| PROJECTION: | NONE |
| SCALE: | 1" = 60' |

| | |
|---------|--|
| PROJECT | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 |
| TITLE | HORIZONTAL DISTRIBUTION OF TPH-GASOLINE IN SOIL |

| | |
|--------------|---------------|
| DATE: | AUGUST 2009 |
| PROJECT NO.: | 9-915-15716-C |
| REV. NO.: | 1 |
| FIGURE No. | 26 |

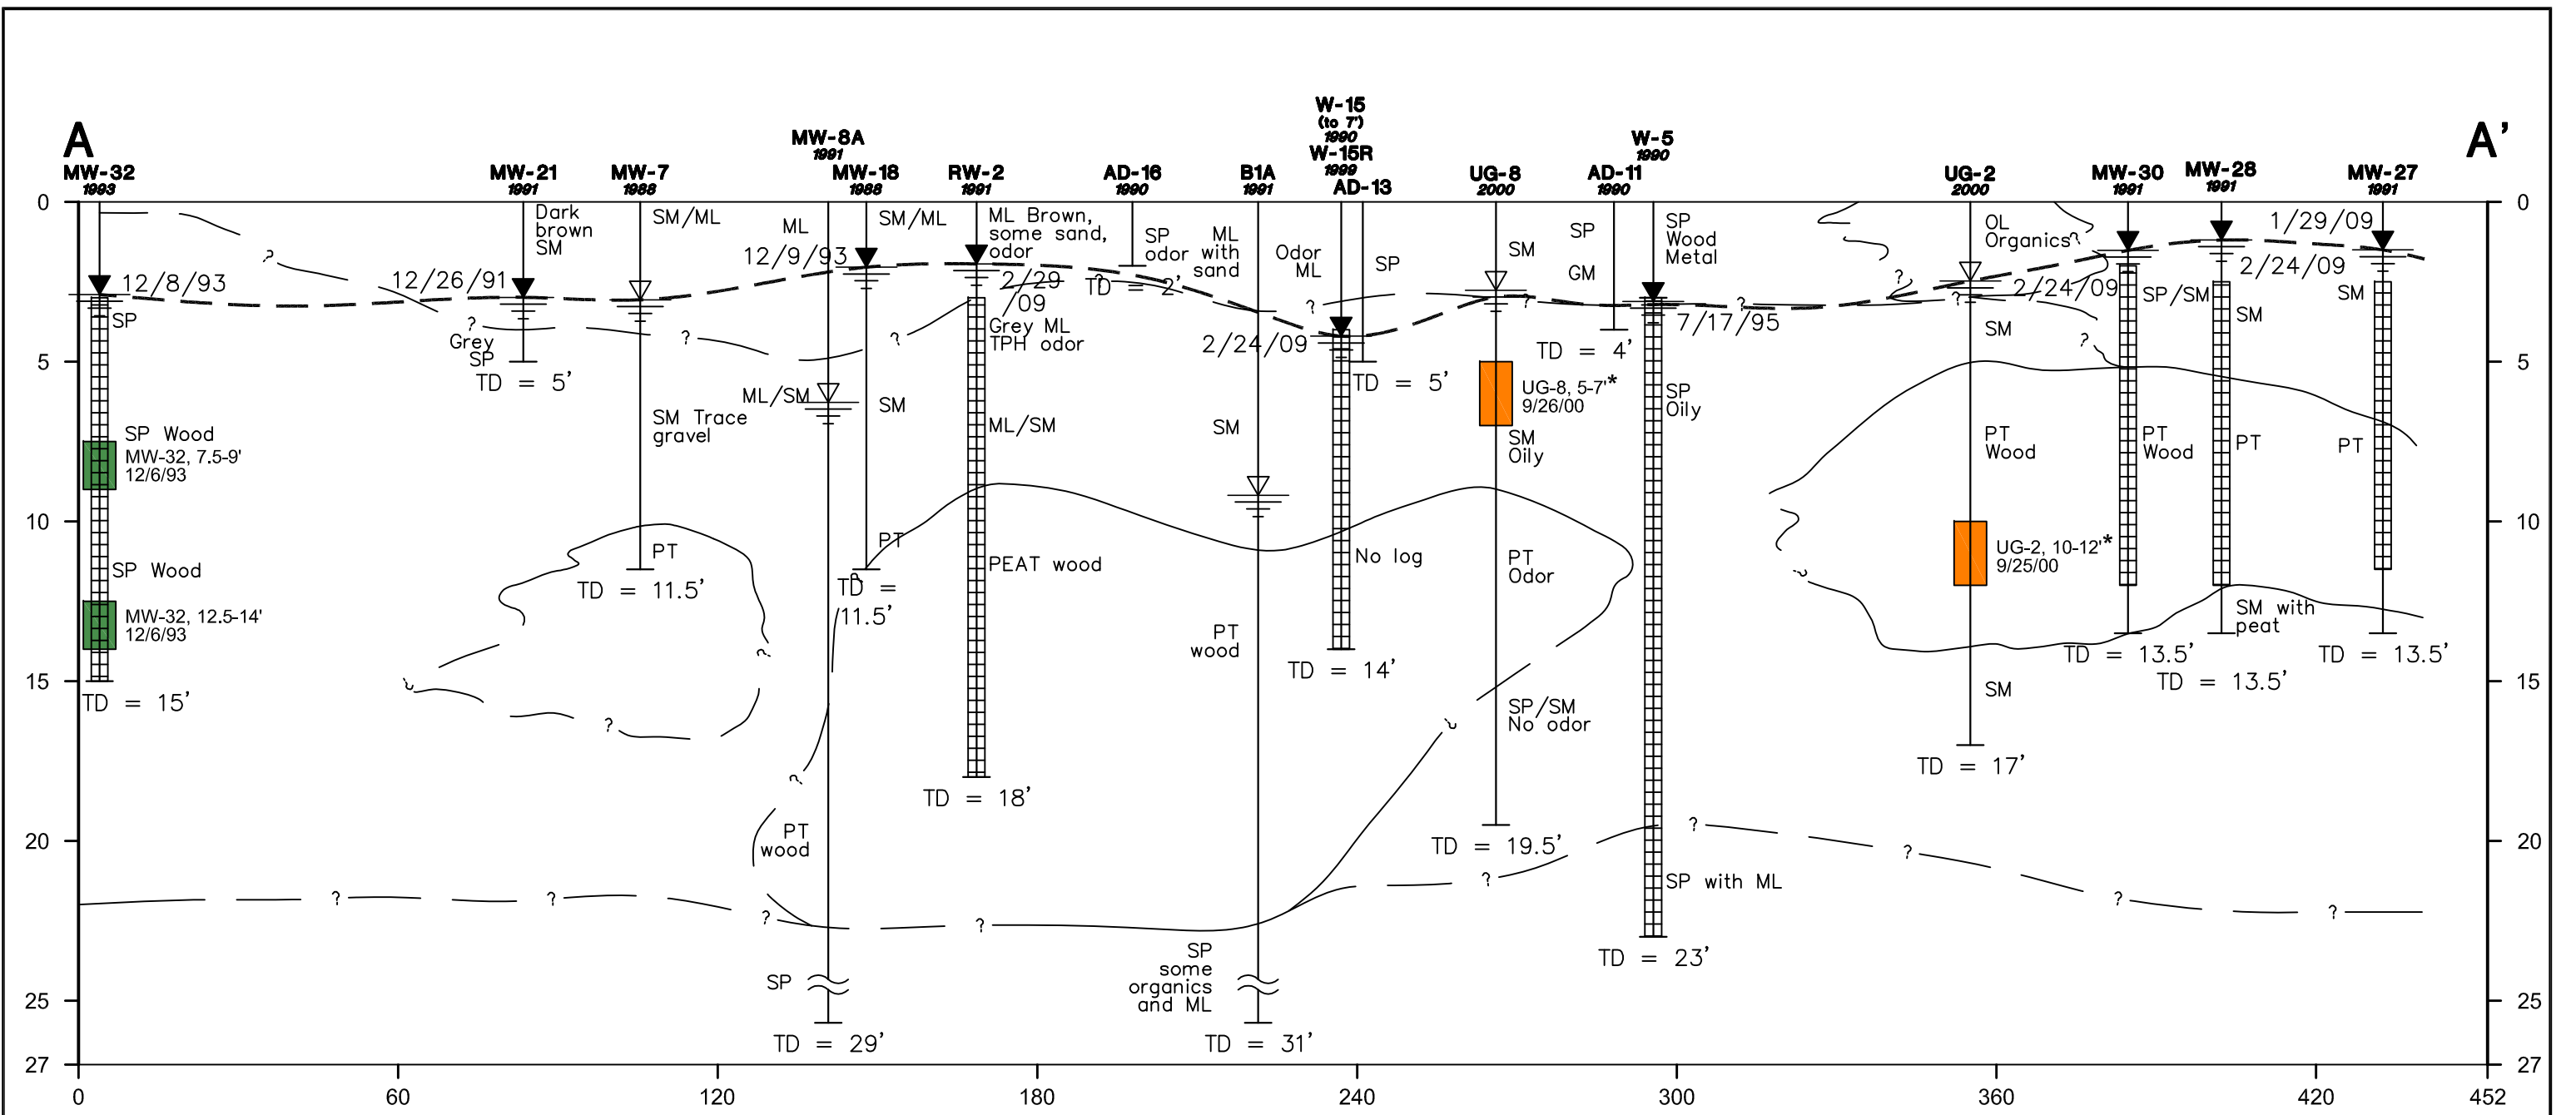

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-16 1990 Boring number and year installed

MW-30 1991 Well number and year installed

Screen interval

TD = 2' Total depth in feet

TD = 15' Total depth in feet

TPH-G

Detected ≥ 30 mg/kg


Detected < 30 mg/kg

Not detected

mg/kg Milligram per kilogram

UG-2, 10-12' 9/25/00 Sample depth and date collected

* Sample was not analyzed for benzene

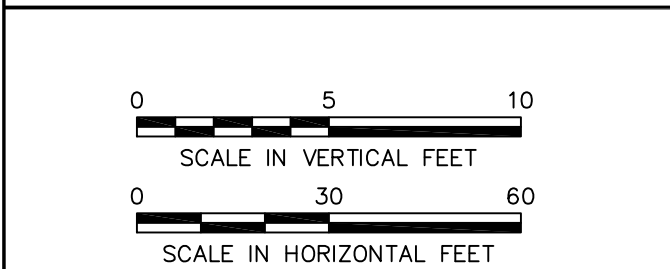

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT: EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728


TITLE: VERTICAL DISTRIBUTION OF TPH-G IN SOIL CROSS SECTION A-A'

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. 27

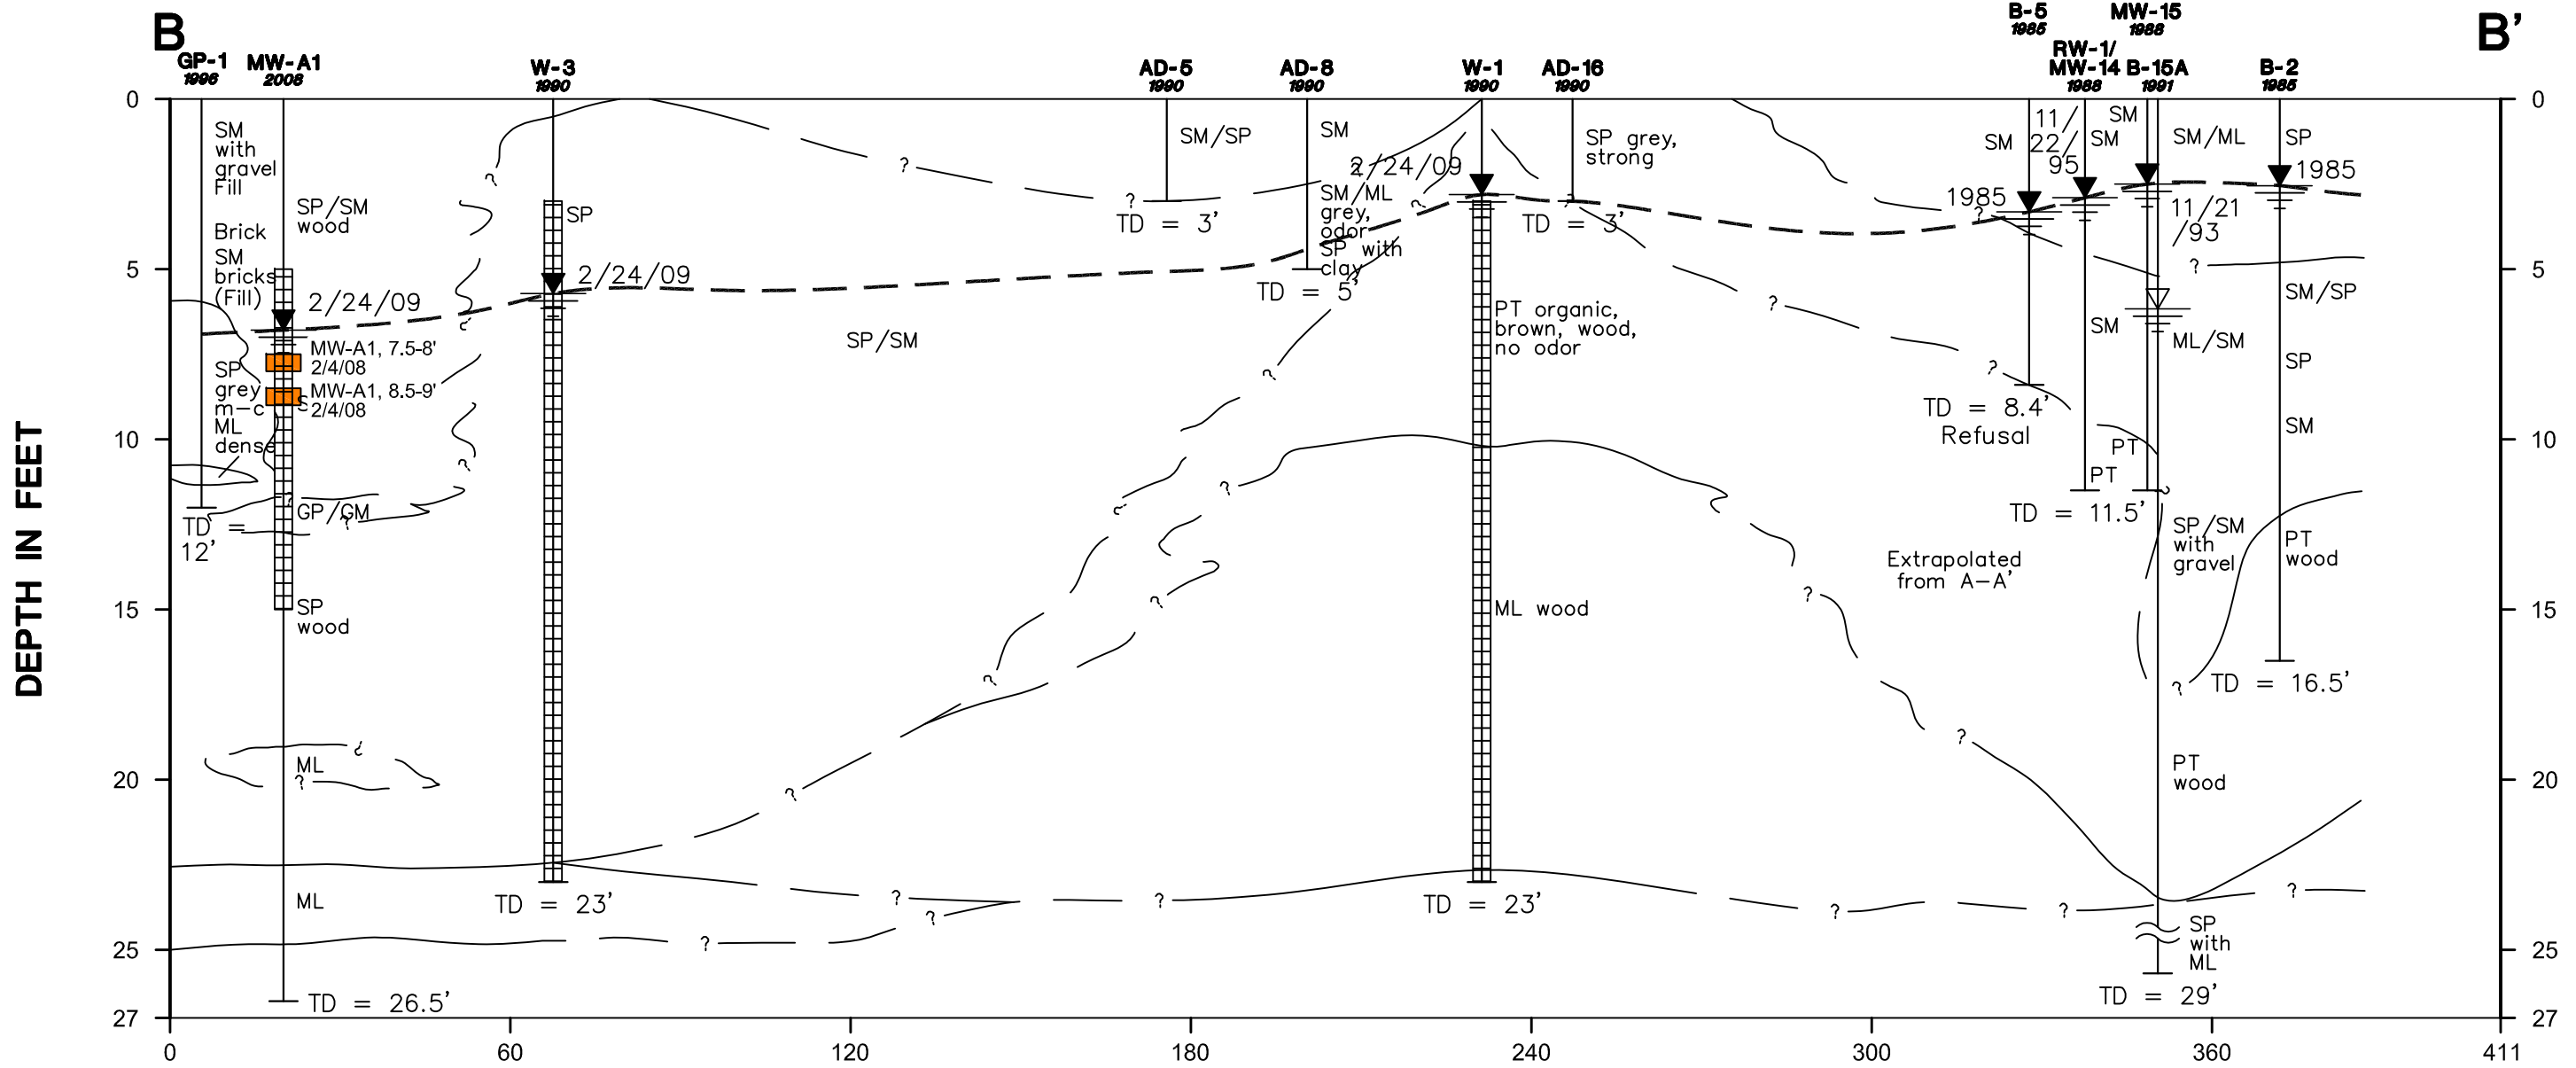

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

--- Unconfined groundwater table

AD-5
1990 Boring number and year installed

MW-A1
2008 Well number and year installed

TD = 3' Total depth in feet

TD = 23' Total depth in feet

TPH-G


Detected ≥ 30 mg/kg

Detected < 30 mg/kg

Not detected

mg/kg Milligram per kilogram

UG-2, 10-12' 9/25/00 Sample depth and date collected



CLIENT LOGO

CLIENT:

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**


AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS
CHK'D BY: AS
DATUM: NONE
PROJECTION: NONE
SCALE: AS SHOWN

PROJECT: EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE: VERTICAL DISTRIBUTION OF TPH-G IN SOIL CROSS SECTION B-B'

DATE: AUGUST 2009
PROJECT NO: 9-915-15716-C
REV. NO.:
FIGURE No. 28

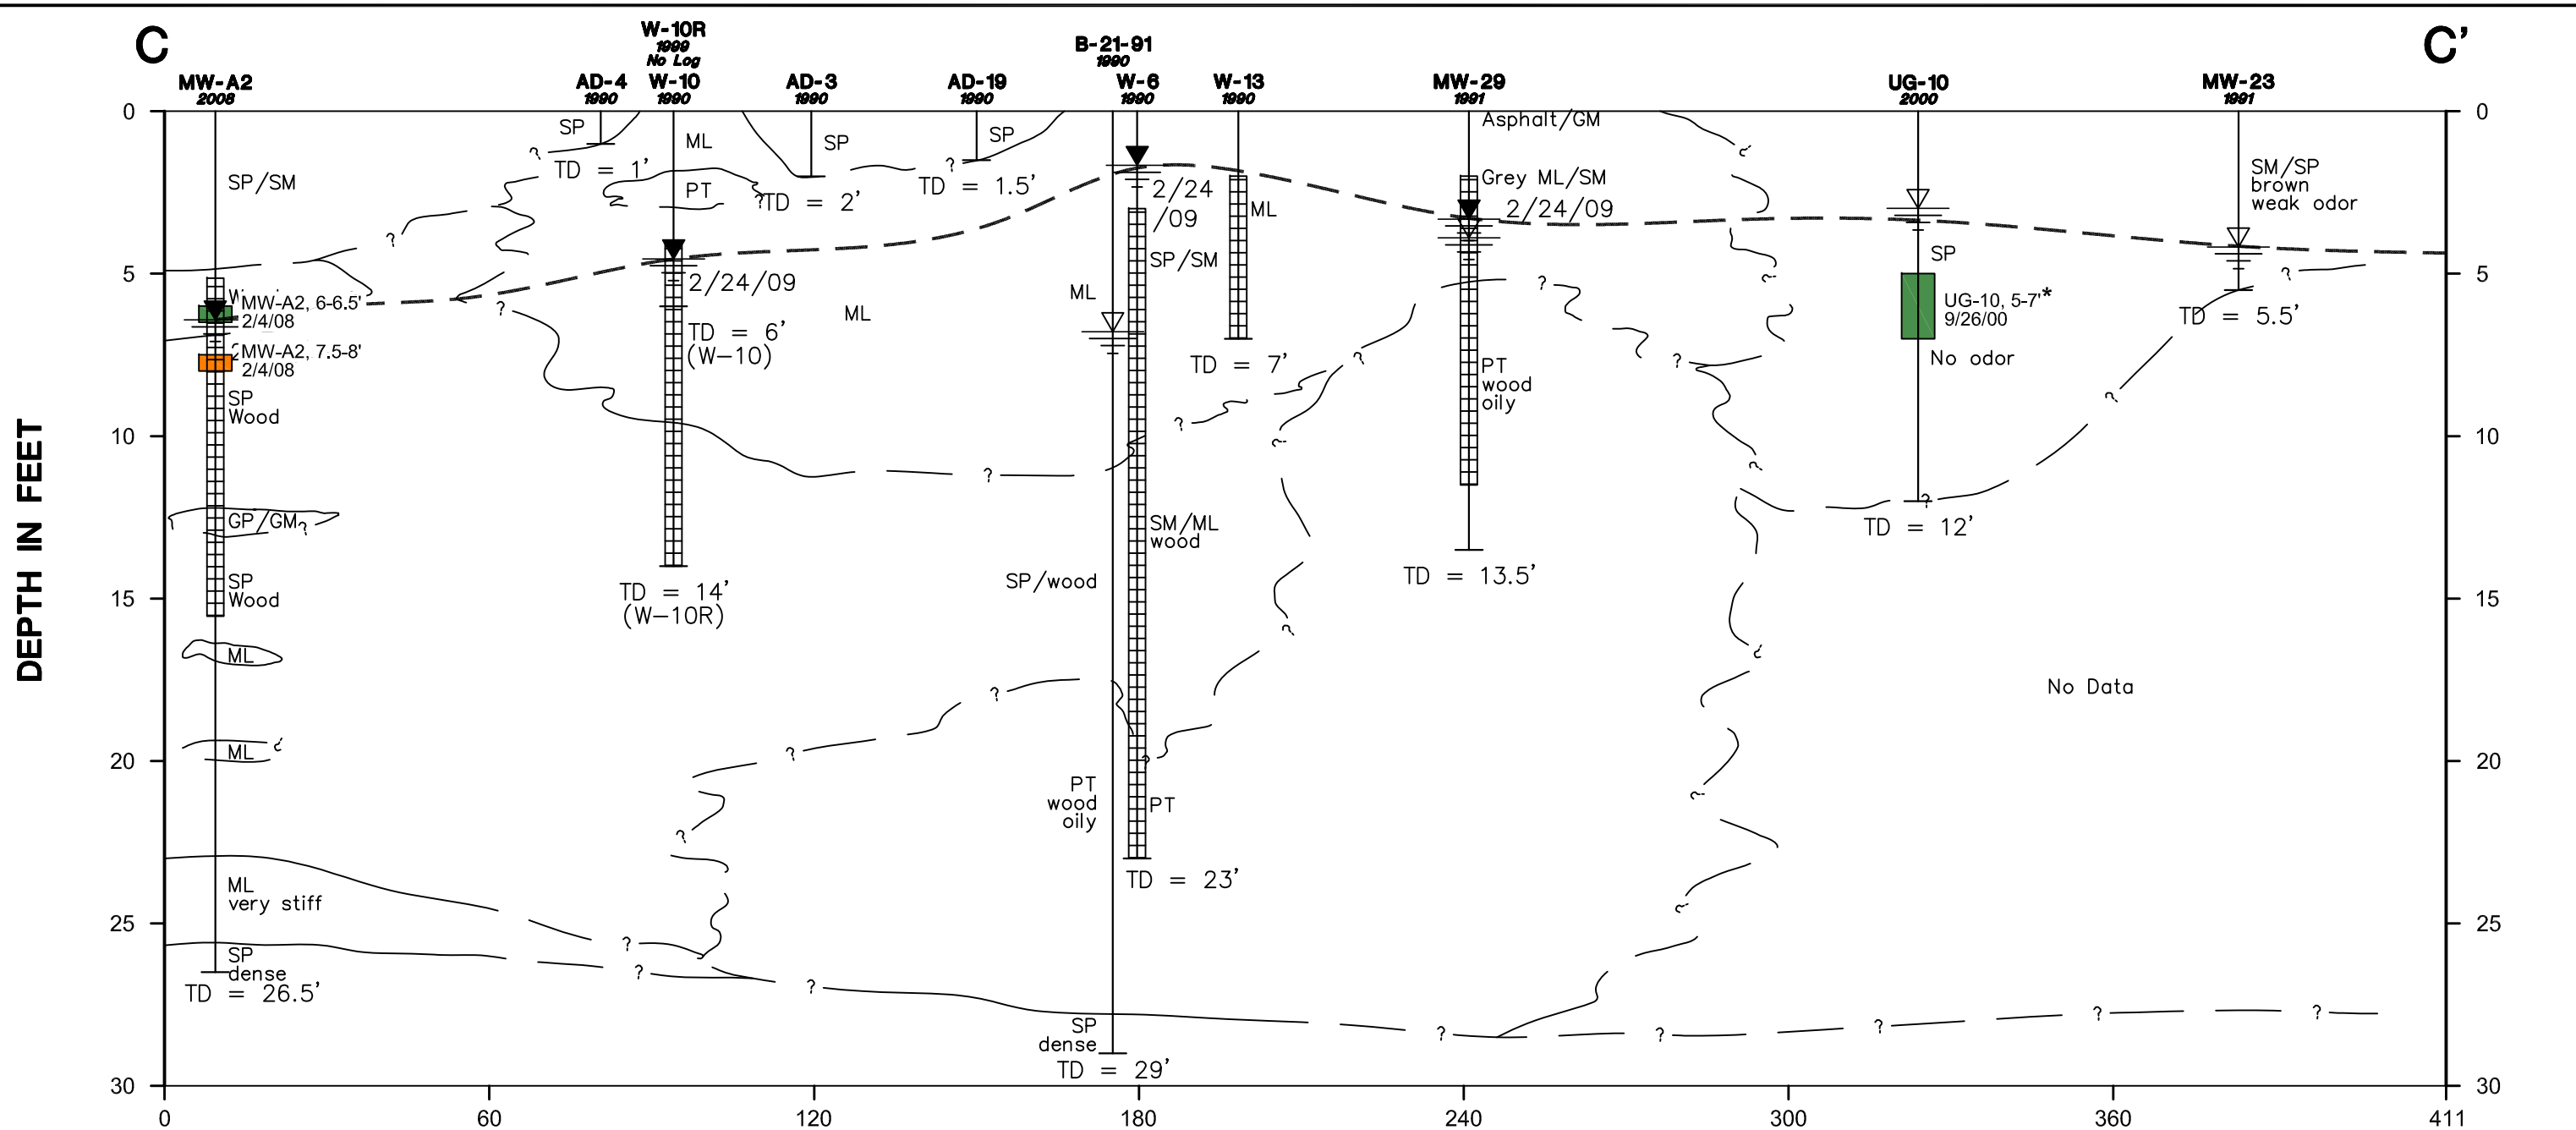

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-4 1990 Boring number and year installed

MW-A2 2008 Well number and year installed

TD = 1' Total depth in feet

TD = 26' Total depth in feet

TPH-G

Detected ≥ 30 mg/kg


Detected < 30 mg/kg

Not detected

mg/kg Milligram per kilogram

UG-10, 5-7' 9/26/00 Sample depth and date collected

* Sample was not analyzed for benzene

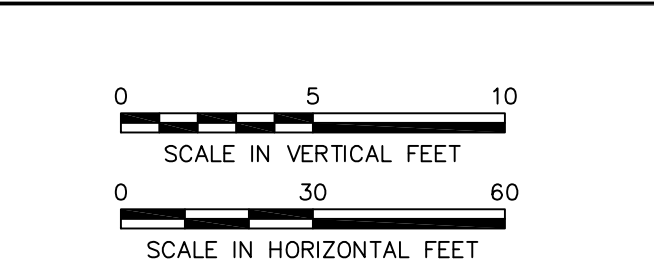

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF TPH-G IN SOIL CROSS SECTION C-C'

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. 29

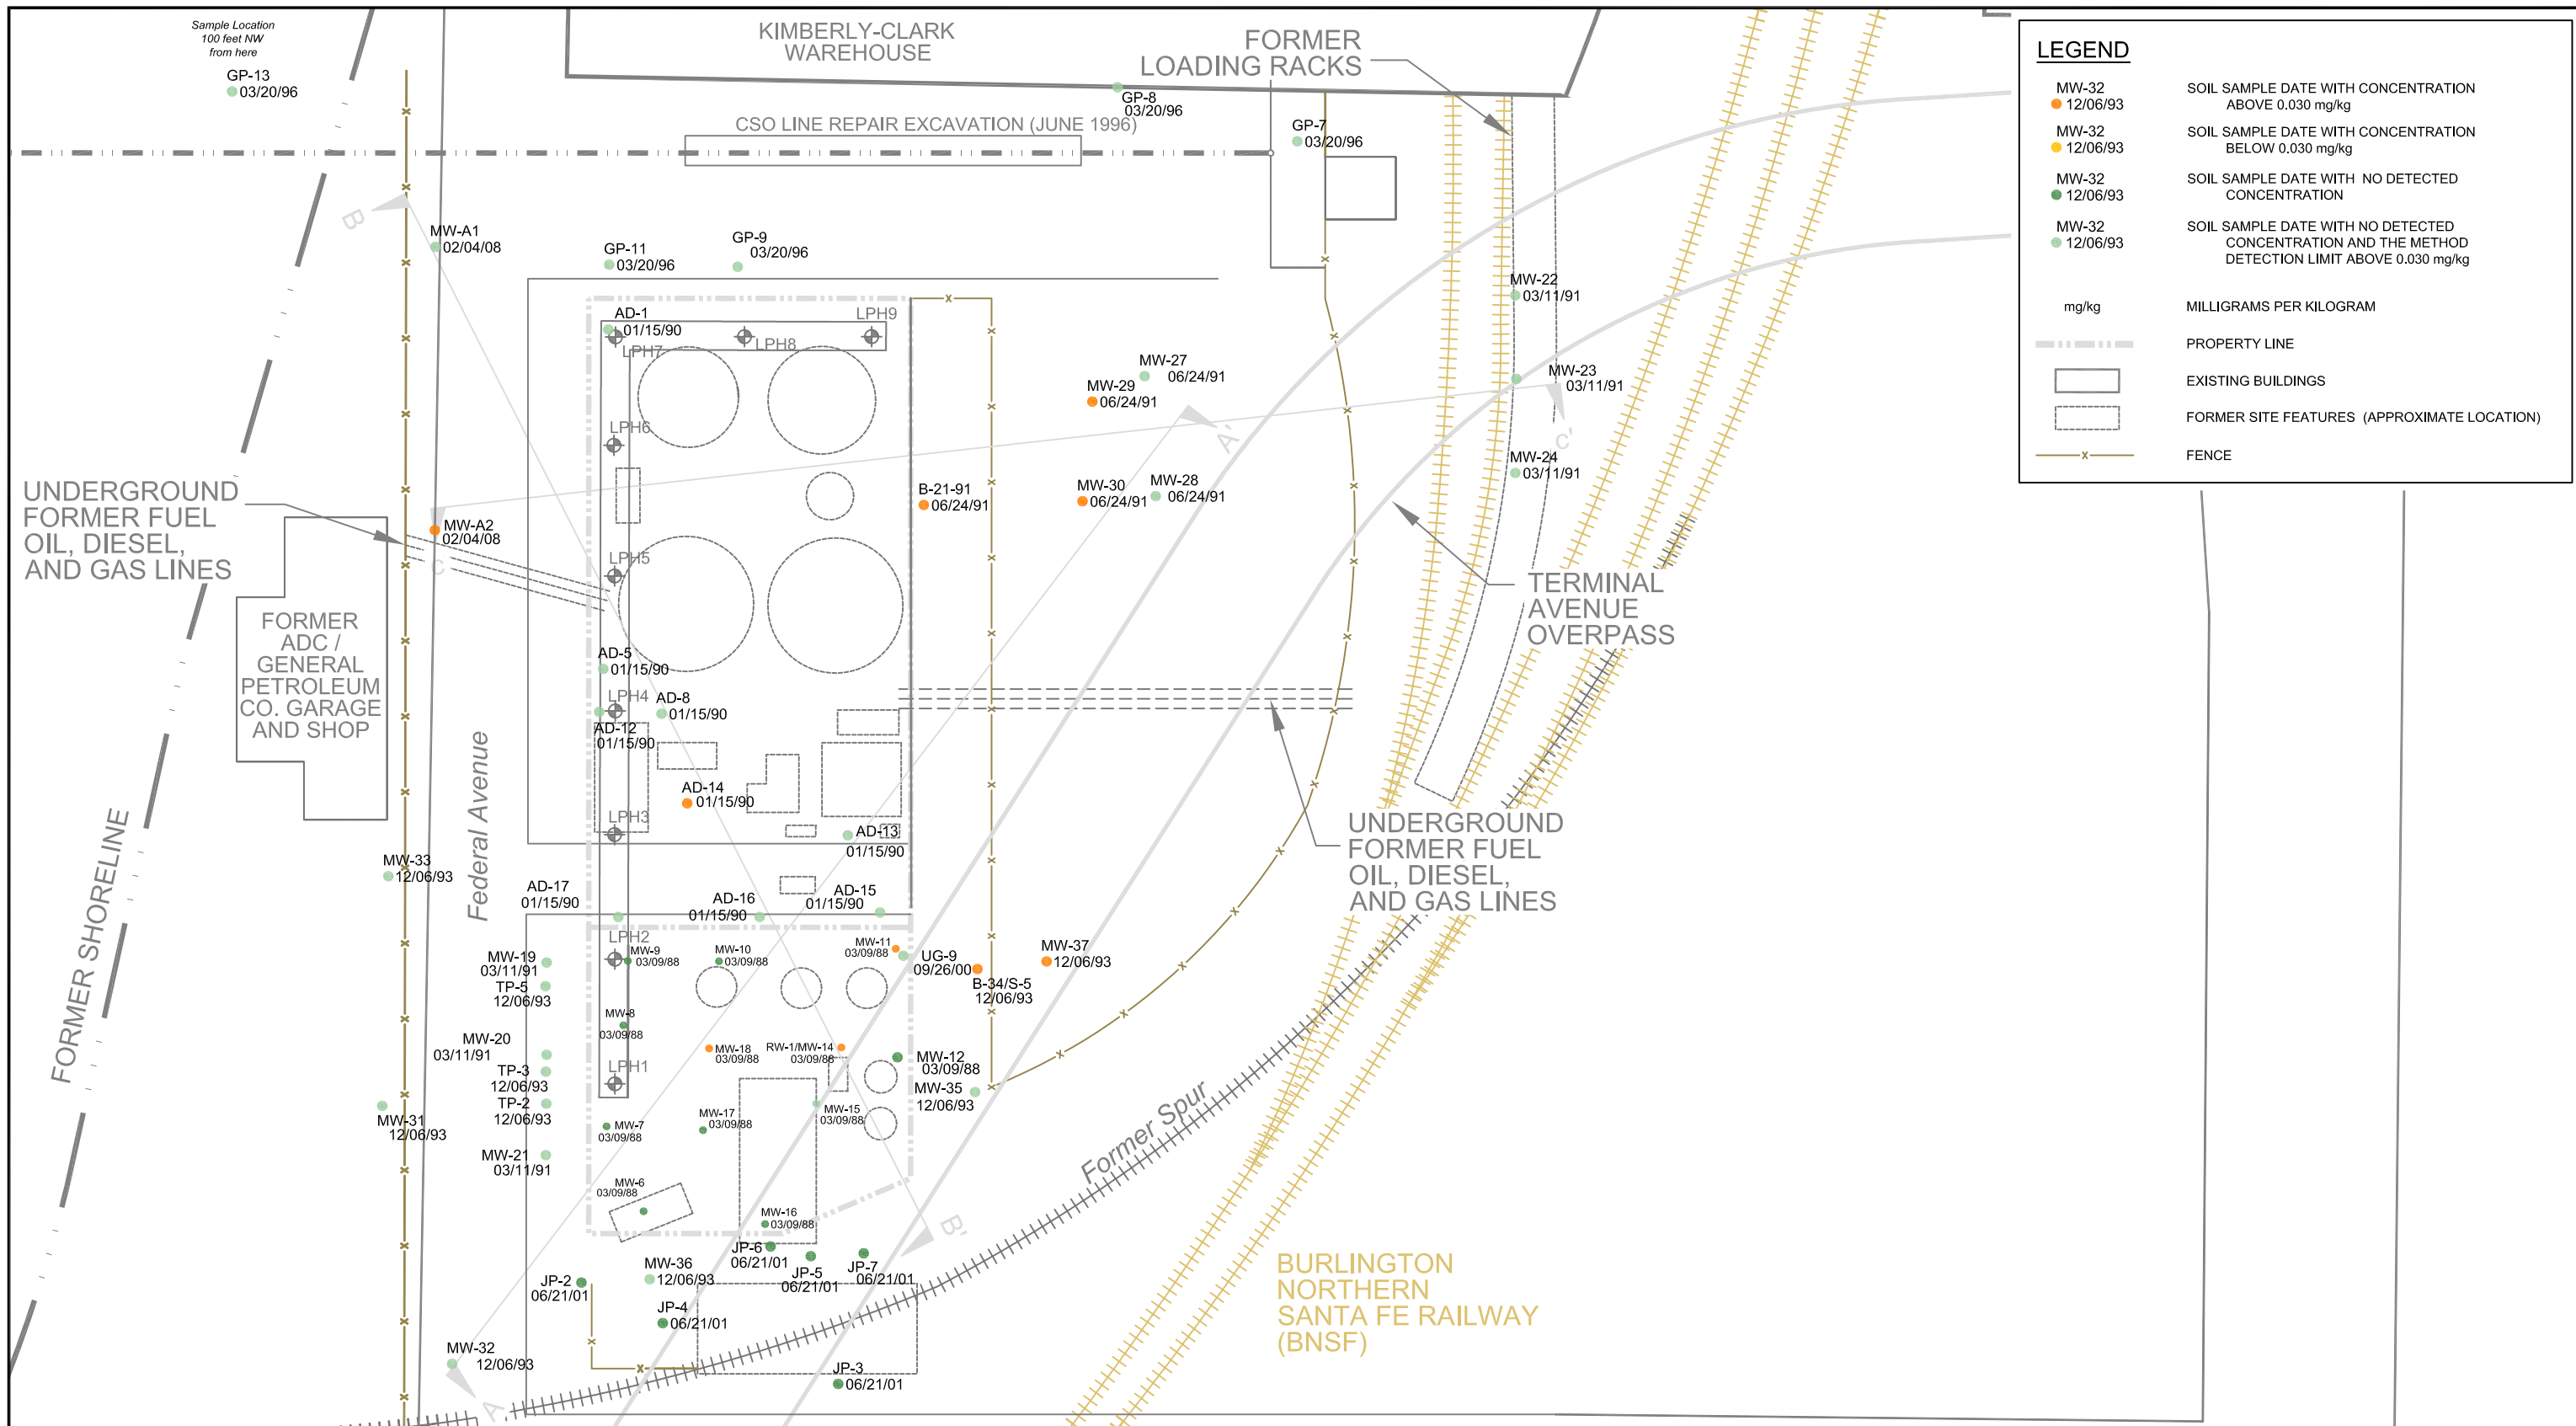

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ

CHK'D BY: AIS

DATUM: NONE

PROJECTION: NONE

SCALE: 1" = 60'

PROJECT

EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728

TITLE


HORIZONTAL DISTRIBUTION OF BENZENE IN SOIL

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.: 1

FIGURE No. 30

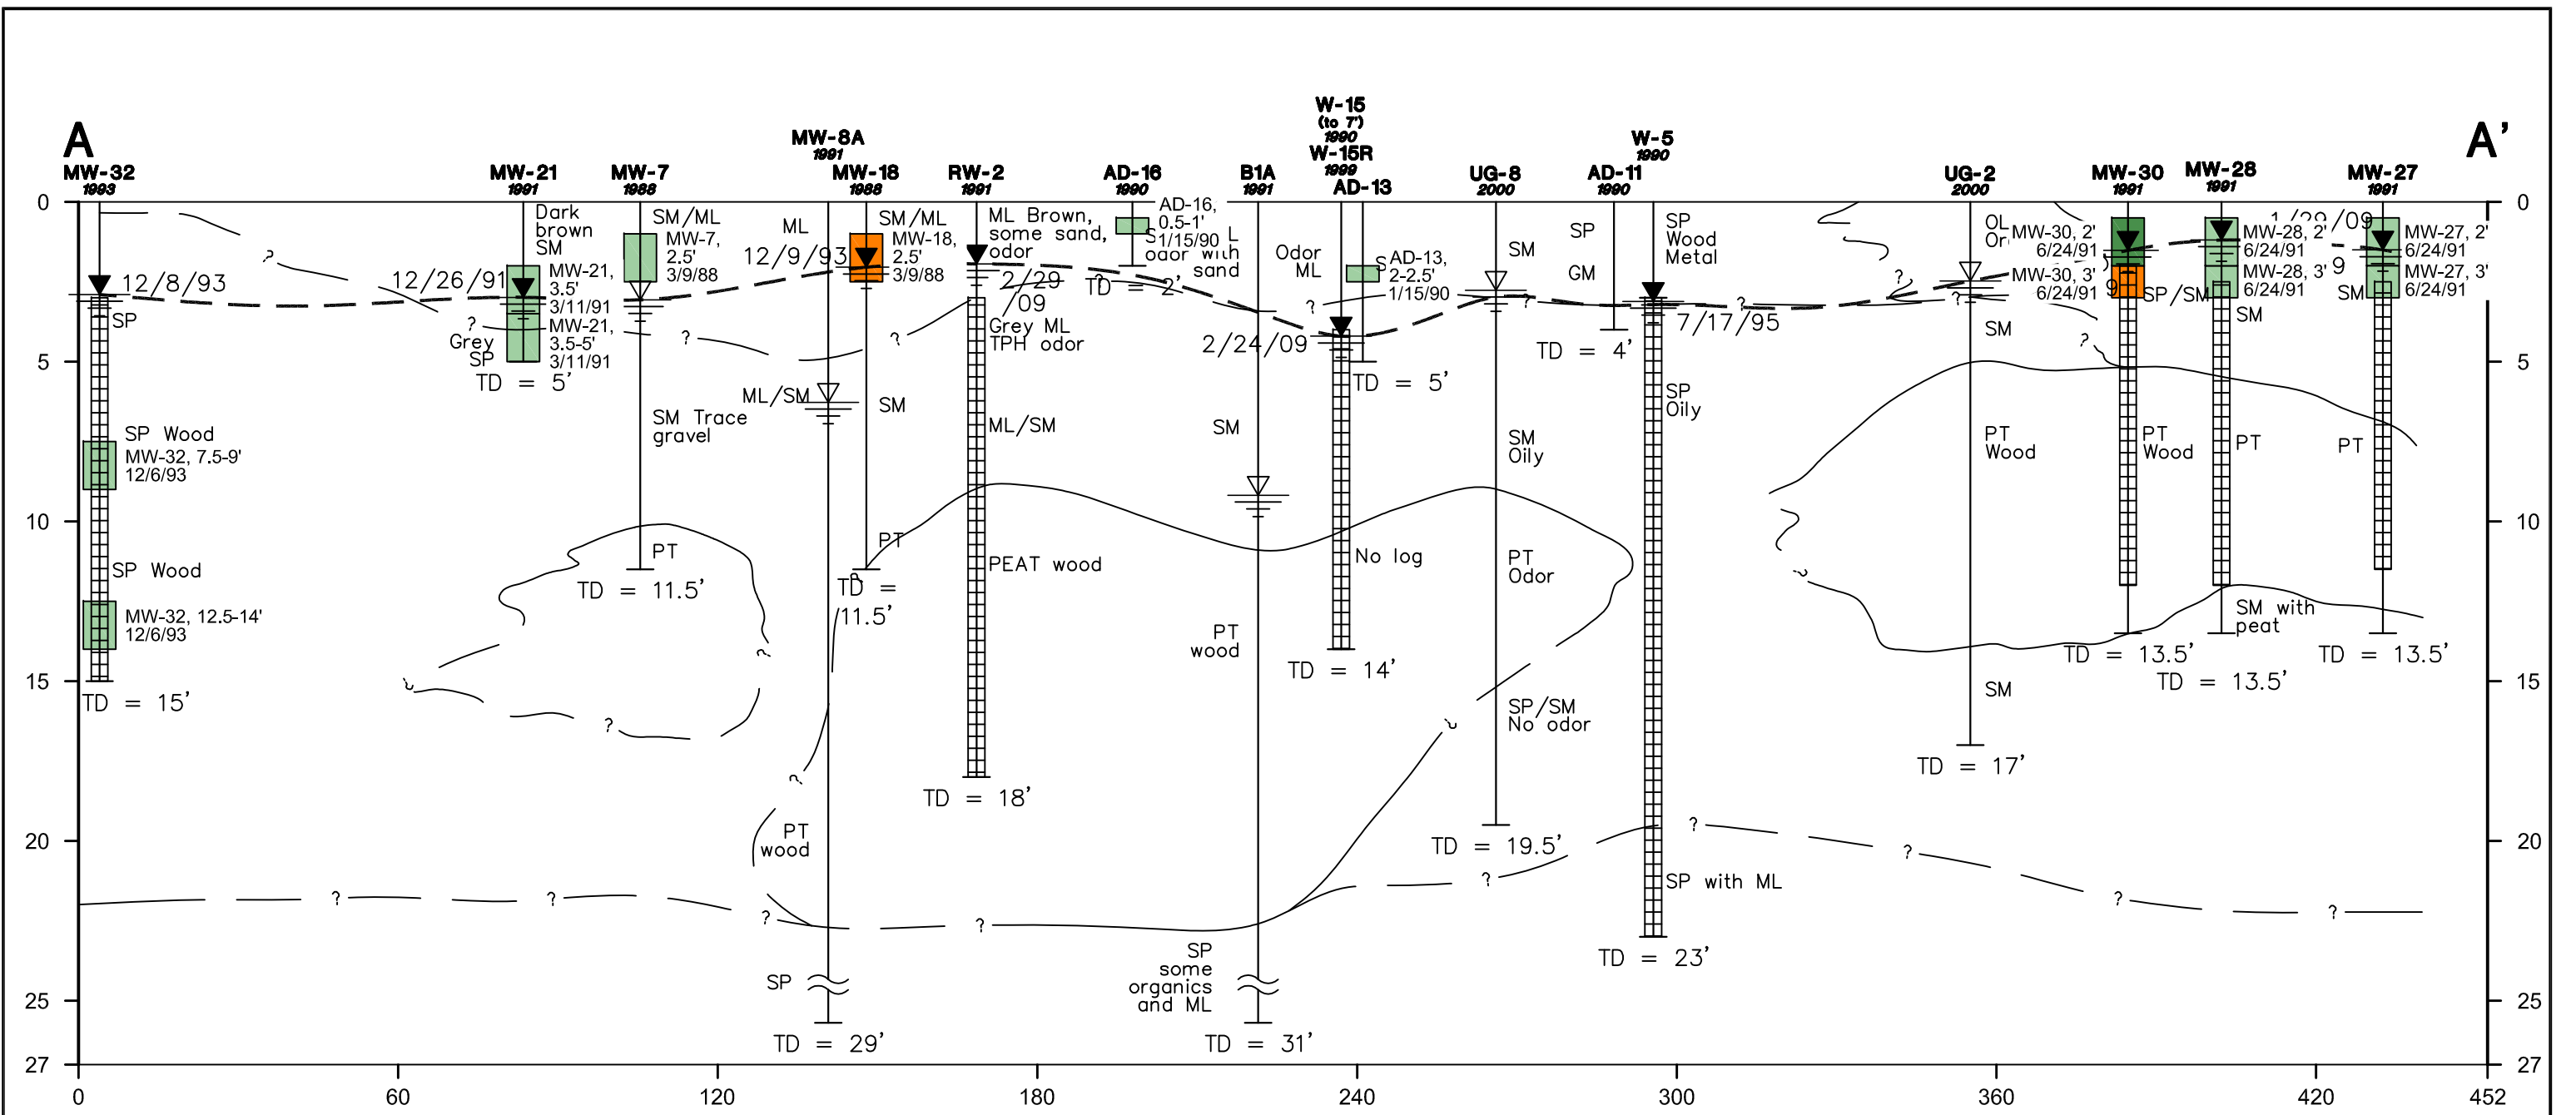

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-16 Boring number and year installed

MW-30 Well number and year installed

Screen interval

TD = 2' Total depth in feet

TD = 15' Total depth in feet

Benzene

Detected ≥ 0.030 mg/kg


Detected < 0.030 mg/kg

Not detected

Not detected, but detection limit above 0.030 mg/kg

mg/kg Milligram per kilogram

MW-27, 2' 6/24/91 Sample depth and date collected

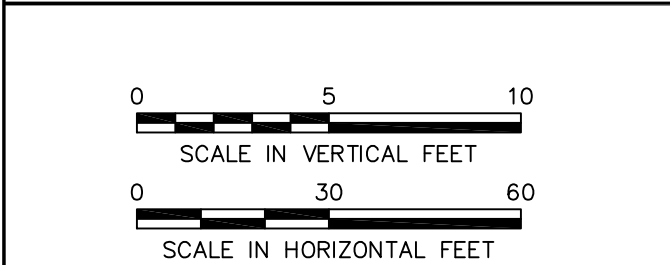

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF BENZENE IN SOIL CROSS SECTION A-A'

DATE: JUNE 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. **31**

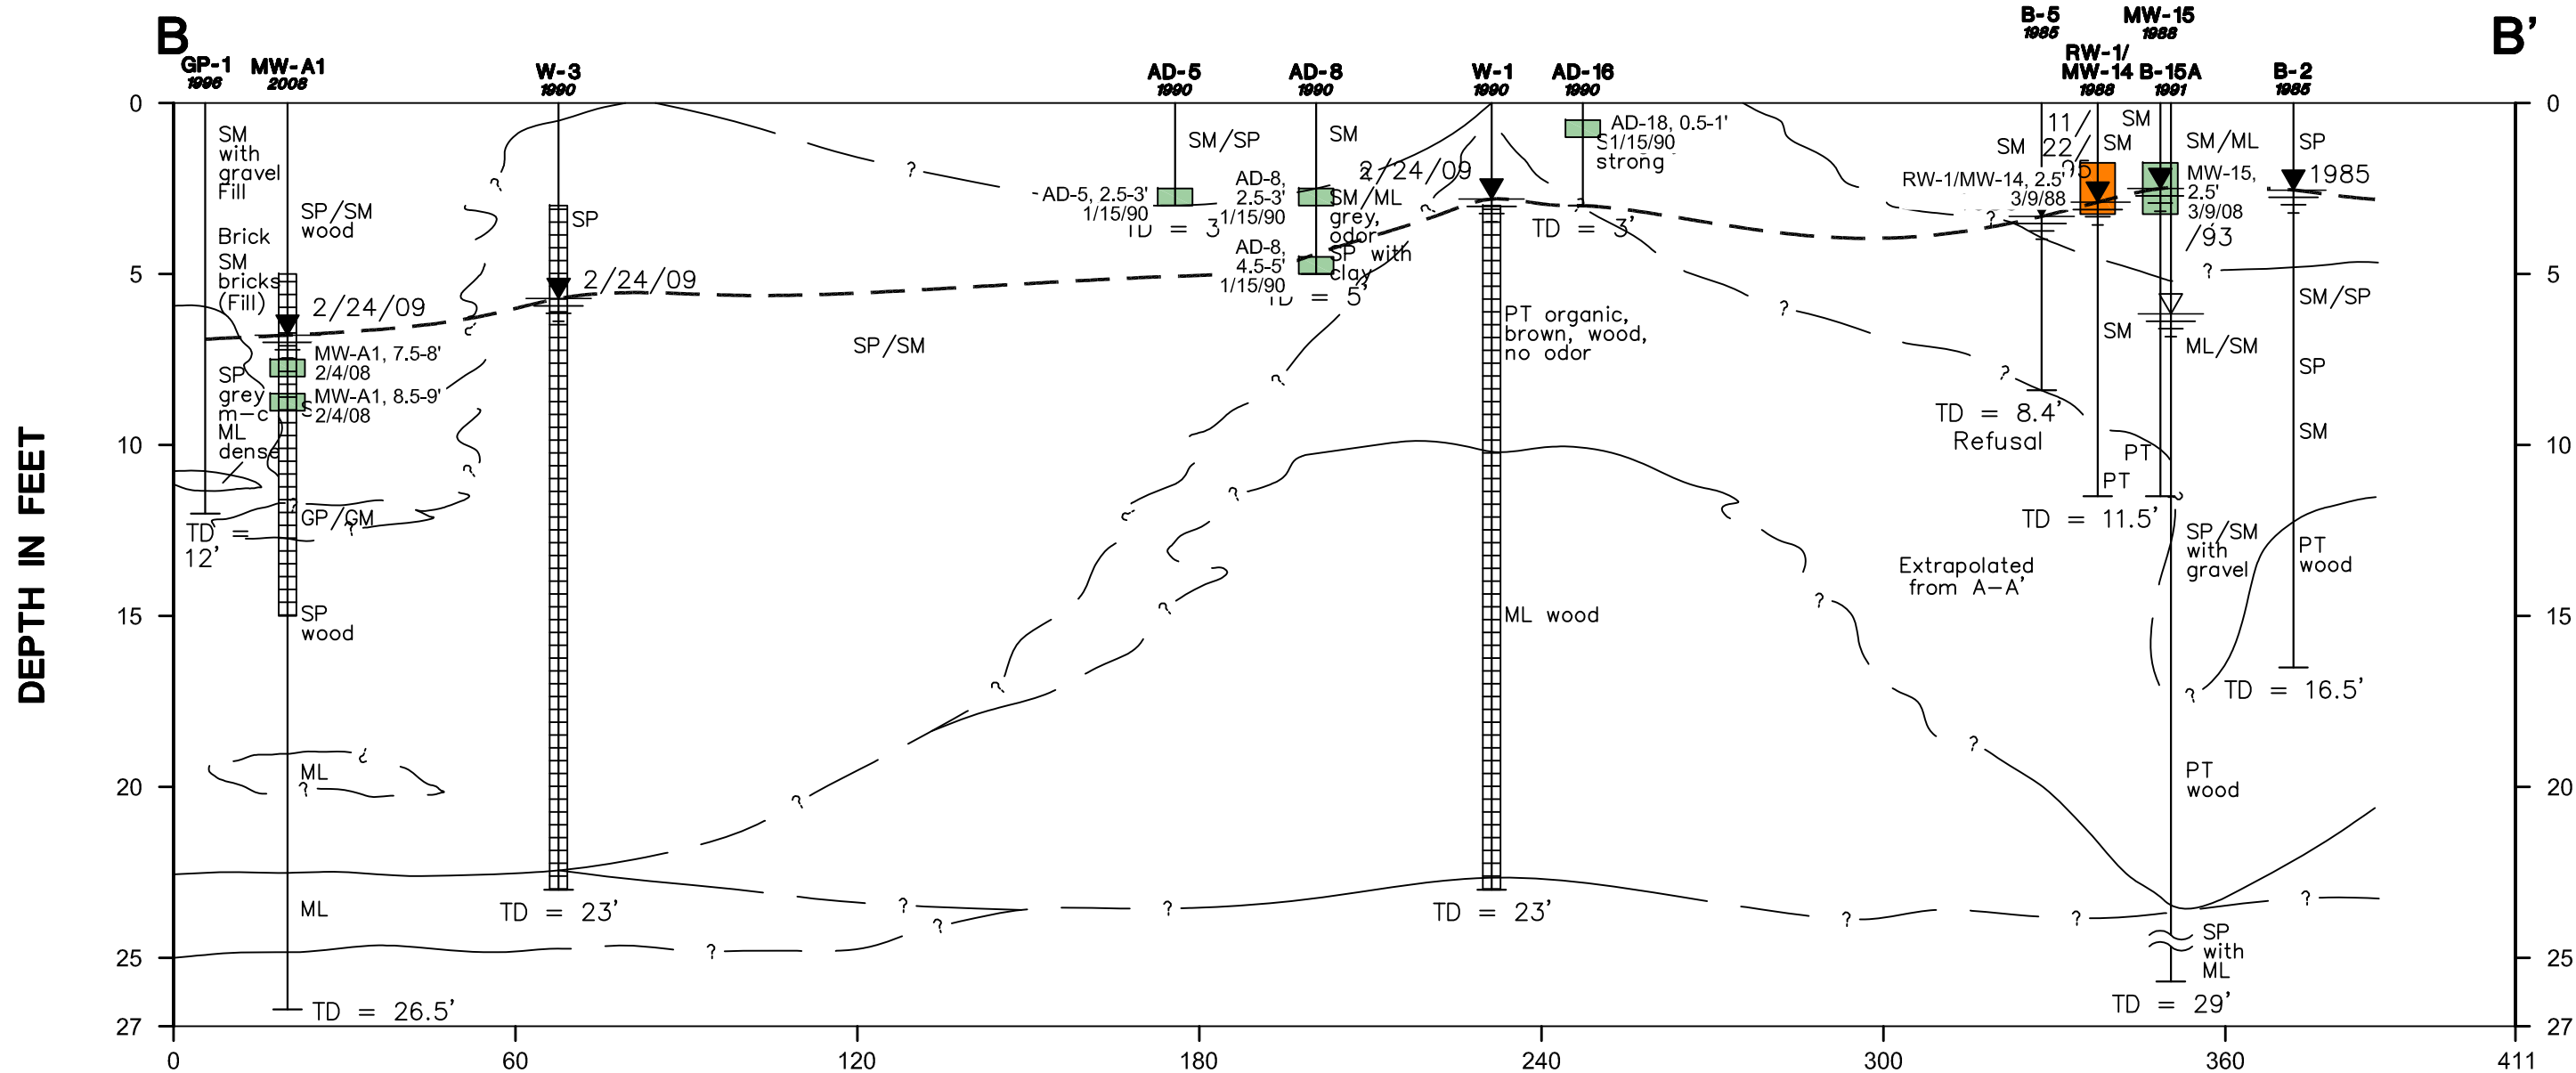

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-5 1990 Boring number and year installed TD = 3' Total depth in feet


MW-A1 2008 Well number and year installed TD = 23' Total depth in feet

Benzene

- Detected ≥ 0.030 mg/kg
- Detected < 0.030 mg/kg
- Not detected
- Not detected, but detection limit above 0.030 mg/kg

mg/kg Milligram per kilogram

MW-15, 2.5' 3/9/08 Sample depth and date collected



CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY


AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS
 CHK'D BY: AS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: AS SHOWN

PROJECT: EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728

TITLE: VERTICAL DISTRIBUTION OF BENZENE IN SOIL CROSS SECTION B-B'

DATE: JUNE 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.:
 FIGURE No. 32

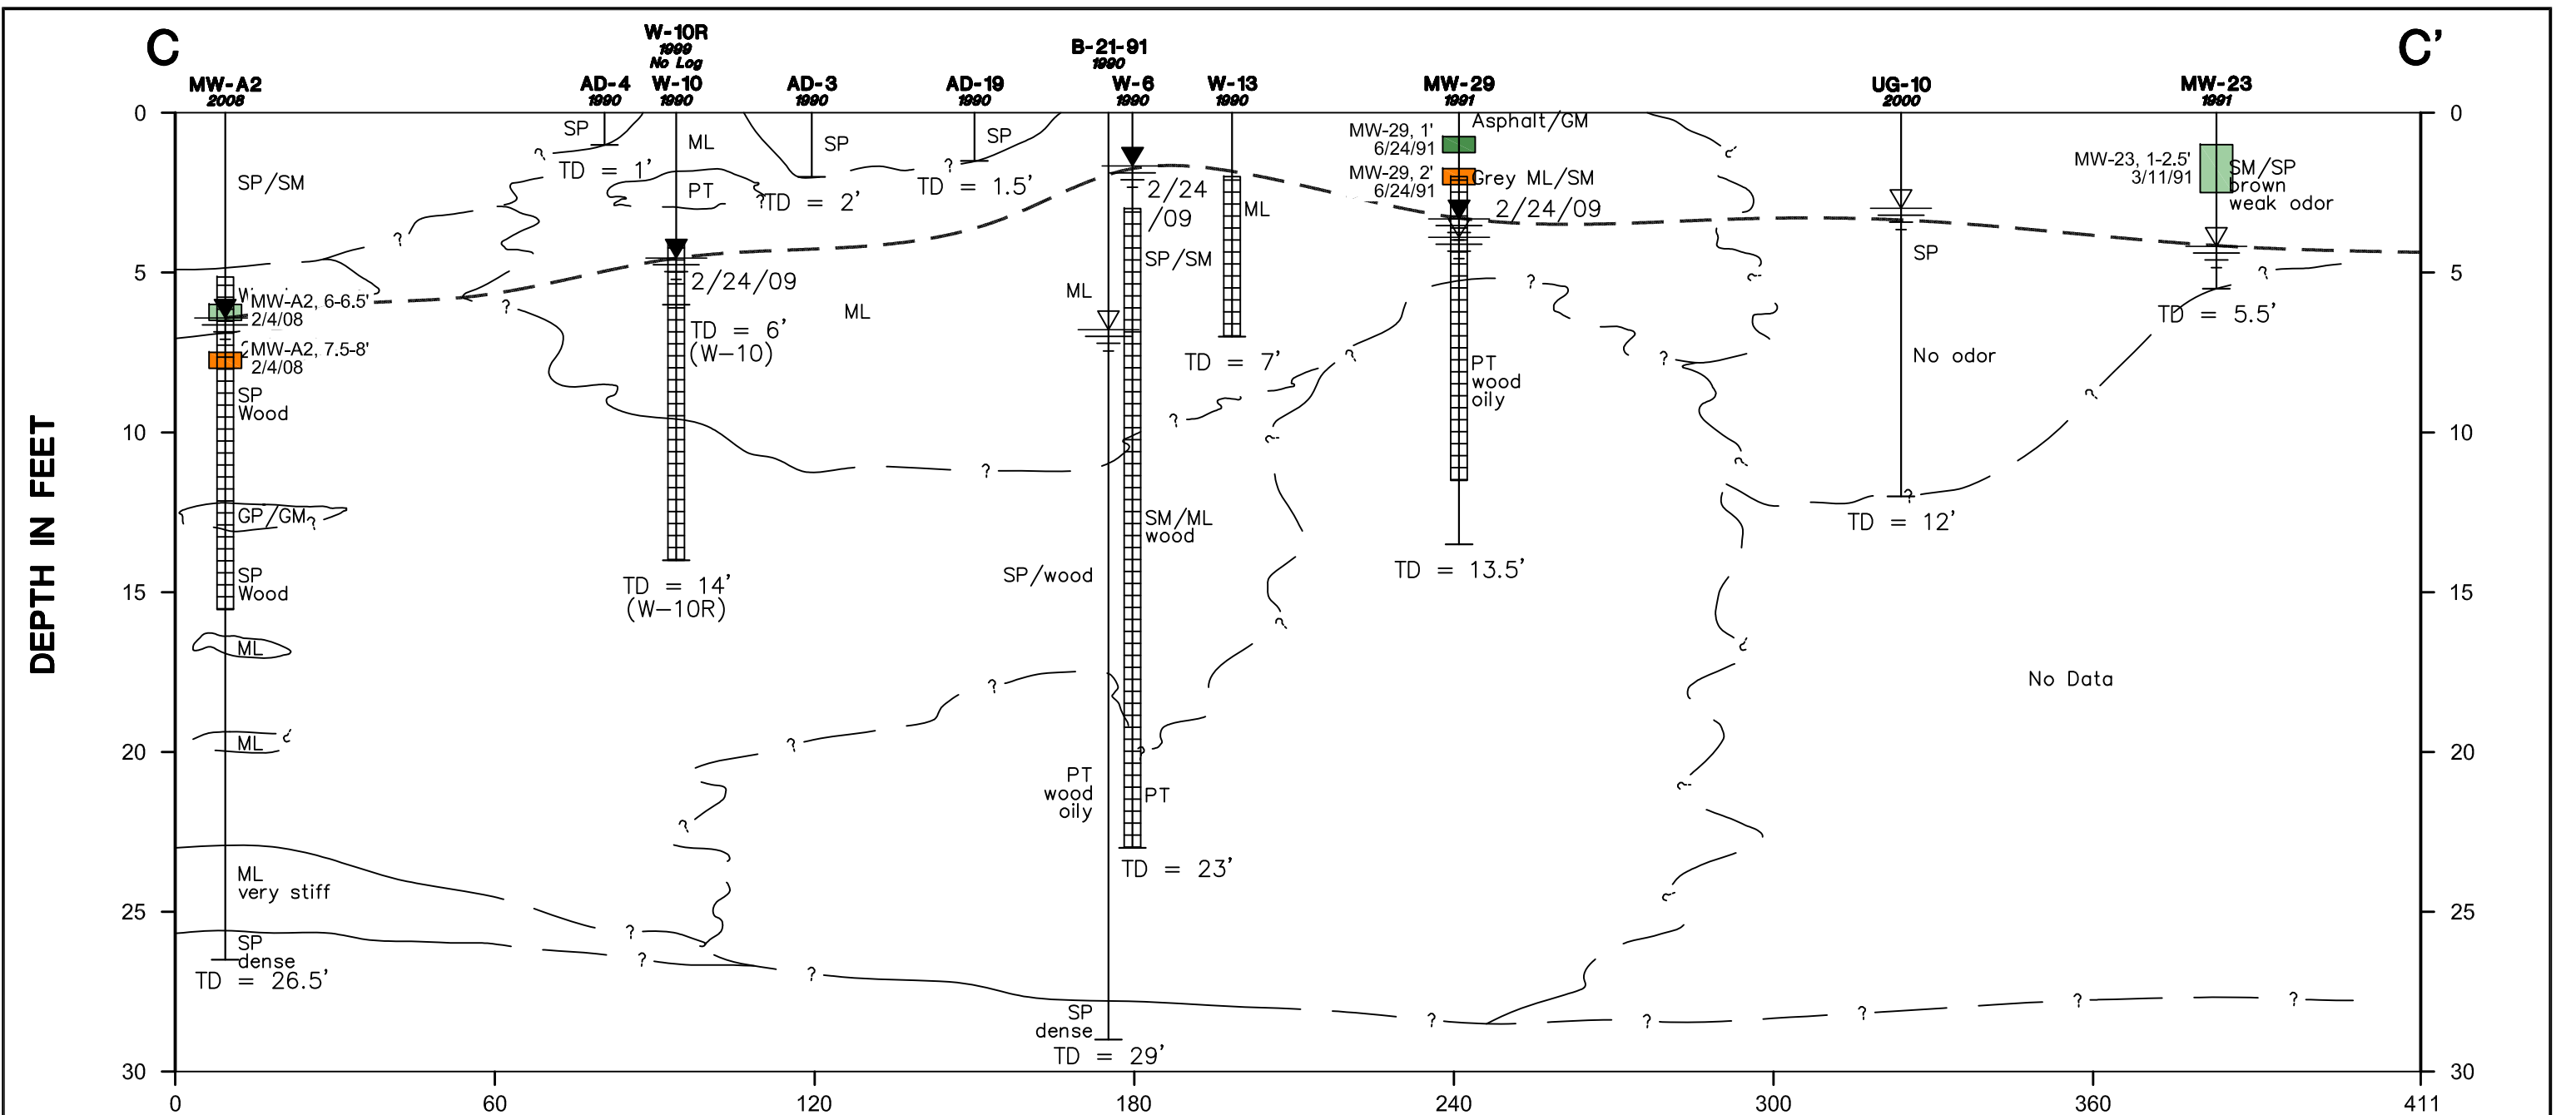

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-4 1990 Boring number and year installed

MW-A2 2008 Well number and year installed

Screen interval

TD = 1' Total depth in feet

TD = 26' Total depth in feet


Benzene

- Detected ≥ 0.030 mg/kg
- Detected < 0.030 mg/kg
- Not detected
- Not detected, but detection limit above 0.030 mg/kg

mg/kg Milligram per kilogram


MW-23, 1-2.5' 3/11/91 Sample depth and date collected

| | | | | |
|--|---|--|---|--|
| SCALE IN VERTICAL FEET SCALE IN HORIZONTAL FEET | CLIENT LOGO CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | DWN BY: JRS CHK'D BY: AS DATUM: NONE PROJECTION: NONE SCALE: AS SHOWN | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: JUNE 2009 PROJECT NO: 9-915-15716-C |
| | | AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | TITLE VERTICAL DISTRIBUTION OF BENZENE IN SOIL CROSS SECTION C-C' | REV. NO.: FIGURE No. 33 |

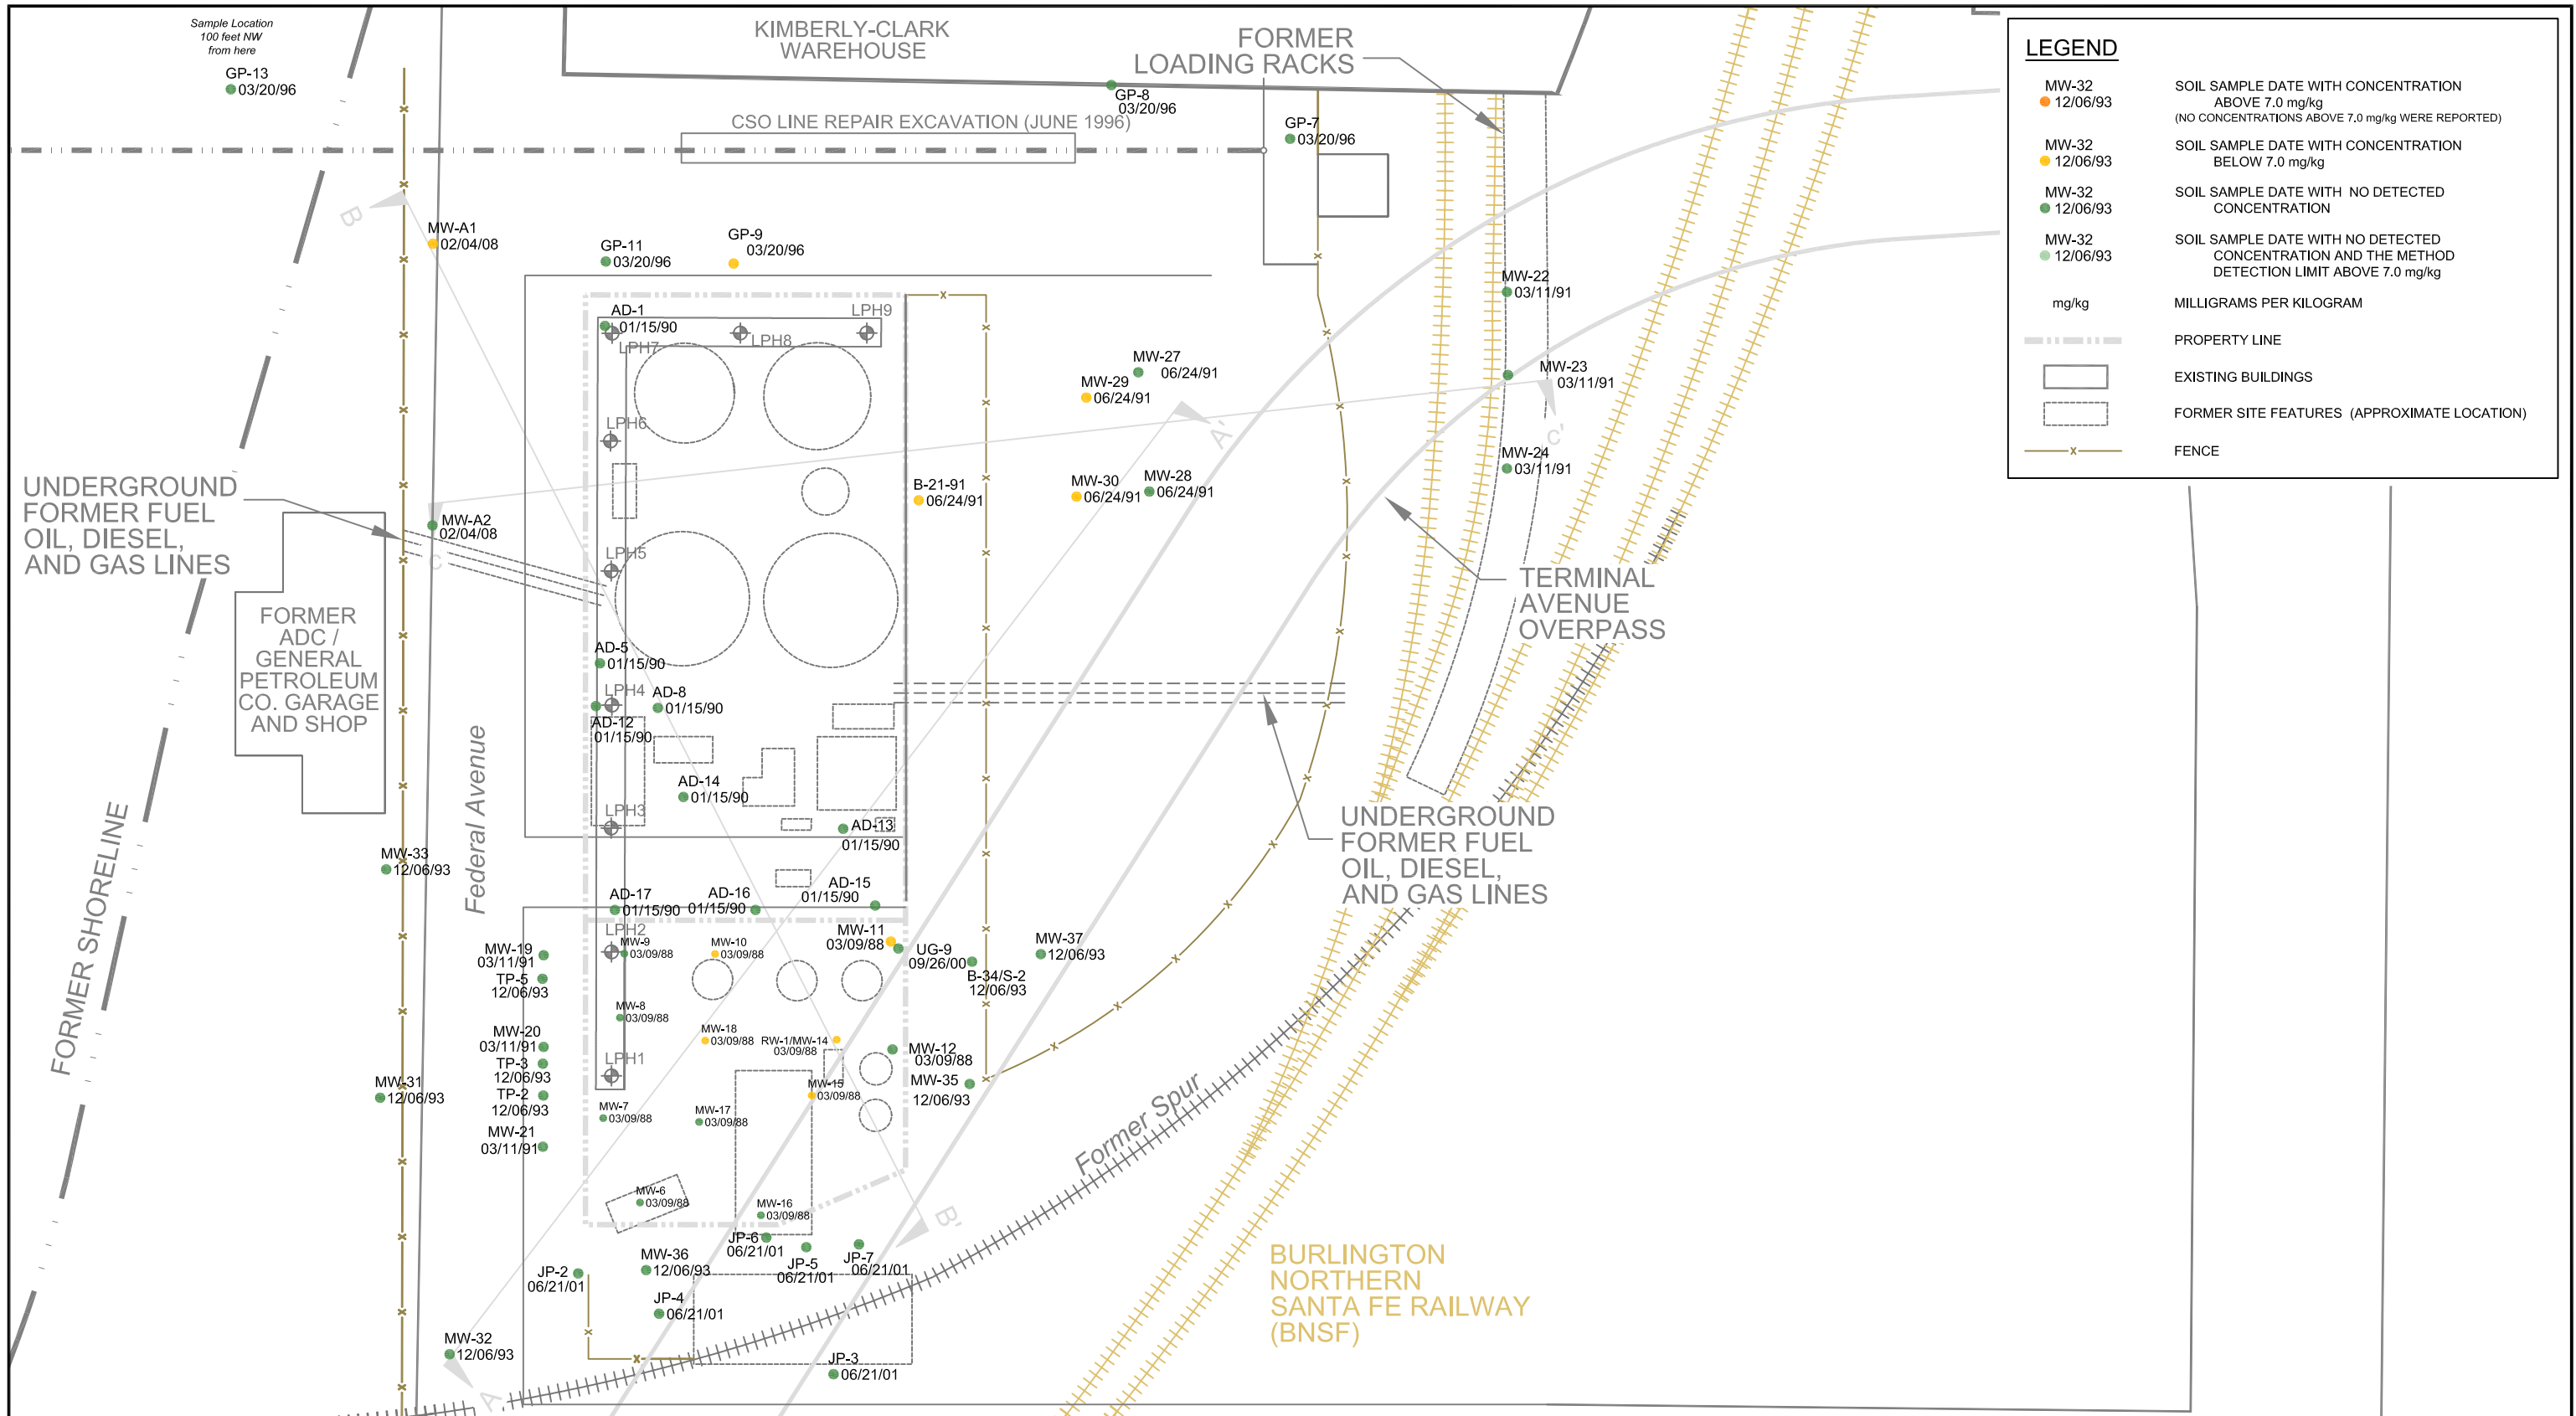


| LEGEND | |
|---------------------|--|
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION ABOVE 7.0 mg/kg (NO CONCENTRATIONS ABOVE 7.0 mg/kg WERE REPORTED) |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION BELOW 7.0 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH NO DETECTED CONCENTRATION AND THE METHOD DETECTION LIMIT ABOVE 7.0 mg/kg |
| mg/kg | MILLIGRAMS PER KILOGRAM |
| --- | PROPERTY LINE |
| ▭ | EXISTING BUILDINGS |
| ▭ | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| -x- | FENCE |

| | | | | | |
|---|--|--|--|--|--|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.   SCALE IN FEET | CLIENT LOGO  | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | DWN BY: JRS / BRJ CHK'D BY: AIS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C REV. NO.: 1 FIGURE No. 34 |
| | | AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201  | TITLE HORIZONTAL DISTRIBUTION OF TOLUENE IN SOIL | | |

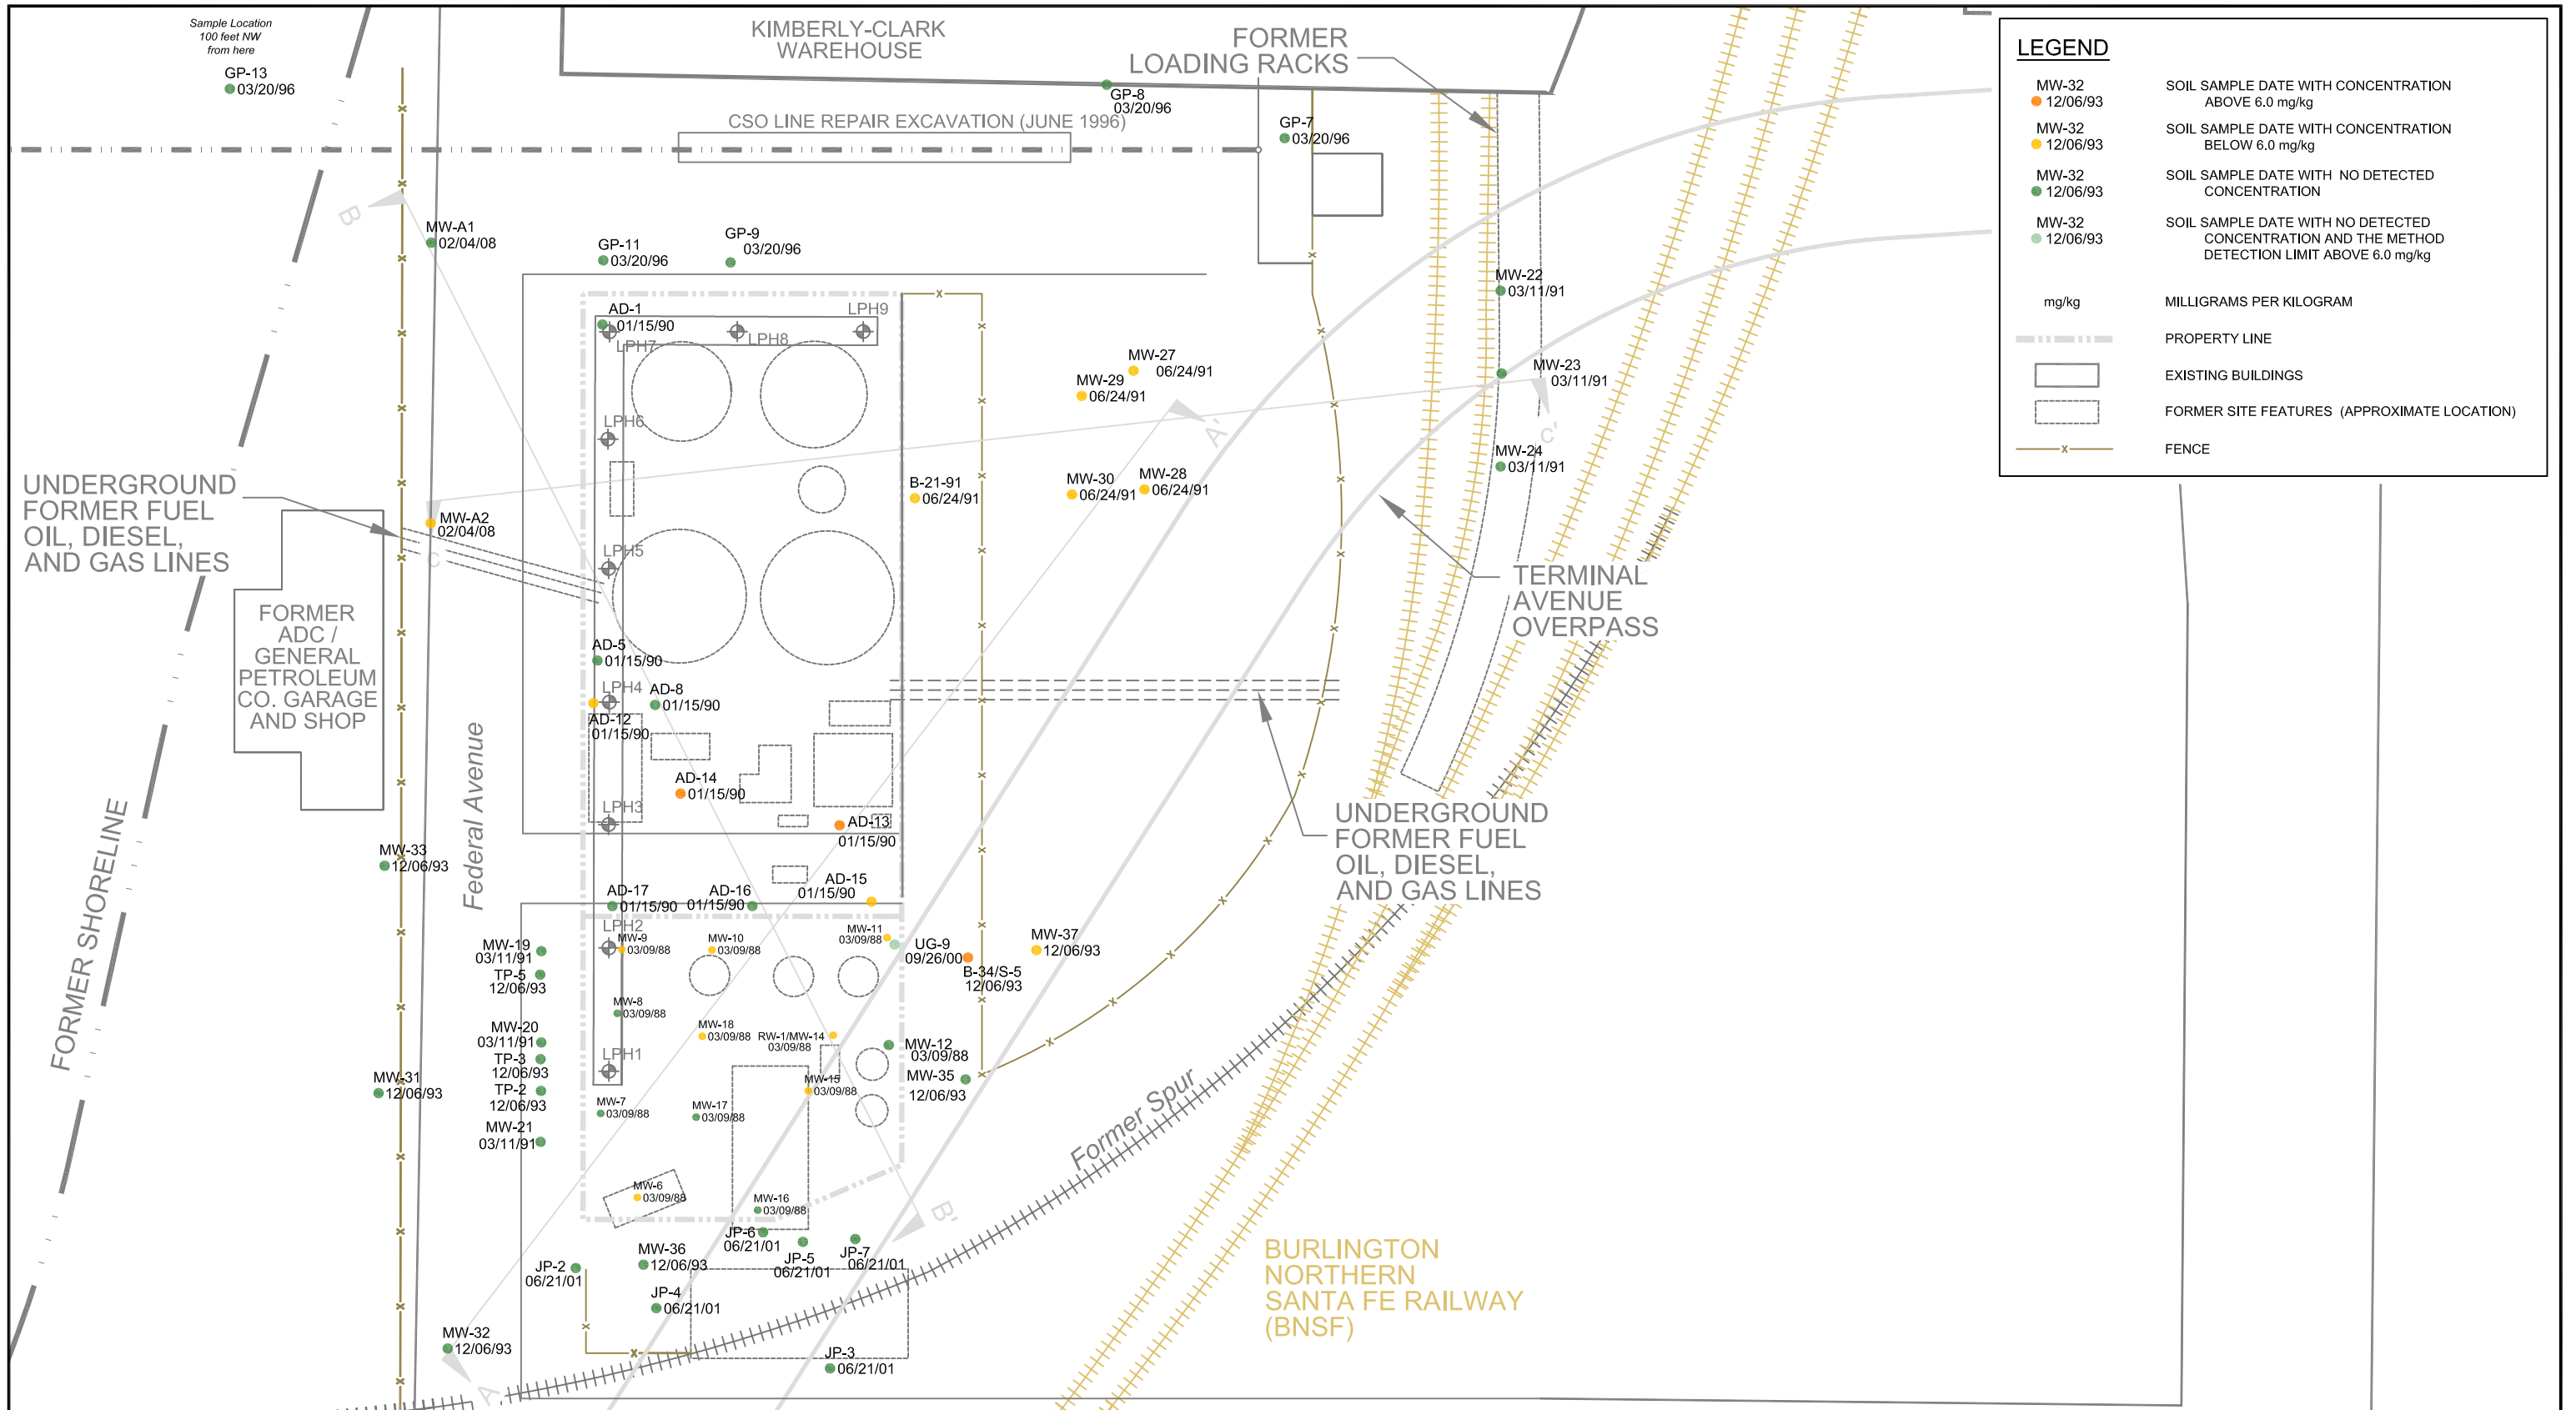


| | | | | | |
|---|--|--|--|--|--|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.   SCALE IN FEET | CLIENT LOGO  | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | DWN BY: JRS / BRJ CHK'D BY: AIS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C REV. NO.: 1 FIGURE No. 35 |
| | | AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201  | TITLE HORIZONTAL DISTRIBUTION OF ETHYLBENZENE IN SOIL | | |

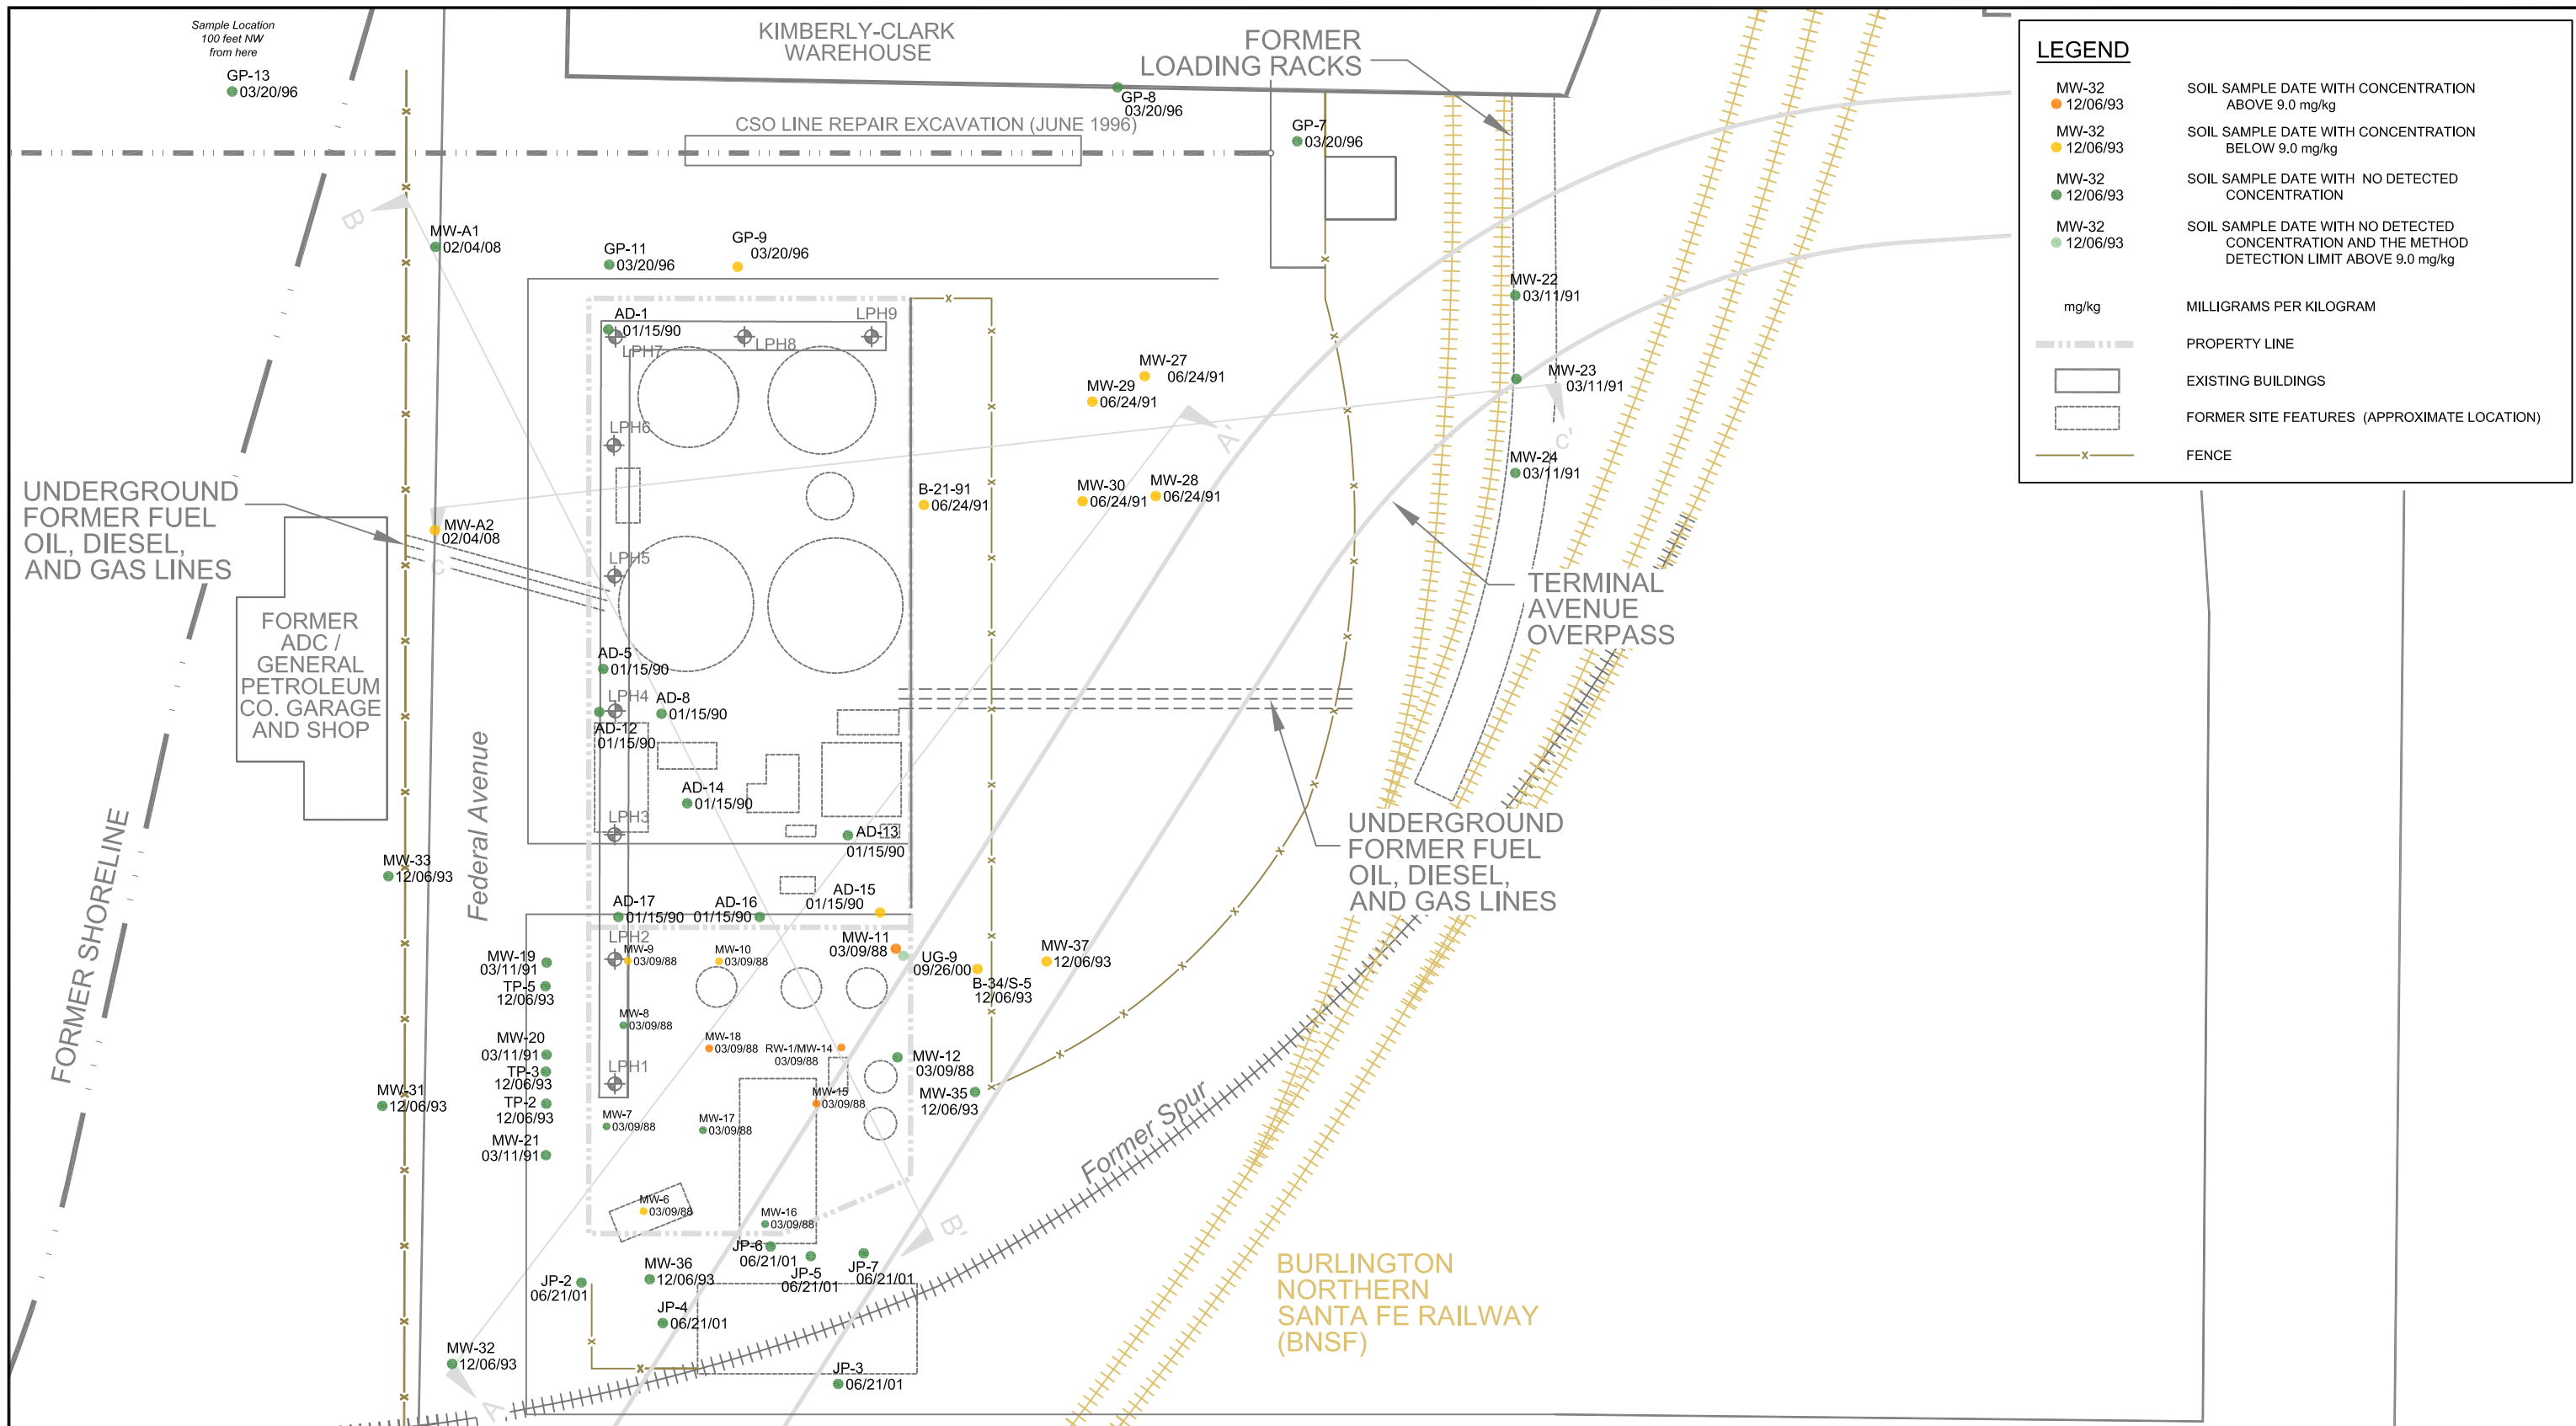

| LEGEND | |
|---------------------|--|
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION ABOVE 9.0 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH CONCENTRATION BELOW 9.0 mg/kg |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| MW-32 ● 12/06/93 | SOIL SAMPLE DATE WITH NO DETECTED CONCENTRATION AND THE METHOD DETECTION LIMIT ABOVE 9.0 mg/kg |
| mg/kg | MILLIGRAMS PER KILOGRAM |
| --- | PROPERTY LINE |
| ▭ | EXISTING BUILDINGS |
| ▭ | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| --- | FENCE |

| | | | | | |
|---|-----------------|---|--|--|--|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc. SCALE IN FEET | CLIENT LOGO | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | DWN BY: JRS / BRJ CHK'D BY: AIS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C REV. NO.: 1 FIGURE No. 36 |
| | | CLIENT: AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | TITLE HORIZONTAL DISTRIBUTION OF TOTAL XYLENE IN SOIL | | |

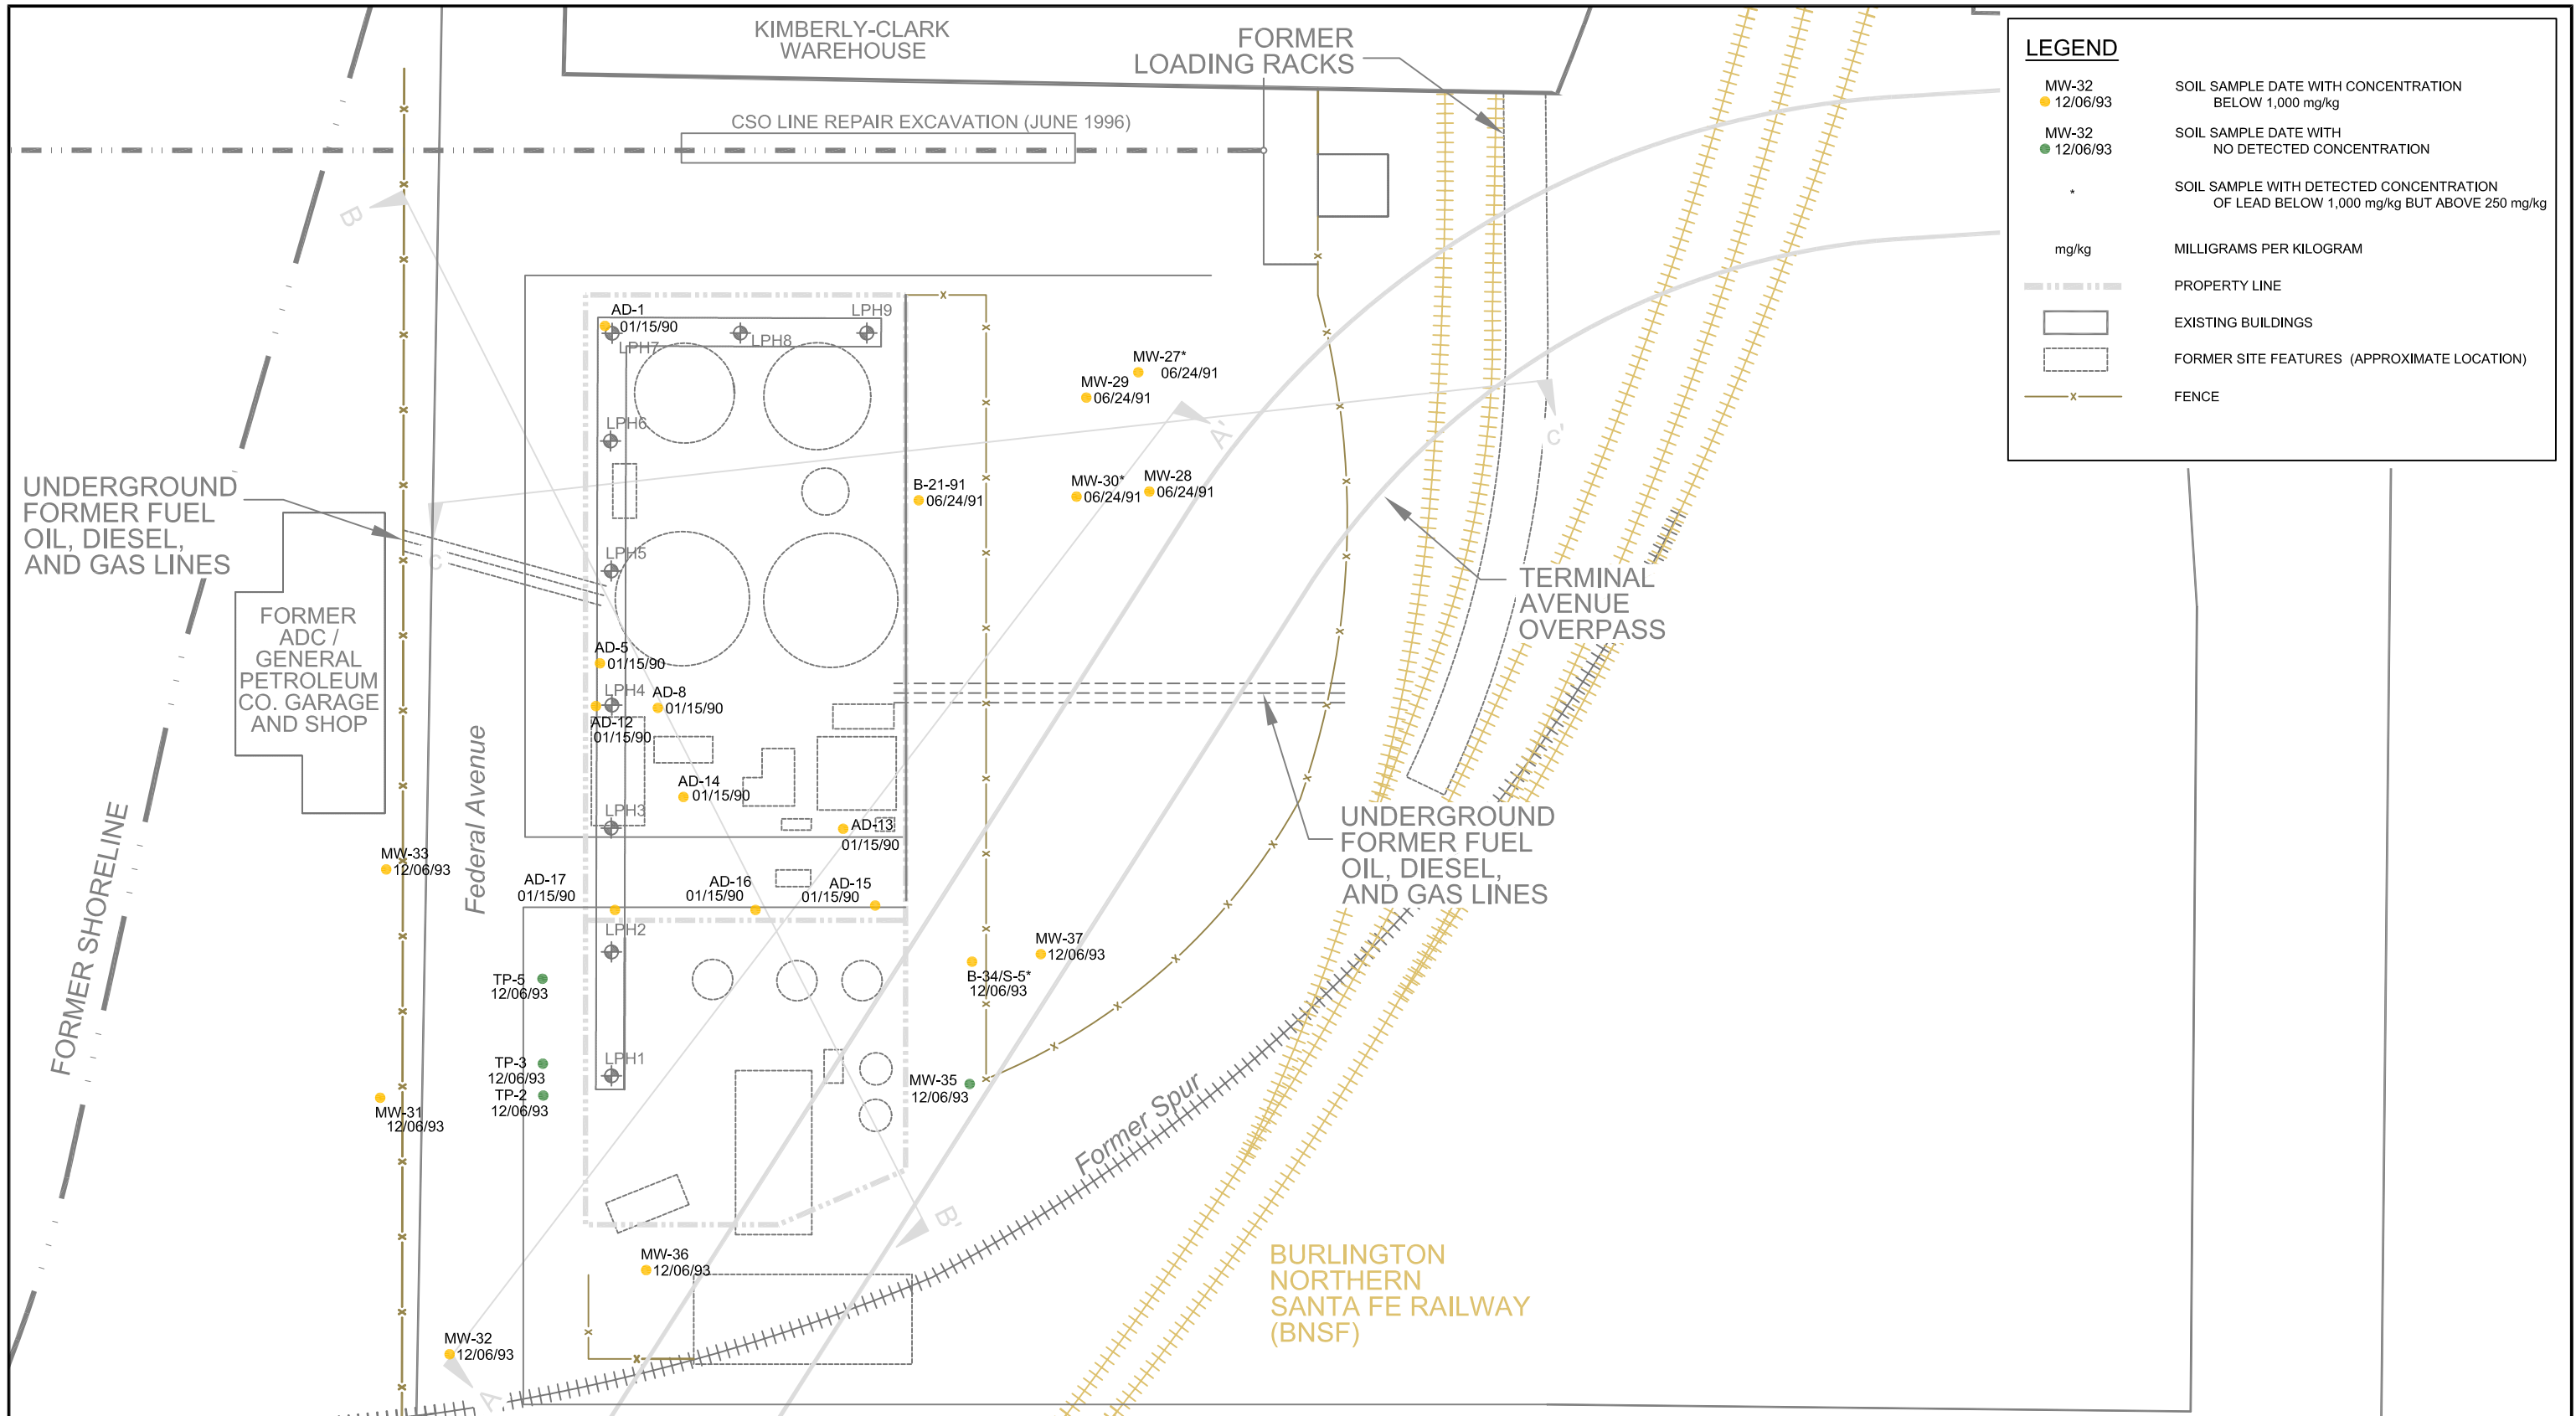

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

| | |
|-------------|-----------|
| DWN BY: | JRS / BRJ |
| CHK'D BY: | AMS |
| DATUM: | NONE |
| PROJECTION: | NONE |
| SCALE: | 1" = 60' |


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE

**HORIZONTAL DISTRIBUTION
 OF LEAD IN SOIL**

| | |
|--------------|---------------|
| DATE: | AUGUST 2009 |
| PROJECT NO.: | 9-915-15716-C |
| REV. NO.: | 1 |
| FIGURE No. | 37 |

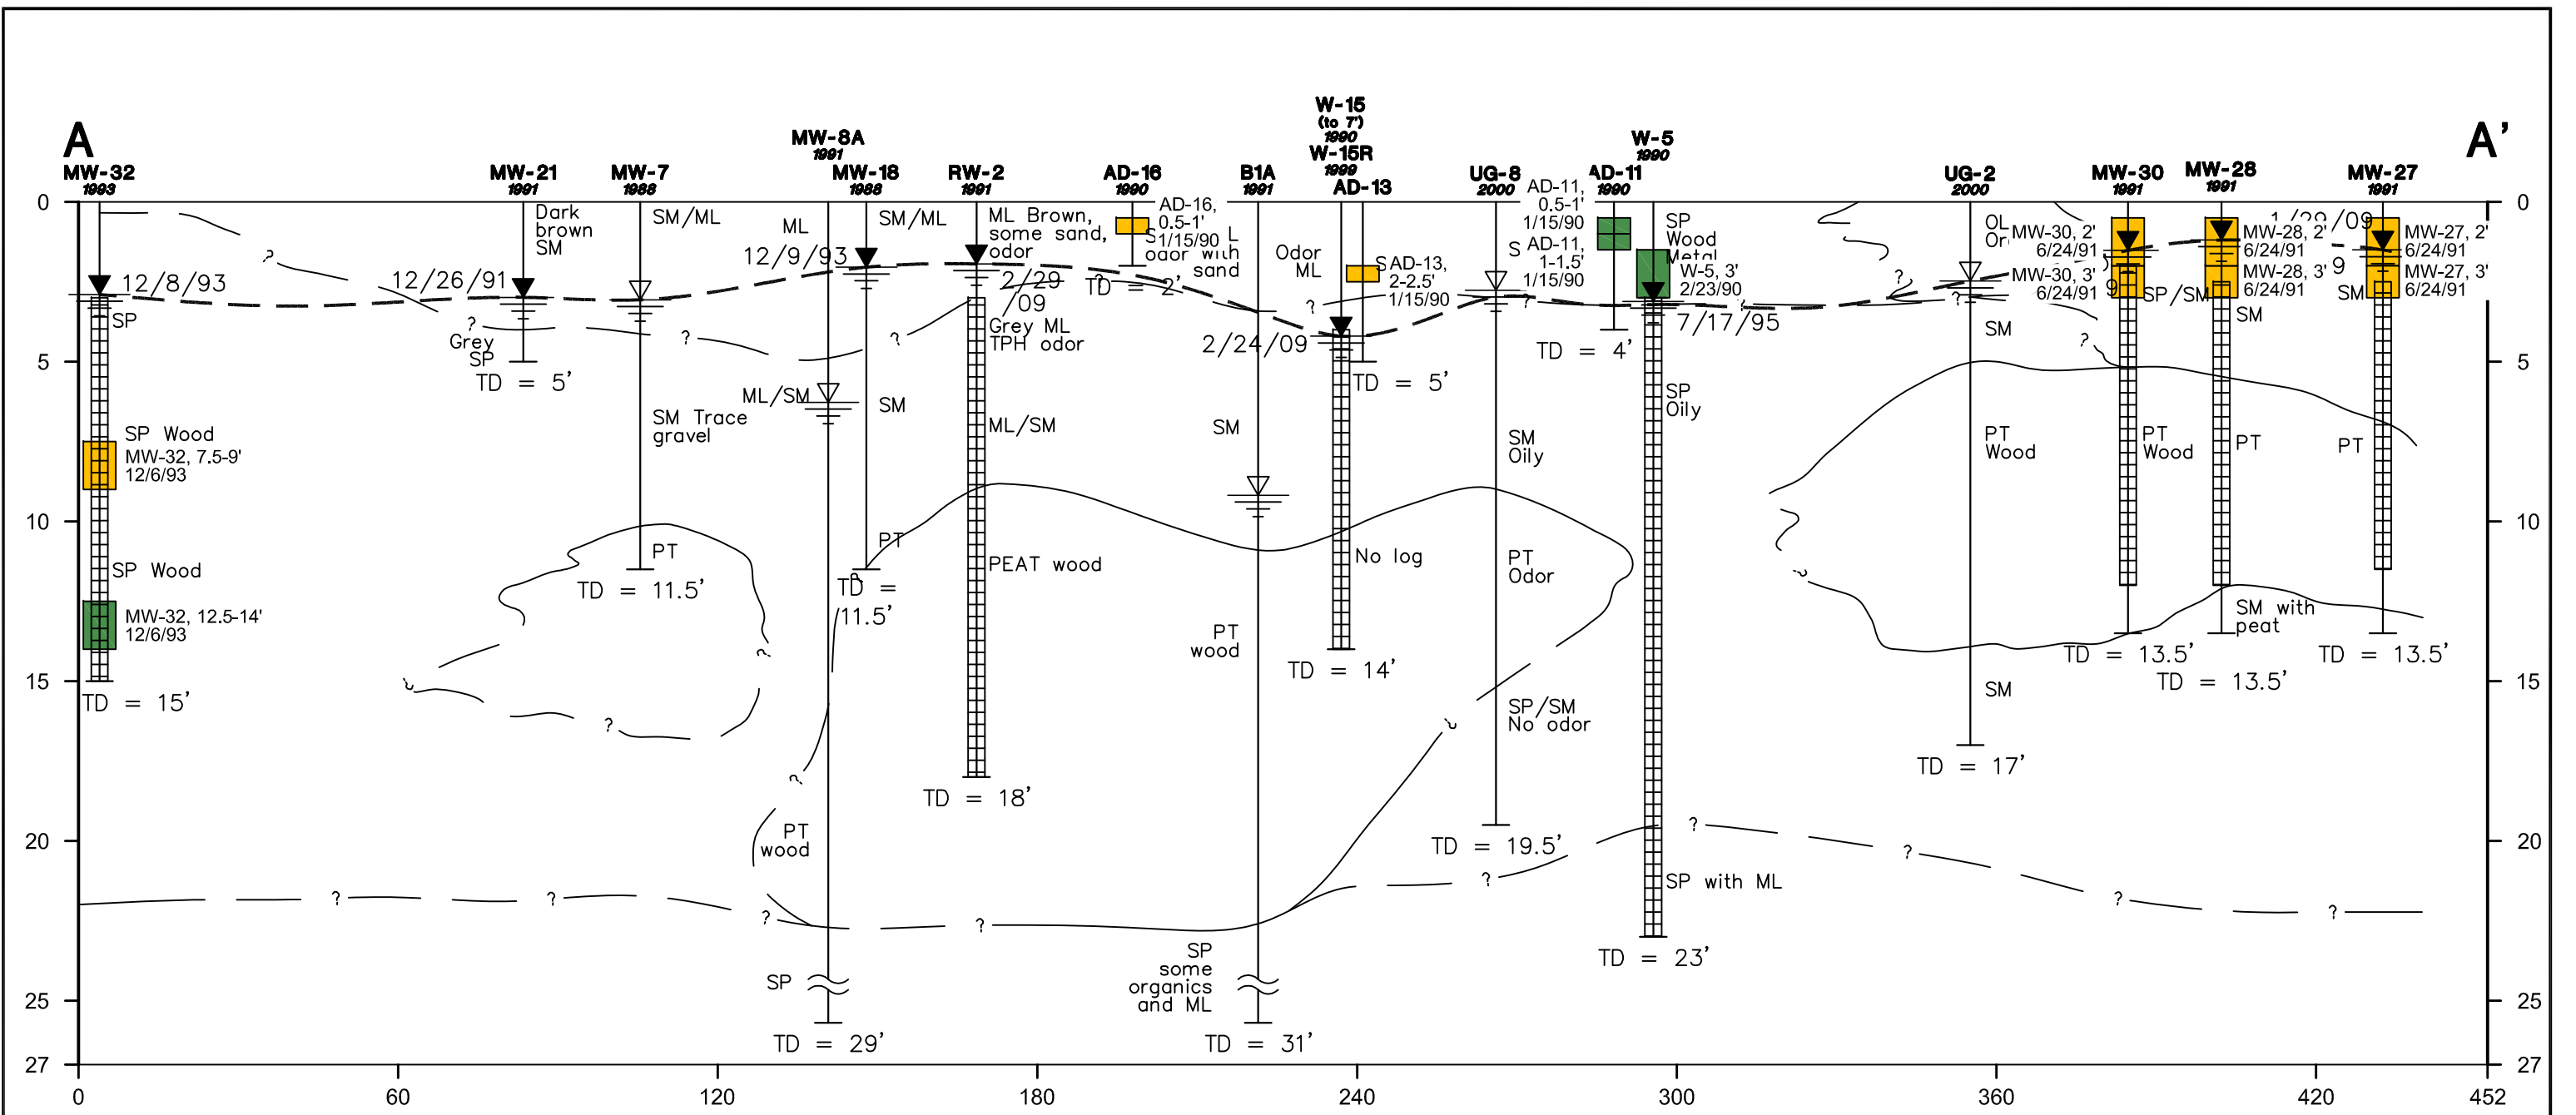

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-16 Boring number and year installed

MW-30 Well number and year installed

Screen interval

TD = 2' Total depth in feet

TD = 15' Total depth in feet


Lead

- Detected $\geq 1,000\text{ mg/kg}$
- Detected $< 1,000\text{ mg/kg}$
- Not detected

mg/kg Milligram per kilogram

MW-28, 2' 6/24/91 Sample depth and date collected

| | | | | | |
|---|--|--|--------------|--|----------------------------|
| SCALE IN VERTICAL FEET SCALE IN HORIZONTAL FEET | CLIENT LOGO | CLIENT: | DWN BY: JRS | PROJECT | DATE: AUGUST 2009 |
| | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | | CHK'D BY: AS | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | PROJECT NO: 9-915-15716-C |
| AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | | DATUM: NONE PROJECTION: NONE SCALE: AS SHOWN | | TITLE VERTICAL DISTRIBUTION OF LEAD IN SOIL CROSS SECTION A-A' | REV. NO.: FIGURE No. 38 |

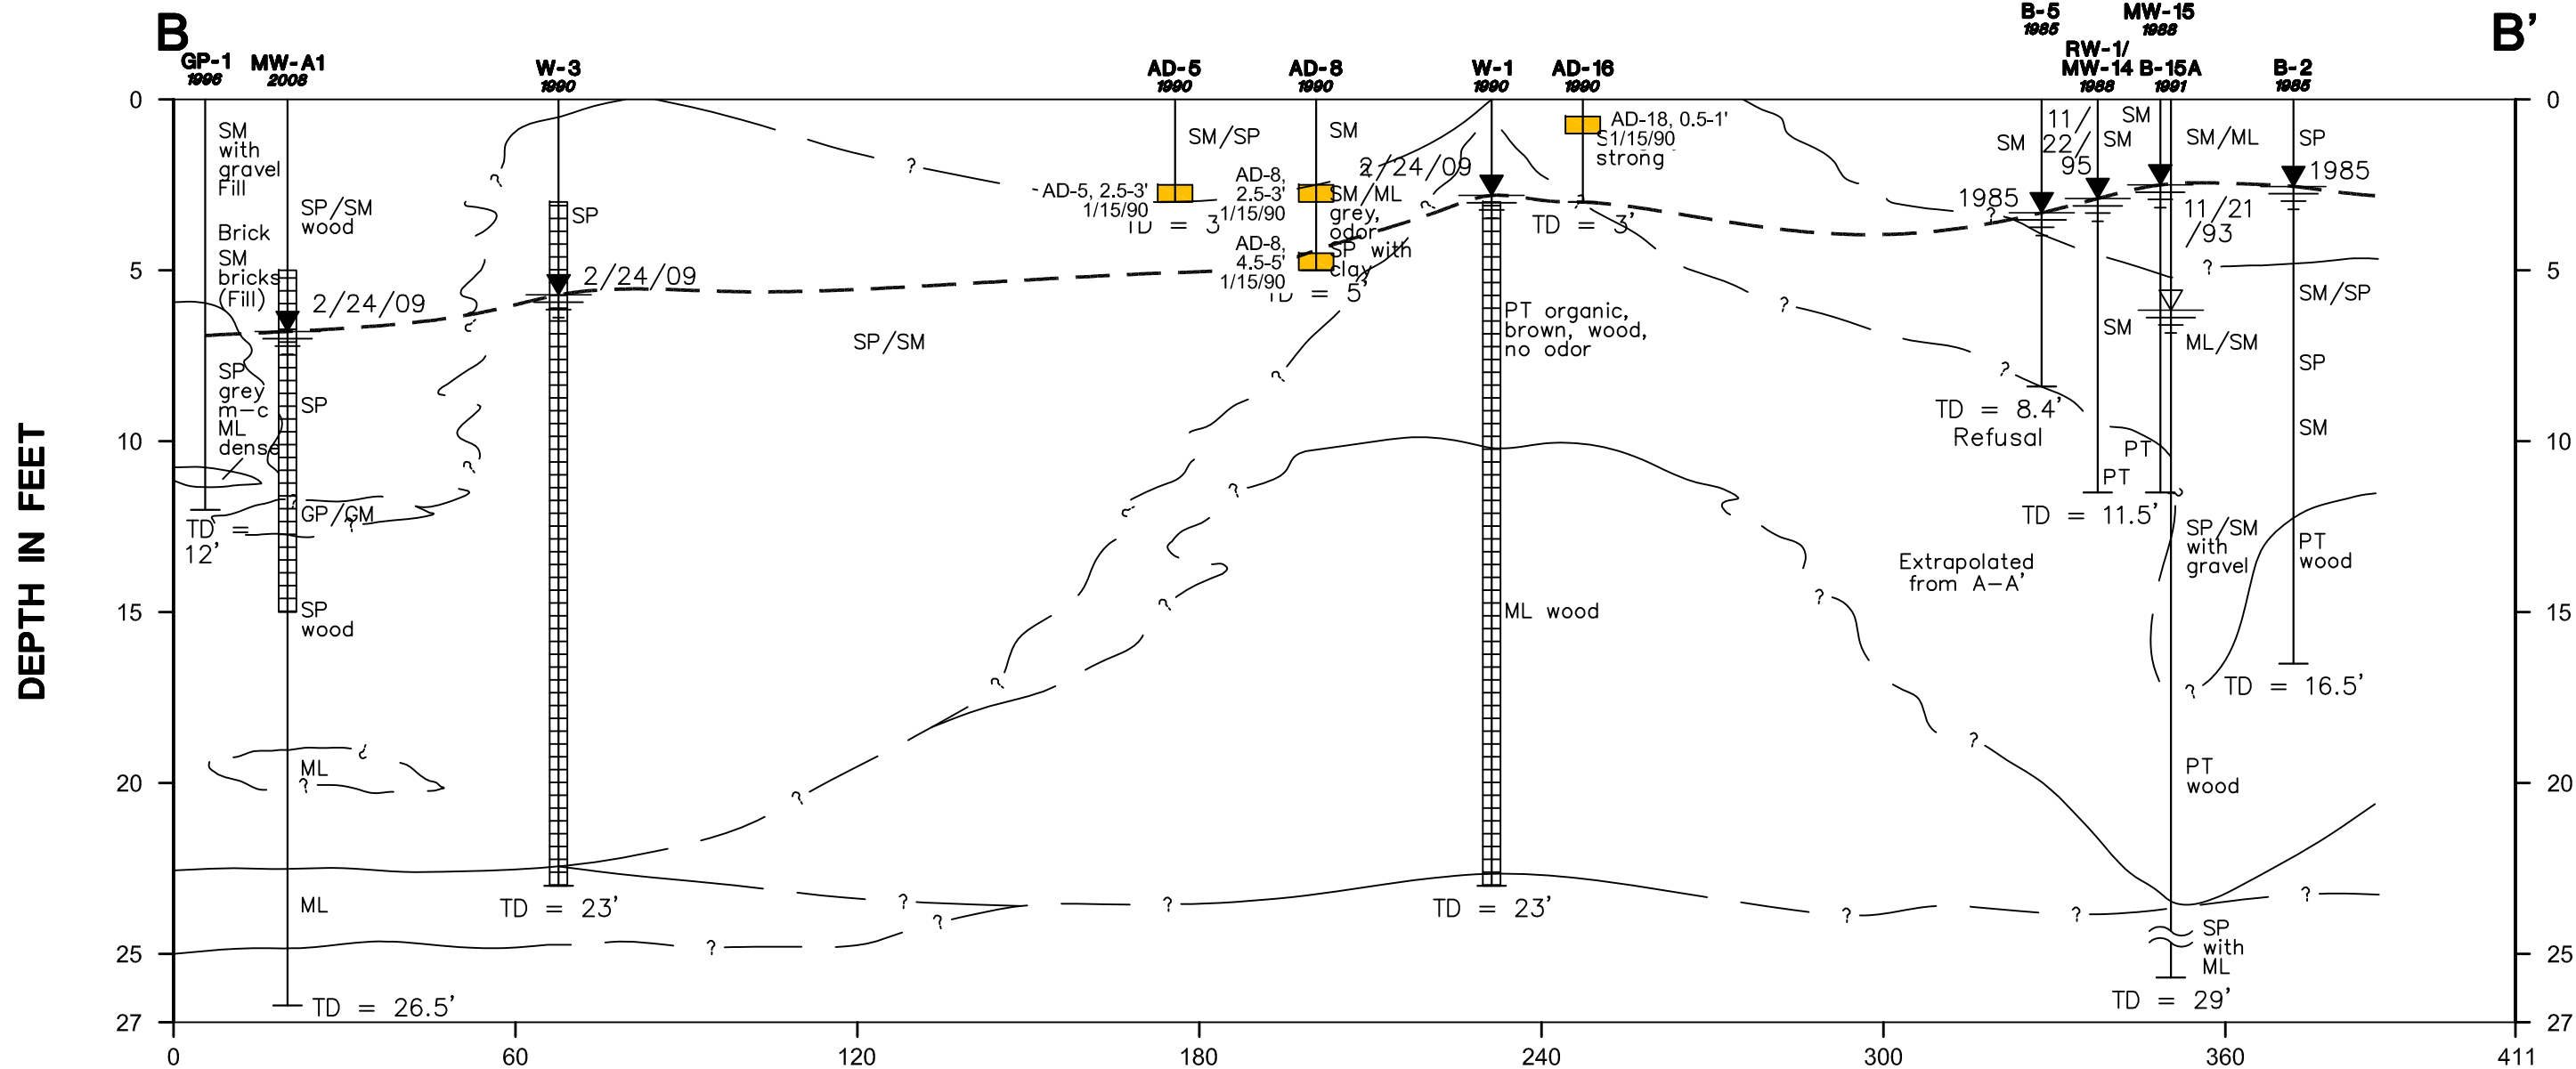

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

--- Unconfined groundwater table

AD-5 1990 Boring number and year installed

MW-A1 2008 Well number and year installed

Screen interval

TD = 3' Total depth in feet

TD = 23' Total depth in feet

Lead


Detected $\geq 1,000$ mg/kg

Detected $< 1,000$ mg/kg

Not detected

mg/kg Milligram per kilogram

AD-18, 0.5-1' 1/15/90 Sample depth and date collected



CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF LEAD IN SOIL CROSS SECTION B-B'

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. **39**

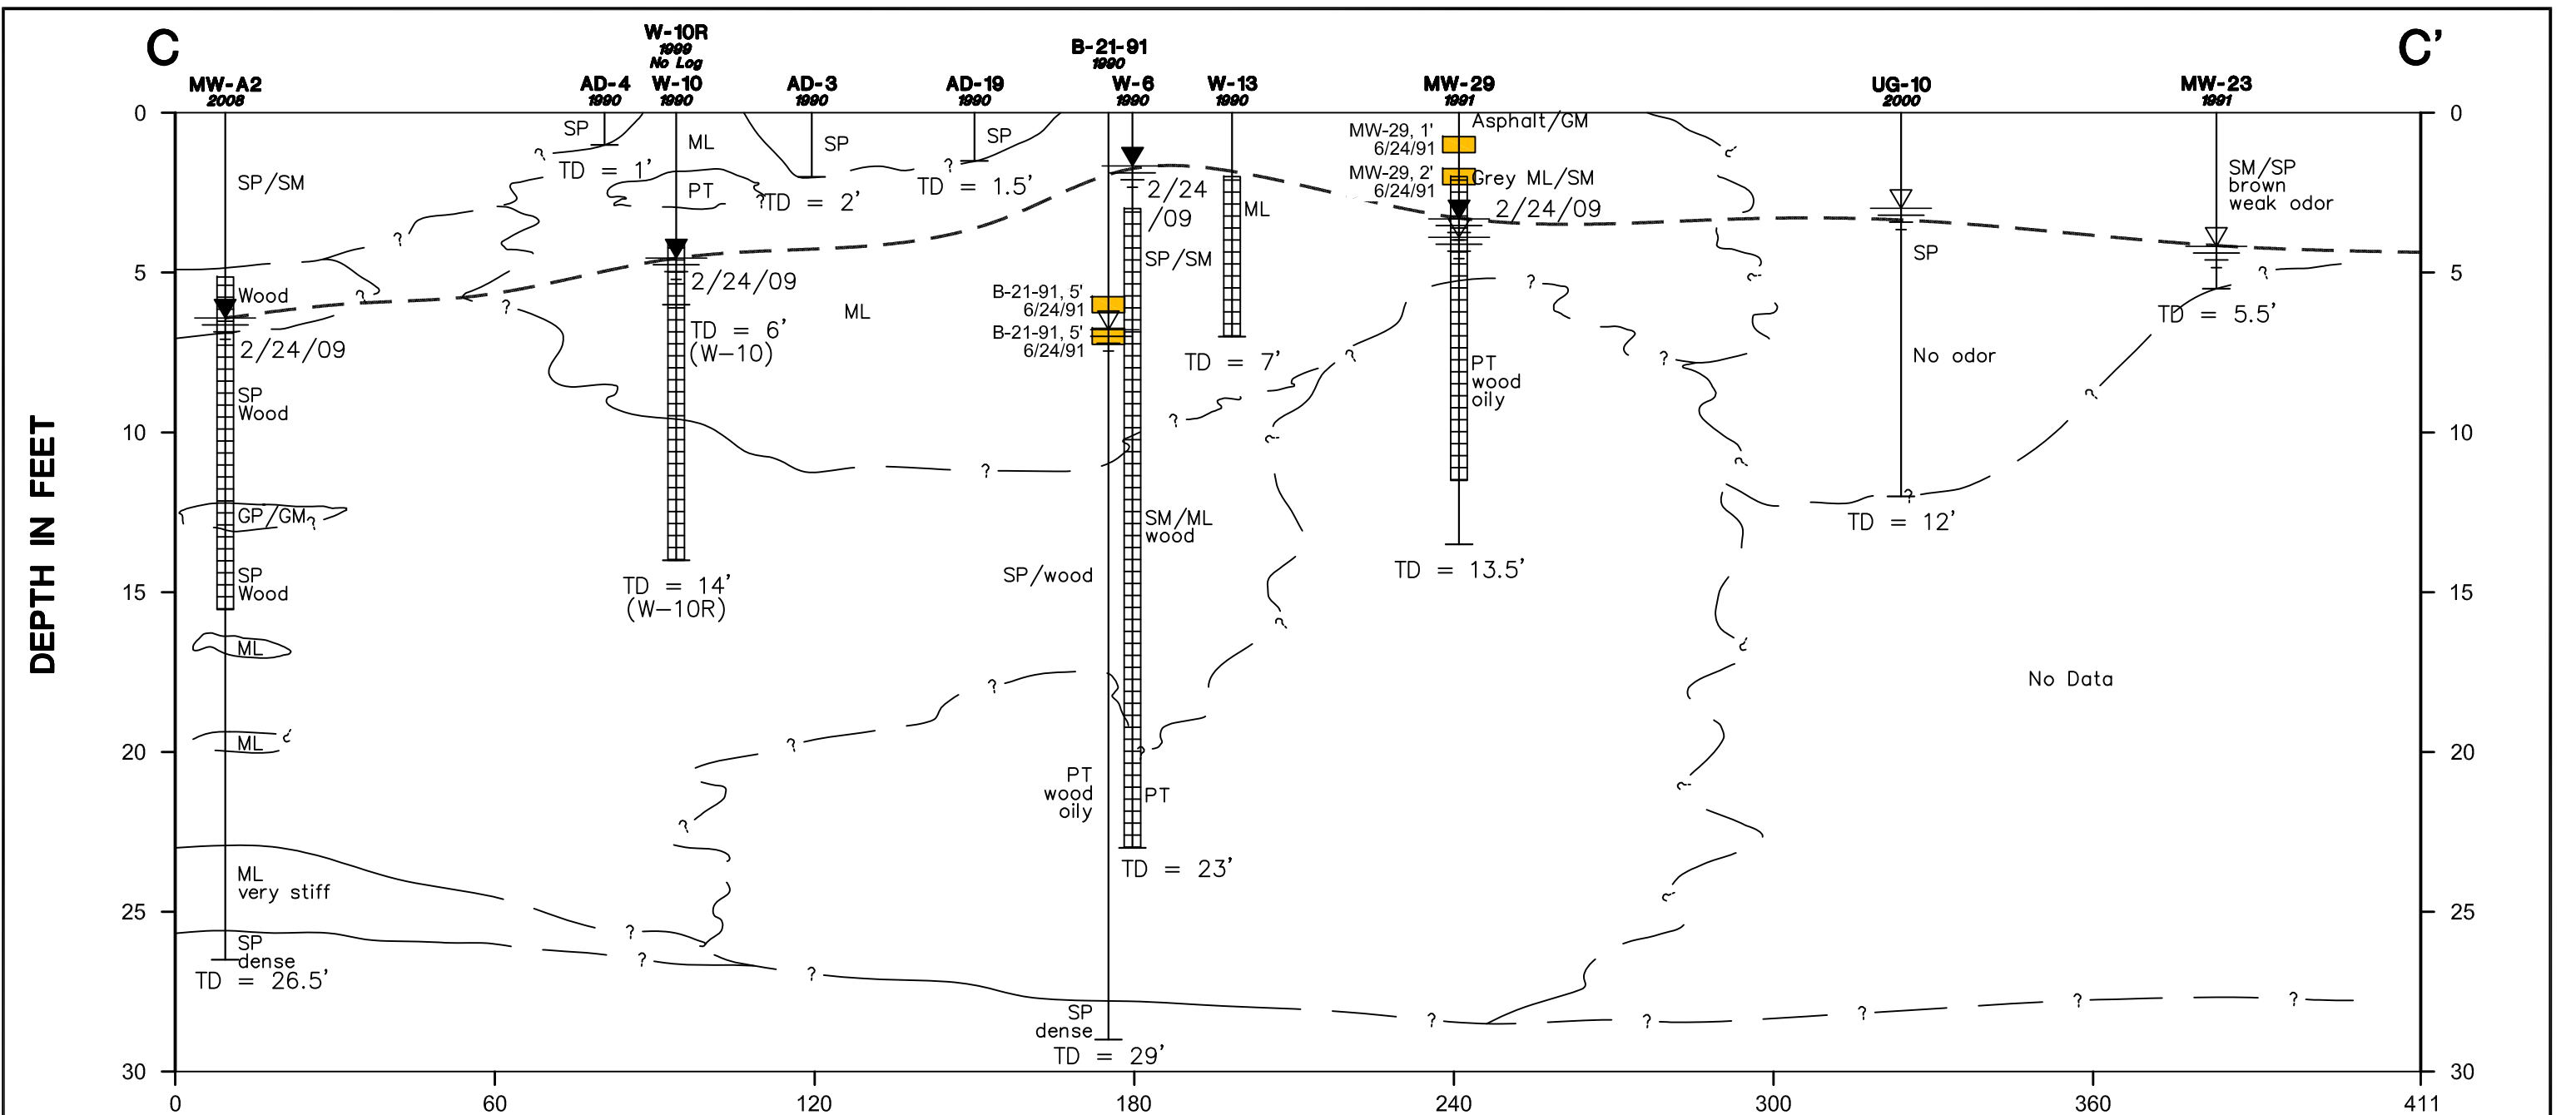

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

Unconfined groundwater table

AD-4 1990 Boring number and year installed

TD = 1' Total depth in feet

MW-A2 2008 Well number and year installed

Screen interval

TD = 26' Total depth in feet

Lead


Detected ≥ 1,000 mg/kg

Detected < 1,000 mg/kg

Not detected

mg/kg Milligram per kilogram

MW-29, 2' 6/24/91 Sample depth and date collected

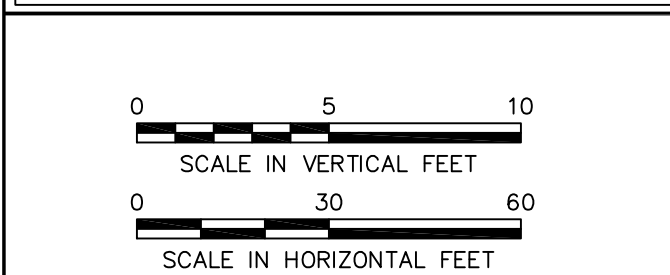

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS

CHK'D BY: AS

DATUM: NONE

PROJECTION: NONE

SCALE: AS SHOWN

PROJECT

EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE


VERTICAL DISTRIBUTION OF LEAD IN SOIL
CROSS SECTION C-C'

DATE: AUGUST 2009


PROJECT NO: 9-915-15716-C

REV. NO.:

FIGURE No. **40**

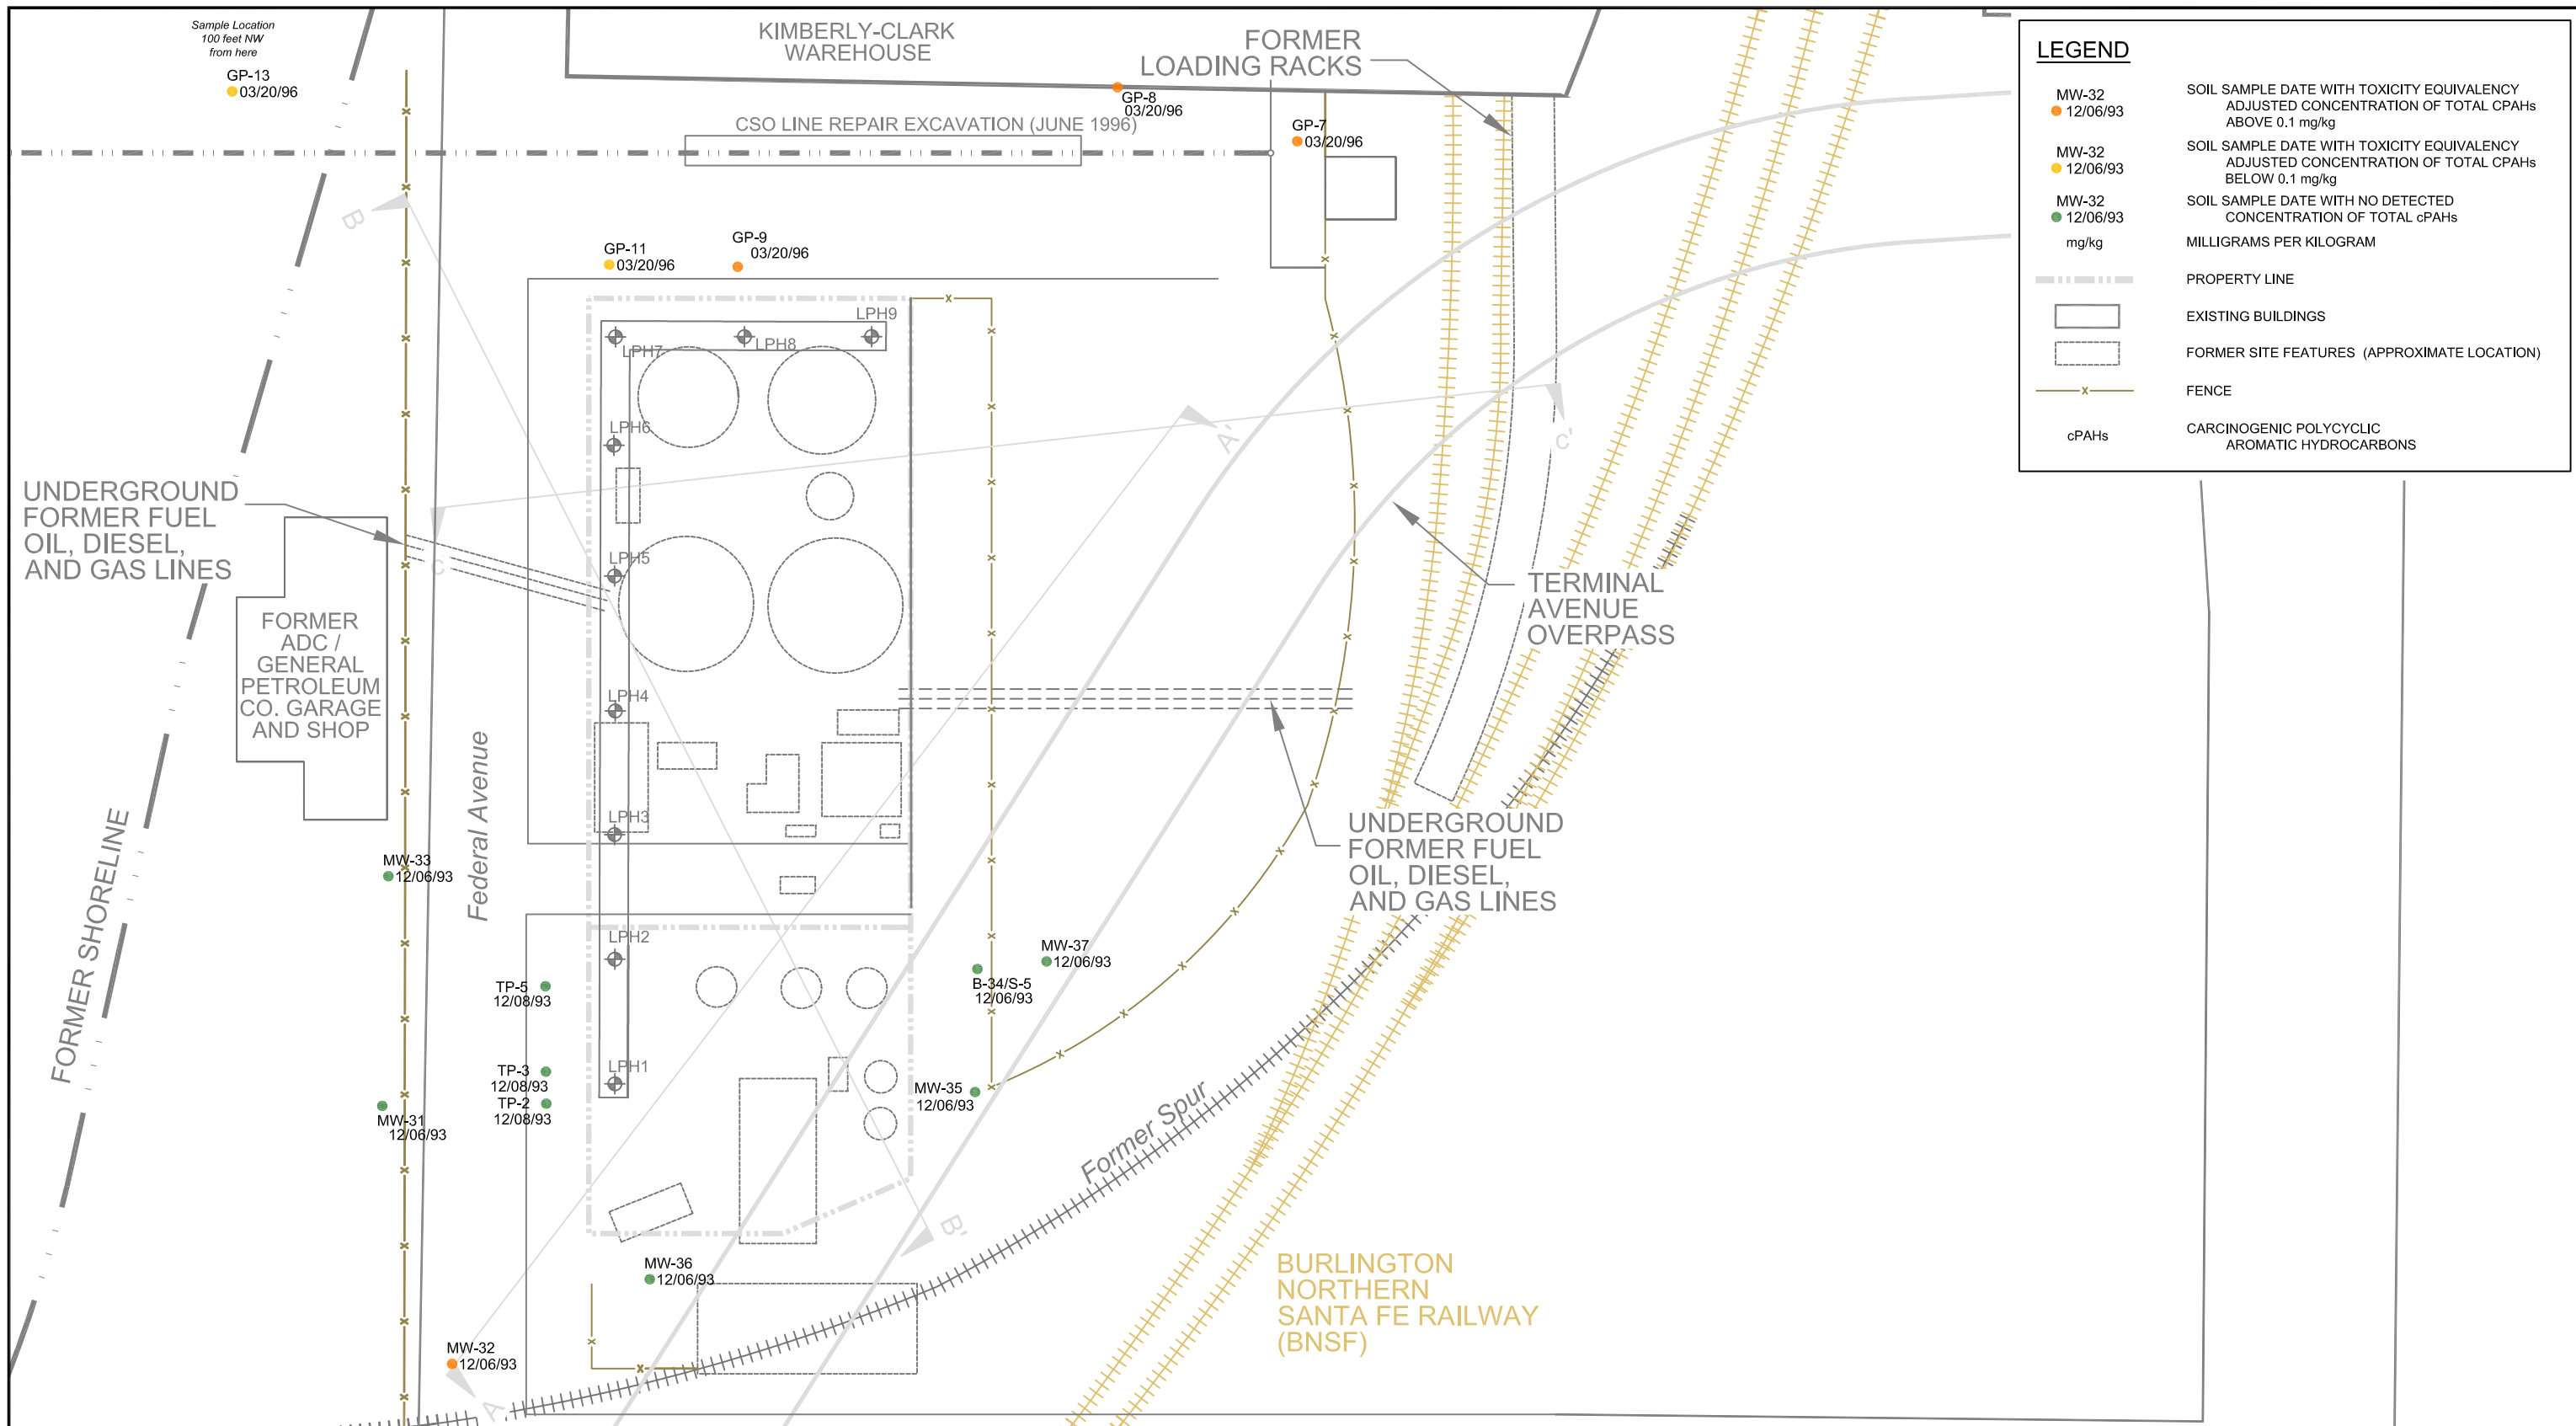

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

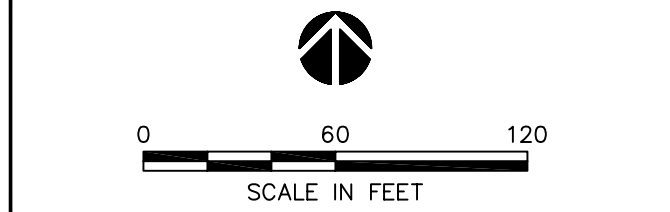


CLIENT LOGO

CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY
 AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
 CHK'D BY: AIS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'

PROJECT
EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728
 TITLE
HORIZONTAL DISTRIBUTION OF ADJUSTED TOTAL cPAHs CONCENTRATION IN SOIL

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.: 1
 FIGURE No. 41

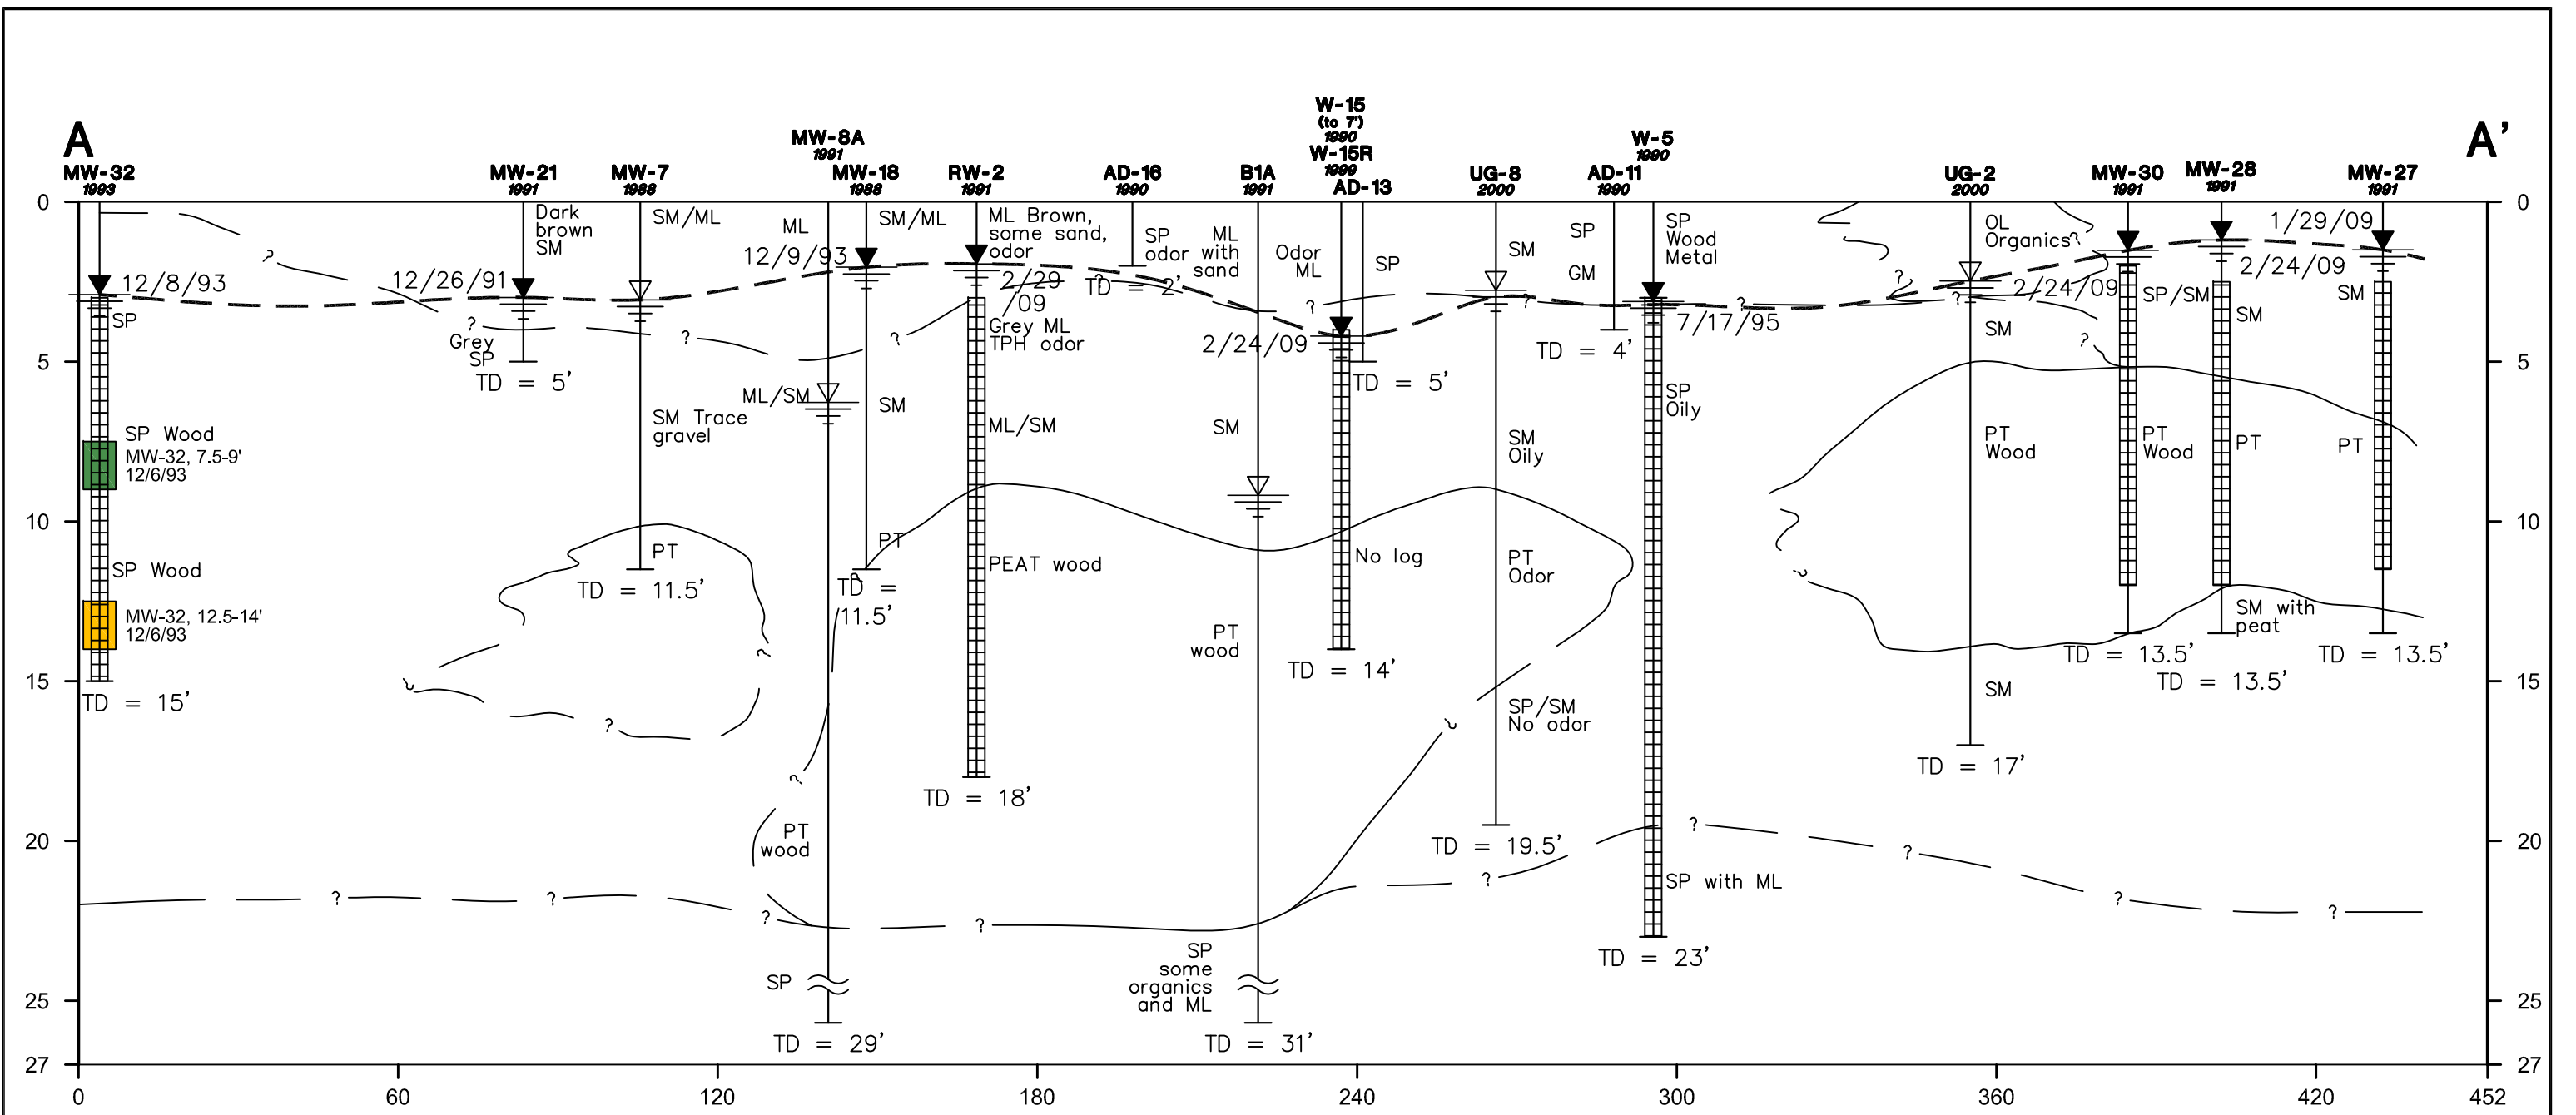

LEGEND

12/26/91 Static water level measured after drilling and date measured

Water level during drilling

--- Unconfined groundwater table

AD-16 1990 Boring number and year installed

TD = 2' Total depth in feet

MW-30 1991 Well number and year installed

Screen interval

TD = 15' Total depth in feet

CARCINOGENIC POLYCYCLIC AROMATIC HYDROCARBON
(Toxicity Equivalent Adjusted Concentration)

Detected ≥ 2.0 mg/kg


Detected < 2.0 mg/kg

Not detected

mg/kg Milligram per kilogram


UG-8, 5-7' 9/26/00 Sample depth and date collected

| | | | | |
|--|---|---|---|--|
| SCALE IN VERTICAL FEET SCALE IN HORIZONTAL FEET | CLIENT LOGO CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | DWN BY: JRS CHK'D BY: AS DATUM: NONE PROJECTION: NONE SCALE: AS SHOWN | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 TITLE VERTICAL DISTRIBUTION OF TOXICITY-ADJUSTED TOTAL cPAHS CONCENTRATIONS IN SOIL CROSS SECTION A-A' | DATE: JUNE 2009 PROJECT NO: 9-915-15716-C REV. NO.: FIGURE No. 42 |
|--|---|---|---|--|

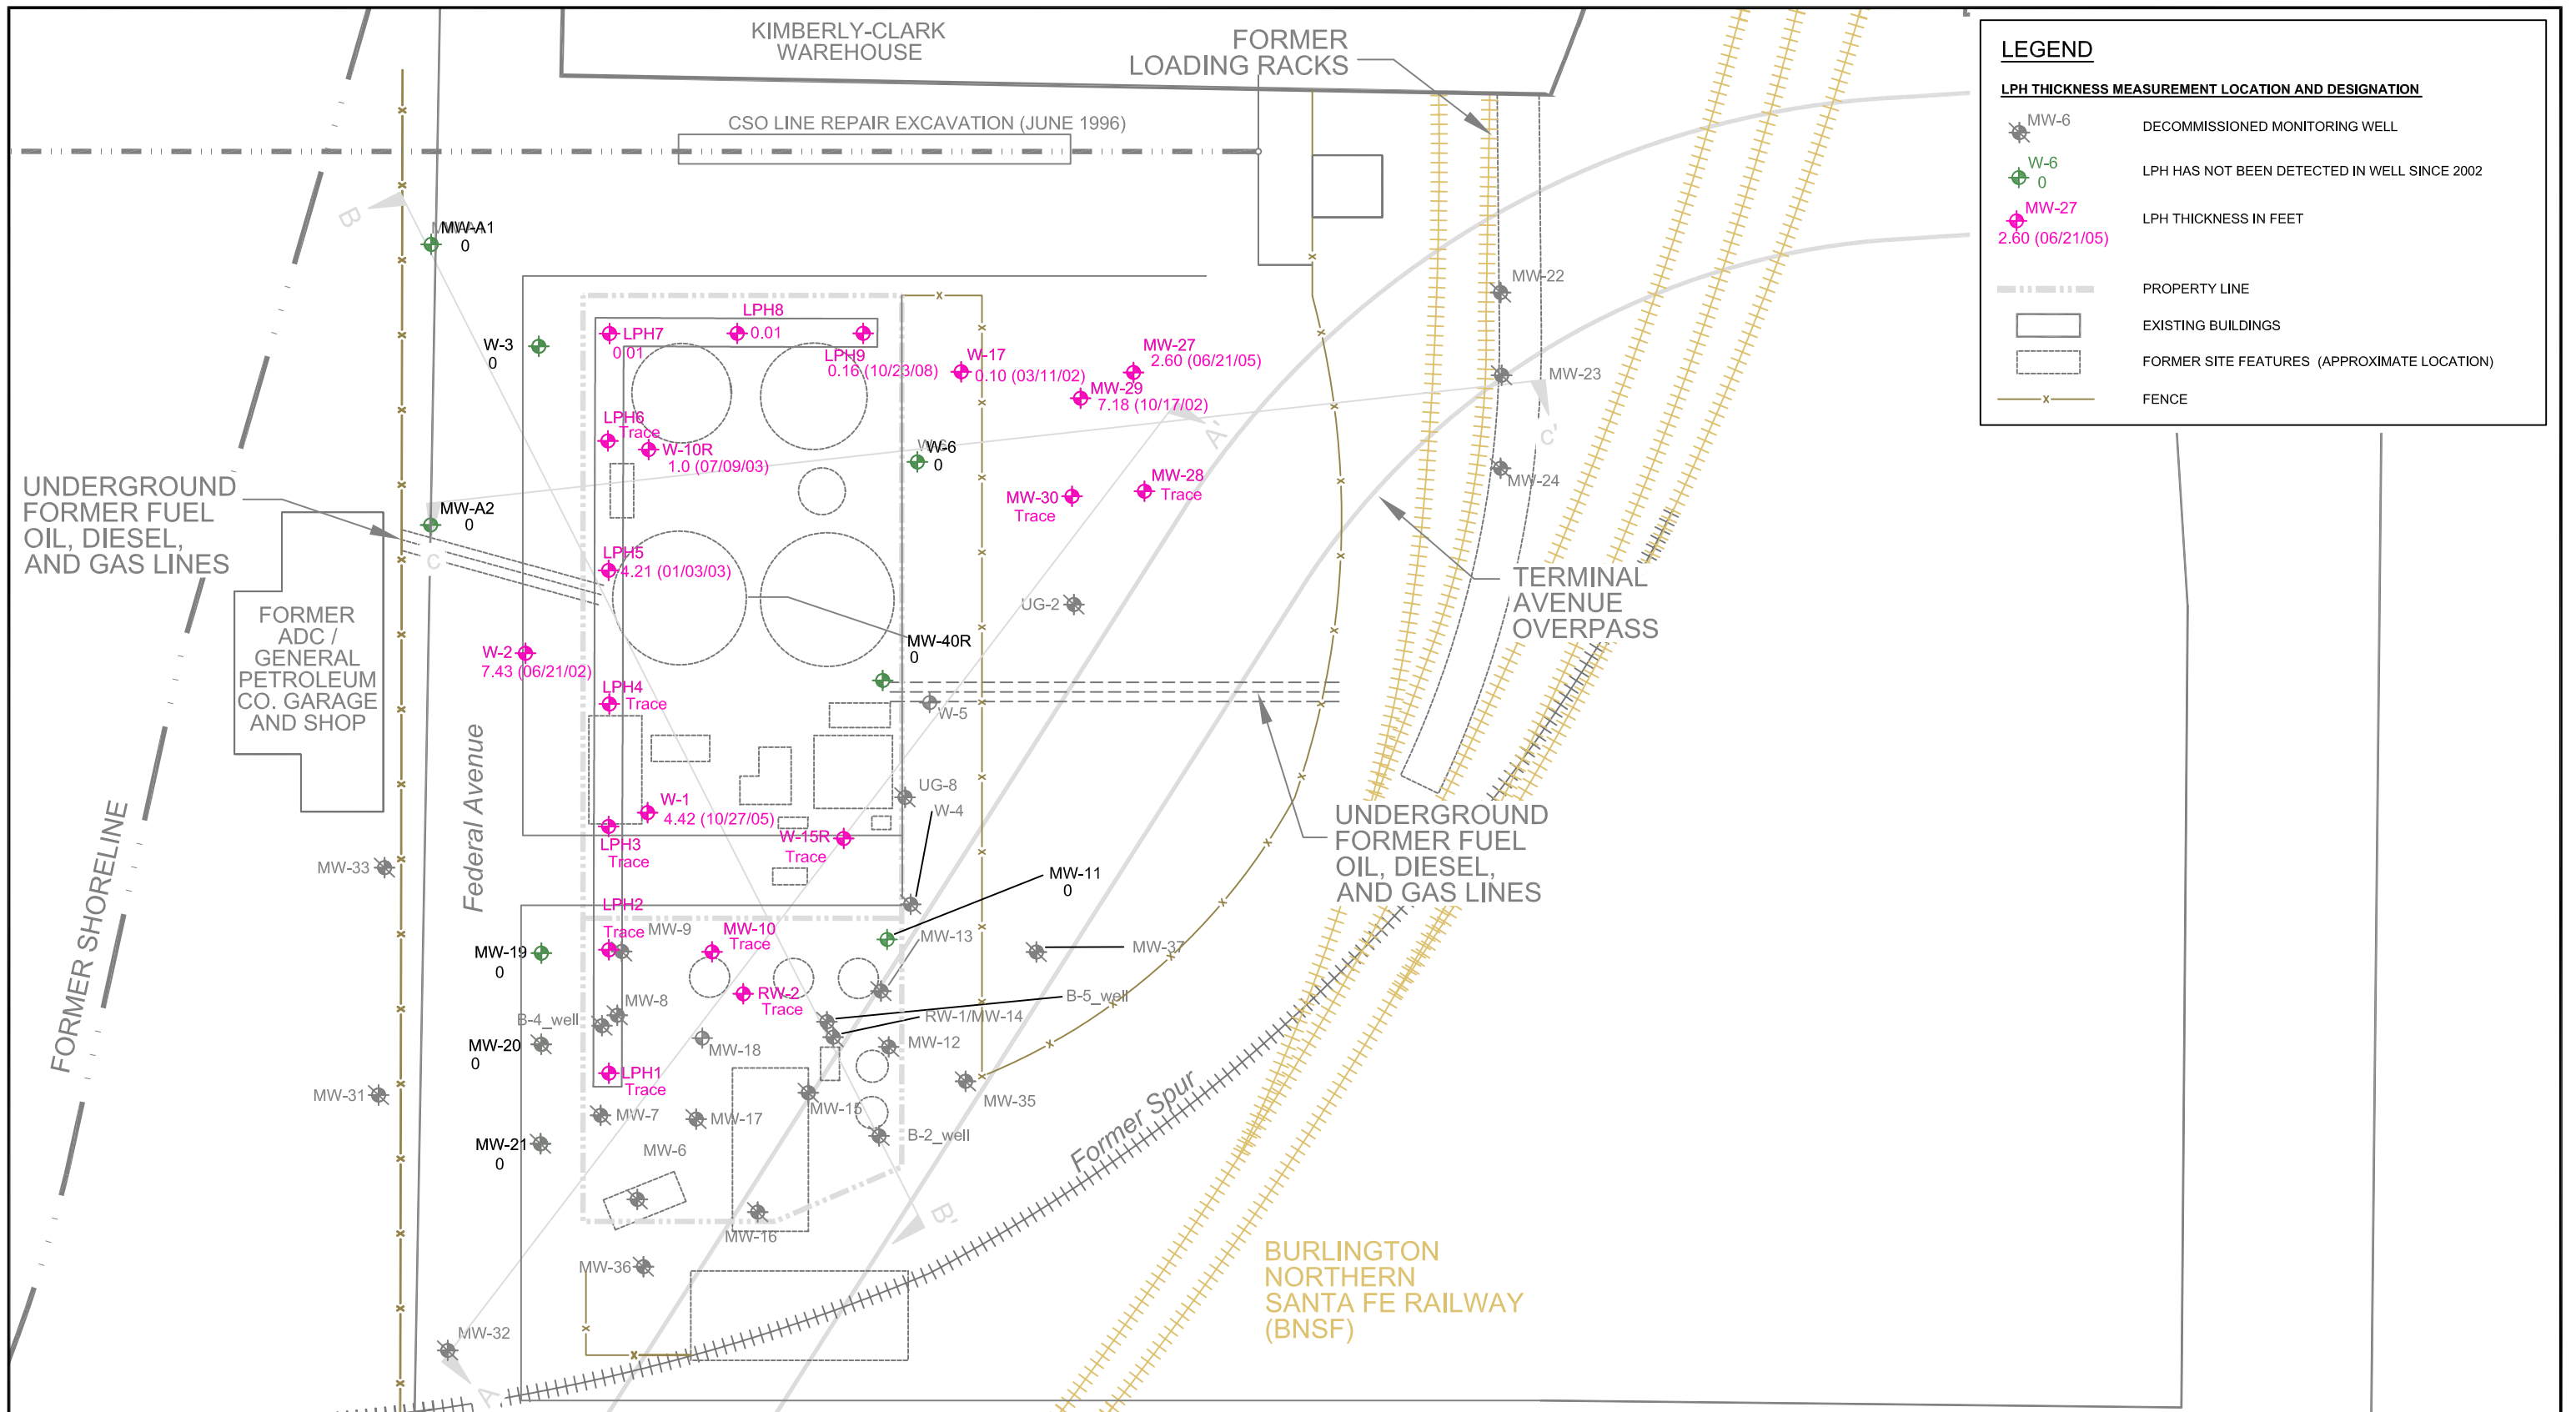


| LEGEND | |
|--|--|
| LPH THICKNESS MEASUREMENT LOCATION AND DESIGNATION | |
| | DECOMMISSIONED MONITORING WELL |
| | LPH HAS NOT BEEN DETECTED IN WELL SINCE 2002 |
| | LPH THICKNESS IN FEET |
| | PROPERTY LINE |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

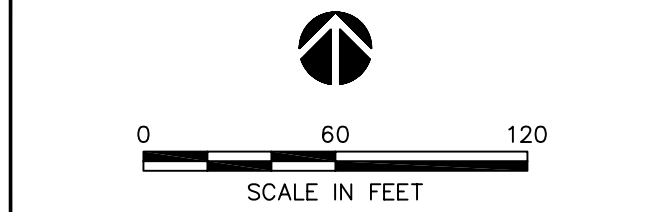

CLIENT LOGO


CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY
 AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201




DWN BY: JRS / BRJ
 CHK'D BY: AIS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'

PROJECT
**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**
 TITLE
**LIQUID-PHASE
 PETROLEUM HYDROCARBON
 MAXIMUM THICKNESS SINCE 2002**

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.: 1
 FIGURE No. 43

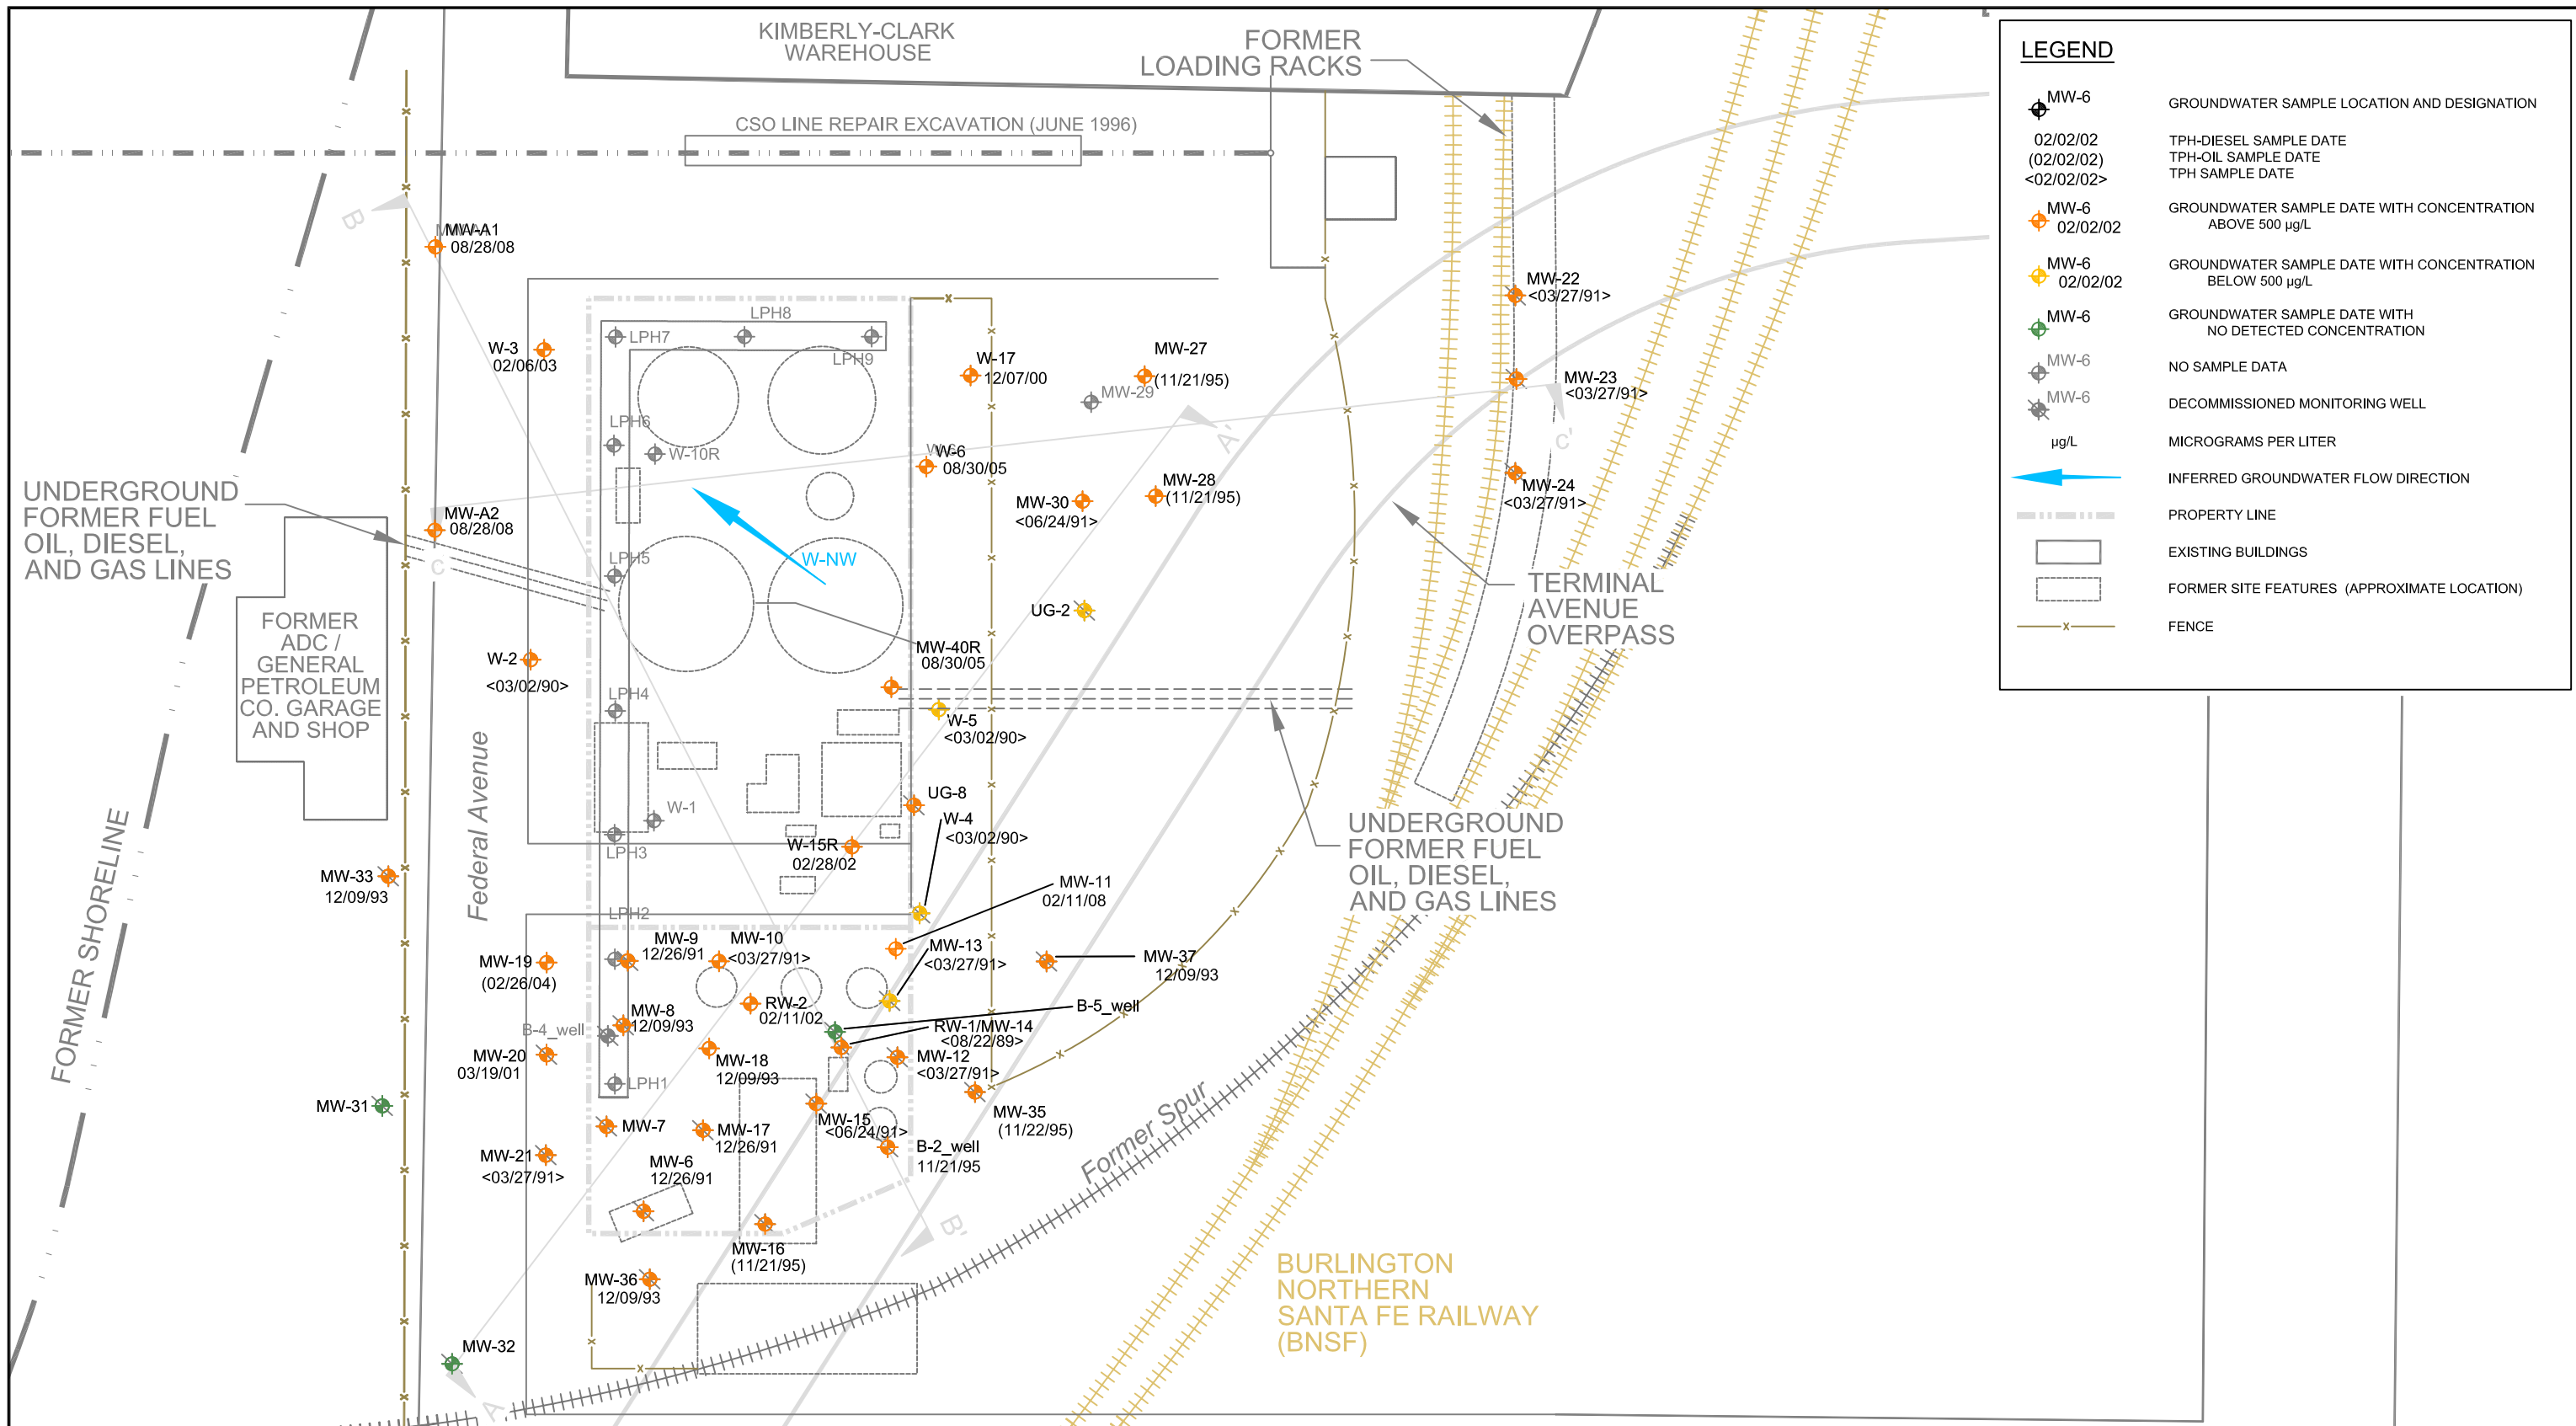


| | | | | | |
|---|-------------|---|---|--|--|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc. 0 60 120 SCALE IN FEET | CLIENT LOGO | CLIENT: | DWN BY: JRS / BRJ CHK'D BY: AIS/MS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 TITLE: HISTORICAL DISTRIBUTION OF TPH-D, TPH-O, AND TPH IN GROUNDWATER MAXIMUM DETECTED VALUE | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C REV. NO.: 1 FIGURE No. 44 |
| | | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | | | |

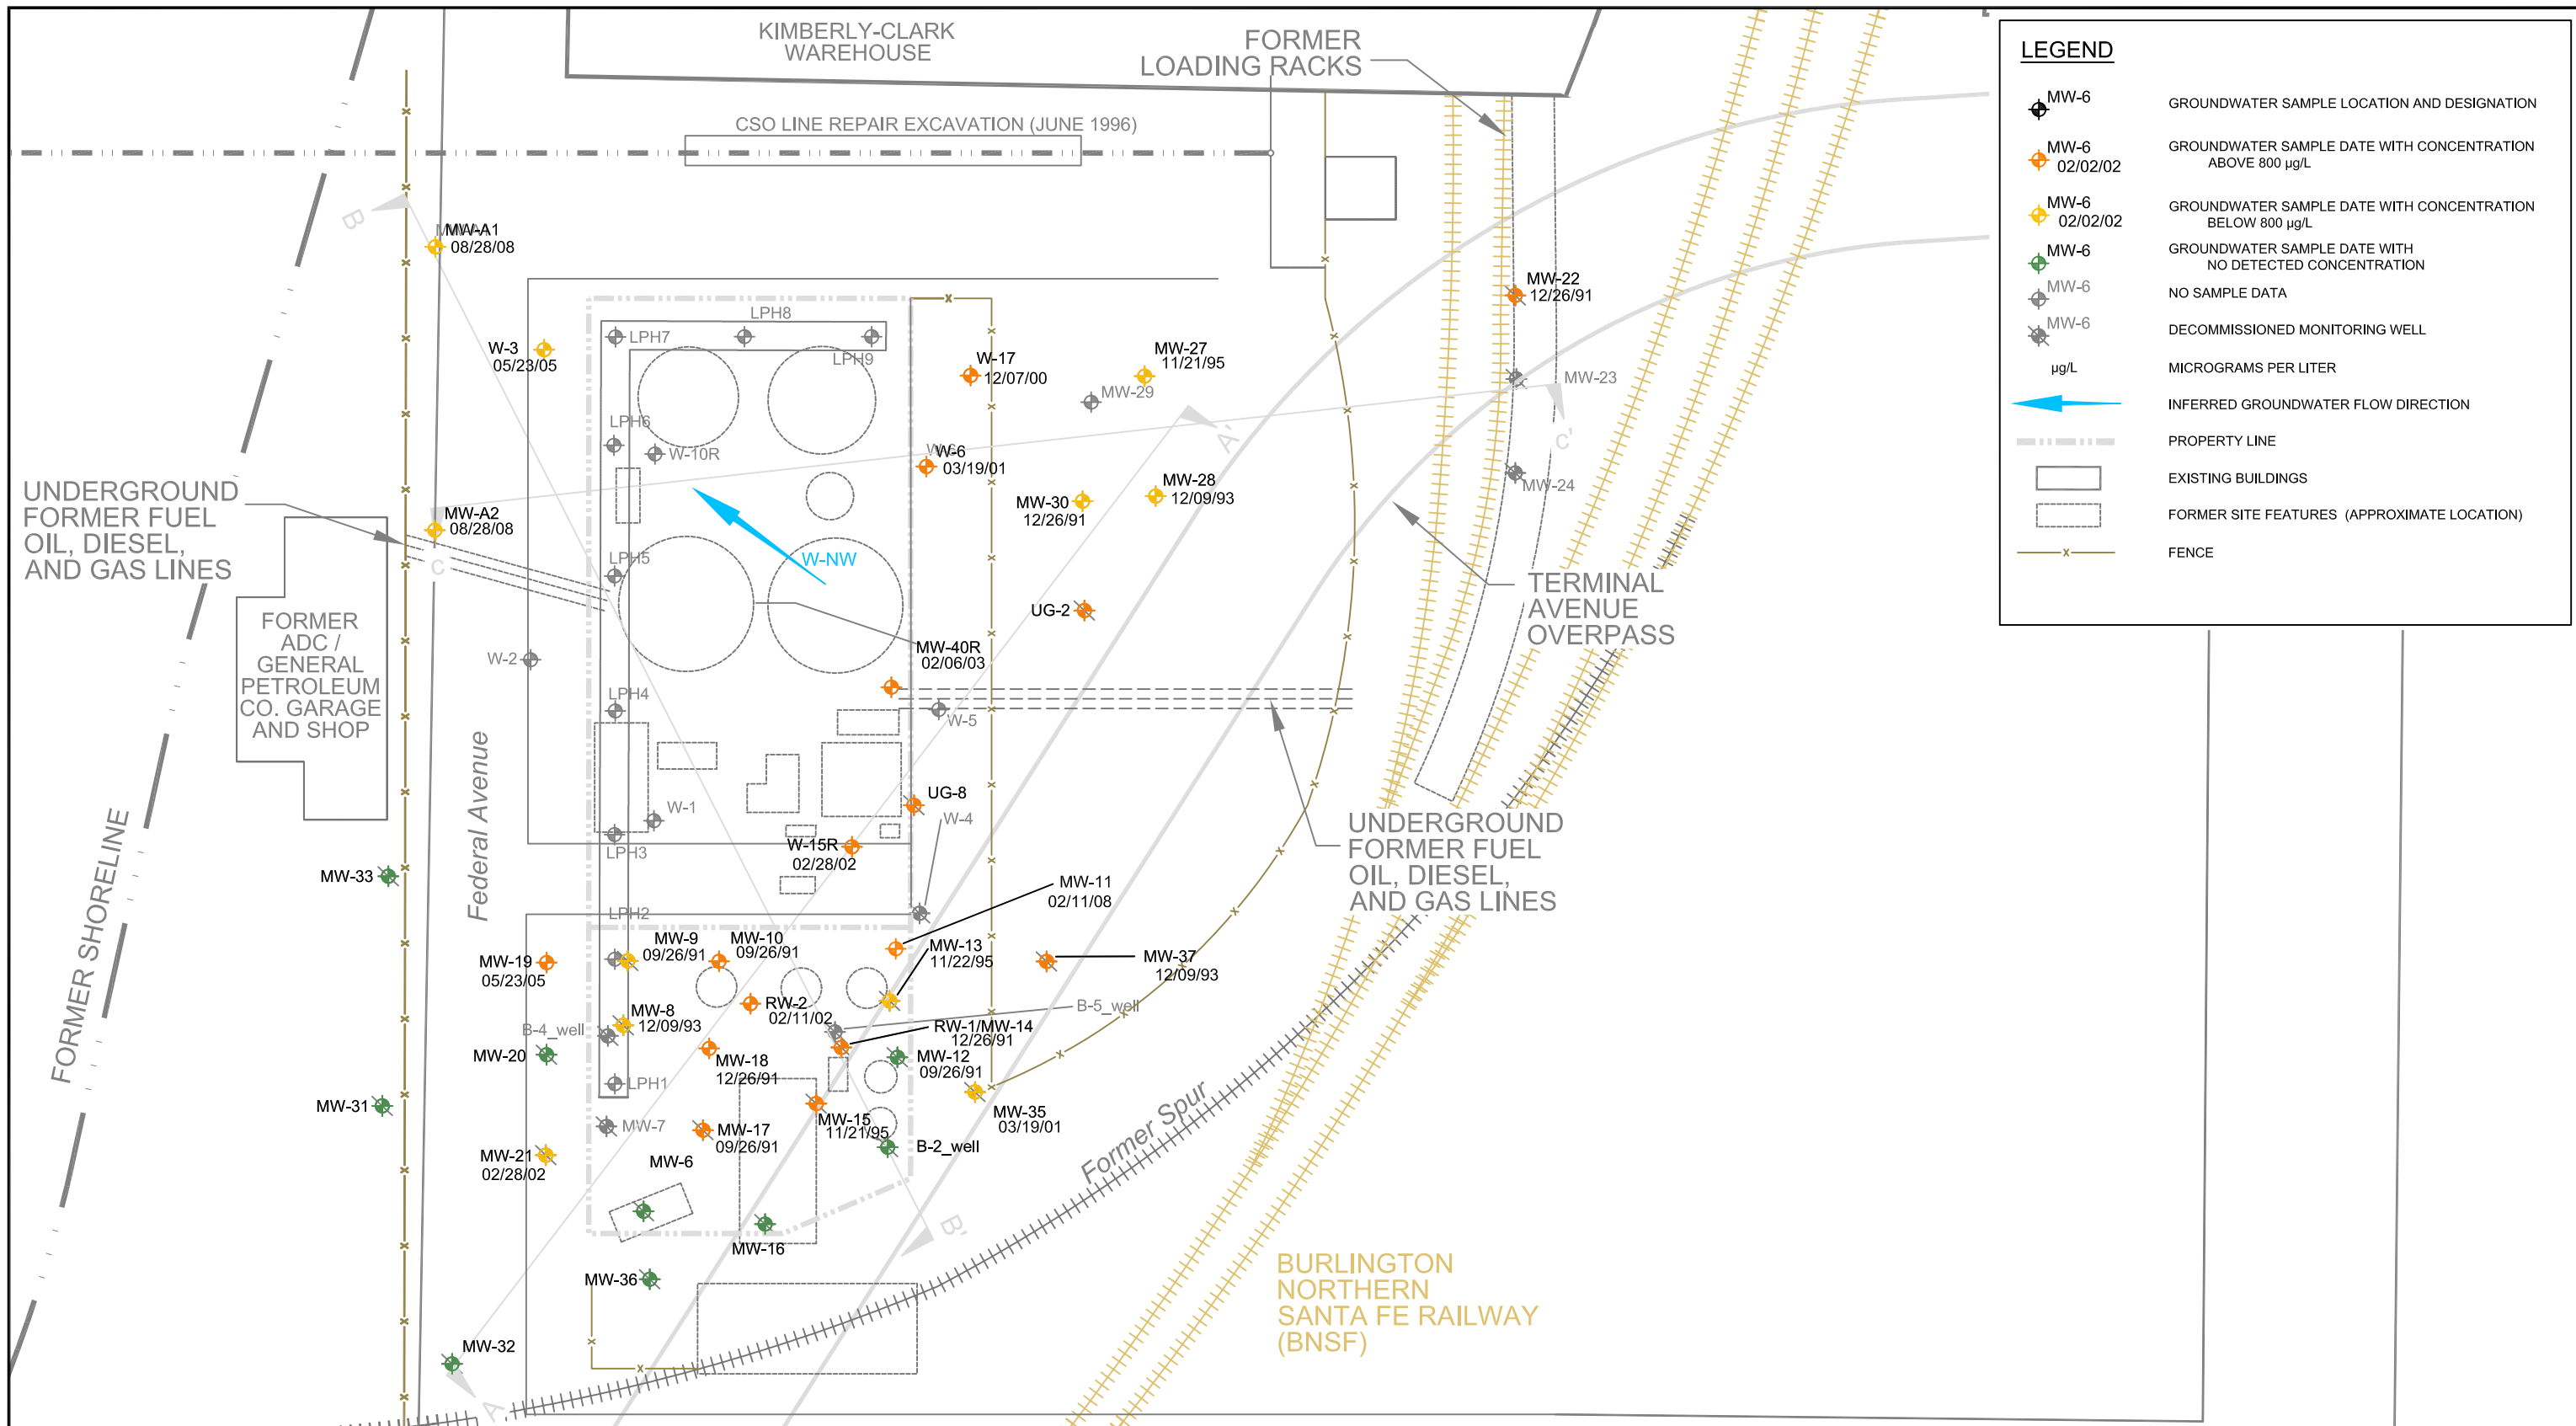


| LEGEND | |
|--------|---|
| | GROUNDWATER SAMPLE LOCATION AND DESIGNATION |
| | GROUNDWATER SAMPLE DATE WITH CONCENTRATION ABOVE 800 µg/L |
| | GROUNDWATER SAMPLE DATE WITH CONCENTRATION BELOW 800 µg/L |
| | GROUNDWATER SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| | NO SAMPLE DATA |
| | DECOMMISSIONED MONITORING WELL |
| | MICROGRAMS PER LITER |
| | INFERRED GROUNDWATER FLOW DIRECTION |
| | PROPERTY LINE |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |

| | | | | | |
|---|-----------------|---|---|--|--|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc. SCALE IN FEET | CLIENT LOGO | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | DWN BY: JRS / BRJ CHK'D BY: AIS/MS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C REV. NO.: 1 FIGURE No. 45 |
| | | AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | TITLE HISTORICAL DISTRIBUTION OF TPH-G IN GROUNDWATER MAXIMUM DETECTED VALUE | | |

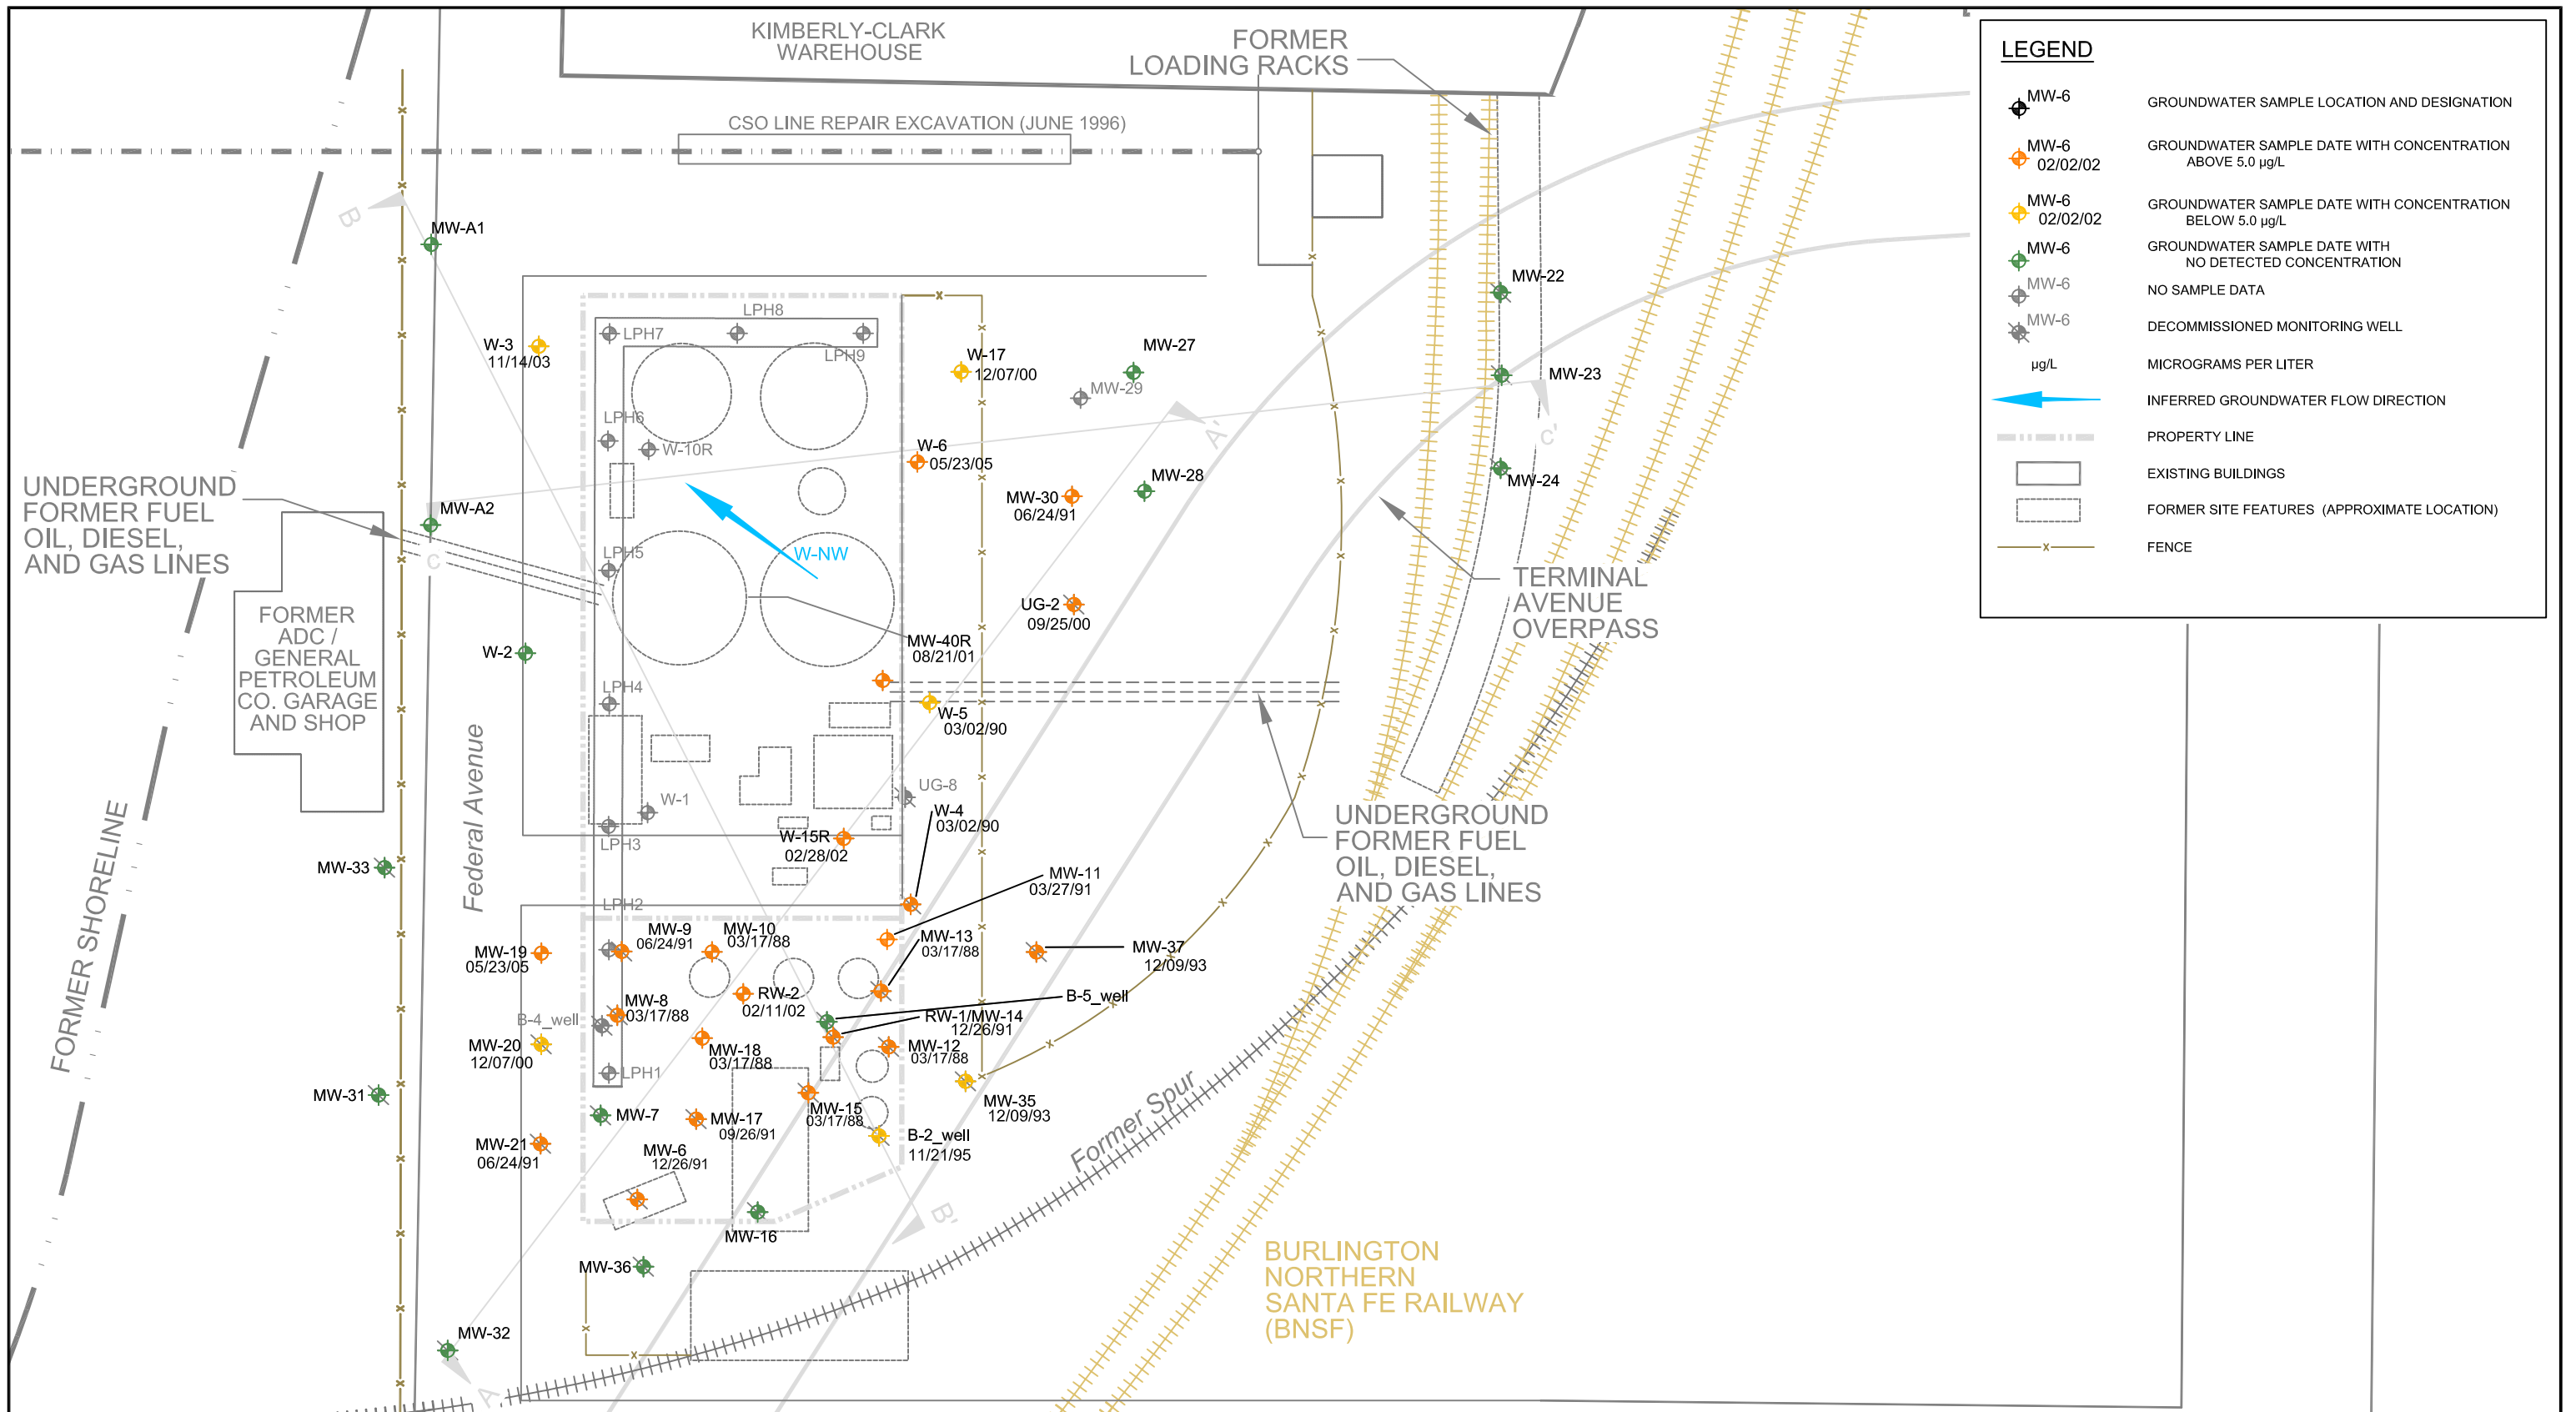


SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

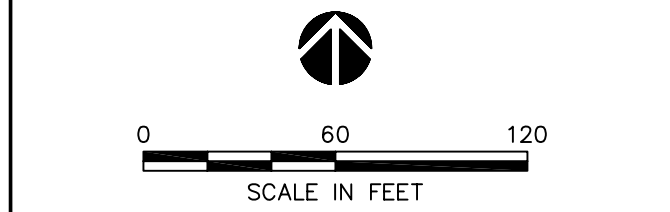

CLIENT LOGO


CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY
AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201



DWN BY: JRS / BRJ
 CHK'D BY: AIS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'

PROJECT
**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**
 TITLE
**HISTORICAL DISTRIBUTION OF
 BENZENE IN GROUNDWATER
 MAXIMUM DETECTED VALUE**

DATE:
 AUGUST 2009
 PROJECT NO:
 9-915-15716-C
 REV. NO.:
 1
 FIGURE No.
46

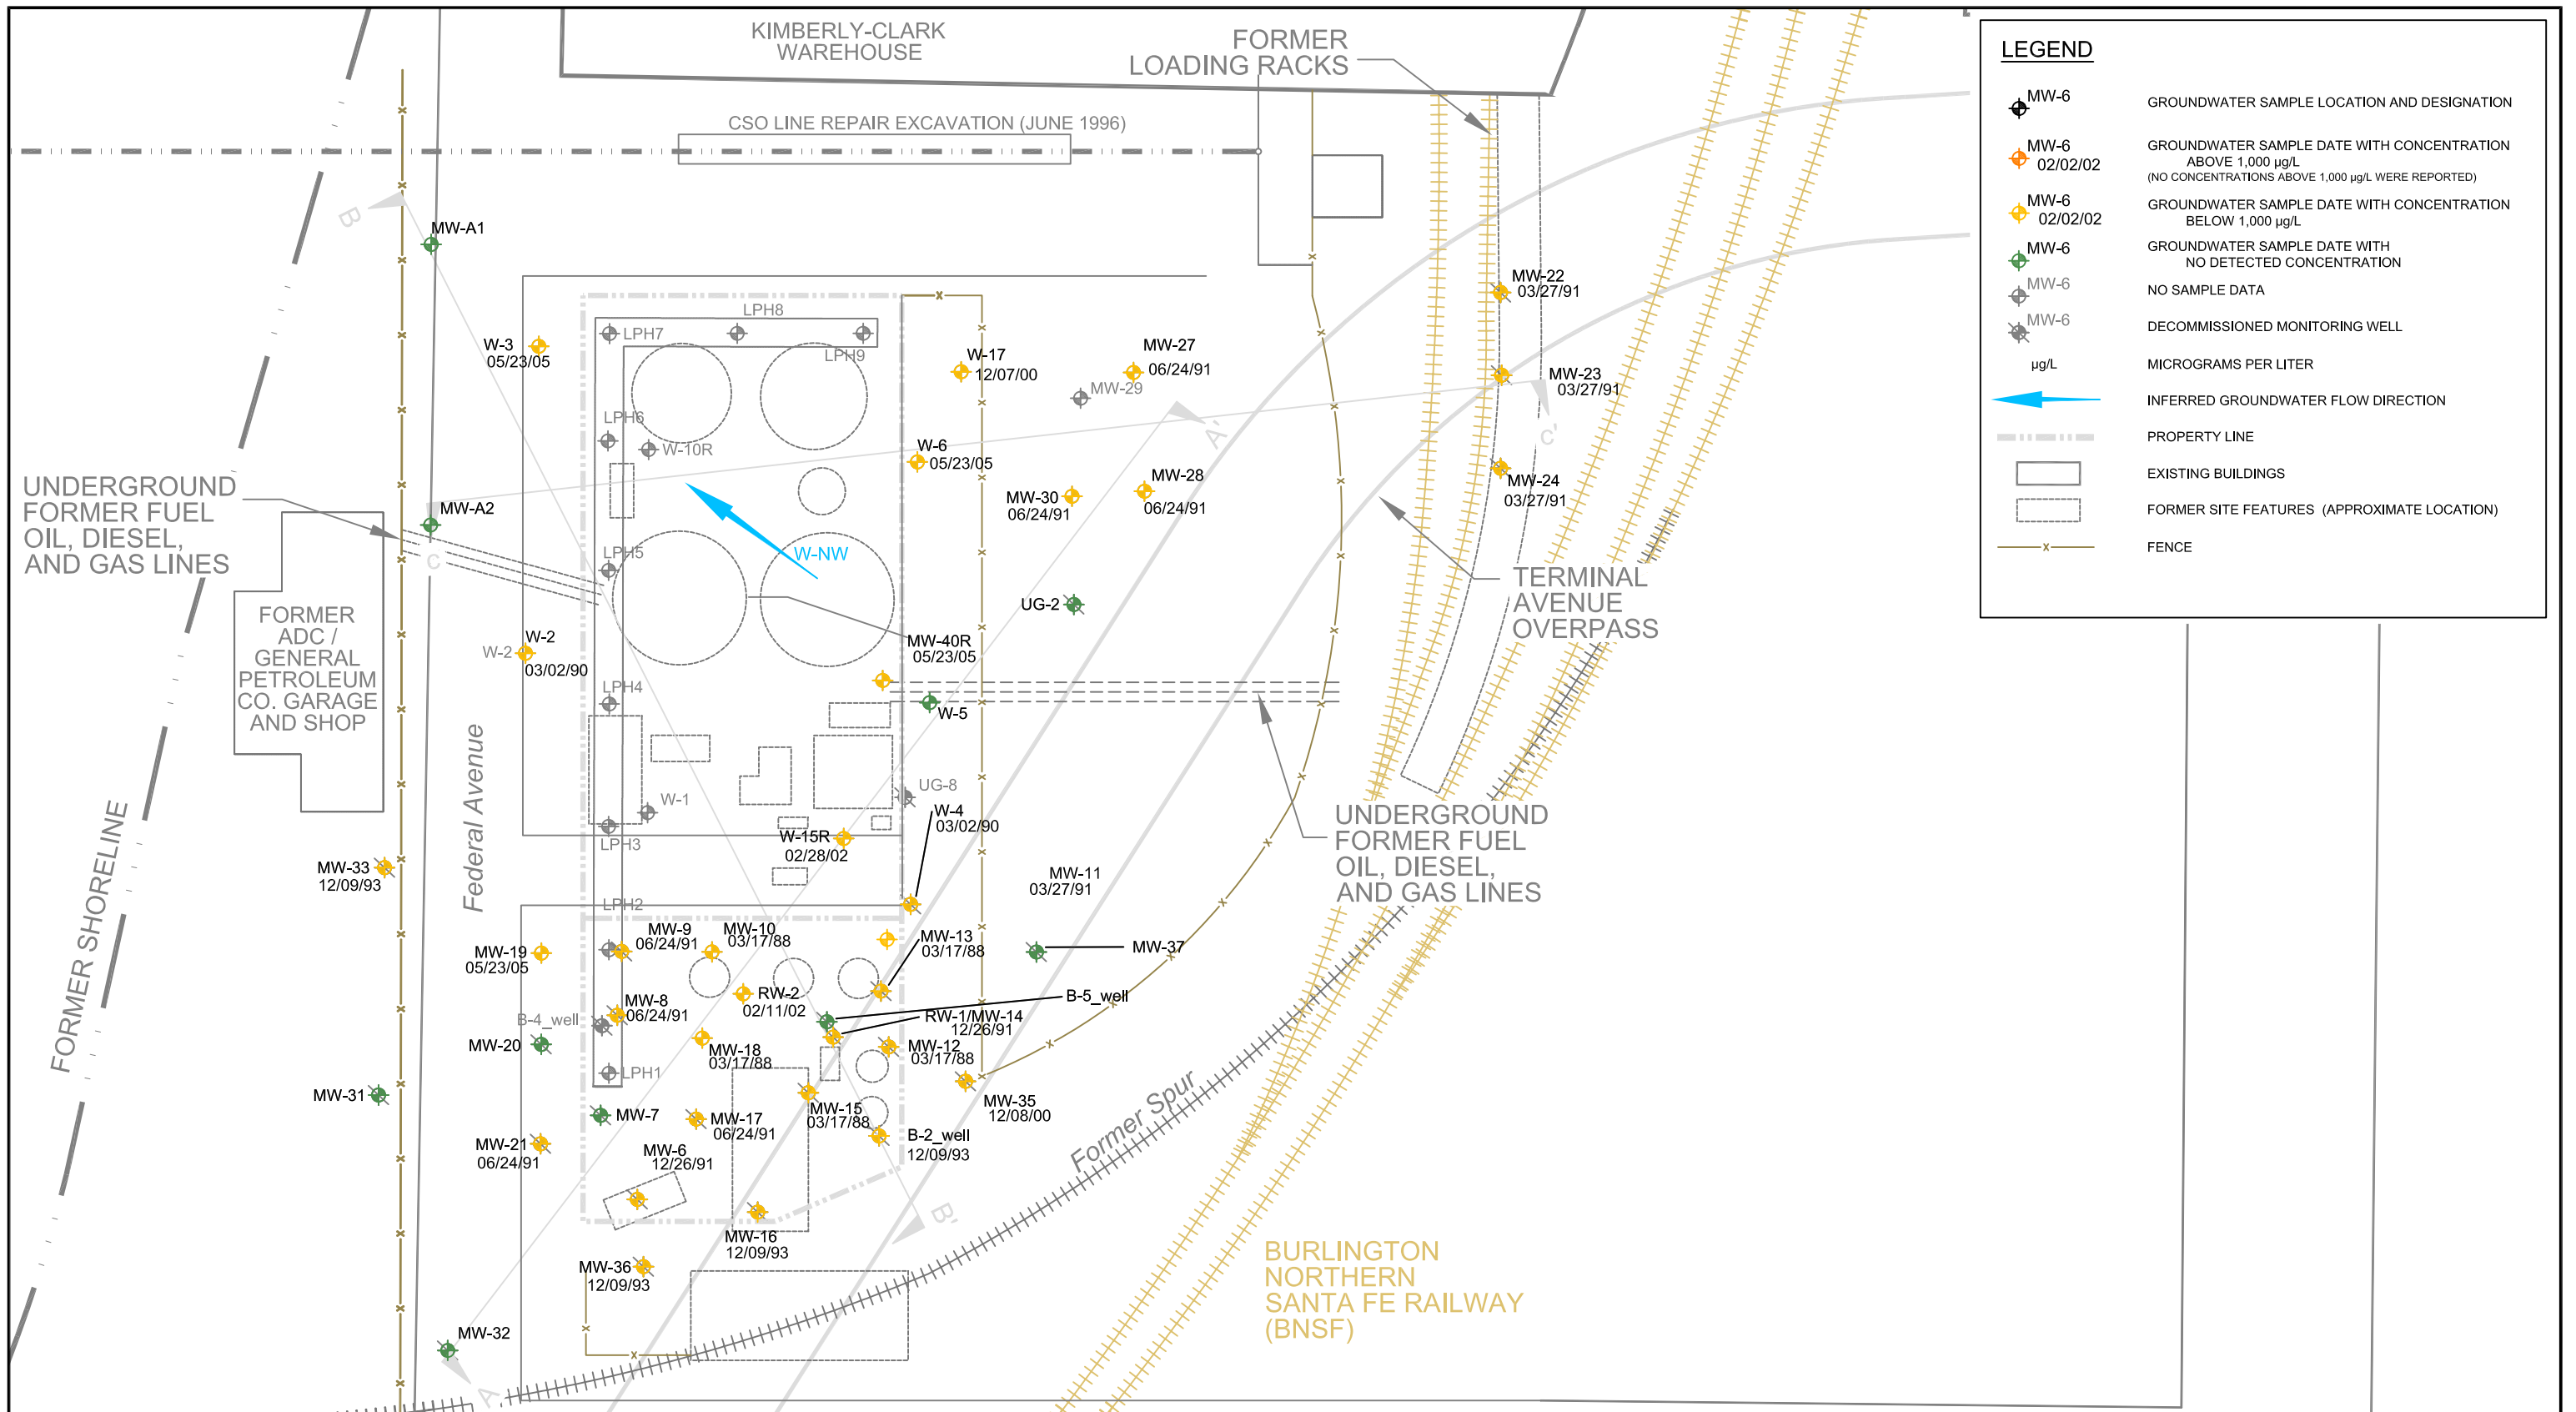

LEGEND

- MW-6 GROUNDWATER SAMPLE LOCATION AND DESIGNATION
- MW-6 02/02/02 GROUNDWATER SAMPLE DATE WITH CONCENTRATION ABOVE 1,000 µg/L (NO CONCENTRATIONS ABOVE 1,000 µg/L WERE REPORTED)
- MW-6 02/02/02 GROUNDWATER SAMPLE DATE WITH CONCENTRATION BELOW 1,000 µg/L
- MW-6 GROUNDWATER SAMPLE DATE WITH NO DETECTED CONCENTRATION
- MW-6 NO SAMPLE DATA
- MW-6 DECOMMISSIONED MONITORING WELL
- µg/L MICROGRAMS PER LITER
- INFERRED GROUNDWATER FLOW DIRECTION
- PROPERTY LINE
- EXISTING BUILDINGS
- FORMER SITE FEATURES (APPROXIMATE LOCATION)
- FENCE

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental

11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ

CHK'D BY: AIS/MS

DATUM: NONE

PROJECTION: NONE

SCALE: 1" = 60'

PROJECT

**EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728**

TITLE


**HISTORICAL DISTRIBUTION OF
TOLUENE IN GROUNDWATER
MAXIMUM DETECTED VALUE**

DATE: AUGUST 2009

PROJECT NO: 9-915-15716-C


REV. NO.: 1

FIGURE No. 47

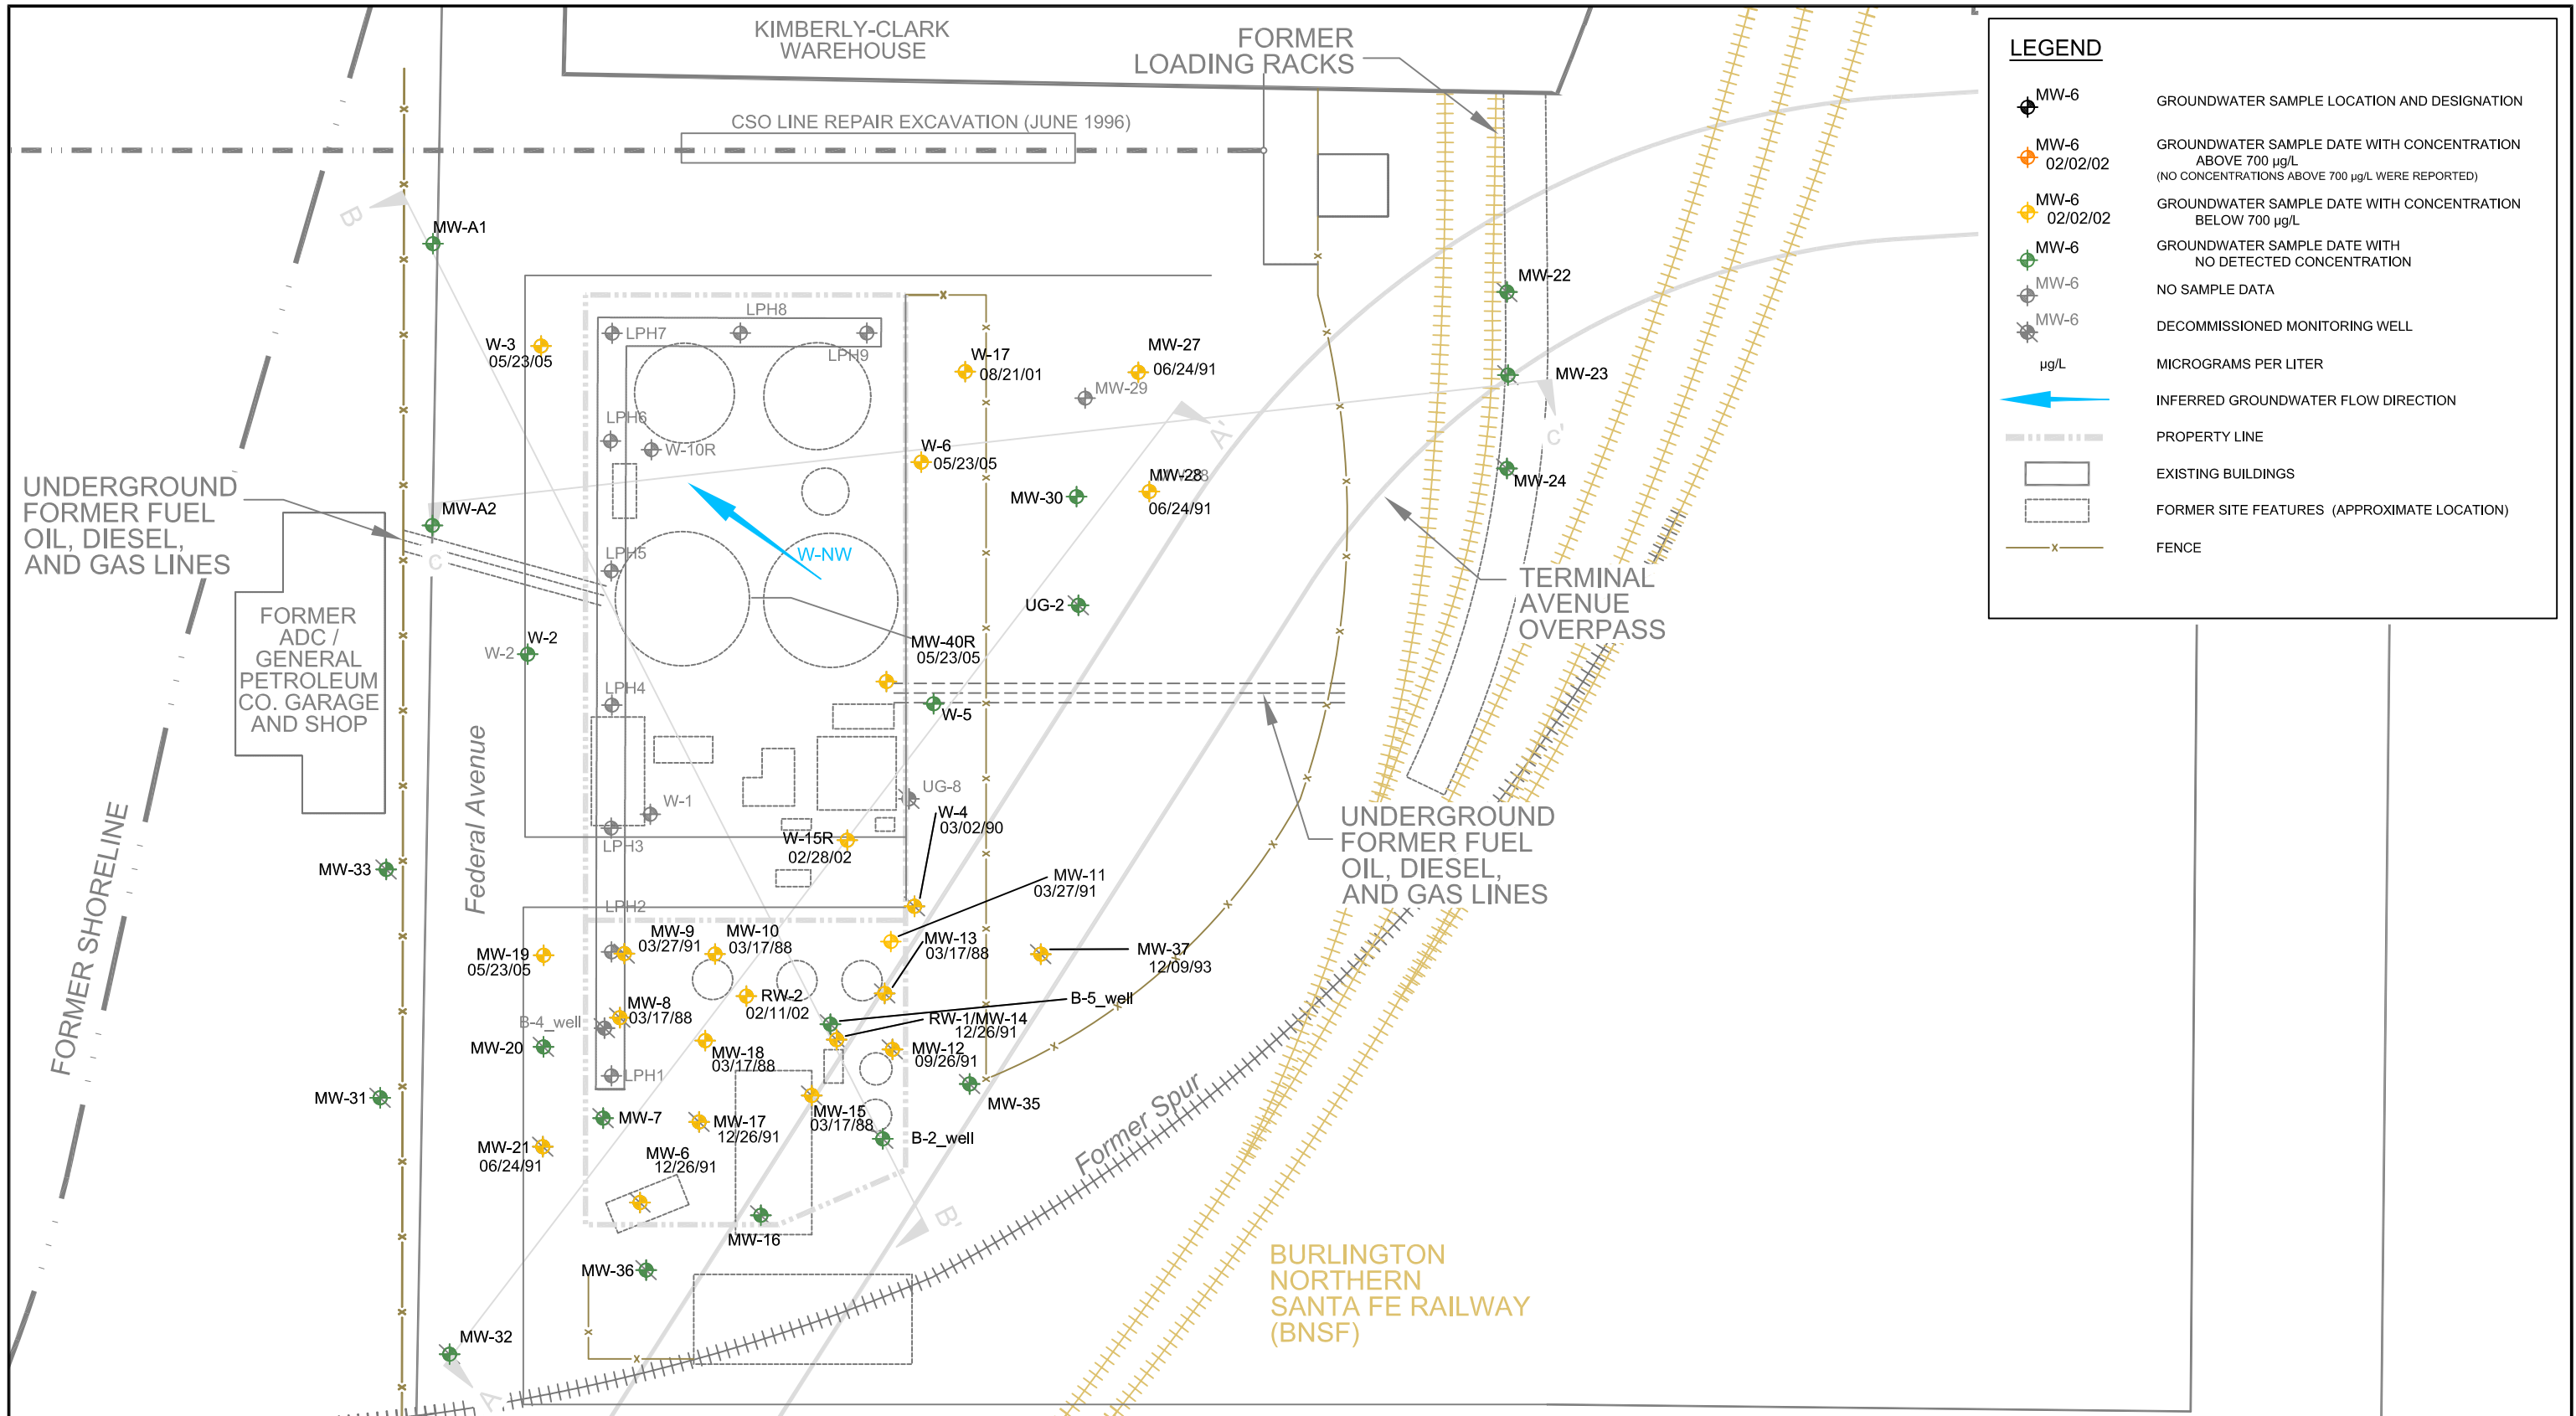

| LEGEND | |
|--------|--|
| | GROUNDWATER SAMPLE LOCATION AND DESIGNATION |
| | GROUNDWATER SAMPLE DATE WITH CONCENTRATION ABOVE 700 µg/L (NO CONCENTRATIONS ABOVE 700 µg/L WERE REPORTED) |
| | GROUNDWATER SAMPLE DATE WITH CONCENTRATION BELOW 700 µg/L |
| | GROUNDWATER SAMPLE DATE WITH NO DETECTED CONCENTRATION |
| | NO SAMPLE DATA |
| | DECOMMISSIONED MONITORING WELL |
| | MICROGRAMS PER LITER |
| | INFERRED GROUNDWATER FLOW DIRECTION |
| | PROPERTY LINE |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |

| | | | | | |
|---|-----------------|---|---|--|--|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc. SCALE IN FEET | CLIENT LOGO | CLIENT: EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY | DWN BY: JRS / BRJ CHK'D BY: AIS/MS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C |
| | | AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | TITLE HISTORICAL DISTRIBUTION OF ETHYLBENZENE IN GROUNDWATER MAXIMUM DETECTED VALUE | REV. NO.: 1 FIGURE No. 48 | |

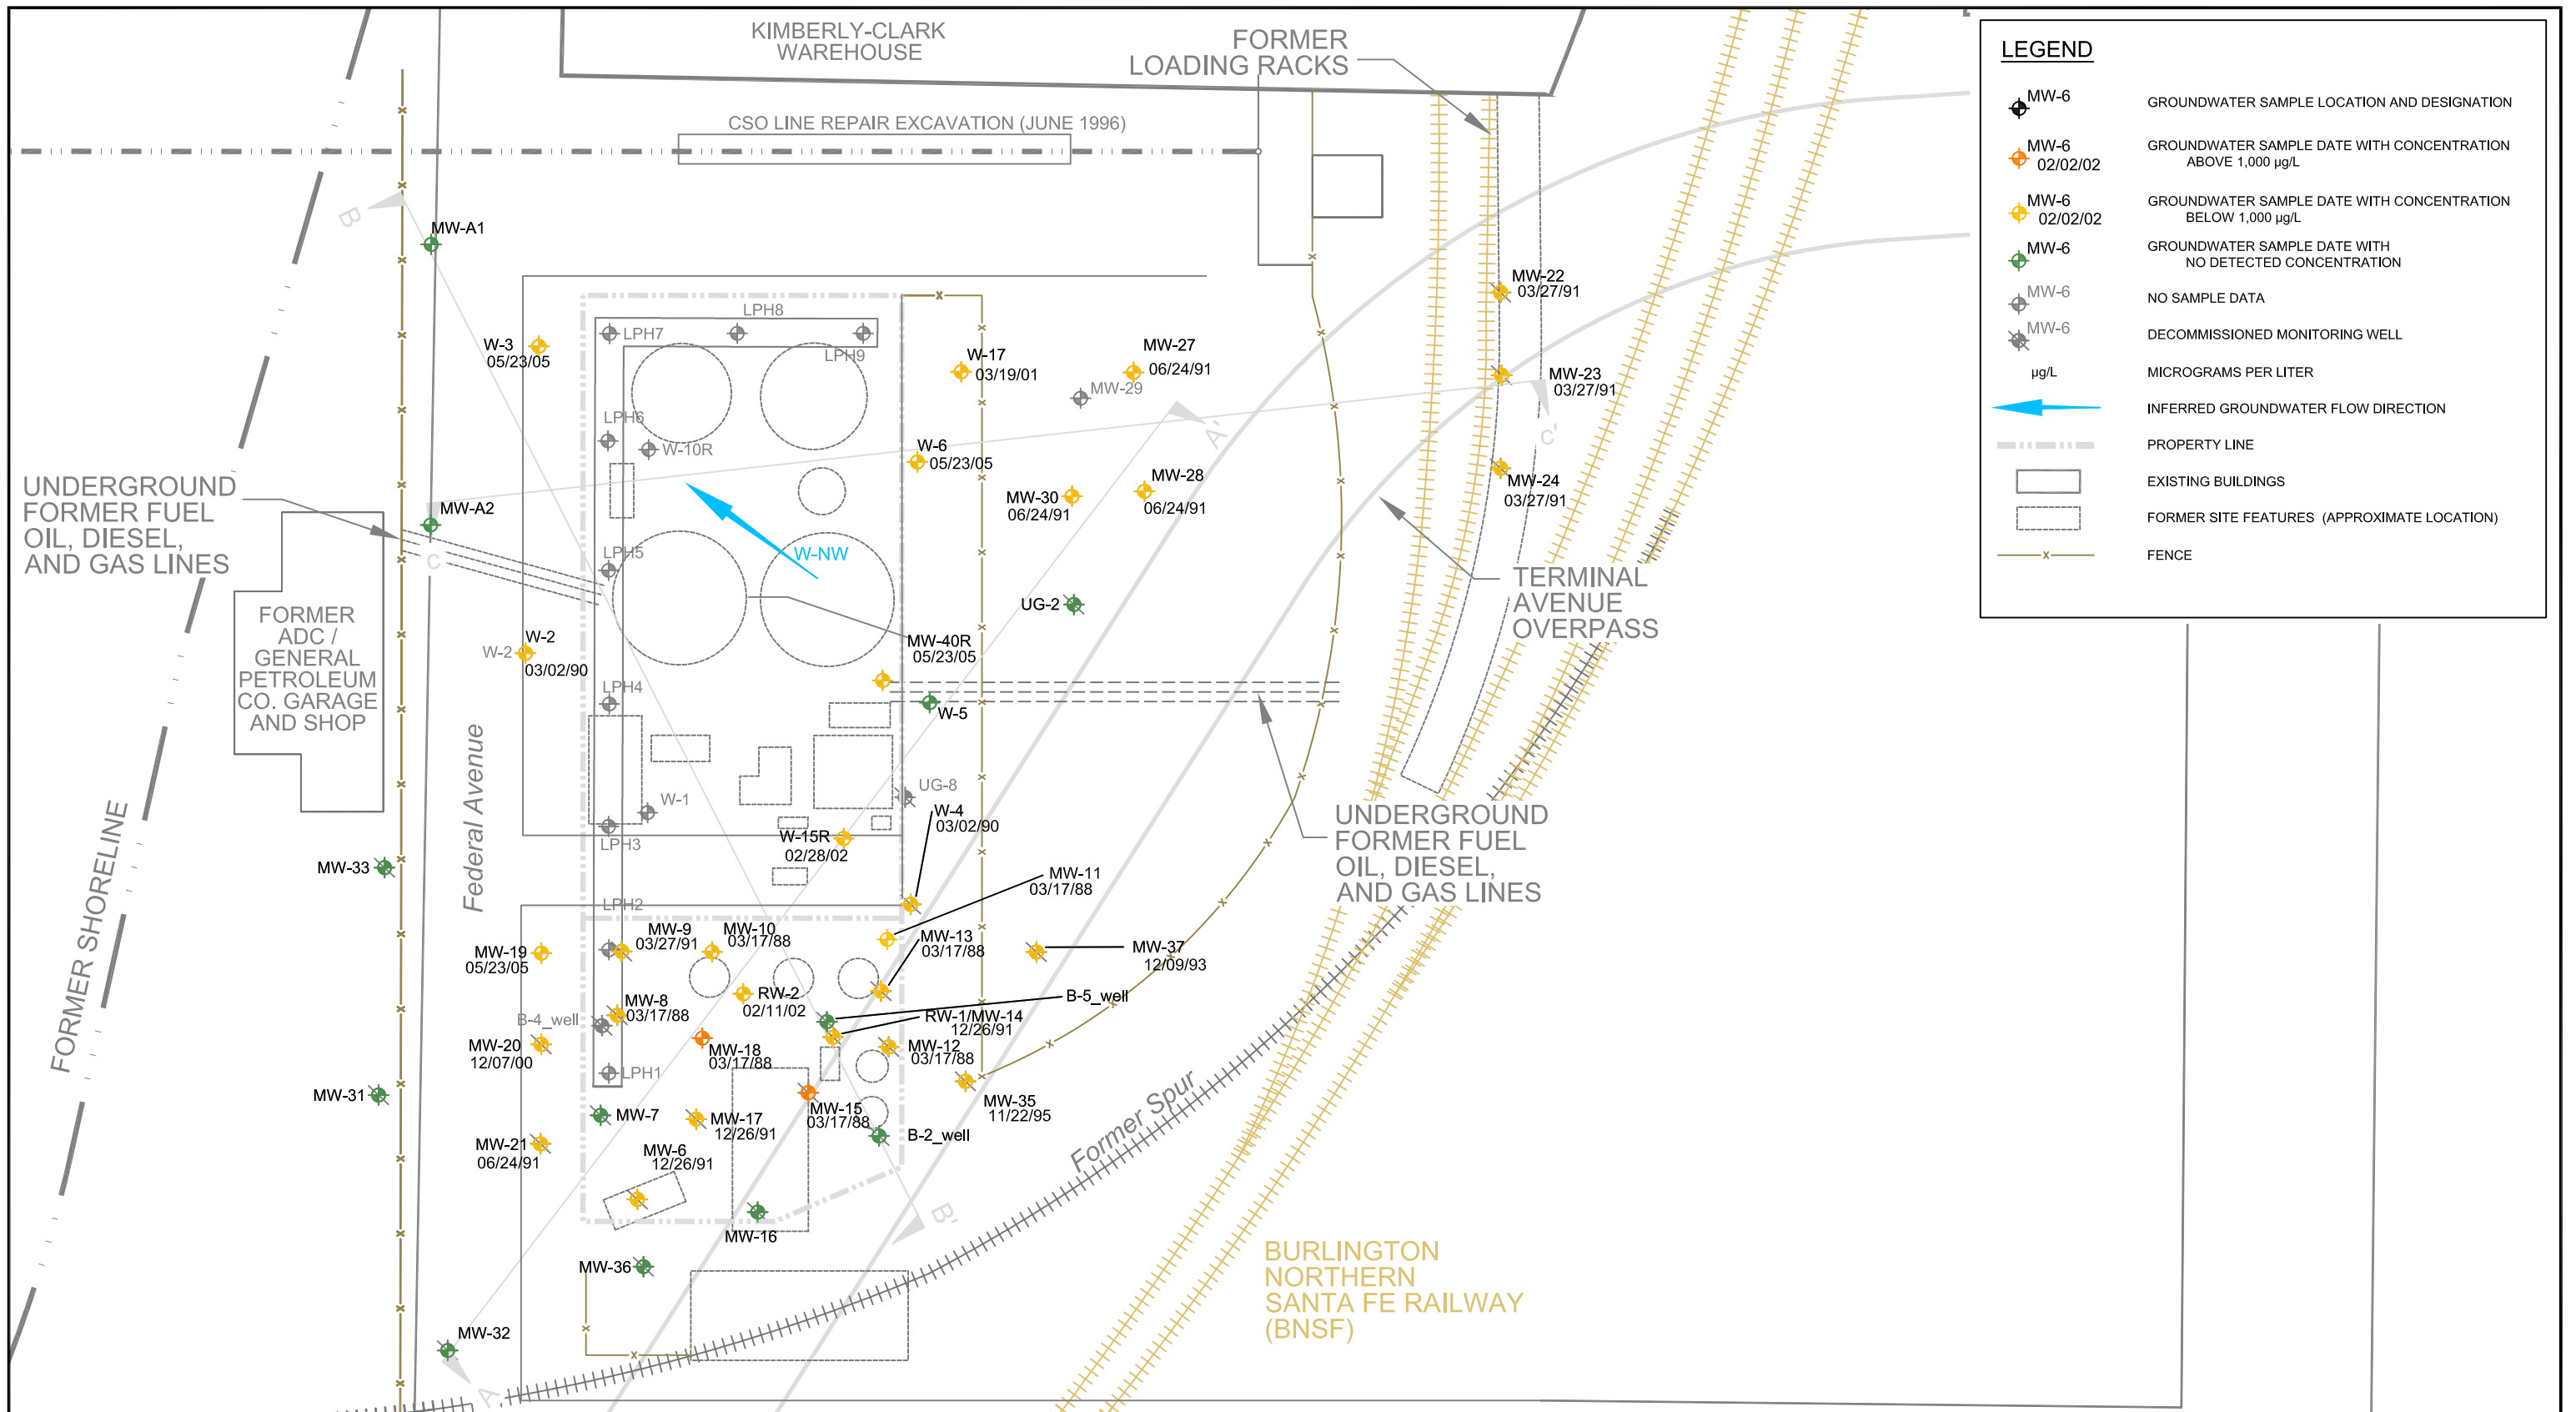

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
 CHK'D BY: AIS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**

TITLE

**HISTORICAL DISTRIBUTION OF
 TOTAL XYLENE IN GROUNDWATER
 MAXIMUM DETECTED VALUE**

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.: 1
 FIGURE No. 49

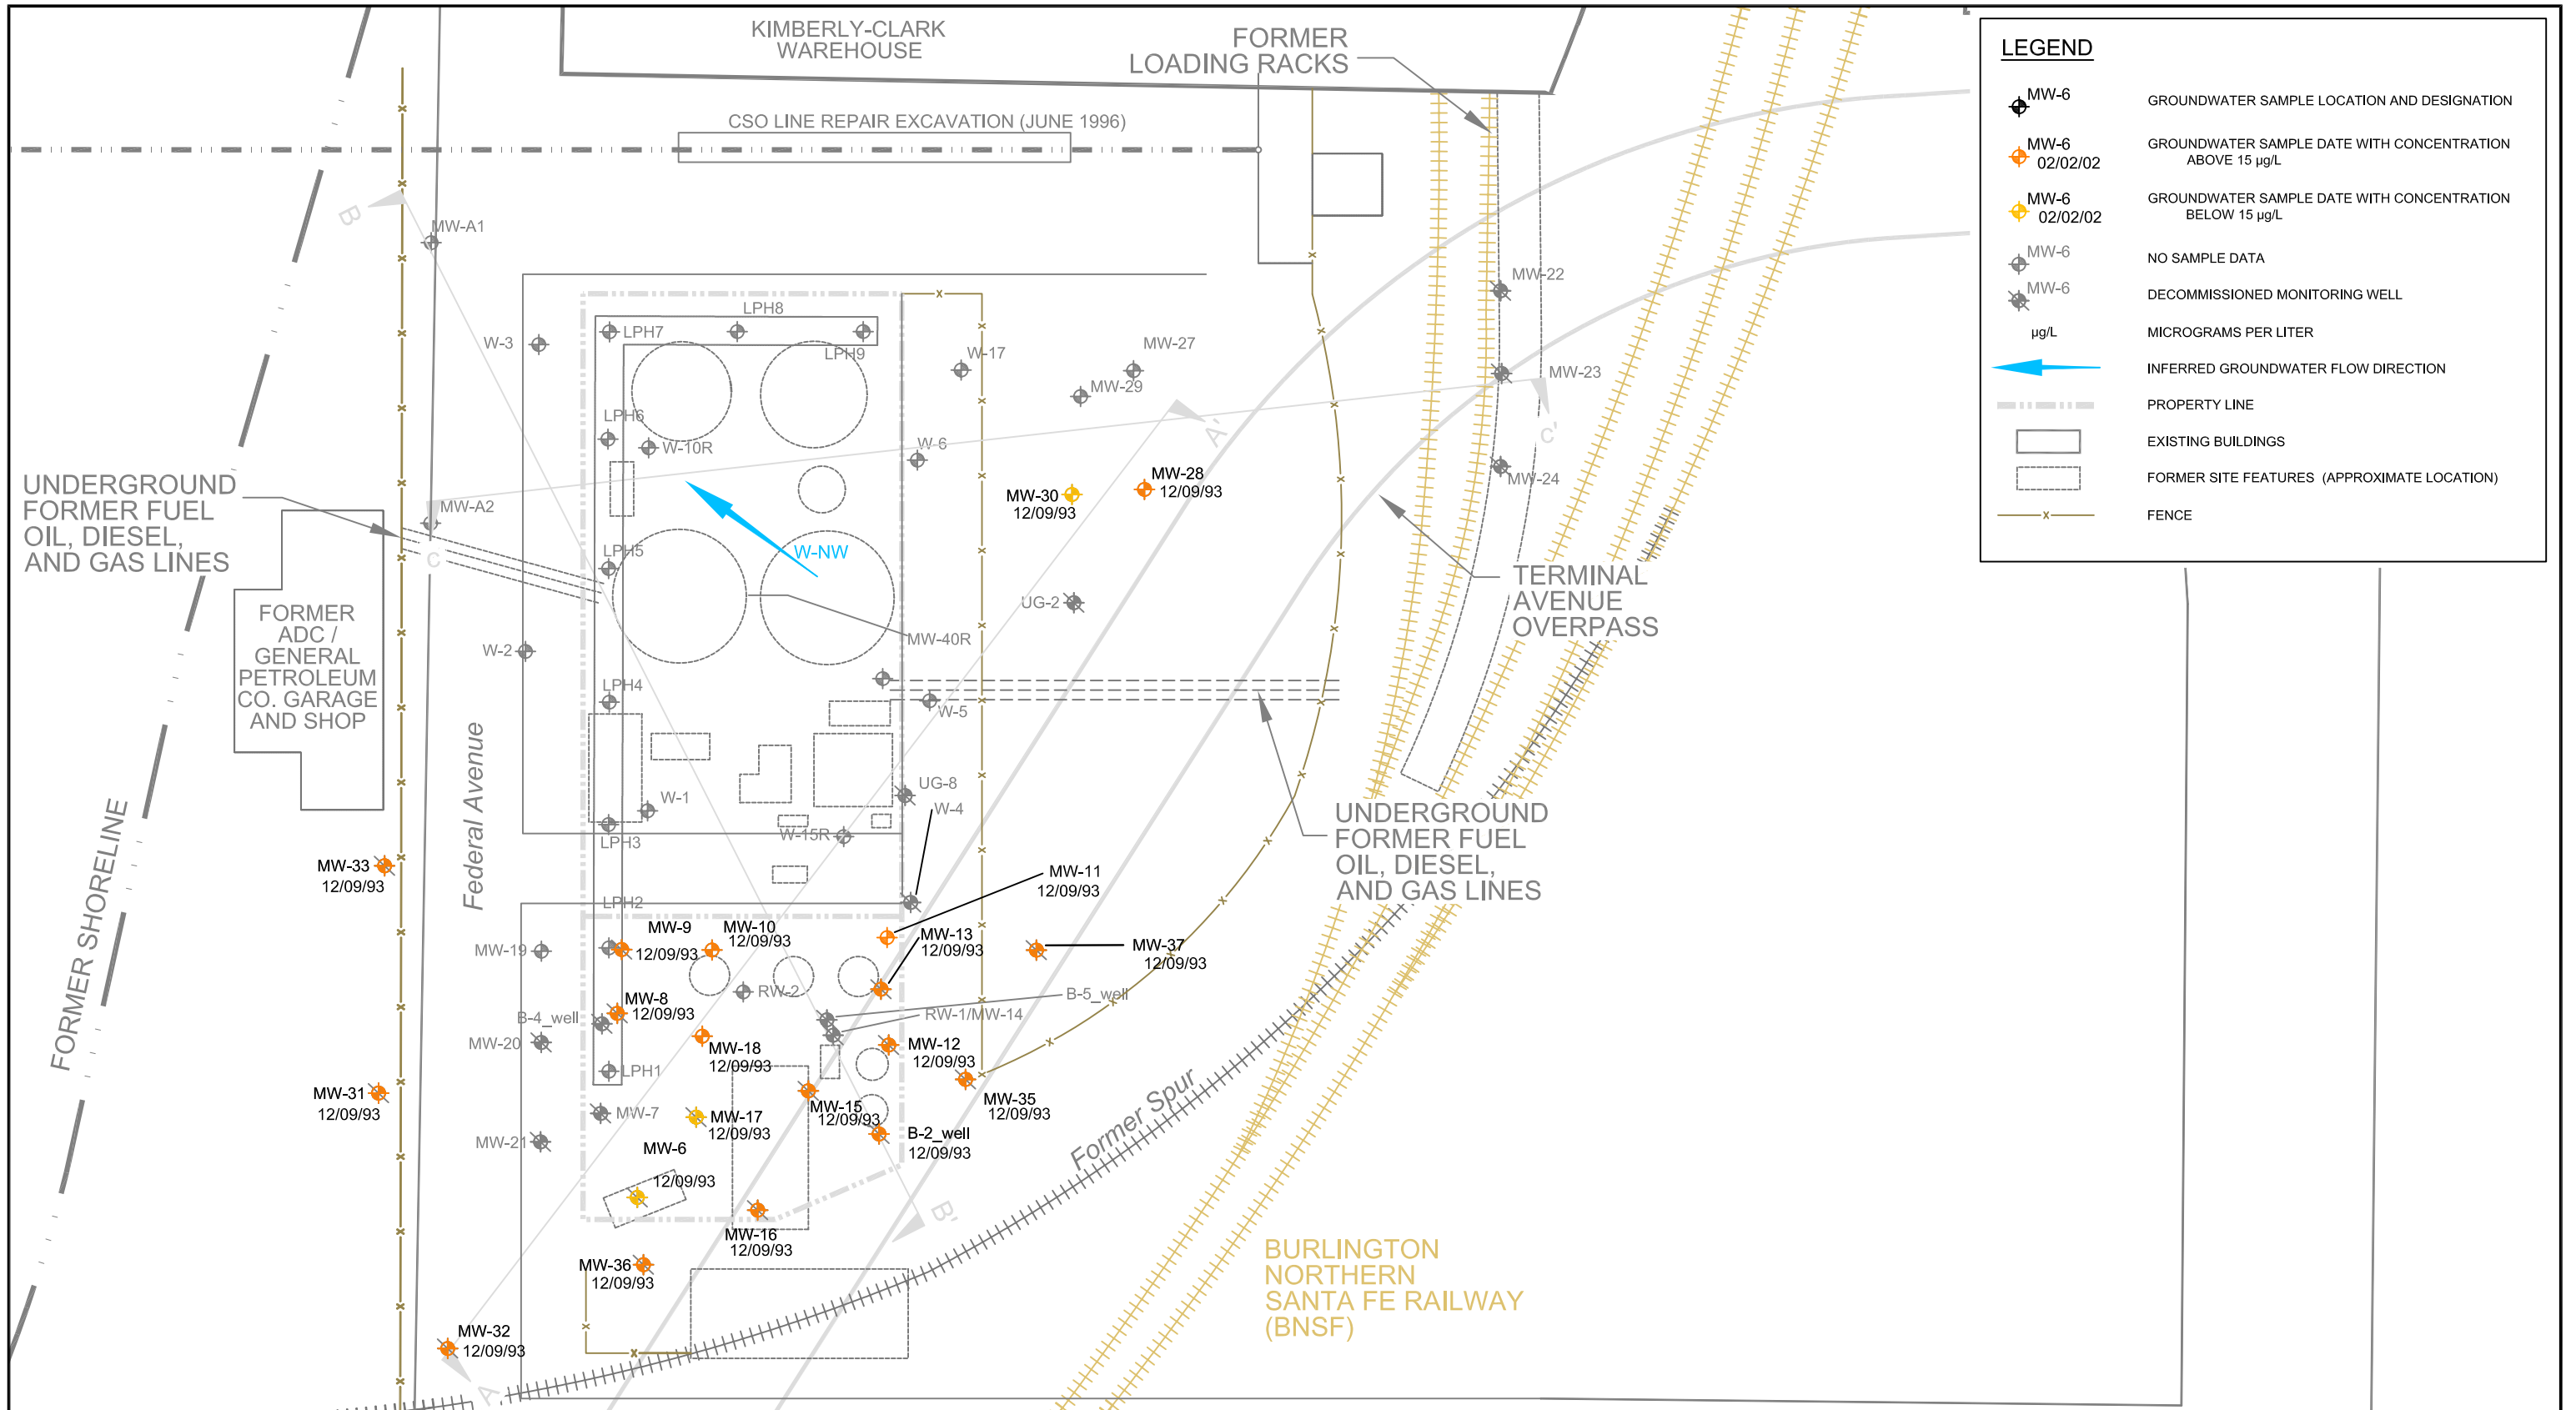

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

0 60 120
SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
CHK'D BY: AIS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728**

TITLE

**HISTORICAL DISTRIBUTION OF
TOTAL LEAD IN GROUNDWATER
MAXIMUM DETECTED VALUE**

DATE: AUGUST 2009
PROJECT NO: 9-915-15716-C
REV. NO.: 1
FIGURE No. 50

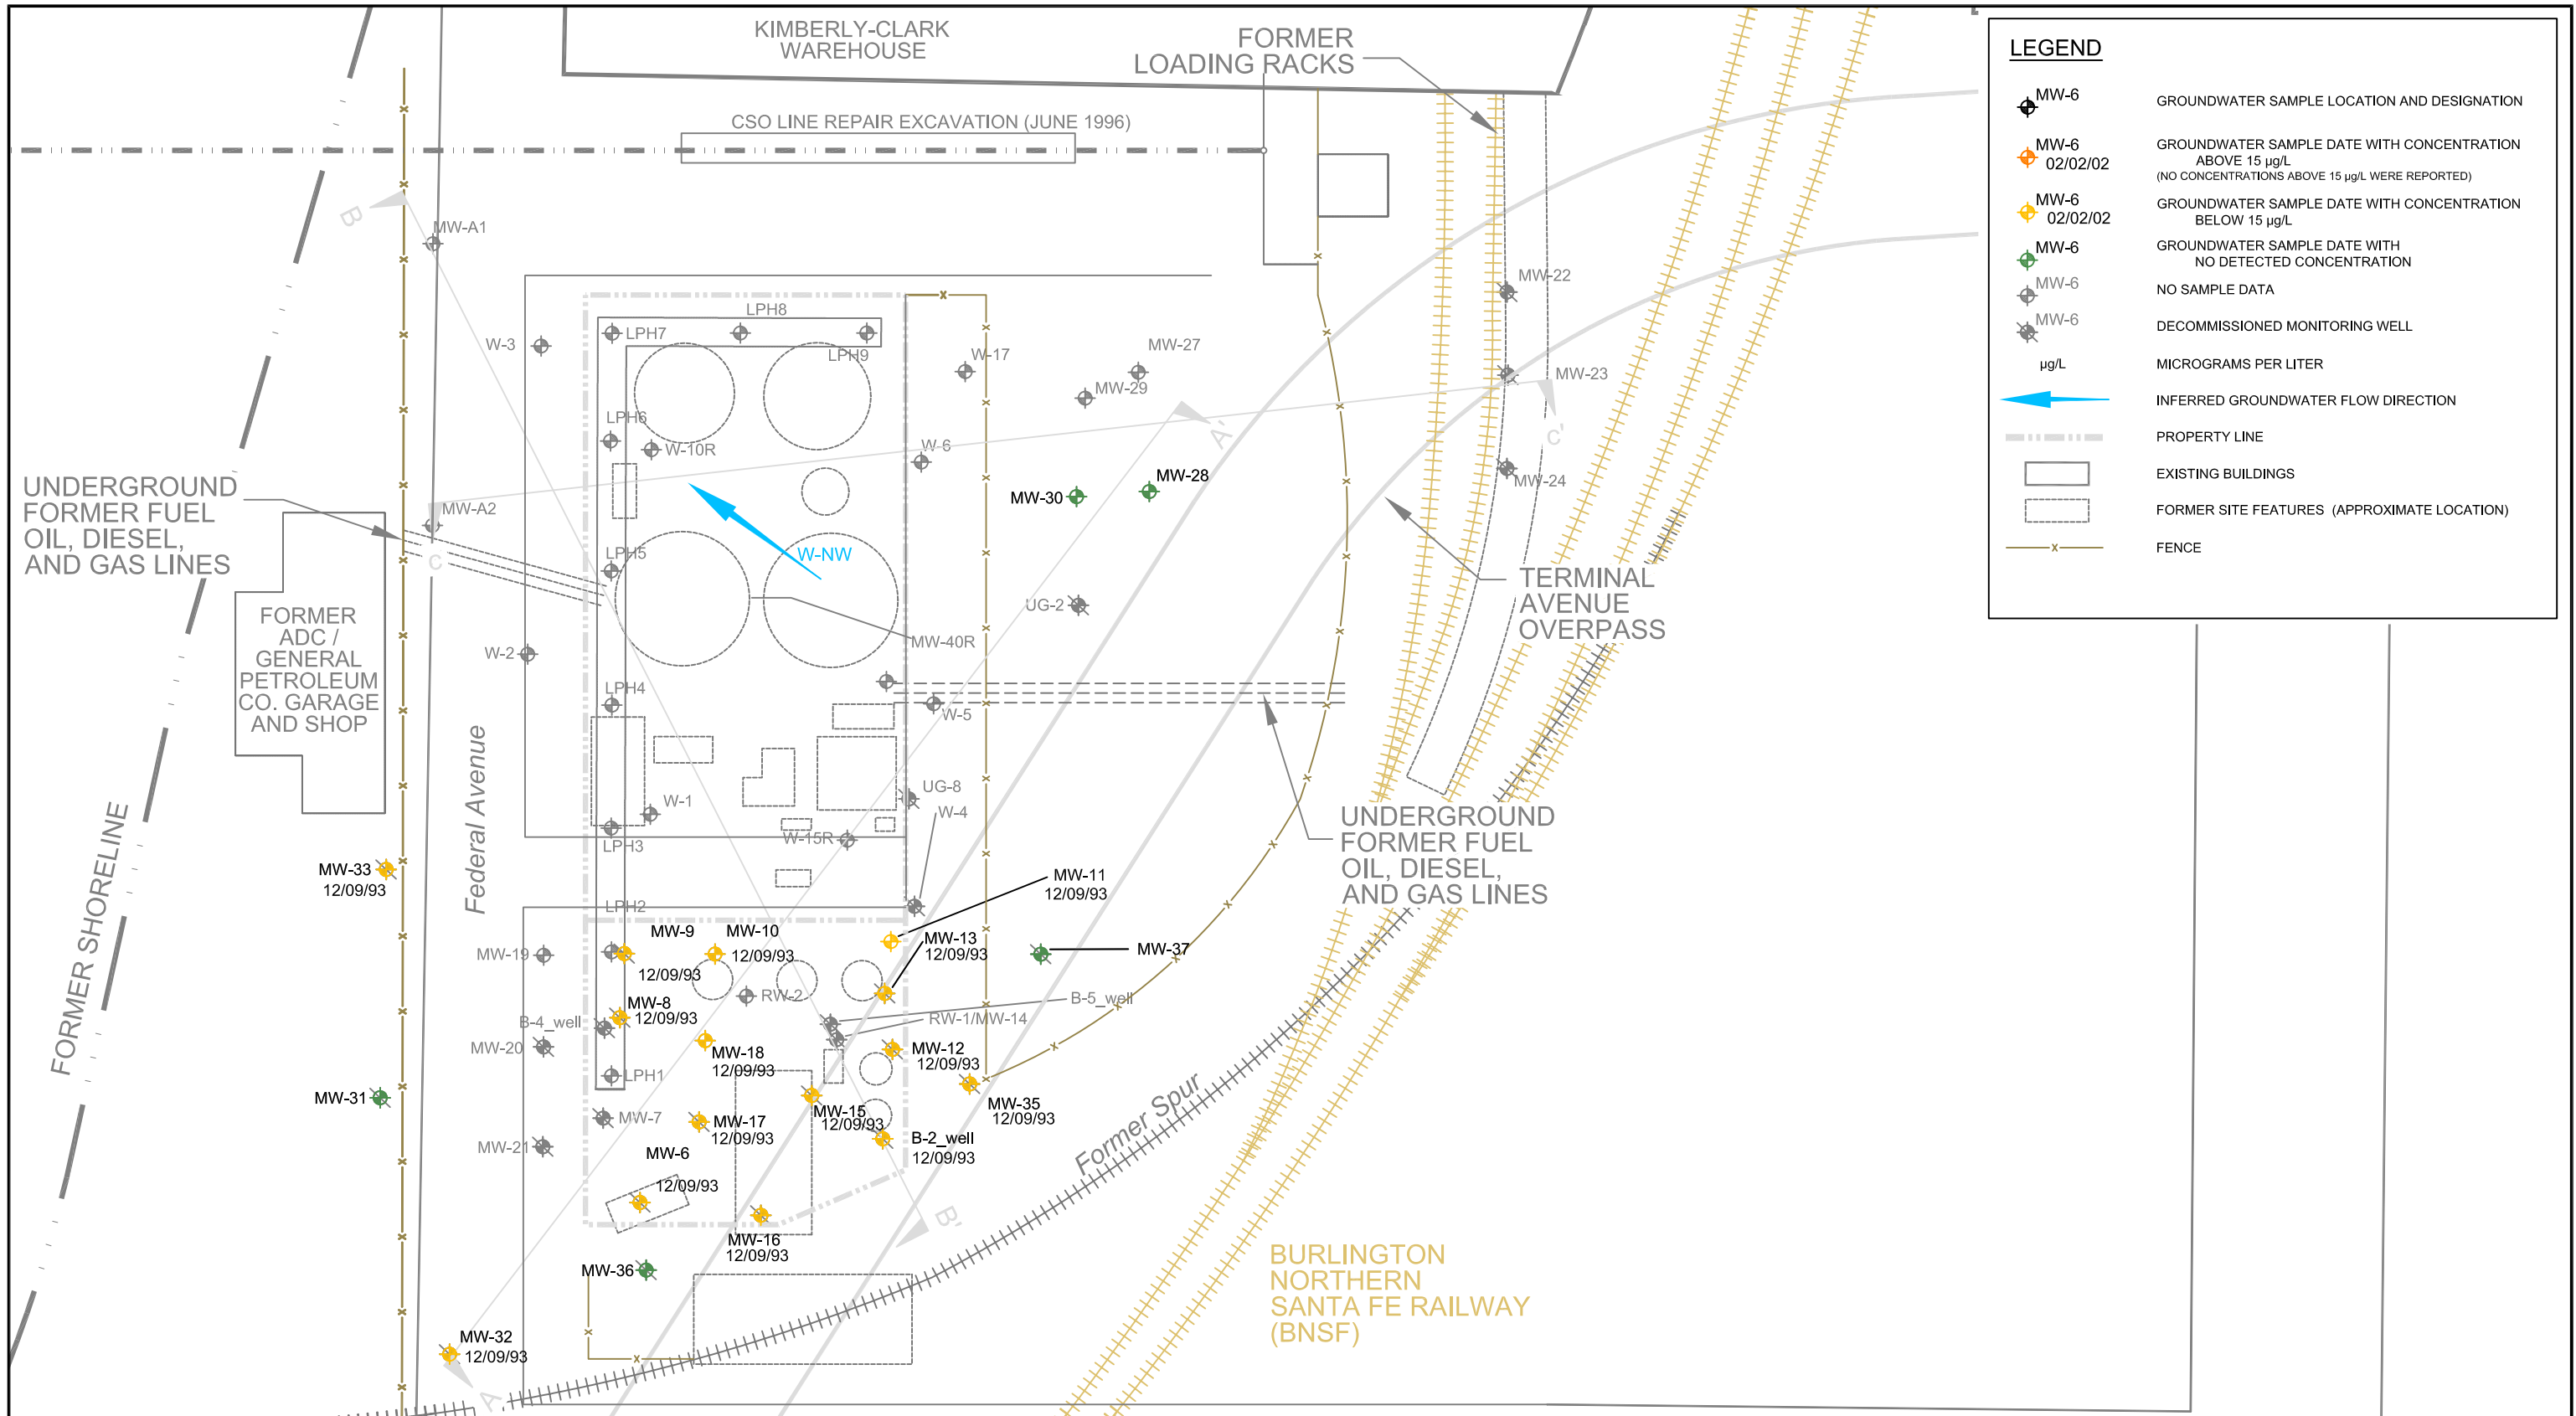

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
 CHK'D BY: AIS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'


PROJECT

**EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728**


TITLE

**HISTORICAL DISTRIBUTION OF
 DISSOLVED LEAD IN GROUNDWATER
 MAXIMUM DETECTED VALUE**

DATE: AUGUST 2009
 PROJECT NO: 9-915-15716-C
 REV. NO.: 1
 FIGURE No. 51

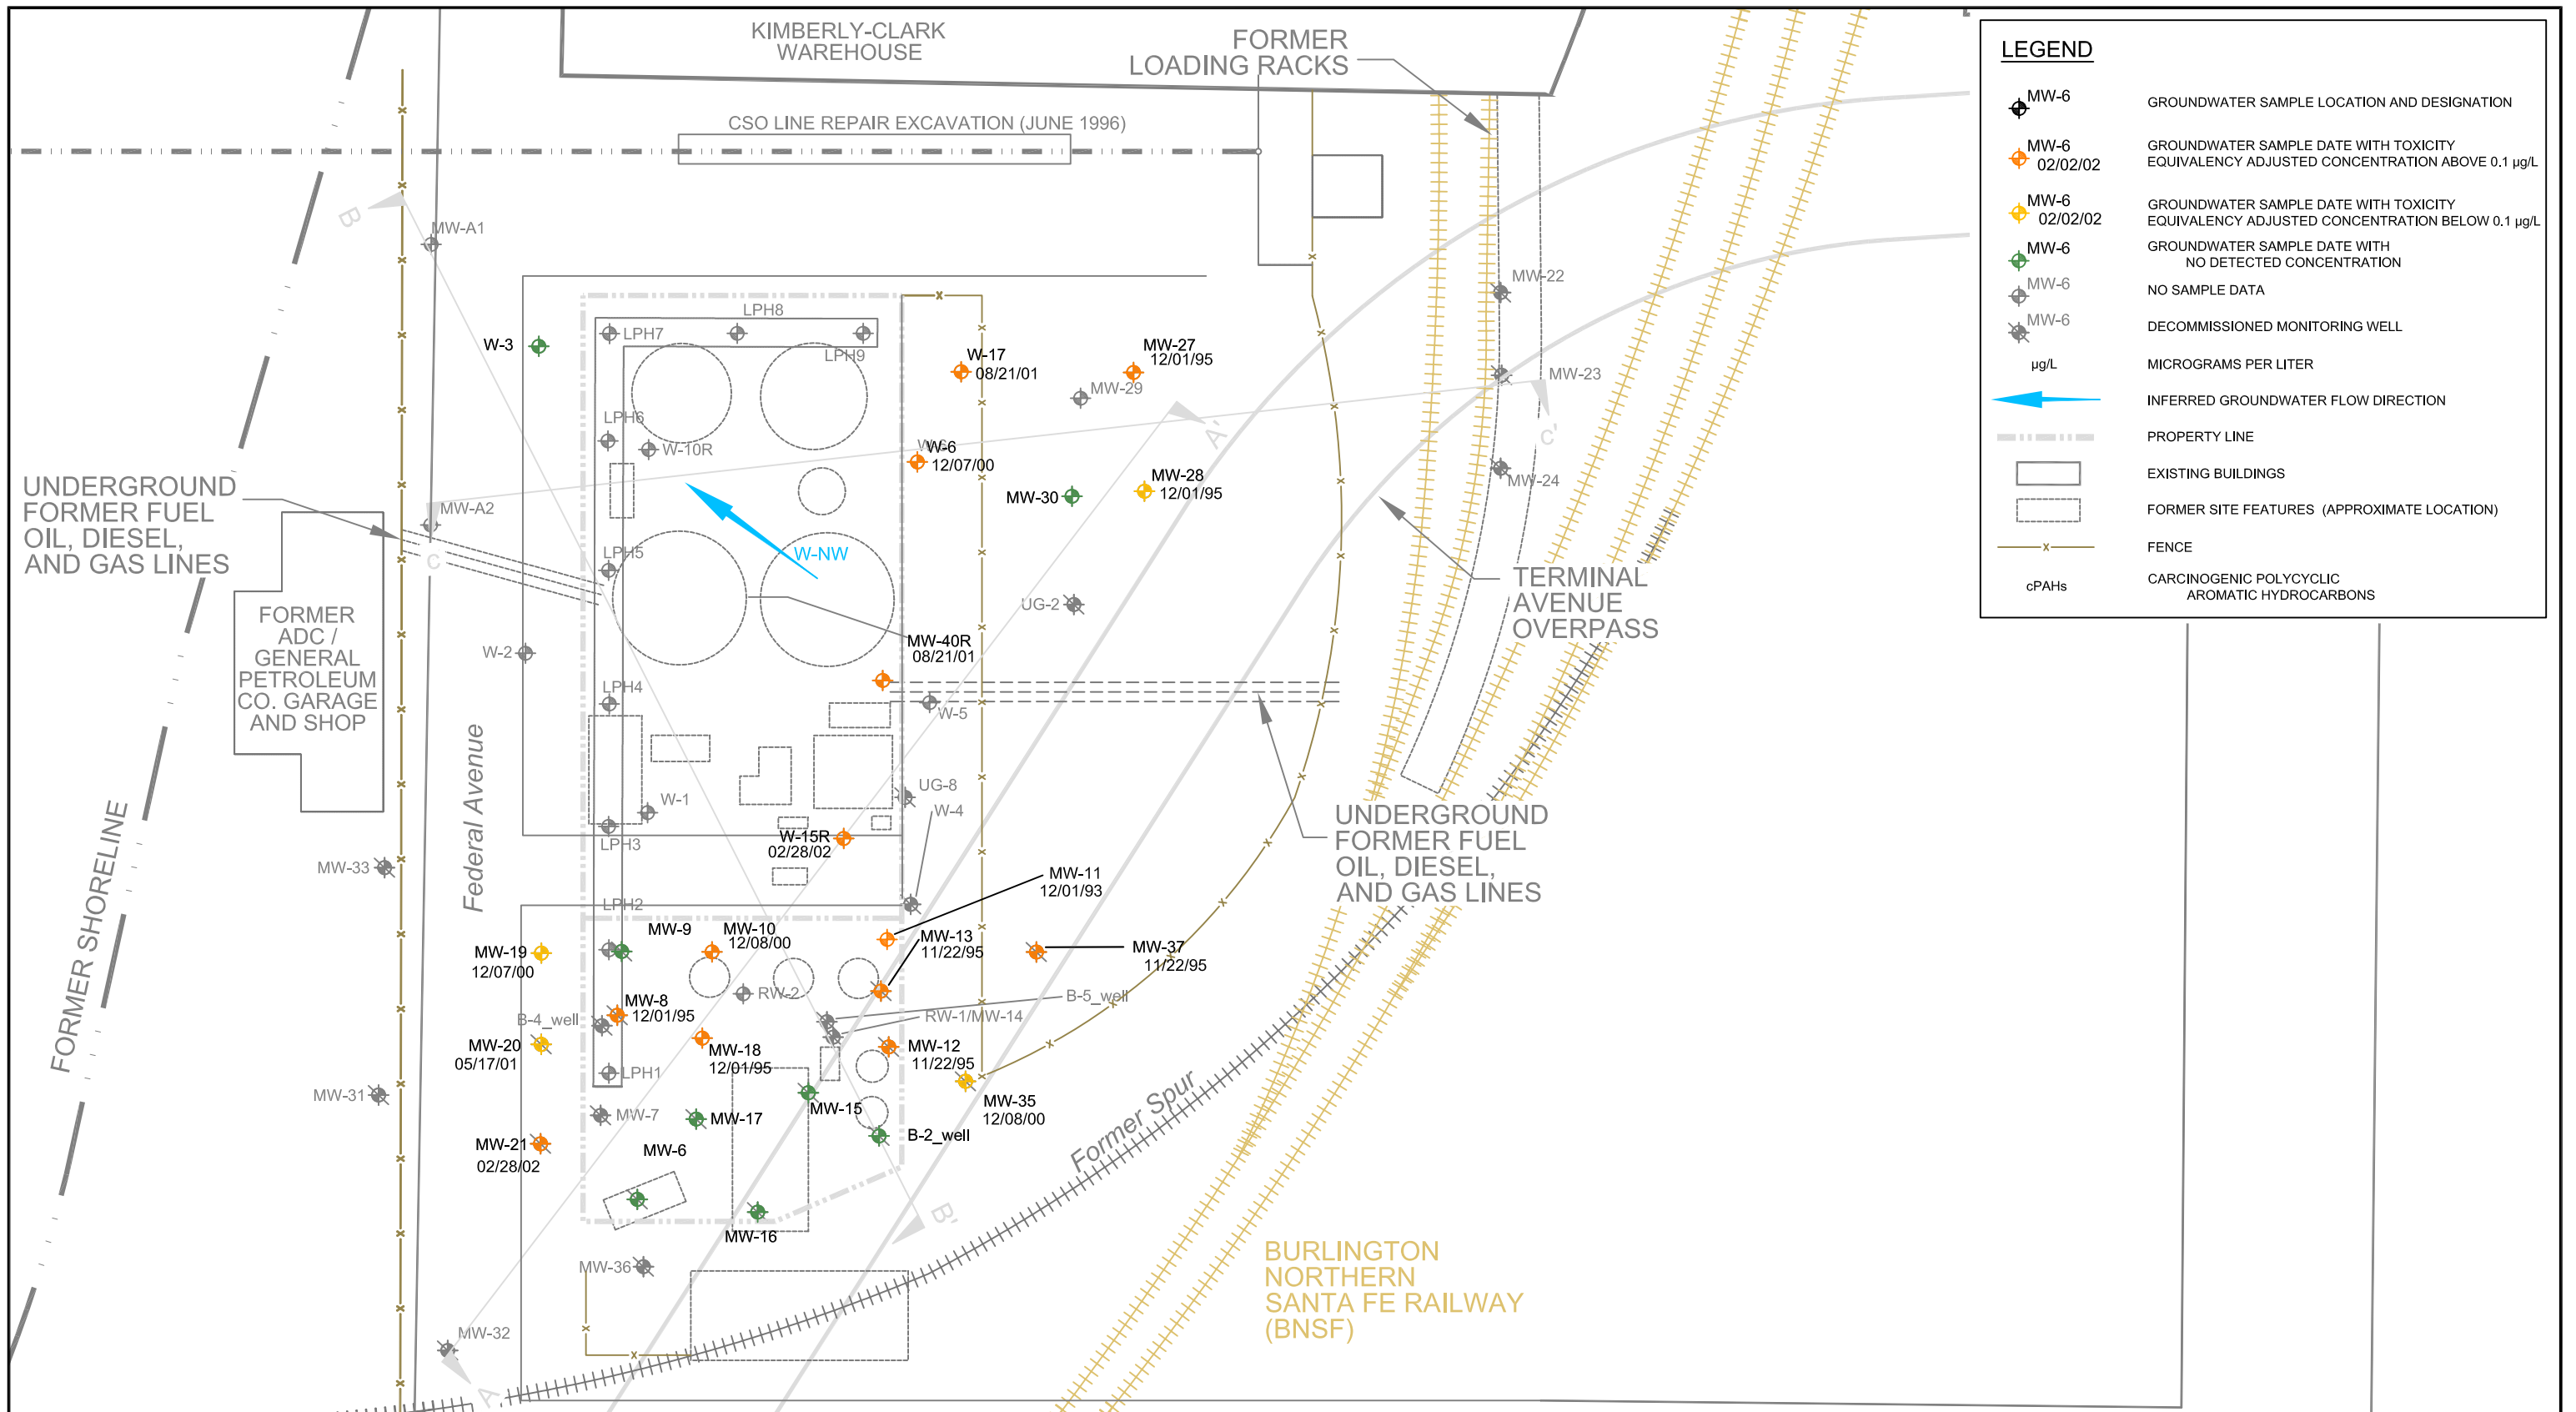

| | | | | | |
|---|-------------|---|--|--|---|
| SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc. 0 60 120 SCALE IN FEET | CLIENT LOGO | CLIENT: | DWN BY: JRS / BRJ CHK'D BY: AIS/MS DATUM: NONE PROJECTION: NONE SCALE: 1" = 60' | PROJECT: EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 | DATE: AUGUST 2009 PROJECT NO: 9-915-15716-C REV. NO.: 1 |
| | | EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY AMEC Earth & Environmental 11810 North Creek Parkway North Bothell, WA, U.S.A. 98011-8201 | TITLE: HISTORICAL DISTRIBUTION OF TOXICITY EQUIVALENCY ADJUSTED TOTAL cPAHs IN GROUNDWATER, MAXIMUM DETECTED VALUE | FIGURE No. 52 | |

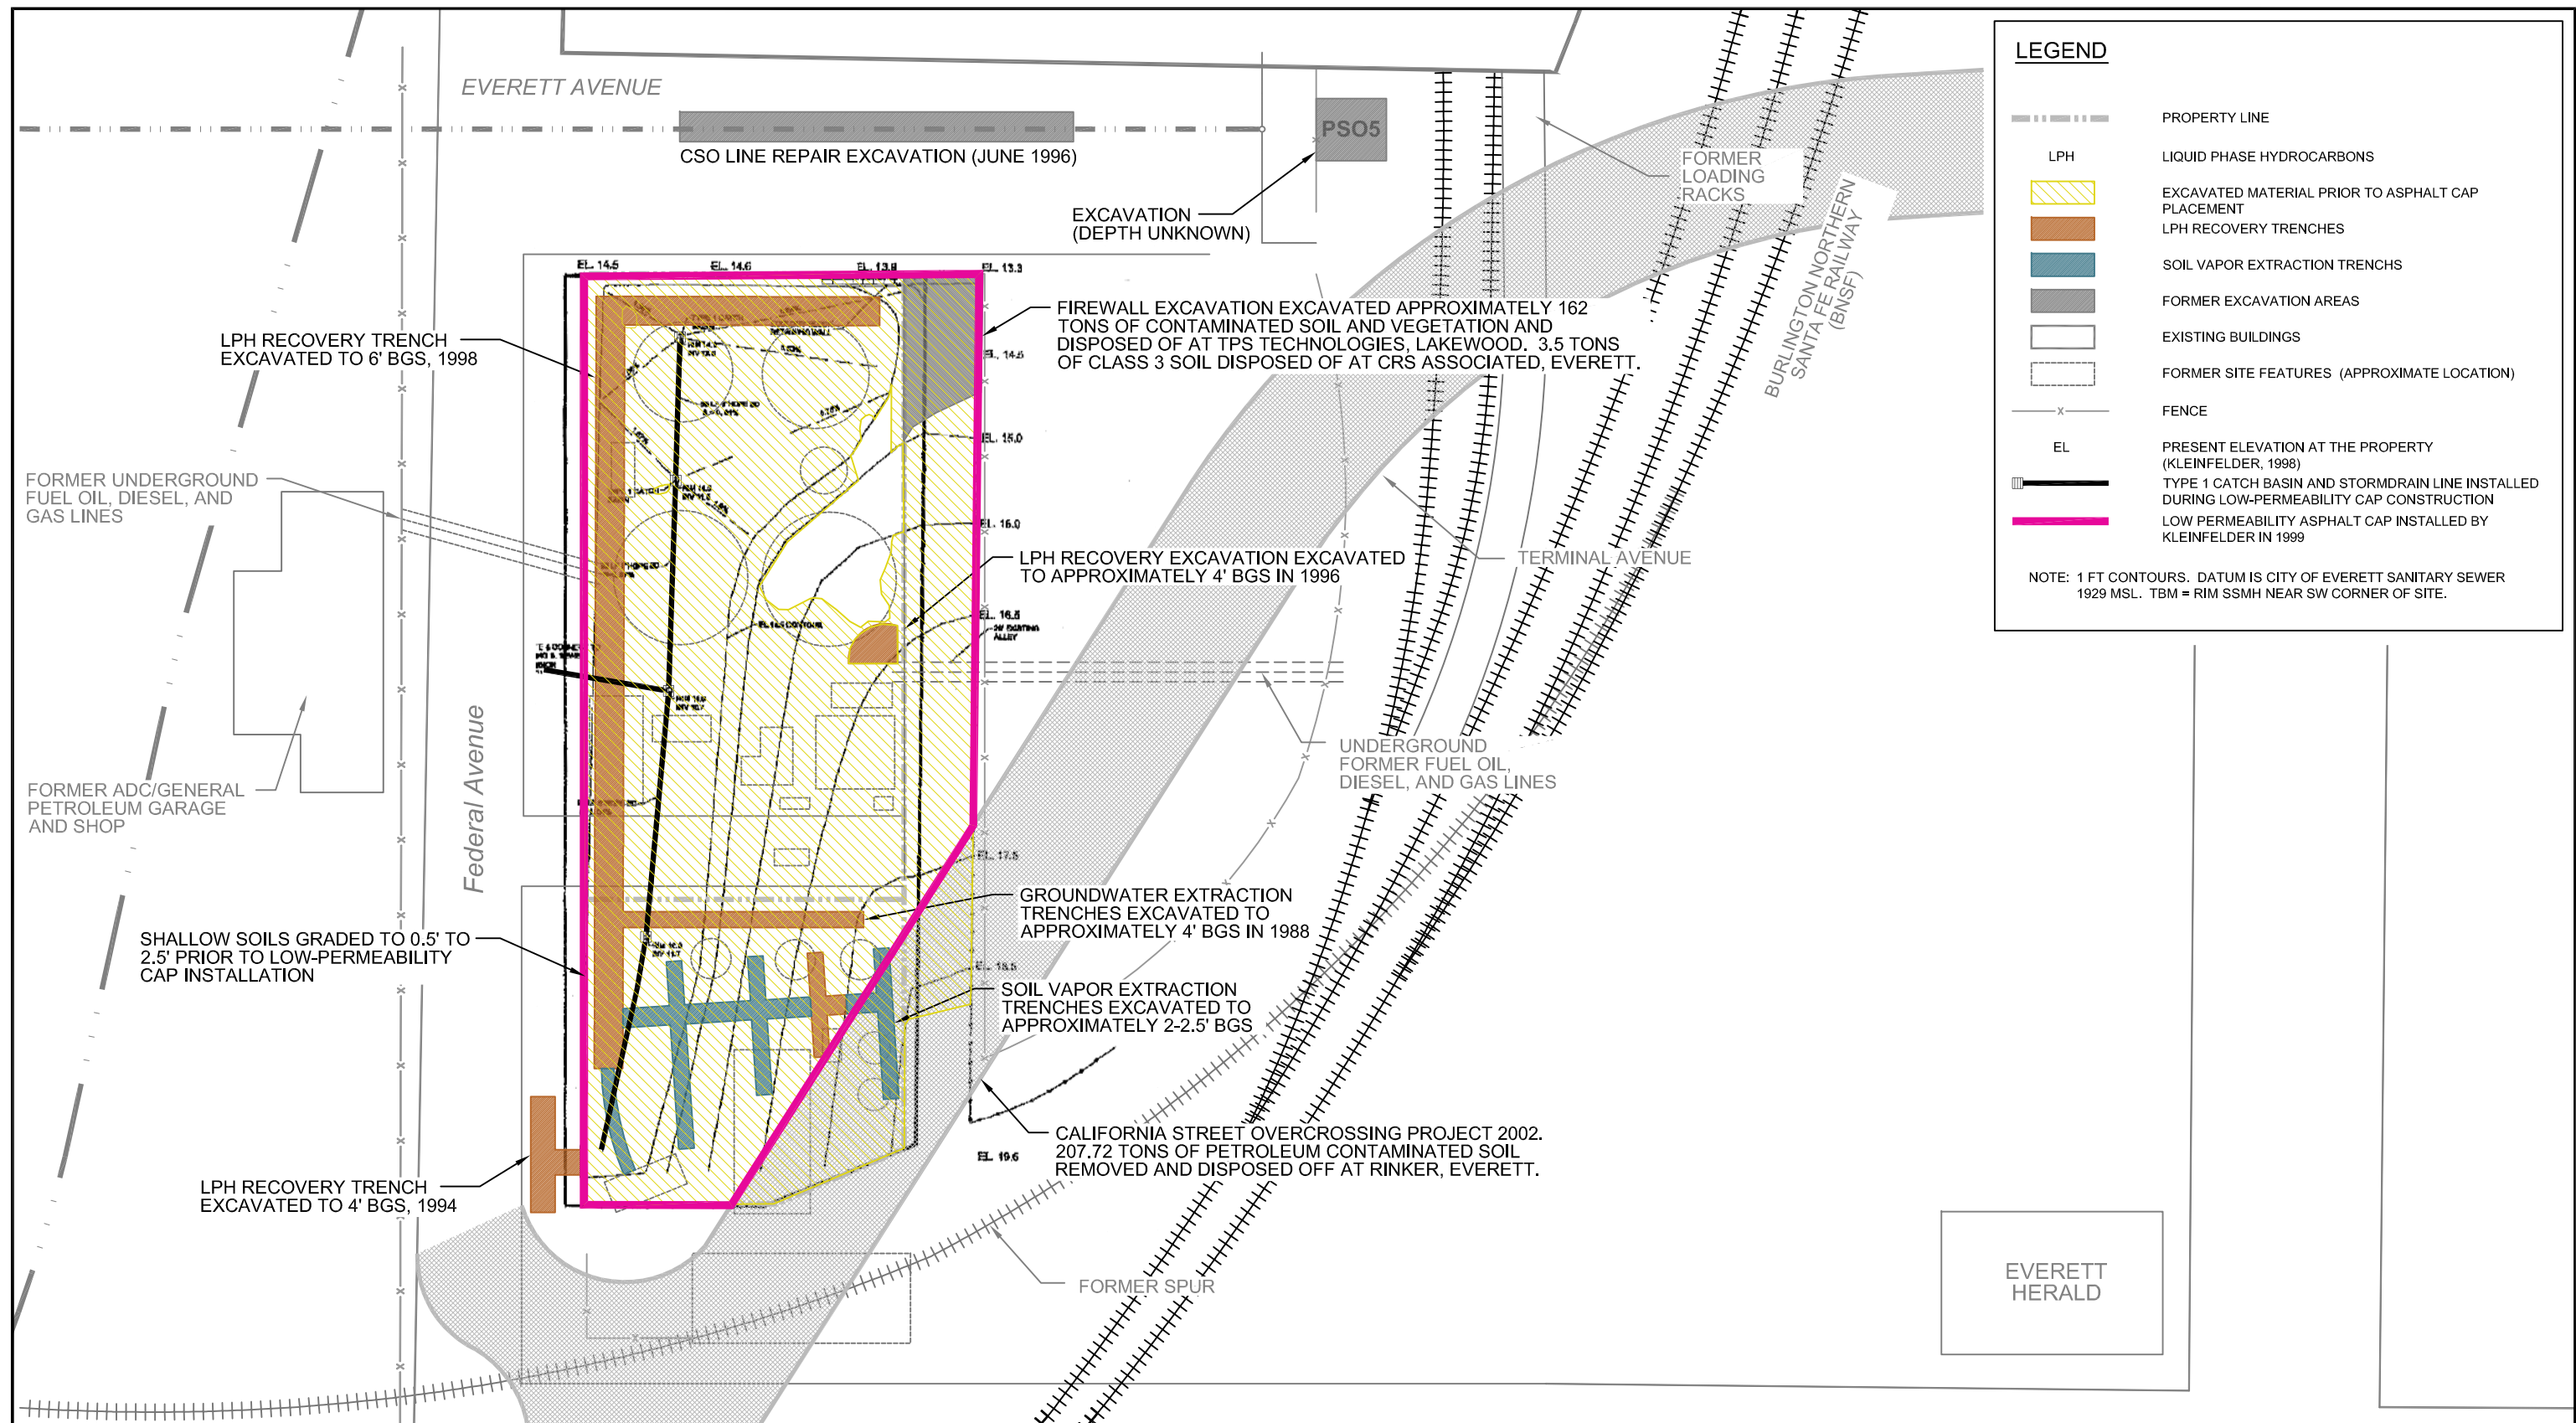

LEGEND

- PROPERTY LINE
- LPH LIQUID PHASE HYDROCARBONS
- EXCAVATED MATERIAL PRIOR TO ASPHALT CAP PLACEMENT
- LPH RECOVERY TRENCHES
- SOIL VAPOR EXTRACTION TRENCHES
- FORMER EXCAVATION AREAS
- EXISTING BUILDINGS
- FORMER SITE FEATURES (APPROXIMATE LOCATION)
- FENCE
- EL PRESENT ELEVATION AT THE PROPERTY (KLEINFELDER, 1998)
- TYPE 1 CATCH BASIN AND STORMDRAIN LINE INSTALLED DURING LOW-PERMEABILITY CAP CONSTRUCTION
- LOW PERMEABILITY ASPHALT CAP INSTALLED BY KLEINFELDER IN 1999

NOTE: 1 FT CONTOURS. DATUM IS CITY OF EVERETT SANITARY SEWER 1929 MSL. TBM = RIM SSMH NEAR SW CORNER OF SITE.

EVERETT HERALD

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

0 60 120
SCALE IN FEET

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY


AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

DWN BY: JRS / BRJ
CHK'D BY: AS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: 1" = 60'

PROJECT: EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728

TITLE: HISTORICAL EXCAVATION LOCATIONS

DATE: AUGUST 2009
PROJECT NO.: 9-915-15716-C
REV. NO.: 1
FIGURE No. 53

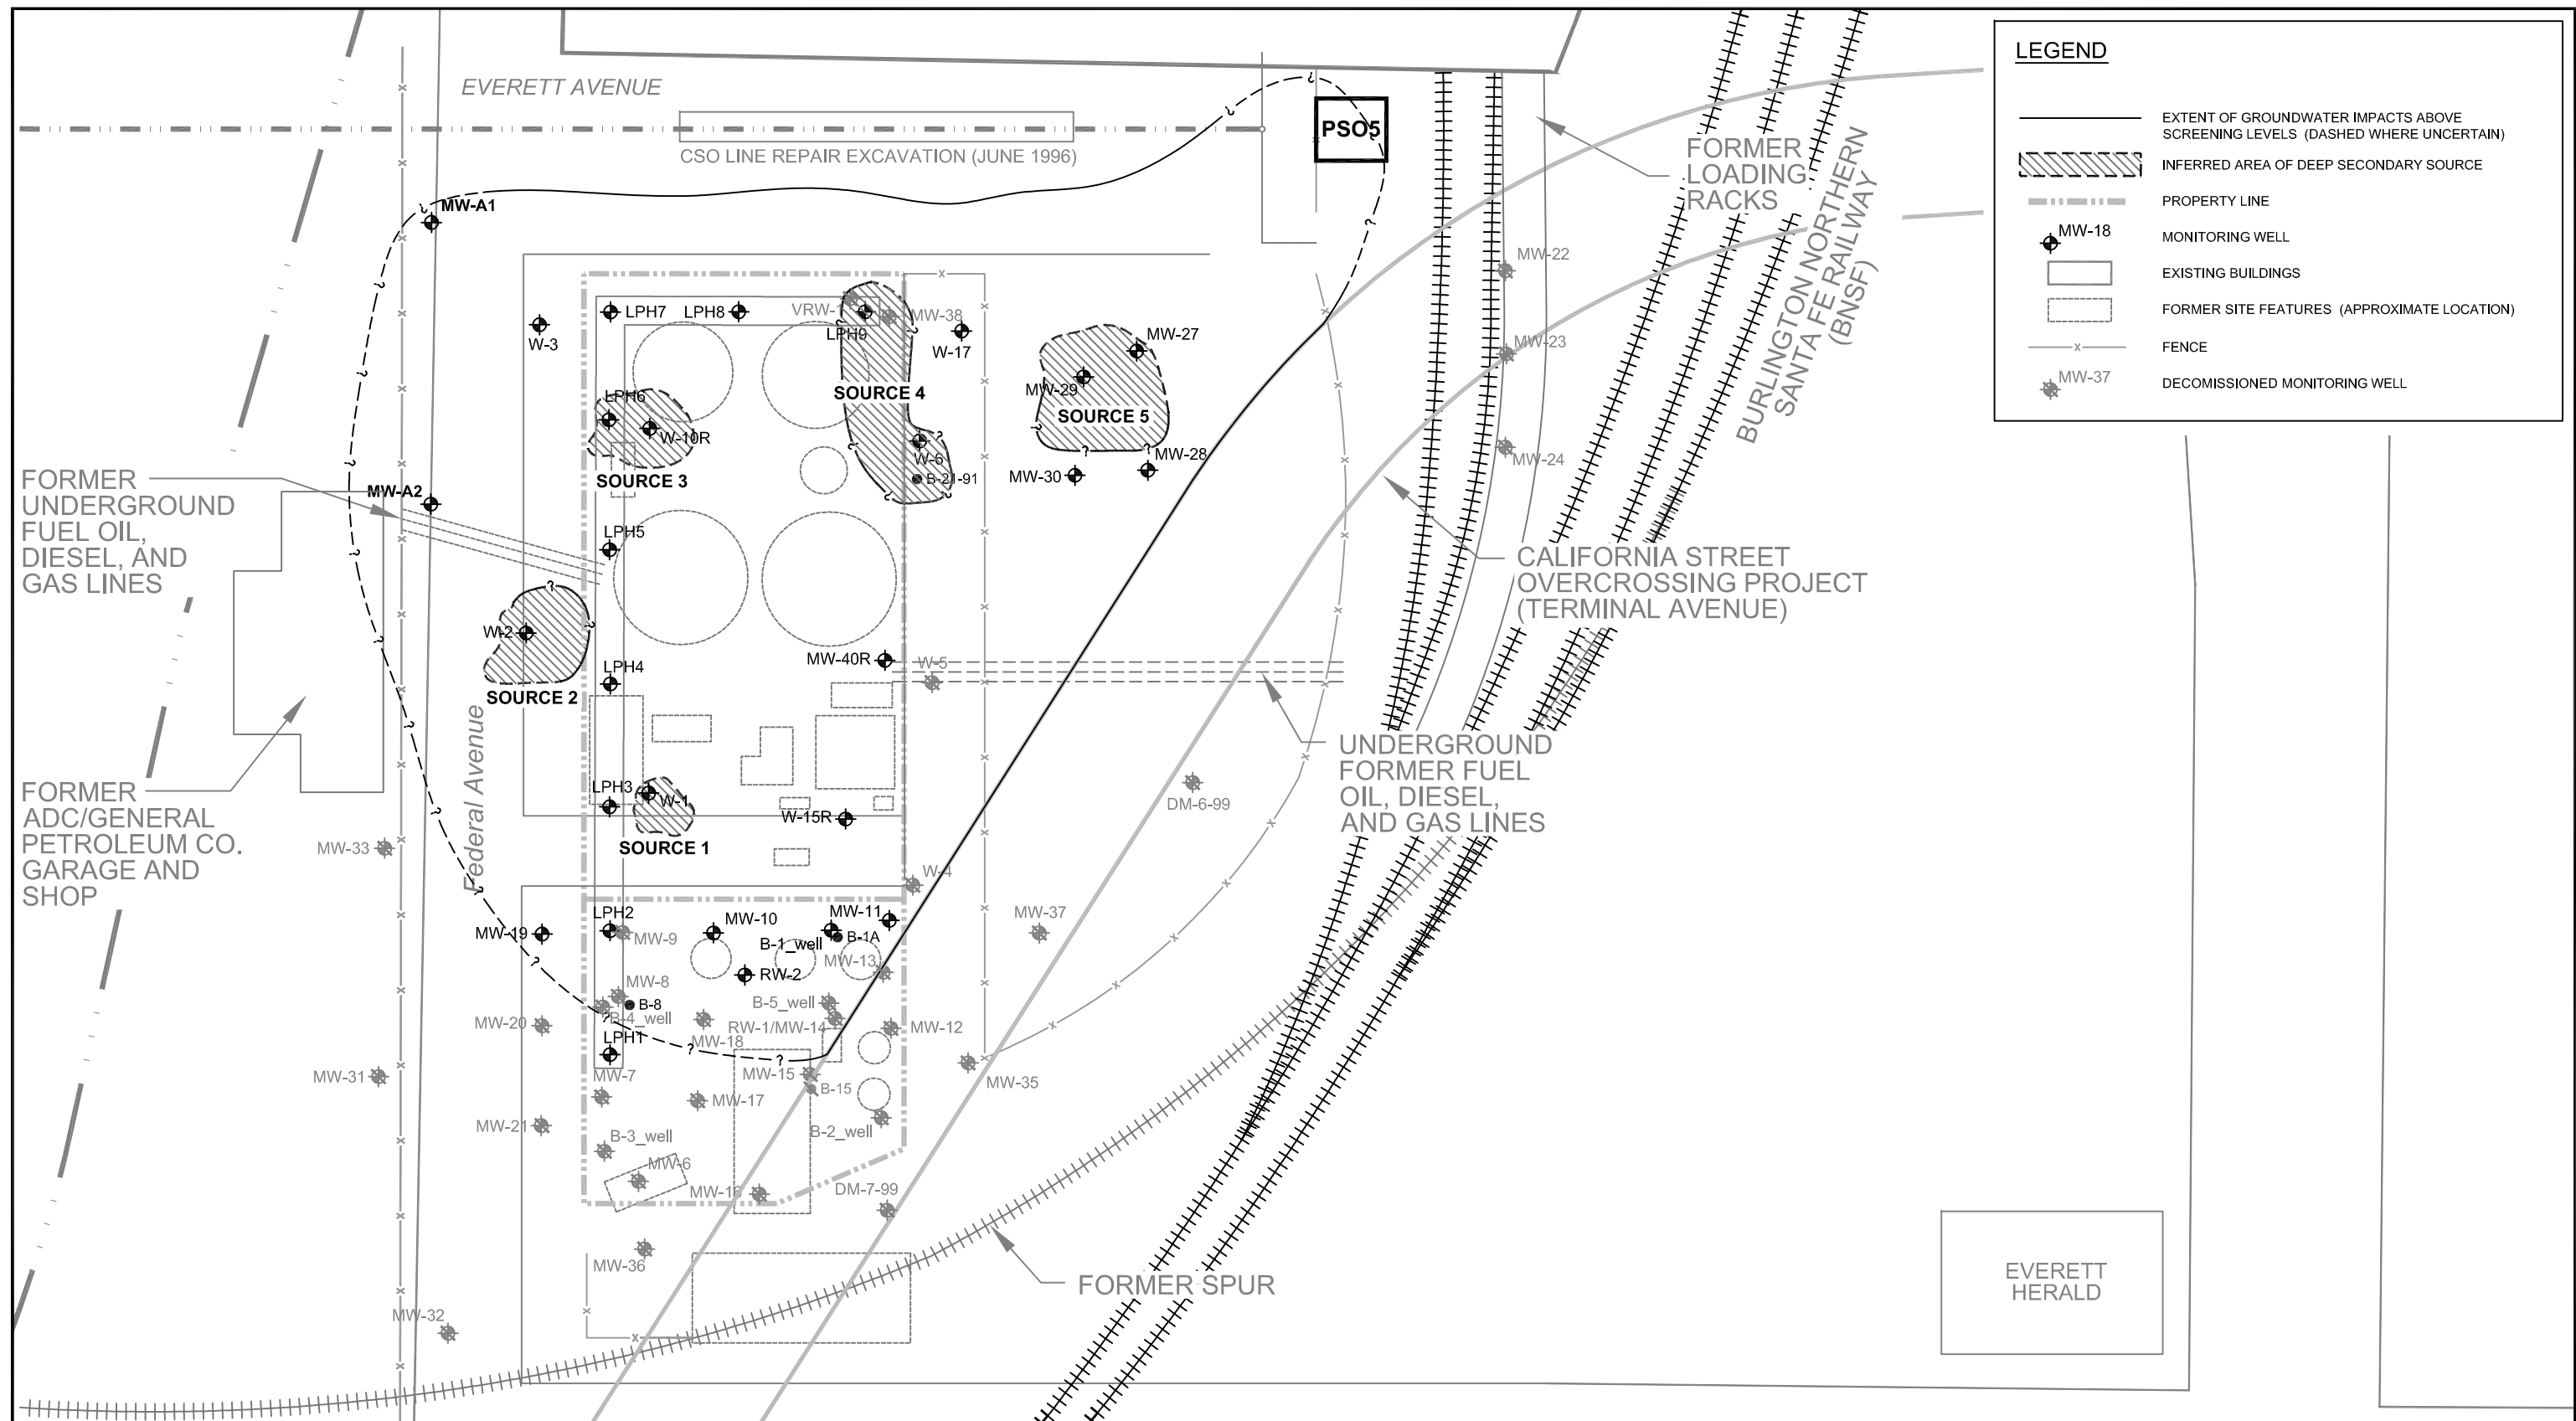

| LEGEND | |
|--------|---|
| | EXTENT OF GROUNDWATER IMPACTS ABOVE SCREENING LEVELS (DASHED WHERE UNCERTAIN) |
| | INFERRED AREA OF DEEP SECONDARY SOURCE |
| | PROPERTY LINE |
| | MONITORING WELL |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |
| | DECOMMISSIONED MONITORING WELL |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201



DWN BY: JRS / BRJ

CHK'D BY: AS/MS

DATUM: NONE

PROJECTION: NONE

SCALE: 1" = 60'

PROJECT

**EXXONMOBIL/ADC PROPERTY
ECOLOGY SITE ID 2728**

TITLE


**AREA OF IMPACT
AND SECONDARY SOURCE AREAS**


DATE: AUGUST 2009

PROJECT NO:
9-915-15716-C

REV. NO.: 1

FIGURE No. 54



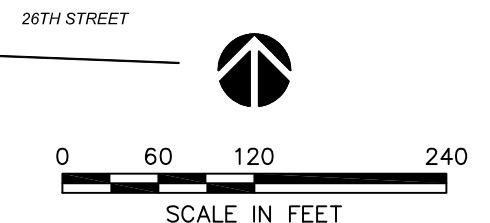

LEGEND

| | |
|------------------|---|
| MW-A7 | PROPOSED MONITORING WELL LOCATION AND NUMBER |
| AP-6 | PROPOSED DEEP BORING LOCATION AND NUMBER |
| AP-7 | PROPOSED PUSH-PROBE BORING LOCATION AND NUMBER |
| BB-1 | PREVIOUS EXPLORATION LOCATION, PLEASE REFER TO FIGURE 3 FOR DETAILS |
| TP-3 | |
| GP-8 | |
| PROBE-15 KC-2 | |
| AD-5 | |
| LP4 | |
| --- | PROPERTY LINE |
| ▭ | EXISTING BUILDINGS |
| - - - | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| -x-x- | FENCE |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:
**EXXONMOBIL
AMERICAN DISTRIBUTING CO.**

DWN BY: JRS
CHK'D BY: AS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: AS SHOWN

PROJECT
**EXXONMOBIL/ADC PROPERTY
ECOLOGY ID 2728**

DATE:
FEBRUARY 2010
PROJECT NO.:
9-915-15716-C

AMEC Earth & Environmental
11810 North Creek Parkway N
Bothell, WA, U.S.A. 98011-8201



TITLE
**PROPOSED DATA GAP INVESTIGATIONS
EXPLORATION PLAN**

REV. NO.:
FIGURE No.
55

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|--|-------------------|------------------|--|--|--|
| May-85 | Rittenhouse-Zeman and Associates, Inc. (RZA) | ExxonMobil Parcel | | Borings, monitoring well installation | 2-inch diameter monitoring wells B-1 through B-5 (MW-1 through MW-5 in several reports) installed. | B-1, B-2, B-4, and B-5. Petroleum odor noticed in borings, evidence found of contamination below groundwater table. |
| Mar-88 | RZA | ExxonMobil Parcel | | Borings, monitoring well installation | 2-inch diameter monitoring wells MW-6 through MW-18 installed. | Soil and groundwater samples collected. LPH (1.29 feet) measured in MW-14. |
| Apr-88 | RZA | ExxonMobil Parcel | | Recovery trench installation, SVE and groundwater treatment system test (oil-water separator and air stripper) | Installation of recovery trench near MW-14, soil vapor extraction system and groundwater treatment system to evaluate feasibility of extracting LPH | Decommissioned in 1998 during construction of low-permeability cap at the Property. |
| May-88 | RZA | ExxonMobil Parcel | | Infiltration gallery, pumping subsurface fluids | Infiltration gallery installed in the vicinity of MW-14. Subsurface fluids were pumped with a vacuum truck from the sumps. | The gallery was T-shaped and 45 ft long with two 55 gal drums installed at both ends as sumps. 1,400 gal of liquid removed, 50 gal was LPH. As a result, LPH thickness in MW-14 decreased to 0.40 ft by August 1988. |
| Mar-89 | RZA | ExxonMobil Parcel | | Automated groundwater extraction and treatment system | An automated groundwater extraction and treatment system was installed in the location of the infiltration gallery. The system included fluid extraction sump stationed in RW-1 (formerly MW-14), oil-water separator, air stripper, and reinfiltration gallery. | The groundwater extraction and treatment system was shut down in March 1990 due to flooding of the re-infiltration gallery, and has not been restarted. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|---------------------|---|---------------------------------------|------------------|---|---|---|
| Jan-90 | Environmental Science and Engineering, Inc. (ESE) | ADC Parcel | | Borings | Hand auger AD-01 through AD-19 | Soil samples collected. |
| Feb-90 | ESE | ADC Parcel | | Borings, monitoring well installation | HSA borings W-1 through W-7. 2-inch diameter monitoring wells W-1 through W-6 installed. | W-7 was backfilled. |
| Jun-90 | ESE | ADC Parcel | | Hand-auger borings | Hand-auger borings W-8 through W-17 hand | No soil data found for W-8 through W-17. |
| Oct-90 | RZA | ExxonMobil Parcel | | Shallow grid soil sampling, bio-feasibility study | Hand auger B-1 through B-25. Two soil sample studies for the purpose of conducting a slurry flask bio-feasibility study. | 0-3 ft bgs. Rapid biodegradation of TPH-G fraction was observed. Biodegradation of TPH (undifferentiated) was not achieved. |
| Nov-90 | Unknown | ExxonMobil Parcel | | Monitoring wells decommissioning | B-3 (MW-3), B-4 (MW-4), and MW-7 destroyed | No documentation of well decommissioning. |
| Mar through June-91 | RZA | Parcels surrounding ExxonMobil Parcel | | Borings, monitoring well installation | 2-inch diameter monitoring wells MW-19 through MW-24 and 4-inch diameter monitoring wells MW-27 through MW-30 installed. Soil boring B-21-91 advanced. | MW-25 and MW-26 were inaccessible or dry and later renamed as B-25 and B-26. No well decommissioning records were found. |
| Jun-91 | RZA and ESE | The Property | | Quarterly groundwater monitoring | Groundwater monitoring event. New 2-inch diameter monitoring wells MW-25 and MW-26 installed. Gauged wells: RW-1, B-1, B-2, B-5, MW-6, MW-8 through MW-13, MW-15 through MW-18, AD-19, W-1 through W-6, and W-8 through W-15. | B-1, MW-8, AD-19, W-1, W-6, W-9, W-11, W-12, W-13, and W-15 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|---|---|------------------|--|---|---|
| Nov-91 | RZA AGRA | ExxonMobil Parcel | | Borings, recovery well | 8-inch diameter recovery well RW-2 installed. Deep soil borings B-1A, B-8A, and B-15A advanced. | Soil borings advanced in vicinity of existing wells B-1, B-8, and B-15. No analytical data found for this event. |
| Dec-91 | RZA AGRA Earth & Environmental, Inc. (RZA AGRA) | ExxonMobil Parcel | | Quarterly groundwater monitoring, aquifer and tidal study | Quarterly groundwater monitoring. Gauged wells: RW-1, B-1, B-2, B-5, MW-6, MW-8 through MW-13, MW-15 through MW-30, and AD-19. 24-hour pumping from MW-10 at a rate of 1 to 2 gpm and measuring response in MW-18, RW-1, and RW-2 for 48 hours. | B-1, MW-8, MW-11, MW-26, MW-27, MW-29, and AD-19 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. Hydraulic conductivity at the Site was estimated as 4 to 9.5 ft/day. Minimum tidal influence was observed. |
| 1992 | RZA AGRA | | | Discussions with Ecology | Ecology discussed enforcement with Mobil and RZA AGRA. Ecology decided to allow site to go independent. | |
| Dec-93 | RZA AGRA | West of ExxonMobil Parcel | | Off-Property borings, monitoring well installation, GPR survey | 2-inch diameter monitoring wells MW-31 through MW-33 and MW-35 through MW-37 were installed; B-34 advanced and backfilled. GPR survey was conducted to assess whether underground product lines had been removed. | Survey did not identify any subsurface linear features. |
| Dec-93 | RZA AGRA | ExxonMobil Parcel and off-site property to the west | | Quarterly groundwater monitoring | Groundwater monitoring event. Gauged wells B-1, B-2, MW-6, MW-8 through MW-13, MW-15 through MW-18, MW-27 through MW-33, MW-35 through MW-37. | B-1, MW-27, and MW-29 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|---|---------------------------|------------------|--|---|--|
| Dec-93 | RZA AGRA | West of ExxonMobil Parcel | | Test pits, recovery trench | Excavated five test pits TP-1 through TP-5. Recovery trench installation along the western border of ExxonMobil Parcel. | Monitoring well MW-21 was decommissioned during the recovery trench installation activities. However, a 2002 decommissioning record was found that stated that MW-21 was decommissioned in 2002. |
| 1995 | | | | Agreed Order DE-95TC-N402 | | Required evaluation of LPH. |
| Jul-95 | RZA AGRA | ADC Parcel | | Quarterly groundwater monitoring | Groundwater monitoring event. Gauged wells: W-3, W-5, W-9, W-10, W-12 through W-15. | W-9, W-12, and W-13 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |
| Oct-95 | U.S. Coast Guard Puget Sound Marine Safety Office & City of Everett | North of the Property | | Investigation of petroleum product discharge into Everett Harbor | Camera surveys of the sewer lines | Outfall located approximately 175 yards northwest of the ADC parcel, section of Combined Sewer Outflow (CSO) line with LPH seepage. |
| Nov-95 | RZA AGRA | Site | | Groundwater monitoring | Groundwater monitoring event. Gauged wells: RW-1, B-1, B-2, MW-6, MW-8 through MW-13, MW-15 through MW-18, and MW-27 through MW-37. | B-1, MW-18, MW-29, and MW-30 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |
| Dec-95 | RZA AGRA | Site | | Groundwater monitoring | Groundwater monitoring event. Gauged wells: RW-2, B-2, MW-8, MW-9, MW-18, MW-15 through MW-18, MW-27, and MW-28. | RW-2, MW-9, MW-18, and MW-28 contained LPH and were not sampled. Results are presented in April 4, 1996, Groundwater Monitoring and Sampling Report by AGRA. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|-------------------|--------------------------------|------------------|--|---|---|
| Mar-96 | AGRA | North of the Property | | Borings | Direct-push soil borings GP-1 through GP-13. Borings associated with the CSO line repair. | The collected soil sample results indicated that soil surrounding the damaged portion of the CSO line were impacted with petroleum hydrocarbons. LPH accumulation was noticed in temporary screens installed in soil borings. No groundwater samples were collected from temporary screens. |
| Apr-96 | City of Everett | | | Meeting | Meeting held to discuss options for repairing the section of CSO line. | Replacement of the settled portion of the line and slip lining of the remaining portion of the line was decided. |
| May-96 | AGRA | ADC Parcel | | Borings | Bobcat borings BB-1 through BB-14. | Soil samples collected. |
| Jun-96 | AGRA | North of the Property | | CSO line repairs | Excavation of settled portion of pipe replaced. Slip-lining of remaining CSO line. CSO line excavation dewatering. | 1,450,800 gal of groundwater and 23,050 gal of LPH were removed during CSO line excavation and dewatering. |
| Jun-96 | AGRA | ADC Parcel | | Borings, monitoring wells, and test pits | 4-inch diameter recovery well VRW-1 and 2-inch diameter monitoring well MW-38 installed. Seven test pits TP-1-96 through TP-7-96 excavated. | Wells were installed on the northeast corner of the property. Test pits were throughout the ADC Parcel. |
| Jun-96 | AGRA | LPH Vacuum Recovery Pilot Test | | LPH vacuum recovery pilot test | 14-day test included SVE and groundwater/LPH pumping system. | 125 gal of LPH and 28,228 gal of groundwater removed from VRW-1 during test. |
| Aug-96 | AGRA | Site | | Monitoring wells | Gauged wells at the property. | LPH found in B-1, VRW-1, MW-27, MW-29, MW-30, MW-38, W-1, W-9, W-15. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|------------------|--|----------------------------|------------------|---|--|---|
| Feb-97 | PTI Environmental Services (PTI) | Site | | LPH recovery technical memorandum | Technical memorandum to summarize environmental investigations, LPH recovery activities, and geology. | PTI concluded that long-term, passive (LPH only) recovery may be the most effective method of LPH recovery. |
| Nov-97 Jan-98 | Pacific Environmental Group, Inc. (PEG) | Kimberly-Clark Property | | Boring, monitoring well | Direct push borings Probe-1 through Probe-15. 2-inch diameter HSA monitoring wells KC-1 and KC-2 inside the KC warehouse. | Groundwater samples were collected from temporary screens installed in each boring. LPH not identified in soil borings or monitoring wells. TPH-D and TPH-O were detected above MTCA Method A cleanup levels in borings advanced in the vicinity of repaired CSO line. Samples not collected in vicinity of former ASTs. |
| 1998 | | | | Agreed Order DE98TC-P-N223 | | Required remedial investigation/focused feasibility study. |
| Jul-98 | Exponent | Site | | Remedial Investigation and Focused Feasibility Study | Report | Exponent recommended the installation of LPH recovery trenches and capping the property. |
| Nov-98 | Kleinfelder, Inc. (Kleinfelder) | ADC Parcel | | Survey, geotechnical evaluation | Initial survey. Asbestos survey prior to demolition. | Demolition activities included four buildings on the ADC parcel. Demolition completed in January 1999. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|-------------------|--|------------------|---|--|---|
| Dec-98 | Kleinfelder | The Property | | Interim remedial action | Removed TPH-impacted soil, graded the property, removed purge water. | 162 tons of contaminated shallow soil and vegetation removed from within the ADC firewall area during demolition and transported to TPS Technologies facility for disposal. 3.5 tons of class 3 petroleum-contaminated soil taken to CRS Associated. Marine Services, Inc. removed 110 gal of purge water. |
| 1999 | Kleinfelder | The Property | | Interim remedial action (continued) | Monitoring well abandonment. Interceptor trench construction along the western and northern property boundaries. Low-permeability cap construction over the property. Recovery wells LPH-1 through LPH-9 installed in interceptor trench. Storm collection system that connects to the City of Everett sewer system was installed. | Monitoring wells abandoned (MW-6, MW-8, MW-9, MW-12, MW-13, MW-15, MW-16, MW-17, MW-38, WP-1, B-1, B-2, W-4, W-8, W-11, W-12, W-14, AD-11, AD-12, AD-13, AD-15, AD-19, W-10, W-15, and MW-40). Completed site grading, installation of two layers of geotextile fabric, asphalt-treated base material, and paving fabric and asphalt cap. |
| Oct-99 | Kleinfelder | The Property | | Monitoring wells installation | Monitoring wells W-10R, W-15R, and MW-40R. | Wells installed to replace wells W-10, W-15, and MW-40. |
| Dec-99 | Dames and Moore | To the south and southeast from the Property | | Geotechnical drilling and piezometer installation | DM-6, DM-7, and DM-8 were sampled for environmental samples. | Work associated with California Street Overcrossing (CSTO) Project. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|-------------|---|---|------------------|--|--|---|
| Sep-00 | URS Corporation (URS) | To the south, east, and southeast from the Property | | Borings | Phase II investigation for the CSTO Project. Push-probe borings UG-1 through UG-12. | Groundwater samples collected from temporary screens installed in UG-2 and UG-8. Estimated 7,600 cubic yards of petroleum-contaminated soil present along the overcrossing alignment. |
| Jul-01 | URS | Johnston Petroleum parcel | | Borings | Phase II investigation for Johnson Petroleum parcel. Push-probe borings JP-1 through JP-7. | Soil samples collected. Groundwater samples collected from JP-1, JP-4, and JP-7. No significant contamination found. |
| Feb-02 | Environmental Resolutions, Inc. (ERI) | Site and vicinity | | Monitoring wells decommissioning, monitoring well re-installment | Abandonment of monitoring wells (MW-22, MW-23, MW-24, MW-35, and MW-37) and piezometer DM-6 due to proximity to the CSTO Project. Re-installed well W-2. | No soil samples taken during W-2 installation. |
| 2002 | Reid Middleton | CSTO | | Memorandum to Ecology | Southeast corner of the asphalt cap over the ExxonMobil Parcel removed. Steel piles for concrete foundation were installed. | No information regarding contaminant soil excavation and removal was found. |
| 2002-2007 | Kleinfelder, ERI, AMEC Earth & Environmental, Inc. (AMEC) | Site | | Groundwater monitoring | Monthly LPH gauging and quarterly groundwater monitoring. | LPH greater than 0.02 ft thick is bailed manually and oleophilic socks are replaced. |
| Jul-02 | ERI | West of the ExxonMobil Parcel | | Well decommissioning | Monitoring wells MW-20, MW-21, and one unidentified well were decommissioned. | The record contradicts the records that indicate that MW-21 was decommissioned during the December 1993 recovery trench installation. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

| Date | Consultant | Location | Reference | Activities | Tasks Performed | Notes |
|--------------|-------------------|---------------------------------|------------------|--|--|--|
| 2007-present | AMEC | Site | | Groundwater monitoring | AMEC request to change to semiannual groundwater monitoring. | Request was accepted by Ecology. |
| 2008 | AMEC | West of the property | | Monitoring wells | Off-property monitoring wells MW-A1 and MW-2A installed on the west side of Federal Avenue. | Monitoring wells MW-A1 and MW-2A are incorporated into existing groundwater monitoring network. |
| Feb-08 | AMEC | Site | | Tidal study | Tidal response was measured in W-3, W-6, MW-11, MW-28, and MW-40R | Minimal response in each well, except MW-11. |
| Jun-08 | AMEC | Site | | Well Head elevations survey | True North Land Surveying of Seattle, Washington, surveyed recovery and monitoring wells located on-site | Recovery wells LPH-1 through LPH-9 and monitoring wells W-1, W-2, W-3, W-6, W-10R, MW-10, MW-11, W-15R, W-17, RW-2, MW-19, MW-27, MW-28, MW-29, MW-30, MW-40R, and MW-A1 and MW-A2. |
| Jun-08 | Floyd Snider | North-Northeast of the property | | Excavation and disposal of PCS and dewatering the excavation | Soil associated with Puget Sound Outfall 5 (PSO 5) Overflow Structure project was excavated and disposed off. In addition, dewatering also occurred during excavation. | Soil was field-screen. Soil that exhibited obvious signs of contamination was disposed off as Class II soil without sampling. Soil that appeared to be "clean", was sampled and then disposed as Class II soil. Water from the excavation was sampled for the City sewer discharge requirements. |
| 2009 | AMEC | Site | | Proposed 2009 Agreed Order | | Data Gap Investigations, followed by Focused Feasibility Study, and CAP. |

Table 1 Chronology of Historical On-Site Environmental Investigations and Remedial Actions

Abbreviations

ADC = American Distributing Company
AST = Above Ground Storage Tank
bgs = below ground surface
CAP = Cleanup Action Plan
CSO = Combined Sewer Outflow
CSTO = California Street Overcrossing
Ecology = Washington State Department of Ecology
ft = feet
gal = gallons
gpm = gallons per minute
GPR = Ground Penetrating Radar
HSA = Hollow Stem Auger
KC = Kimberly-Clark
LPH = Liquid Petroleum Hydrocarbons
MTCA = Model Toxics Control Act
PCS = petroleum-contaminated soil
SVE = Soil Vapor Extraction
TPH = Total Petroleum Hydrocarbons
TPH-D = Total Petroleum Hydrocarbons-Diesel Range Organics
TPH-G = Total Petroleum Hydrocarbons-Gasoline Range Organics
TPH-O = Total Petroleum Hydrocarbons-Residual Range Organics

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|---------------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| AD-1 | 0.5 to 1 | 1/15/1990 | -- | 780 | -- | -- |
| AD-1 | 3 | 1/15/1990 | -- | 3,900 | -- | -- |
| AD-1 | 3 | 1/15/1990 | -- | 2,380 ¹ | -- | -- |
| AD-2 | 0.5 to 1 | 1/15/1990 | -- | 250 | -- | -- |
| AD-2 | 2.5 to 3 | 1/15/1990 | -- | 280 | -- | -- |
| AD-3 | 0.5 to 1 | 1/15/1990 | -- | 31 | -- | -- |
| AD-3 | 1.5 to 2 | 1/15/1990 | -- | 9 | -- | -- |
| AD-4 | 0.5 to 1 | 1/15/1990 | -- | 720 | -- | -- |
| AD-5 | 0.5 to 1 | 1/15/1990 | -- | 8,800 | -- | -- |
| AD-5 | 1.5 to 2 | 1/15/1990 | -- | 1,900 | -- | -- |
| AD-5 | 2.5 to 3 | 1/15/1990 | -- | 2,300 | -- | -- |
| AD-5 | 2.5 to 3 | 1/15/1990 | -- | 2,100 ¹ | -- | -- |
| AD-6 | 0.5 to 1 | 1/15/1990 | -- | 2,700 | -- | -- |
| AD-7 | 0.5 to 1 | 1/15/1990 | -- | 5,800 | -- | -- |
| AD-8 | 0.5 to 1 | 1/15/1990 | -- | 1,600 | -- | -- |
| AD-8 | 2.5 to 3 | 1/15/1990 | -- | 2,700 | -- | -- |
| AD-8 | 2.5 to 3 | 1/15/1990 | -- | 1,530 ¹ | -- | -- |
| AD-8 | 4.5 to 5 | 1/15/1990 | -- | 6,200 | -- | -- |
| AD-8 | 4.5 to 5 | 1/15/1990 | -- | 7,080 ¹ | -- | -- |
| AD-9 | 0.5 to 1 | 1/15/1990 | -- | 630 | -- | -- |
| AD-9 | 1.5 to 2 | 1/15/1990 | -- | 4,400 | -- | -- |
| AD-10 | 0.5 to 1 | 1/15/1990 | -- | 33,000 | -- | -- |
| AD-11 | 0.5 to 1 | 1/15/1990 | -- | 8,000 | -- | -- |
| AD-11 | 1 to 1.5 | 1/15/1990 | -- | 12,000 | -- | -- |
| AD-12 | 0.5 to 1 | 1/15/1990 | -- | 230 | -- | -- |
| AD-12 | 2.5 to 3 | 1/15/1990 | -- | 14,000 | -- | -- |
| AD-12 | 2.5 to 3 | 1/15/1990 | -- | 9900 ¹ | -- | -- |
| AD-12 | 3 to 3.5 | 1/15/1990 | -- | 16,000 | -- | -- |
| AD-12 | 3 to 3.5 | 1/15/1990 | -- | 12,800 ¹ | -- | -- |
| AD-13 | 0.5 to 1 | 1/15/1990 | -- | 4,400 | -- | -- |
| AD-13 | 2 to 2.5 | 1/15/1990 | -- | 27,000 | -- | -- |
| AD-13 | 2 to 2.5 | 1/15/1990 | -- | 24,900 ¹ | -- | -- |
| AD-14 | 0.5 to 1 | 1/15/1990 | -- | 13,000 | -- | -- |
| AD-14 | 2 to 2.5 | 1/15/1990 | -- | 17,000 | -- | -- |
| AD-14 | 2 to 2.5 | 1/15/1990 | -- | 9,500 ¹ | -- | -- |
| AD-15 | 0.5 to 1 | 1/15/1990 | -- | 61 | -- | -- |
| AD-15 | 0.5 to 1 | 1/15/1990 | -- | 7 ¹ | -- | -- |
| AD-15 | 2.5 to 3 | 1/15/1990 | -- | 2,400 | -- | -- |
| AD-15 | 2.5 to 3 | 1/15/1990 | -- | 3,340 ¹ | -- | -- |
| AD-16 | 0.5 to 1 | 1/15/1990 | -- | 2,200 | -- | -- |
| AD-16 | 0.5 to 1 | 1/15/1990 | -- | 1,370 ¹ | -- | -- |
| AD-17 | 0.5 to 1 | 1/15/1990 | -- | 8,500 | -- | -- |
| AD-17 | 0.5 to 1 | 1/15/1990 | -- | 8,100 ¹ | -- | -- |
| AD-18 | 0.5 to 1 | 1/15/1990 | -- | 24 | -- | -- |
| AD-18 | 4 to 4.5 | 1/15/1990 | -- | 520 | -- | -- |
| AD-19 | 0.5 to 1 | 1/15/1990 | -- | 23,000 | -- | -- |

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|--------------------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| AD-19 | 1 to 1.5 | 1/15/1990 | -- | 100,000 | -- | -- |
| B-1_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 2,117 | -- | -- |
| B-1_Soil Grab | 1.5 to 2 | 10/9/1990 | -- | 446 | -- | -- |
| B-2_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 90.6 | -- | -- |
| B-3_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 213 | -- | -- |
| B-3_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 831 | -- | -- |
| B-4_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 65.2 | -- | -- |
| B-5_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 701 | -- | -- |
| B-6_Soil Grab | 0 to 1 | 10/9/1990 | -- | 428 | -- | -- |
| B-7_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 434 | -- | -- |
| B-8_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 126 | -- | -- |
| B-8_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 174 | -- | -- |
| B-9_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 469 | -- | -- |
| B-9_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 643 | -- | -- |
| B-10_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 206 | -- | -- |
| B-10_Soil Grab | 1.5 to 2 | 10/9/1990 | -- | 231 | -- | -- |
| B-11_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 323 | -- | -- |
| B-11_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 406 | -- | -- |
| B-12_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 191 | -- | -- |
| B-12_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 11,775 | -- | -- |
| B-13_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 277 | -- | -- |
| B-13_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 15.9 | -- | -- |
| B-14_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 212 | -- | -- |
| B-14_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 128 | -- | -- |
| B-15_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 132 | -- | -- |
| B-15_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 17 | -- | -- |
| B-16_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 1,898 | -- | -- |
| B-16_Soil Grab | 1.5 to 2.5 | 10/9/1990 | -- | 9,718 | -- | -- |
| B-17_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 1,513 | -- | -- |
| B-17_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 2,139 | -- | -- |
| B-18_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 46 | -- | -- |
| B-18_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 738 | -- | -- |
| B-19_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 626 | -- | -- |
| B-19_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 10,577 | -- | -- |
| B-20_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 117 | -- | -- |
| B-20_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 46.9 | -- | -- |
| B-21_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 2,116 | -- | -- |
| B-21_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 1,974 | -- | -- |
| B-21-91 | 5 | 6/24/1991 | -- | 12,000 | -- | -- |
| B-21-91 | 5 | 6/24/1991 | -- | 4,700¹ | -- | -- |
| B-21-91 | 6 | 6/24/1991 | -- | 27 | -- | -- |
| B-21-91 | 6 | 6/24/1991 | -- | 10 U | -- | -- |
| B-22_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 360 | -- | -- |
| B-22_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 1,800 | -- | -- |
| B-23_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 1,691 | -- | -- |
| B-23_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 6,421 | -- | -- |
| B-24_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 560 | -- | -- |

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|---------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| B-25_Soil Grab | 0 to 1.5 | 10/9/1990 | -- | 76 | -- | -- |
| B-25_Soil Grab | 1.5 to 3 | 10/9/1990 | -- | 29.8 | -- | -- |
| B-34/S-2 | 4 to 5.5 | 12/6/1993 | -- | -- | 500 | -- |
| B-34/S-5 | 12.5 to 14 | 12/6/1993 | -- | -- | 4,800 | -- |
| CSO Log yard backfill | | 6/27/1996 | -- | -- | 3,910 | 586 |
| CSO Log yard N-2 | | 7/1/1996 | -- | -- | 58.9 | 221 |
| CSO Log yard pipe | | 6/27/1996 | -- | -- | 45.2 | 25 U |
| CSO Log yard W-1 | | 7/1/1996 | -- | -- | 27 | 67.3 |
| DM-6 | | 12/6/1999 | -- | -- | 44.3 | 25 U |
| DM-7 | | 12/8/1999 | -- | -- | 482 | 225 |
| DM-8 | | 12/1/1999 | -- | -- | 44.4 | 102 |
| GP-1 | 10 | 3/20/1996 | -- | -- | 276 | -- |
| GP-2 | 11.5 | 3/20/1996 | -- | -- | 322 | -- |
| GP-3 | 6 | 3/20/1996 | -- | -- | 1,370 | -- |
| GP-4 | 6 | 3/20/1996 | -- | -- | 297 | -- |
| GP-5 | 3 | 3/20/1996 | -- | -- | 30.4 | -- |
| GP-5 | 8.5 | 3/20/1996 | -- | -- | 703.2 | -- |
| GP-7 | 5.5 | 3/20/1996 | -- | -- | 3,800 | 4,300 |
| GP-8 | 7 | 3/20/1996 | -- | -- | 77 | 160 |
| GP-8 | 8 | 3/20/1996 | -- | -- | 6.55 | -- |
| GP-9 | 8 | 3/20/1996 | -- | -- | 12,000 | 2,900 |
| GP-10 | 7 to 7 | 3/20/1996 | -- | -- | 383 | -- |
| GP-11 | 6.5 | 3/20/1996 | -- | -- | 92 | 60 |
| GP-12 | 11 | 3/20/1996 | -- | -- | 382 | -- |
| GP-12 | 12.5 | 3/20/1996 | -- | -- | 414 | -- |
| GP-13 | 7 | 3/20/1996 | -- | -- | 2 U | -- |
| GP-13 | 10 | 3/20/1996 | -- | -- | 15 | 41 |
| JP-1 | 4 to 8 | 6/21/2001 | -- | -- | 73.8 | 100 |
| JP-2 | 0 to 3 | 6/21/2001 | -- | -- | 134 | 341 |
| JP-2 | 3 to 6 | 6/21/2001 | -- | -- | 379 | 942 |
| JP-3 | 4 to 6 | 6/21/2001 | -- | -- | 10 U | 25 U |
| JP-4 | 3 to 6 | 6/21/2001 | -- | -- | 180 | 58.2 |
| JP-5 | 3 to 6 | 6/21/2001 | -- | -- | 210 | 375 |
| JP-6 | 6 to 9 | 6/21/2001 | -- | -- | 26.6 | 69.3 |
| JP-7 | 1 to 2 | 6/21/2001 | -- | -- | 264 | 923 |
| MW-6 | 2.5 | 3/9/1988 | 180 | 80 | -- | -- |
| MW-7 | 2.5 | 3/9/1988 | 605 | 605 | -- | -- |
| MW-8 | 2.5 | 3/9/1988 | 1,680 | 1,580 | -- | -- |
| MW-9 | 2.5 | 3/9/1988 | 33,500 | 33,500 | -- | -- |
| MW-10 | 2.5 | 3/9/1988 | 1,380 | 1,260 | -- | -- |
| MW-11 | 2.5 | 3/9/1988 | 10,100 | 9,480 | -- | -- |
| MW-12 | 2.5 | 3/9/1988 | 5 U | 5 U | -- | -- |
| MW-15 | 2.5 | 3/9/1988 | 3,430 | 3,030 | -- | -- |
| MW-16 | 2.5 | 3/9/1988 | 5 U | 5 U | -- | -- |
| MW-17 | 2.5 | 3/9/1988 | 174 | 124 | -- | -- |
| MW-18 | 2.5 | 3/9/1988 | 777 | 777 | -- | -- |
| MW-19 | 2 to 3.5 | 3/11/1991 | -- | 53 | -- | -- |

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|--------------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| MW-19 | 2 to 3.5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-19 | 3.5 to 5 | 3/11/1991 | -- | 14 | -- | -- |
| MW-19 | 3.5 to 5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-20 | 2 to 3.5 | 3/11/1991 | -- | 18 | -- | -- |
| MW-20 | 2 to 3.5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-20 | 3.5 to 5 | 3/11/1991 | -- | 20 | -- | -- |
| MW-20 | 3.5 to 5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-21 | 1.5 to 3 | 3/11/1991 | -- | 110 | -- | -- |
| MW-21 | 1.5 to 3 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-21 | 3.5 to 5 | 3/11/1991 | -- | 12,000 | -- | -- |
| MW-21 | 3.5 to 5 | 3/11/1991 | -- | 4,700 ¹ | -- | -- |
| MW-22 | 2.5 to 4 | 3/11/1991 | -- | 41,000 | -- | -- |
| MW-22 | 2.5 to 4 | 3/11/1991 | -- | 7,300 ¹ | -- | -- |
| MW-22 | 4 to 5.5 | 3/11/1991 | -- | 24,000 | -- | -- |
| MW-22 | 4 to 5.5 | 3/11/1991 | -- | 430 ¹ | -- | -- |
| MW-23 | 1 to 2.5 | 3/11/1991 | -- | 300 | -- | -- |
| MW-23 | 1 to 2.5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-24 | 2.5 to 4 | 3/11/1991 | -- | 260 | -- | -- |
| MW-24 | 2.5 to 4 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-24 | 4 to 5.5 | 3/11/1991 | -- | 1,300 | -- | -- |
| MW-24 | 4 to 5.5 | 3/11/1991 | -- | 10 U ¹ | -- | -- |
| MW-27 | 2 | 6/24/1991 | -- | 4,700 | -- | -- |
| MW-27 | 2 | 6/24/1991 | -- | 900 | -- | -- |
| MW-27 | 3 | 6/24/1991 | -- | 61 | -- | -- |
| MW-27 | 3 | 6/24/1991 | -- | 10 U ¹ | -- | -- |
| MW-28 | 2 | 6/24/1991 | -- | 93 | -- | -- |
| MW-28 | 2 | 6/24/1991 | -- | 10 U ¹ | -- | -- |
| MW-28 | 3 | 6/24/1991 | -- | 51 | -- | -- |
| MW-28 | 3 | 6/24/1991 | -- | 10 U ¹ | -- | -- |
| MW-29 | 1 | 6/24/1991 | -- | 590 | -- | -- |
| MW-29 | 1 | 6/24/1991 | -- | 220 ¹ | -- | -- |
| MW-29 | 2 | 6/24/1991 | -- | 730,000 | -- | -- |
| MW-29 | 2 | 6/24/1991 | -- | 160,000 | -- | -- |
| MW-30 | 2 | 6/24/1991 | -- | 4,900 | -- | -- |
| MW-30 | 2 | 6/24/1991 | -- | 820 | -- | -- |
| MW-30 | 3 | 6/24/1991 | -- | 7,700 | -- | -- |
| MW-30 | 3 | 6/24/1991 | -- | 3,000 | -- | -- |
| MW-31 | 12.5 to 14 | 12/6/1993 | -- | -- | 49 | -- |
| MW-31 | 2.5 to 4 | 12/6/1993 | -- | -- | 13 | -- |
| MW-32 | 12.5 to 14 | 12/6/1993 | -- | -- | 17 | -- |
| MW-32 | 7.5 to 9 | 12/6/1993 | -- | -- | 10 U | -- |
| MW-33 | 12.5 to 14 | 12/6/1993 | -- | -- | 11 | -- |
| MW-33 | 5 to 6.5 | 12/6/1993 | -- | -- | 1,100 | -- |
| MW-35 | 12.5 to 14 | 12/6/1993 | -- | -- | 16 | -- |
| MW-35 | 2.5 to 4 | 12/6/1993 | -- | -- | 10 U | -- |
| MW-36 | 12.5 to 14 | 12/6/1993 | -- | -- | 22 | -- |

Table 2 Analytical Results for Total Petroleum Hydrocarbons in Soil

| Sample ID | Depth (feet) | Date Sampled | Oil and Grease (mg/kg) | TPH (mg/kg) | TPH-Diesel (mg/kg) | TPH-Oil (mg/kg) |
|---|--------------|--------------|------------------------|---------------|--------------------|-----------------|
| MTCA Method A Cleanup Level Unrestricted/Residential | | | 2,000 | 2,000 | 2,000 | 2,000 |
| MW-36 | 2.5 to 4 | 12/6/1993 | -- | -- | 700 | -- |
| MW-37 | 2.5 to 4 | 12/6/1993 | -- | -- | 3,500 | -- |
| MW-37 | 12.5 to 14 | 12/6/1993 | -- | -- | 380 | -- |
| MW-A1 | 7.5 to 8 | 2/4/2008 | -- | -- | 74.1 | 79.5 |
| MW-A1 | 8.5 to 9 | 2/4/2008 | -- | -- | 5,160 | 471 U |
| MW-A2 | 6 to 6.5 | 2/4/2008 | -- | -- | 33.3 | 290 |
| MW-A2 | 7.5 to 8 | 2/4/2008 | -- | -- | 2,370 | 279 |
| RW-1/MW-14 | 2.5 | 3/9/1988 | 1,730 | 1,730 | -- | -- |
| TP-2 | 3.5 | 12/6/1993 | -- | -- | 10 U | -- |
| TP-2 | 3.5 | 12/8/1993 | -- | -- | -- | -- |
| TP-3 | 3.5 | 12/6/1993 | -- | -- | 16 | -- |
| TP-3 | 3.5 | 12/8/1993 | -- | -- | -- | -- |
| TP-5 | 3.5 | 12/6/1993 | -- | -- | 10 U | -- |
| TP-5 | 3.5 | 12/8/1993 | -- | -- | -- | -- |
| UG-1 | 5 to 7 | 9/25/2000 | -- | -- | 27,100 | 52,300 |
| UG-2 | 10 to 12 | 9/25/2000 | -- | -- | 364 | 353 |
| UG-3 | 7.5 to 9.5 | 9/25/2000 | -- | -- | 190 | 79.5 |
| UG-4 | 5 to 7 | 9/25/2000 | -- | -- | 10 U | 25 U |
| UG-5 | 5 to 7 | 9/25/2000 | -- | -- | 10 U | 25 U |
| UG-6 | 5 to 7 | 9/26/2000 | -- | -- | 10 U | 25 U |
| UG-7 | 2.5 to 4.5 | 9/26/2000 | -- | -- | 402 | 1,860 |
| UG-8 | 5 to 7 | 9/26/2000 | -- | -- | 5,180 | 730 |
| UG-9 | 2.5 to 4.5 | 9/26/2000 | -- | -- | 8,560 | 327 |
| UG-9 | 10 to 12 | 9/26/2000 | -- | -- | 2,170 | 320 |
| UG-10 | 5 to 7 | 9/26/2000 | -- | -- | 10 U | 25 U |
| UG-11 | 5 to 7 | 9/26/2000 | -- | -- | 153 | 176 |
| UG-12 | 5 to 7 | 9/26/2000 | -- | -- | 10 U | 25 U |
| W-1 | 3 | 2/23/1990 | -- | 13,000 | -- | -- |
| W-2 | 3 | 2/23/1990 | -- | 17,000 | -- | -- |
| W-3 | 3 | 2/23/1990 | -- | 28 | -- | -- |
| W-4 | 3 | 2/23/1990 | -- | 4,600 | -- | -- |
| W-5 | 3 | 2/23/1990 | -- | 2,300 | -- | -- |
| W-6 | 3 | 2/23/1990 | -- | 1,200 | -- | -- |
| W-7 | 3 | 2/23/1990 | -- | 910 | -- | -- |

Notes:

1. Duplicate result analyzed using EPA Method 8015 Modified. The primary results were analyzed using EPA Method 418.1.

mg/kg = milligrams per kilogram

MTCA = Model Toxics Control Act

TPH = Total Petroleum Hydrocarbon

U = Analyte not detected above the reporting limit indicated

-- = Not analyzed

Bold and cell in orange = Result greater than MTCA A CUL criteria

Table 3 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Soil

| Sample ID | Depth | Date Sampled | TPH-Gas mg/kg | Benzene mg/kg | Ethylbenzene mg/kg | Toluene mg/kg | Total Xylene mg/kg | Lead mg/kg |
|---|------------|--------------|---------------------|---------------|--------------------|---------------|--------------------|------------|
| MTCA Method A Industrial Cleanup Level | | | | | | | | 1,000 |
| MTCA Method A Cleanup Level, Unrestricted/Residential | | | 100/30 ¹ | 0.03 | 6 | 7 | 9 | 250 |
| AD-1 | 3 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 22 |
| AD-5 | 2.5 to 3 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 76 |
| AD-8 | 2.5 to 3 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 10 |
| AD-8 | 4.5 to 5 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 2.8 |
| AD-12 | 2.5 to 3 | 1/15/1990 | -- | 0.4 U | 1.5 | 8 U | 2 U | -- |
| AD-12 | 3 to 3.5 | 1/15/1990 | -- | 0.4 U | 2.5 | 8 U | 2 U | 44 |
| AD-13 | 2 to 2.5 | 1/15/1990 | -- | 0.4 U | 10 | 8 U | 2 U | 180 |
| AD-14 | 2 to 2.5 | 1/15/1990 | -- | 5.1 | 15 | 8 U | 2 U | 58 |
| AD-15 | 0.5 to 1 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 97 |
| AD-15 | 2.5 to 3 | 1/15/1990 | -- | 0.4 U | 0.25 | 8 U | 0.61 | 14 |
| AD-16 | 0.5 to 1 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 7.9 |
| AD-17 | 0.5 to 1 | 1/15/1990 | -- | 0.4 U | 0.8 U | 8 U | 2 U | 69 |
| B-21-91 | 5 | 6/24/1991 | -- | 0.035 | 2 | 0.53 | 8.8 | 30 |
| B-21-91 | 6 | 6/24/1991 | -- | 0.05 U | 0.05 U | 0.05 U | 0.05 U | 3.7 |
| B-34/S-2 | 4 to 5.5 | 12/6/1993 | 670 | 0.63 | 2.6 | 0.05 U | 0.9 | 15 U |
| B-34/S-5 | 12.5 to 14 | 12/6/1993 | 2,600 | 6.6 | 14 | 0.05 U | 3.8 | 860 |
| DM-6 | | 12/6/1999 | 10.5 | -- | -- | -- | -- | -- |
| DM-7 | | 12/8/1999 | 20.1 | -- | -- | -- | -- | -- |
| DM-8 | | 12/1/1999 | 5 U | -- | -- | -- | -- | -- |
| GP-7 | 5.5 | 3/20/1996 | 150 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| GP-8 | 7 | 3/20/1996 | 3.9 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| GP-9 | 8 | 3/20/1996 | 880 | 0.05 U | 0.05 U | 0.18 | 0.6 | -- |
| GP-11 | 6.5 | 3/20/1996 | 160 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| GP-13 | 10 | 3/20/1996 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-1 | 4 to 8 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-2 | 0 to 3 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-2 | 3 to 6 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-3 | 4 to 6 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-4 | 3 to 6 | 6/21/2001 | 6.04 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-5 | 3 to 6 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-6 | 6 to 9 | 6/21/2001 | 5 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| JP-7 | 1 to 2 | 6/21/2001 | 26.5 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | -- |
| MW-6 | 2.5 | 3/9/1988 | -- | 0.015 U | 1.001 | 0.01 U | 2.95 | -- |
| MW-7 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.087 U | 0.01 U | 0.064 U | -- |
| MW-8 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.01 U | 0.01 U | 0.015 U | -- |
| MW-9 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.432 | 0.01 U | 1.207 | -- |
| MW-10 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.122 | 0.02 | 1.399 | -- |
| MW-11 | 2.5 | 3/9/1988 | -- | 0.362 | 1.994 | 1.31 | 10.39 | -- |
| MW-12 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.01 U | 0.01 U | 0.015 U | -- |
| MW-15 | 2.5 | 3/9/1988 | -- | 0.158 U | 0.781 | 0.66 | 11.018 | -- |
| MW-16 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.01 U | 0.01 U | 0.015 U | -- |
| MW-17 | 2.5 | 3/9/1988 | -- | 0.015 U | 0.01 U | 0.01 U | 0.015 U | -- |
| MW-18 | 2.5 | 3/9/1988 | -- | 0.048 | 2.685 | 0.028 | 10.215 | -- |

Table 3 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Soil

| Sample ID | Depth | Date Sampled | TPH-Gas mg/kg | Benzene mg/kg | Ethylbenzene mg/kg | Toluene mg/kg | Total Xylene mg/kg | Lead mg/kg |
|--|------------|--------------|---------------------|---------------|--------------------|---------------|--------------------|------------|
| MTCA Method A Industrial Cleanup Level | | | | | | | | 1,000 |
| MTCA Method A Cleanup Level, Unrestricted/Residential | | | 100/30 ¹ | 0.03 | 6 | 7 | 9 | 250 |
| MW-19 | 2 to 3.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-19 | 3.5 to 5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-20 | 2 to 3.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-20 | 3.5 to 5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-21 | 1.5 to 3 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-21 | 3.5 to 5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-22 | 2.5 to 4 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-22 | 4 to 5.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-23 | 1 to 2.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-24 | 2.5 to 4 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-24 | 4 to 5.5 | 3/11/1991 | -- | 0.05 U | 0.1 U | 0.1 U | 0.1 U | -- |
| MW-27 | 2 to 2 | 6/24/1991 | -- | 0.05 U | 0.57 | 0.05 U | 0.64 | 310 |
| MW-27 | 3 to 3 | 6/24/1991 | -- | 0.05 U | 0.05 U | 0.05 U | 0.05 U | 10 |
| MW-28 | 2 to 2 | 6/24/1991 | -- | 0.05 U | 0.05 U | 0.05 U | 0.05 U | 15 |
| MW-28 | 3 to 3 | 6/24/1991 | -- | 0.05 U | 0.66 | 0.05 U | 1.9 | 11 |
| MW-29 | 1 to 1 | 6/24/1991 | -- | 0.05 U | 0.84 | 0.55 | 3.5 | 29 |
| MW-29 | 2 to 2 | 6/24/1991 | -- | 0.18 | 2.9 | 5.3 | 7.9 | 89 |
| MW-30 | 2 to 2 | 6/24/1991 | -- | 0.05 U | 0.74 | 0.77 | 2.6 | 37 |
| MW-30 | 3 to 3 | 6/24/1991 | -- | 0.5 | 0.24 | 0.13 | 1 | 570 |
| MW-31 | 12.5 to 14 | 12/6/1993 | 31 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-31 | 2.5 to 4 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 44 |
| MW-32 | 12.5 to 14 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 200 |
| MW-32 | 7.5 to 9 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-33 | 12.5 to 14 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-33 | 5 to 6.5 | 12/6/1993 | 49 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 54 |
| MW-35 | 12.5 to 14 | 12/6/1993 | 1.3 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-35 | 2.5 to 4 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-36 | 12.5 to 14 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 15 U |
| MW-36 | 2.5 to 4 | 12/6/1993 | 30 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 26 |
| MW-37 | 12.5 to 14 | 12/6/1993 | 170 | 0.18 | 0.19 | 0.05 U | 0.26 | 15 U |
| MW-37 | 2.5 to 4 | 12/6/1993 | 180 | 0.77 | 1.4 | 0.05 U | 2.3 | 55 |
| MW-A1 | 7.5 to 8 | 2/4/2008 | 50 U | 0.0322 U | 0.0322 U | 0.0376 | 0.0965 U | -- |
| MW-A1 | 8.5 to 9 | 2/4/2008 | 168 | 0.0319 U | 0.0319 U | 0.0319 U | 0.0956 U | -- |
| MW-A2 | 6 to 6.5 | 2/4/2008 | 10.2 U | 0.102 U | 0.102 U | 0.102 U | 0.306 U | -- |
| MW-A2 | 7.5 to 8 | 2/4/2008 | 203 | 0.0355 | 0.04 | 0.0313 U | 0.6 | -- |
| RW-1/MW-14 | 2.5 | 3/9/1988 | -- | 0.575 | 2.348 | 1.301 | 12.975 | -- |
| TP-2 | 3.5 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 10 U |
| TP-3 | 3.5 | 12/6/1993 | 3.4 | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 10 U |
| TP-5 | 3.5 | 12/6/1993 | 1 U | 0.05 U | 0.05 U | 0.05 U | 0.1 U | 10 U |
| UG-1 | 5 to 7 | 9/25/2000 | 173 | -- | -- | -- | -- | -- |
| UG-2 | 10 to 12 | 9/25/2000 | 55.3 | -- | -- | -- | -- | -- |
| UG-3 | 7.5 to 9.5 | 9/25/2000 | 108 | -- | -- | -- | -- | -- |
| UG-4 | 5 to 7 | 9/25/2000 | 5 U | -- | -- | -- | -- | -- |

Table 3 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Soil

| Sample ID | Depth | Date Sampled | TPH-Gas mg/kg | Benzene mg/kg | Ethylbenzene mg/kg | Toluene mg/kg | Total Xylene mg/kg | Lead mg/kg |
|---|------------|--------------|---------------------|---------------|--------------------|---------------|--------------------|------------|
| MTCA Method A Industrial Cleanup Level | | | | | | | | 1,000 |
| MTCA Method A Cleanup Level, Unrestricted/Residential | | | 100/30 ¹ | 0.03 | 6 | 7 | 9 | 250 |
| UG-5 | 5 to 7 | 9/25/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-6 | 5 to 7 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-7 | 2.5 to 4.5 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-8 | 5 to 7 | 9/26/2000 | 3410 | -- | -- | -- | -- | -- |
| UG-9 | 2.5 to 4.5 | 9/26/2000 | 6050 | 2.5 U | 34 U | 5.5 U | 30.5 U | -- |
| UG-9 | 10 to 12 | 9/26/2000 | 630 | -- | -- | -- | -- | -- |
| UG-10 | 5 to 7 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-11 | 5 to 7 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |
| UG-12 | 5 to 7 | 9/26/2000 | 5 U | -- | -- | -- | -- | -- |

Notes:

1. Cleanup level for TPH-Gas is 100 mg/kg when benzene is absent, and 30 mg/kg in presence of benzene.

mg/kg = milligrams per kilogram

MTCA = Model Toxics Control Act

U = Analyte not detected above the reporting limit indicated

-- = Not analyzed

Bold TPH-Gas = Result greater than 30 mg/kg but presence of benzene is unknown due to high detection limit

Bold and cell in orange = Result greater than MTCA Method A Unrestricted Land Use

cell in yellow = analyte not detected, but detection limit is greater than MTCA Unrestricted Land Use

Bold and cell in green = Result greater than MTCA Unrestricted Land Use but less than MTCA Method A Industrial Cleanup Level

Table 4 Analytical Results for Polycyclic Aromatic Hydrocarbons in Soil

| Sample ID | Depth | Date Sampled | Acenaphthene (mg/kg) | Acenaphthylene (mg/kg) | Anthracene (mg/kg) | Benzo(a) anthracene* (mg/kg) | Benzo(a) pyrene* (mg/kg) | Benzo(b) fluoranthene* (mg/kg) | Benzo(g,h,i) perylene (mg/kg) | Benzo(k) fluoranthene* (mg/kg) | Chrysene* (mg/kg) | Dibenz(a,h) anthracene* (mg/kg) | Indeno(1,2,3-cd) pyrene* (mg/kg) | Naphthalene (mg/kg) | Phenanthrene (mg/kg) | Pyrene (mg/kg) | Total cPAH ¹ TEQ-Adjusted (mg/kg) | |
|-------------------------------------|------------|--------------|----------------------|------------------------|--------------------|------------------------------|--------------------------|--------------------------------|-------------------------------|--------------------------------|-------------------|---------------------------------|----------------------------------|---------------------|----------------------|----------------|--|--------|
| MTCA A Industrial CUL | | | | | | | 2 | | | | | | | | | | 2 | |
| MTCA A Unrestricted/Residential CUL | | | | | | | 0.1 | | | | | | | | | | 0.1 | |
| MTCA B Carcinogen CUL | | | | | | | 0.14 | | | | | | | | | | | |
| MTCA B Non-Carcinogen CUL | | | 4,800 | | 24,000 | | | | | | | | | 1,600 | | 2,400 | | |
| B-34/S-2 | 4 to 5.5 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 1.1 | 0.24 | 0.1 U | 0.0755 U | |
| B-34/S-5 | 12.5 to 14 | 12/6/1993 | 2 U | 2 U | 4.9 | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 4.9 | 2 U | 1.51 U | |
| GP-7 | 5.5 | 3/20/1996 | 0.15 U | 0.993 | 0.261 | 4.25 | 0.024 | 0.468 | 0.744 | 0.132 | 3.43 | 0.01 U | 1.43 | 0.15 U | 0.844 | 1.3 | 0.6868 | |
| GP-8 | 7 | 3/20/1996 | 0.32 | 0.168 | 0.147 | 0.717 | 0.166 | 0.141 | 0.0728 | 0.0435 | 25.2 | 0.01 U | 0.0967 | 0.15 U | 0.669 | 0.02 U | 0.51832 | |
| GP-9 | 8 | 3/20/1996 | 1.27 | 2.98 | 0.15 U | 0.01 U | 0.105 | 0.173 | 0.412 | 0.111 | 12.4 | 0.409 | 0.0858 | 0.15 U | 1.3 | 1.35 | 0.30738 | |
| GP-11 | 6.5 | 3/20/1996 | 0.15 U | 0.15 U | 0.15 U | 0.0859 | 0.0106 | 0.053 | 0.165 | 0.01 U | 0.192 | 0.0644 | 0.0483 | 0.15 U | 0.276 | 0.202 | 0.03818 | |
| GP-13 | 10 | 3/20/1996 | 0.15 U | 0.15 U | 0.15 U | 0.0479 | 0.0361 | 0.0173 | 0.01 U | 0.0365 | 0.0597 | 0.0312 | 0.0157 | 0.15 U | 0.15 U | 0.0482 | 0.051557 | |
| MW-31 | 2.5 to 4 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.12 | 0.14 | 0.0755 U | |
| MW-31 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-32 | 7.5 to 9 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-32 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 | 0.34 | 0.26 | 0.33 | 0.18 | 0.16 | 0.16 | 0.1 U | 0.17 | 0.1 U | 0.68 | 0.98 | 0.3666 | |
| MW-33 | 5 to 6.5 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-33 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-35 | 2.5 to 4 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-35 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-36 | 2.5 to 4 | 12/6/1993 | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 2 U | 0.31 | 0.31 | 1.51 U |
| MW-36 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| MW-37 | 2.5 to 4 | 12/6/1993 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | 0.3775 U | |
| MW-37 | 12.5 to 14 | 12/6/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| TP-2 | 3.5 | 12/8/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| TP-3 | 3.5 | 12/8/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |
| TP-5 | 3.5 | 12/8/1993 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.0755 U | |

Notes:

- * = Compounds is a cPAH compound included in calculations of TEQ-adjusted total cPAH concentration. Values for individual cPAH constituents are actual analytical results.
- 1. Total cPAH concentration expressed as TEQ-adjusted total cPAH concentration adjusted using Toxicity Equivalency Factors for maximum required cPAHs (Table 708-2 under WAC 173-340-708).
- cPAH = Carcinogenic Polycyclic Aromatic Hydrocarbon
- CUL = cleanup level
- mg/kg = milligrams per kilogram
- MTCA = Model Toxics Control Act
- TEQ = toxicity-equivalent quotient
- U = Sample was analyzed but not detected above the reporting limit indicated
- = Not analyzed
- Bold and cell in blue** = Benzo(a)pyrene result greater than MTCA Method A CUL Residential and MTCA Method B CUL Carcinogen but less than MTCA Method A CUL Industrial
- Bold and cell in yellow** = Analyte not detected, but detection limit is greater than MTCA Method A CUL Unrestricted and/or Industrial land use
- Bold and cell in orange** = Result for TEQ-adjusted total cPAHs greater than MTCA Method A residential/unrestricted CUL.

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|---------------|--------------|-----------------------|-------------------------------|-------------------|-----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| B-2_well | 3/27/1991 | -- | 3,800 | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 12/26/1991 | -- | -- | 500 U | -- |
| | 12/9/1993 | -- | -- | 780 | -- |
| | 11/21/1995 | -- | -- | 4,400 | 3,900 |
| B-5_well | 3/27/1991 | -- | 1,000 U | -- | -- |
| MW-10 | 3/17/1988 | 86,200 | 86.2 | -- | -- |
| | 3/27/1991 | -- | 27,000 | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 2,600 | -- |
| | 12/26/1991 | -- | -- | 9,000 | -- |
| | 12/9/1993 | -- | -- | 10,000 | -- |
| | 11/22/1995 | -- | -- | 4,200 | 6,800 |
| | 12/8/2000 | -- | -- | 19,000 | 18,000 J |
| 2/28/2002 | -- | -- | 5,700 | 2,300 J | |
| MW-11 | 3/17/1988 | 48,400 | 41.4 | -- | -- |
| | 3/27/1991 | -- | 15,000 | -- | -- |
| | 6/24/1991 | -- | 7,200 | -- | -- |
| | 9/26/1991 | -- | -- | 3,900 | -- |
| | 12/9/1993 | -- | -- | 10,000 | -- |
| | 11/22/1995 | -- | -- | 2,400 | 1,200 |
| | 12/8/2000 | -- | -- | 230 J | 400 U |
| | 3/19/2001 | -- | -- | 540 | 310 J |
| | 5/16/2001 | -- | -- | 760 | 590 |
| | 8/21/2001 | -- | -- | 670 | 820 |
| | 2/28/2002 | -- | -- | 460 | 520 |
| | 8/27/2002 | -- | -- | 3,700 | 1,300 J |
| | 11/26/2002 | -- | -- | 480 | 520 |
| | 2/6/2003 | -- | -- | 460 | 460 J |
| | 5/15/2003 | -- | -- | 470 | 440 J |
| | 8/20/2003 | -- | -- | 610 | 610 |
| | 11/14/2003 | -- | -- | 360 | 330 J |
| | 2/26/2004 | -- | -- | 430 | 410 J |
| | 5/27/2004 | -- | -- | 270 J | 310 J |
| | 11/18/2004 | -- | -- | 500 J | 480 U |
| | 2/24/2005 | -- | -- | 240 | 430 J |
| | 5/23/2005 | -- | -- | 470 | 380 J |
| | 8/30/2005 | -- | -- | 79 U | 98 U |
| | 11/29/2005 | -- | -- | 160 J | 200 J |
| | 2/23/2006 | -- | -- | 77 U | 96 U |
| | 8/24/2006 | -- | -- | 93.9 U | 93.9 U |
| | 11/27/2006 | -- | -- | 108 | 94.3 U |
| 2/12/2007 | -- | -- | 93.9 U | 141 | |
| 8/29/2007 | -- | -- | 94.3 U | 109 | |
| 2/11/2008 | -- | -- | 19,200 | 1,280 | |
| 2/12/2009 | -- | -- | 94.3 U | 94.3 U | |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|---------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| MW-12 | 3/17/1988 | 10,500 | 4 | -- | -- |
| | 3/27/1991 | -- | 5,200 | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 4,100 | -- |
| | 12/26/1991 | -- | -- | 500 U | -- |
| | 12/9/1993 | -- | -- | 550 | -- |
| | 11/22/1995 | -- | -- | 2,100 | 3,600 |
| MW-13 | 3/17/1988 | 25,000 | 16.9 | -- | -- |
| | 3/27/1991 | -- | 8,200 | -- | -- |
| | 6/24/1991 | -- | 4,300 | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/9/1993 | -- | -- | 2,600 | -- |
| | 11/22/1995 | -- | -- | 6,700 | 3,100 |
| MW-15 | 3/17/1988 | 9,500 | 9.5 | -- | -- |
| | 3/27/1991 | -- | 4,000 | -- | -- |
| | 6/24/1991 | -- | 4,000 | -- | -- |
| | 9/26/1991 | -- | -- | 860 | -- |
| | 12/26/1991 | -- | -- | 790 | -- |
| | 12/9/1993 | -- | -- | 600 | -- |
| | 11/21/1995 | -- | -- | 1,700 | 1,700 |
| MW-16 | 3/17/1988 | 2,700 | 2.7 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 910 | -- |
| | 12/9/1993 | -- | -- | 610 | -- |
| | 11/21/1995 | -- | -- | 770 | 1,200 |
| MW-17 | 3/17/1988 | 3,800 | 3.8 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 460 | -- |
| | 12/26/1991 | -- | -- | 1,000 | -- |
| | 12/9/1993 | -- | -- | 320 | -- |
| | 11/21/1995 | -- | -- | 490 | 970 |
| MW-18 | 3/17/1988 | 31,000 | 18 | -- | -- |
| | 3/27/1991 | -- | 43,000 | -- | -- |
| | 6/24/1991 | -- | 15,000 | -- | -- |
| | 9/26/1991 | -- | -- | 5,300 | -- |
| | 12/26/1991 | -- | -- | 11,000 | -- |
| | 12/9/1993 | -- | -- | 46,000 | -- |
| | 11/21/1995 | -- | -- | 16,000 | 4,400 |
| | 2/28/2002 | -- | -- | 2,500 | 950 U |
| MW-19 | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 1,800 | -- |
| | 12/7/2000 | -- | -- | 830 J | 1,000 U |
| | 3/19/2001 | -- | -- | 1,600 | 800 |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|----------------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| MW-19 (continued) | 5/16/2001 | -- | -- | 760 | 590 |
| | 8/21/2001 | -- | -- | 1,100 | 1,200 |
| | 2/28/2002 | -- | -- | 1,200 | 580 |
| | 8/27/2002 | -- | -- | 680 | 410 J |
| | 11/26/2002 | -- | -- | 860 | 570 |
| | 2/6/2003 | -- | -- | 1,900 | 1,100 J |
| | 5/15/2003 | -- | -- | 3,300 | 2,000 |
| | 8/20/2003 | -- | -- | 1,400 J | 1,400 J |
| | 11/14/2003 | -- | -- | 1,400 | 750 |
| | 2/26/2004 | -- | -- | 1,800 J | 4,700 J |
| | 5/27/2004 | -- | -- | 680 | 460 J |
| | 8/30/2004 | -- | -- | 850 | 460 J |
| | 11/18/2004 | -- | -- | 640 | 190 U |
| | 2/24/2005 | -- | -- | 860 | 500 |
| | 5/23/2005 | -- | -- | 1,000 | 550 J |
| | 8/30/2005 | -- | -- | 1,200 | 470 J |
| | 11/29/2005 | -- | -- | 200 J | 180 J |
| | 2/12/2006 | -- | -- | 1,570 | 705 |
| | 2/23/2006 | -- | -- | 200 J | 100 U |
| | 8/24/2006 | -- | -- | 1,740 | 825 |
| 11/27/2006 | -- | -- | 209 | 118 | |
| 8/29/2007 | -- | -- | 1,390 | 547 | |
| 2/11/2008 | -- | -- | 794 | 587 | |
| 8/28/2008 | -- | -- | 1,050 | 1,200 | |
| 2/12/2009 | -- | -- | 993 | 303 | |
| MW-20 | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 520 | -- |
| | 12/7/2000 | -- | -- | 410 J | 400 U |
| | 3/19/2001 | -- | -- | 610 | 480 J |
| | 5/17/2001 | -- | -- | 540 | 390 J |
| | 2/28/2002 | -- | -- | 540 | 410 J |
| MW-21 | 3/27/1991 | -- | 1,058,000 | -- | -- |
| | 6/24/1991 | -- | 63,000 | -- | -- |
| | 2/28/2002 | -- | -- | 9,800 | 5,800 |
| MW-22 | 3/27/1991 | -- | 800,000 | -- | -- |
| | 12/26/1991 | -- | -- | 26,000 | -- |
| MW-23 | 3/27/1991 | -- | 25,000 | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| MW-24 | 3/27/1991 | -- | 6,000 | -- | -- |
| MW-27 | 6/24/1991 | -- | 16,000 | -- | -- |
| | 9/26/1991 | -- | -- | 9,400 | -- |
| | 11/21/1995 | -- | -- | 4,700 | 4,400 |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|---------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| MW-28 | 6/24/1991 | -- | 600 | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 500 U | -- |
| | 12/9/1993 | -- | -- | 2,600 | -- |
| | 11/21/1995 | -- | -- | 3,400 | 3,700 |
| MW-30 | 6/24/1991 | -- | 7,200 | -- | -- |
| | 9/26/1991 | -- | -- | 1,300 | -- |
| | 12/26/1991 | -- | -- | 3,500 | -- |
| | 12/9/1993 | -- | -- | 2,200 | -- |
| MW-31 | 12/9/1993 | -- | -- | 470 | -- |
| | 11/21/1995 | -- | -- | 470 | 750 U |
| MW-32 | 12/9/1993 | -- | -- | 490 | -- |
| | 11/21/1995 | -- | -- | 400 | 750 U |
| MW-33 | 12/9/1993 | -- | -- | 5,500 | -- |
| | 11/21/1995 | -- | -- | 790 | 750 U |
| MW-35 | 12/9/1993 | -- | -- | 900 | -- |
| | 11/22/1995 | -- | -- | 330 | 1,100 |
| | 12/8/2000 | -- | -- | 160 J | 400 U |
| | 3/19/2001 | -- | -- | 190 J | 200 |
| MW-36 | 12/9/1993 | -- | -- | 790 | -- |
| | 11/21/1995 | -- | -- | 710 | 750 U |
| MW-37 | 12/9/1993 | -- | -- | 13,000 | -- |
| | 11/21/1995 | -- | -- | 1,600 | 2,400 |
| MW-40R | 12/8/2000 | -- | -- | 11,000 | 6,400 J |
| | 3/19/2001 | -- | -- | 20,000 | 14,000 |
| | 5/16/2001 | -- | -- | 18,000 | 14,000 |
| | 8/21/2001 | -- | -- | 15,000 | 8,100 |
| | 2/28/2002 | -- | -- | 13,000 | 6,500 |
| | 8/27/2002 | -- | -- | 6,600 | 2,700 |
| | 11/26/2002 | -- | -- | 5,900 | 3,600 J |
| | 2/6/2003 | -- | -- | 9,100 | 5,300 |
| | 5/15/2003 | -- | -- | 14,000 | 7,200 |
| | 8/20/2003 | -- | -- | 16,000 | 6,300 J |
| | 11/14/2003 | -- | -- | 5,300 | 2,300 J |
| | 2/26/2004 | -- | -- | 13,000 | 4,600 J |
| | 5/27/2004 | -- | -- | 11,000 | 4,800 J |
| | 8/30/2004 | -- | -- | 15,000 | 5,000 |
| | 2/24/2005 | -- | -- | 4,200 | 1,900 |
| | 5/23/2005 | -- | -- | 15,000 | 4,200 J |
| | 8/30/2005 | -- | -- | 23,000 | 6,600 |
| | 11/29/2005 | -- | -- | 2,100 | 790 J |
| | 2/23/2006 | -- | -- | 2,000 | 540 U |
| | 8/24/2006 | -- | -- | 6,550 | 2,090 |
| 11/27/2006 | -- | -- | 3,750 | 968 | |
| 2/12/2007 | -- | -- | 3,970 | 1,060 | |
| 8/29/2007 | -- | -- | 5,150 | 520 | |
| 2/11/2008 | -- | -- | 2,840 | 1,080 | |
| 8/28/2008 | -- | -- | 10,600 | 8,990 | |
| 2/12/2009 | -- | -- | 3,110 | 959 | |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|---------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| MW-6 | 3/17/1988 | 12,400 | 1.1 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 400 U | -- |
| | 12/26/1991 | -- | -- | 5,500 | -- |
| | 12/9/1993 | -- | -- | 670 | -- |
| | 11/21/1995 | -- | -- | 800 | 1,400 |
| MW-7 | 3/17/1988 | 4,700 | 1.6 | -- | -- |
| MW-8 | 3/17/1988 | 132,000 | 11.5 | -- | -- |
| | 6/24/1991 | -- | 1,300 | -- | -- |
| | 12/9/1993 | -- | -- | 26,000 | -- |
| | 11/21/1995 | -- | -- | 3,300 | 3,100 |
| MW-9 | 3/17/1988 | 7,600 | 1.5 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 500 U | -- | -- |
| | 9/26/1991 | -- | -- | 770 | -- |
| | 12/26/1991 | -- | -- | 4,800 | -- |
| | 12/9/1993 | -- | -- | 2,600 | -- |
| | 11/21/1995 | -- | -- | 3,300 | 3,300 |
| MW-A1 | 2/11/2008 | -- | -- | 2,060 | 488 |
| | 8/28/2008 | -- | -- | 2,850 | 2,600 |
| | 2/12/2009 | -- | -- | 2,080 | 414 |
| MW-A2 | 2/11/2008 | -- | -- | 1,310 | 550 |
| | 8/28/2008 | -- | -- | 1,790 | 1100 |
| | 2/12/2009 | -- | -- | 1840 | 339 |
| RW-1/MW-14 | 8/22/1989 | -- | 19,000 | -- | -- |
| | 3/27/1991 | -- | 1,000 U | -- | -- |
| | 6/24/1991 | -- | 530 | -- | -- |
| | 9/26/1991 | -- | -- | 5,100 | -- |
| | 12/26/1991 | -- | -- | 500 U | -- |
| RW-2 | 2/11/2002 | -- | -- | 2,500 | 950 U |
| UG-2 | 9/25/2000 | -- | -- | 95 | 49 |
| UG-8 | 9/25/2000 | -- | -- | 66,500 | 7,360 |
| VWPT-1 | 6/6/1995 | -- | -- | 2,600 | 1,300 |
| W-15R | 2/28/2002 | -- | -- | 300,000 | 20,000 U |
| W-17 | 12/7/2000 | -- | -- | 53,000 | 26,000 |
| | 3/19/2001 | -- | -- | 12,000 | 6,400 |
| | 5/16/2001 | -- | -- | 43,000 | 19,000 J |
| | 8/21/2001 | -- | -- | 31,000 | 9,800 |
| W-2 | 3/2/1990 | -- | 7,400 | -- | -- |
| W-3 | 3/2/1990 | -- | 530 U | -- | -- |
| | 12/7/2000 | -- | -- | 990 | 350 J |
| | 3/19/2001 | -- | -- | 900 | 370 J |
| | 5/17/2001 | -- | -- | 1,500 | 440 J |
| | 8/21/2001 | -- | -- | 700 | 360 J |
| | 3/1/2002 | -- | -- | 810 | 750 |
| | 8/27/2002 | -- | -- | 1,100 | 540 J |
| | 11/26/2002 | -- | -- | 850 | 260 J |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|--------------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| W-3 (continued) | 2/6/2003 | -- | -- | 2,600 | 1,200 |
| | 5/15/2003 | -- | -- | 1,000 | 350 J |
| | 8/20/2003 | -- | -- | 1,000 | 290 J |
| | 11/14/2003 | -- | -- | 820 | 260 J |
| | 2/26/2004 | -- | -- | 880 | 260 J |
| | 5/27/2004 | -- | -- | 1,600 | 380 J |
| | 8/30/2004 | -- | -- | 950 | 230 J |
| | 11/18/2004 | -- | -- | 1,800 J | 960 U |
| | 2/24/2005 | -- | -- | 1,400 | 250 J |
| | 5/23/2005 | -- | -- | 2,000 | 480 J |
| | 8/30/2005 | -- | -- | 470 | 98 U |
| | 11/29/2005 | -- | -- | 850 | 390 J |
| | 2/23/2006 | -- | -- | 480 | 110 U |
| | 8/24/2006 | -- | -- | 683 | 481 |
| | 11/27/2006 | -- | -- | 1,310 | 153 |
| | 2/12/2007 | -- | -- | 863 | 169 |
| | 8/29/2007 | -- | -- | 1,360 | 95.2 U |
| | 2/11/2008 | -- | -- | 1,720 | 508 |
| 8/28/2008 | -- | -- | 2,100 | 1,840 | |
| 2/12/2009 | -- | -- | 1,400 | 364 | |
| W-4 | 3/2/1990 | -- | 23,200 | -- | -- |
| W-5 | 3/2/1990 | -- | 3,800 | -- | -- |
| W-6 | 12/7/2000 | -- | -- | 32,000 | 15,000 J |
| | 3/19/2001 | -- | -- | 25,000 | 10,000 |
| | 5/16/2001 | -- | -- | 49,000 | 23,000 J |
| | 8/21/2001 | -- | -- | 20 | 6,400 J |
| | 2/28/2002 | -- | -- | 680 | 740 |
| | 8/27/2002 | -- | -- | 160,000 | 71,000 |
| | 11/26/2002 | -- | -- | 3,600 | 3,300 J |
| | 2/6/2003 | -- | -- | 8,800 | 6,300 |
| | 5/15/2003 | -- | -- | 18,000 | 11,000 |
| | 8/20/2003 | -- | -- | 59,000 | 29,000 |
| | 11/14/2003 | -- | -- | 6,100 | 3,700 J |
| | 2/26/2004 | -- | -- | 20,000 | 15,000 |
| | 5/27/2004 | -- | -- | 19,000 | 16,000 |
| | 8/30/2004 | -- | -- | 10,000 | 6,400 |
| | 11/18/2004 | -- | -- | 900 J | 530 J |
| | 2/24/2005 | -- | -- | 13,000 | 11,000 |
| | 5/23/2005 | -- | -- | 8,800 | 5,000 J |
| | 8/30/2005 | -- | -- | 170,000 | 120,000 |
| | 11/29/2005 | -- | -- | 1,500 | 2,600 |
| | 2/23/2006 | -- | -- | 270 | 610 |
| 8/24/2006 | -- | -- | 3,300 | 1,580 | |
| 11/27/2006 | -- | -- | 1,030 | 429 | |
| 2/12/2007 | -- | -- | 1,660 | 532 | |
| 8/29/2007 | -- | -- | 2,080 | 756 | |
| 2/21/2008 | -- | -- | 1,590 | 890 | |

Table 5 Analytical Results for Total Petroleum Hydrocarbons in Groundwater

| Well ID | Date Sampled | Oil and Grease (µg/L) | TPH (undifferentiated) (µg/L) | TPH-Diesel (µg/L) | TPH-Oil (µg/L) |
|--------------------|--------------|-----------------------|-------------------------------|-------------------|----------------|
| MTCA Method A | | 500 | 500 | 500 | 500 |
| W-6 (continued) | 8/26/2008 | -- | -- | 27,900 | 23,800 |
| | 2/12/2009 | -- | -- | 444 | 323 |

Notes:

J = The result is an approximation

µg/L = microgram per liter

MTCA = Model Toxics Control Act

TPH = Total Petroleum Hydrocarbon

U = Analyte not detected above the reporting limit indicated

-- = Not analyzed

Bold and cell in orange = Result greater than MTCA Method A cleanup level

cell in yellow = analyte not detected, but reporting limit is greater than MTCA Method A cleanup level

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| B-2_well | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 12/26/1991 | 50 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 1.1 | 1 U | 2.8 | 20 |
| | 11/21/1995 | 50 U | 0.78 | 0.5 U | 0.5 U | 1 U | -- | -- |
| | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| MW-10 | 3/17/1988 | -- | 27 | 12.7 | 30 | 192 | -- | -- |
| | 3/27/1991 | -- | 5 | 4 | 7 | 6 | -- | -- |
| | 6/24/1991 | -- | 1 | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 1,800 | 19 | 0.5 U | 0.5 U | 7.2 | -- | -- |
| | 12/26/1991 | 960 | 11 | 0.5 U | 0.55 | 2.5 | -- | -- |
| | 12/9/1993 | 1,100 | 0.88 | 0.5 U | 1.6 | 3.8 | 2.3 | 65 |
| | 11/22/1995 | 1,300 | 1.3 | 0.5 U | 0.5 U | 2 | -- | -- |
| | 12/8/2000 | 1,100 | 0.84 J | 4 | 1.1 | 4.1 | -- | -- |
| 2/28/2002 | 1,100 | 0.86 J | 1 U | 0.73 J | 5 | -- | -- | |
| MW-11 | 3/17/1988 | -- | 149 | 18.5 | 12 | 160 | -- | -- |
| | 3/27/1991 | -- | 205 | 68 | 25 | 86 | -- | -- |
| | 6/24/1991 | -- | 36 | 15 | 13 | 20 | -- | -- |
| | 9/26/1991 | 440 | 3.7 | 0.5 U | 0.5 U | 1.1 | -- | -- |
| | 12/9/1993 | 880 | 90 | 9.9 | 0.5 U | 25 | 5.5 | 110 |
| | 11/22/1995 | 790 | 36 | 1.8 | 0.8 | 1.6 | -- | -- |
| | 12/8/2000 | 48 U | 2.8 | 0.2 U | 0.22 J | 0.6 U | -- | -- |
| | 3/19/2001 | 48 U | 0.46 J | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/16/2001 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/21/2001 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/28/2002 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/27/2002 | 48 U | 1.3 | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/26/2002 | 48 U | 0.94 J | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/6/2003 | 48 U | 0.92 J | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/15/2003 | 70 J | 4.4 | 1.5 | 8.7 | 9.3 | -- | -- |
| | 8/20/2003 | 48 U | 0.2 U | 0.2 U | 0.3 J | 0.6 U | -- | -- |
| | 11/14/2003 | 48 U | 0.5 J | 0.6 J | 0.9 J | 3.2 | -- | -- |
| | 2/26/2004 | 48 U | 0.2 U | 0.5 J | 0.2 U | 1.7 J | -- | -- |
| | 5/27/2004 | 48 U | 0.2 U | 0.3 J | 0.5 J | 1.2 J | -- | -- |
| | 11/18/2004 | 48 U | 0.9 J | 0.6 J | 0.8 J | 2.4 J | -- | -- |
| | 2/24/2005 | 48 U | 0.2 U | 0.5 J | 0.4 J | 2.1 J | -- | -- |
| | 5/23/2005 | 140 J | 1 | 3.5 | 9.5 | 19 | -- | -- |
| | 8/30/2005 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/29/2005 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/23/2006 | 51 J | 0.9 J | 1.8 | 2.8 | 6.8 | -- | -- |
| | 8/24/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 11/27/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| 2/12/2007 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/29/2007 | 1 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/11/2008 | 2,300 | 21.1 | 4.44 | 2.65 | 13.5 | -- | -- | |
| 2/12/2009 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| MW-12 | 3/17/1988 | -- | 218 | 2 U | 7.2 | 146.5 | -- | -- |
| | 3/27/1991 | -- | 1 U | 1 U | 1 U | 3 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 160 | 2.1 | 0.42 | 0.5 U | 0.56 | -- | -- |
| | 12/26/1991 | 65 | 20 | 0.5 U | 0.43 | 2.9 | -- | -- |
| | 12/9/1993 | 50 U | 21 | 0.5 U | 0.86 | 3.2 | 4.3 | 23 |
| | 11/22/1995 | 50 U | 9.2 | 0.5 U | 0.5 U | 1 | -- | -- |
| MW-13 | 3/17/1988 | -- | 163 | 42 | 8.9 | 169.8 | -- | -- |
| | 3/27/1991 | -- | 1 U | 2 | 1 | 1 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 50 U | 2.2 | 0.5 U | 0.5 U | 1 U | 5.5 | 30 |
| | 11/22/1995 | 120 | 5.2 | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-15 | 3/17/1988 | -- | 850 | 108 | 351 | 1,453 | -- | -- |
| | 3/27/1991 | -- | 5 | 31 | 9 | 204 | -- | -- |
| | 6/24/1991 | -- | 7 | 13 | 2 | 29 | -- | -- |
| | 9/26/1991 | 220 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 890 | 15 | 34 | 1.1 | 69 | -- | -- |
| | 12/9/1993 | 140 | 1.4 | 1.8 | 0.95 | 1.8 | 3.7 | 19 |
| | 11/21/1995 | 4,800 | 540 | 26 | 9.8 | 140 | -- | -- |
| MW-16 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 50 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.7 | 1 U | 2.8 | 21 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-17 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| | 3/27/1991 | -- | 44 | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 280 | 1 | 4 | 2 | -- | -- |
| | 9/26/1991 | 2,600 | 1,100 | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 1,100 | 480 | 1.3 | 2.2 | 4 | -- | -- |
| | 12/9/1993 | 50 U | 20 | 0.5 U | 0.88 | 1.4 | 6.5 | 10 |
| | 11/21/1995 | 50 U | 66 | 0.5 U | 0.53 | 1 U | -- | -- |
| MW-18 | 3/17/1988 | -- | 800 | 115 | 194 | 1,941 | -- | -- |
| | 3/27/1991 | -- | 141 | 24 | 22 | 158 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 750 | 0.69 | 0.5 U | 0.5 U | 2.4 | -- | -- |
| | 12/26/1991 | 4,400 | 223 | 24 | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 1,700 | 140 | 8.3 | 0.5 U | 58 | 6.1 | 230 |
| | 11/21/1995 | 4,000 | 170 | 5.9 | 2 U | 3.7 | -- | -- |
| | 2/28/2002 | 1,300 | 110 | 0.98 J | 1.6 | 7.8 | -- | -- |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| MW-19 | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 150 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 130 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/7/2000 | 700 | 0.2 U | 2.2 | 0.2 U | 3 | -- | -- |
| | 3/19/2001 | 580 | 0.2 U | 5 U | 1 U | 6.7 | -- | -- |
| | 5/16/2001 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/21/2001 | 400 | 0.2 U | 0.2 U | 1.1 | 1.3 J | -- | -- |
| | 2/28/2002 | 220 J | 0.2 U | 0.2 U | 0.2 U | 2 J | -- | -- |
| | 8/27/2002 | 160 J | 0.2 U | 0.2 U | 0.2 U | 0.81 J | -- | -- |
| | 11/26/2002 | 210 J | 0.21 J | 0.2 U | 0.2 U | 0.92 J | -- | -- |
| | 2/6/2003 | 260 | 0.34 J | 0.2 U | 0.2 U | 0.66 J | -- | -- |
| | 5/15/2003 | 300 | 1.8 | 0.9 J | 5 U | 6.6 | -- | -- |
| | 8/20/2003 | 240 J | 15 | 0.7 J | 1.2 | 2.7 J | -- | -- |
| | 11/14/2003 | 220 J | 0.3 J | 0.3 J | 0.3 J | 1.4 J | -- | -- |
| | 2/26/2004 | 93 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/27/2004 | 210 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/30/2004 | 230 J | 0.2 U | 0.2 U | 1 U | 1.1 J | -- | -- |
| | 11/18/2004 | 130 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/24/2005 | 180 J | 0.2 U | 0.2 U | 0.2 U | 1.2 J | -- | -- |
| | 5/23/2005 | 4,600 | 63 | 92 | 340 | 530 | -- | -- |
| | 8/30/2005 | 160 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/29/2005 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| 2/12/2006 | 336 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/23/2006 | 350 | 0.3 J | 0.2 U | 0.2 U | 0.6 U | -- | -- | |
| 8/24/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 11/27/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/29/2007 | 208 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/11/2008 | 250 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/28/2008 | 135 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/12/2009 | 187 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| MW-20 | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 110 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 50 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/7/2000 | 84 J | 0.21 J | 0.2 U | 0.2 U | 0.99 J | -- | -- |
| | 3/19/2001 | 69 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/17/2001 | 68 J | 0.2 U | 0.2 U | 0.2 U | 0.61 J | -- | -- |
| | 2/28/2002 | 56 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| MW-21 | 3/27/1991 | -- | 3 | 2 | 2 | 25 | -- | -- |
| | 6/24/1991 | -- | 9 | 110 | 220 | 560 | -- | -- |
| | 2/28/2002 | 310 | 0.62 J | 1.5 | 1 | 2.8 J | -- | -- |
| MW-22 | 3/27/1991 | -- | 1 U | 1 U | 2 | 7 | -- | -- |
| | 12/26/1991 | 4,500 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| MW-23 | 3/27/1991 | -- | 1 U | 1 U | 2 | 8 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 2 | -- | -- |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| MW-24 | 3/27/1991 | -- | 1 U | 1 U | 2 | 1 | -- | -- |
| MW-27 | 6/24/1991 | -- | 1 U | 3 | 7 | 9 | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 11/21/1995 | 160 | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-28 | 6/24/1991 | -- | 1 U | 1 | 1 | 3 | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 59 | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 94 | 0.5 U | 0.5 U | 0.5 U | 1 U | 2 U | 120 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-30 | 6/24/1991 | -- | 40 | 0.5 U | 150 | 70 | -- | -- |
| | 9/26/1991 | 280 | 1.6 | 0.5 U | 0.5 U | 0.68 | -- | -- |
| | 12/26/1991 | 680 | 1.8 | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 320 | 1.6 | 0.5 U | 0.5 | 1.3 | 2 U | 11 |
| MW-31 | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | 2 U | 24 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-32 | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | 2.2 | 92 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-33 | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 1.7 | 1 U | 4.7 | 99 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-35 | 12/9/1993 | 50 U | 2.9 | 0.5 U | 0.5 U | 1.6 | 2.8 | 77 |
| | 11/22/1995 | 50 U | 2.7 | 0.5 U | 0.5 U | 1.7 | -- | -- |
| | 12/8/2000 | 48 U | 0.62 J | 0.2 U | 0.32 J | 3 U | -- | -- |
| | 3/19/2001 | 48 | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| MW-36 | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.75 | 1 U | 2 U | 45 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-37 | 12/9/1993 | 3,900 | 630 | 26 | 0.5 U | 12 | 2 U | 140 |
| | 11/21/1995 | 50 U | 0.5 | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-40R | 12/8/2000 | 950 | 19 | 2.9 | 3.5 | 4.2 | -- | -- |
| | 3/19/2001 | 1,400 | 28 | 1.4 | 3.6 | 8.4 | -- | -- |
| | 5/16/2001 | 1,300 | 25 | 2.1 | 5.6 | 9 | -- | -- |
| | 8/21/2001 | 1,600 | 30 | 3.1 | 2.3 | 5.8 | -- | -- |
| | 2/28/2002 | 1,300 | 21 | 1.2 | 2.4 | 5.8 | -- | -- |
| | 8/27/2002 | 1,200 | 23 | 1.6 | 4.4 | 7.1 | -- | -- |
| | 11/26/2002 | 1,800 | 14 | 0.8 J | 1.6 | 4.9 | -- | -- |
| | 2/6/2003 | 1,900 | 21 | 1.1 | 2.3 | 5.1 | -- | -- |
| | 5/15/2003 | 1,700 | 21 | 1.5 | 5.4 | 7.9 | -- | -- |
| | 8/20/2003 | 1,200 | 17 | 1.6 | 4.3 | 7 | -- | -- |
| | 11/14/2003 | 1,600 | 12 | 1.7 | 3 | 9 | -- | -- |
| | 2/26/2004 | 1,400 | 13 | 1.1 | 2.8 | 6.6 | -- | -- |
| | 5/27/2004 | 980 | 10 | 0.9 J | 2.4 | 4.5 | -- | -- |
| | 8/30/2004 | 1,100 | 11 | 1.4 | 4.2 | 7.6 | -- | -- |
| | 2/24/2005 | 1,200 | 9.1 | 1.3 | 2.4 | 6.7 | -- | -- |
| | 5/23/2005 | 1,700 | 17 | 12 | 42 | 69 | -- | -- |
| | 8/30/2005 | 910 | 13 | 2.6 | 6.4 | 8.8 | -- | -- |
| | 11/29/2005 | 1,100 | 10 U | 1.4 | 2.6 | 5.6 | -- | -- |
| 2/23/2006 | 1,200 | 10 U | 1.4 | 3.1 | 5.6 | -- | -- | |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| MW-40R (continued) | 8/24/2006 | 410 | 6.38 | 1 U | 1.88 | 7.55 | -- | -- |
| | 11/27/2006 | 1,390 | 6.42 | 2.68 | 1.32 | 5.05 | -- | -- |
| | 2/12/2007 | 1,560 | 6.38 | 3.14 | 1 U | 3 U | -- | -- |
| | 8/29/2007 | 1,000 | 6.6 | 1 U | 1.5 | 3.48 | -- | -- |
| | 2/11/2008 | 1,100 | 3.18 | 1.09 | 1.24 | 7.12 | -- | -- |
| | 8/28/2008 | 1,070 | 4.91 | 1.2 | 2.29 | 5.97 | -- | -- |
| | 2/12/2009 | 855 | 3.65 | 1.25 | 3.39 | 6.4 | -- | -- |
| MW-6 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| | 3/27/1991 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 6/24/1991 | -- | 1 | 1 U | 1 U | 1 U | -- | -- |
| | 9/26/1991 | 500 U | 0.5 U | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/26/1991 | 760 | 47 | 45 | 8.3 | 19 | -- | -- |
| | 12/9/1993 | 50 U | 0.5 U | 0.5 U | 0.83 | 1 U | 12 | 14 |
| | 11/21/1995 | 50 U | 0.5 U | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-7 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| MW-8 | 3/17/1988 | -- | 1,050 | 359 | 37 | 237 | -- | -- |
| | 6/24/1991 | -- | 47 | 5 | 72 | 17 | -- | -- |
| | 12/9/1993 | 130 | 0.71 | 0.5 U | 0.5 | 1 U | 3.2 | 79 |
| | 11/21/1995 | 110 | 7.7 | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-9 | 3/17/1988 | -- | 2.5 U | 2 U | 2 U | 2 U | -- | -- |
| | 3/27/1991 | -- | 140 | 8 | 3 | 20 | -- | -- |
| | 6/24/1991 | -- | 280 | 1 | 4 | 2 | -- | -- |
| | 9/26/1991 | 220 | 1.1 | 0.5 U | 0.5 U | 0.54 | -- | -- |
| | 12/26/1991 | 50 U | 9.3 | 0.5 U | 0.5 U | 0.5 U | -- | -- |
| | 12/9/1993 | 50 U | 6.7 | 0.5 U | 0.5 U | 1 U | 4.2 | 70 |
| | 11/21/1995 | 50 U | 1.3 | 0.5 U | 0.5 U | 1 U | -- | -- |
| MW-A1 | 2/11/2008 | 250 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 8/28/2008 | 134 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 2/12/2009 | 145 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| MW-A2 | 2/11/2008 | 250 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 8/28/2008 | 159 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 2/12/2009 | 188 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| RW-1/ MW-14 | 8/22/1989 | -- | 1 U | 1 U | 1 U | 1 U | -- | -- |
| | 3/27/1991 | -- | 5 | 1 U | 1 U | 8 | -- | -- |
| | 6/24/1991 | -- | 1 U | 1 U | 1 U | 1 | -- | -- |
| | 9/26/1991 | 2,200 | 410 | 19 | 6.4 | 10 | -- | -- |
| | 12/26/1991 | 3,200 | 590 | 170 | 11 | 56 | -- | -- |
| RW-2 | 2/11/2002 | 1,300 J | 110 | 0.98 J | 1.6 | 7.8 | -- | -- |
| UG-2 | 9/25/2000 | 5.98 | 61 | 2.5 U | 7.45 U | 31 U | -- | -- |
| UG-8 | 9/25/2000 | 5.31 | -- | -- | -- | -- | -- | -- |
| W-15R | 2/28/2002 | 5,000 | 520 | 8.1 | 7.8 | 11 | -- | -- |
| W-17 | 12/7/2000 | 2,600 | 0.67 J | 0.2 U | 6.6 | 3.2 | -- | -- |
| | 3/19/2001 | 2,000 | 0.2 U | 10 U | 1.1 | 11 | -- | -- |
| | 5/16/2001 | 500 | 0.2 U | 0.2 U | 0.51 J | 2.8 J | -- | -- |
| | 8/21/2001 | 1,900 | 1 U | 0.54 J | 0.2 U | 0.6 U | -- | -- |
| W-2 | 3/2/1990 | -- | 0.3 U | 0.3 U | 0.5 | 1 | -- | -- |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| W-3 | 3/2/1990 | -- | 0.3 U | 0.3 U | 0.3 U | 0.3 U | -- | -- |
| | 12/7/2000 | 410 | 0.2 U | 0.72 UJ | 1 U | 1.2 J | -- | -- |
| | 3/19/2001 | 280 | 0.2 U | 0.2 U | 0.2 U | 0.8 J | -- | -- |
| | 5/17/2001 | 290 | 0.2 U | 0.2 U | 0.2 U | 0.61 J | -- | -- |
| | 8/21/2001 | 230 J | 0.2 U | 0.2 U | 0.47 J | 0.6 U | -- | -- |
| | 3/1/2002 | 84 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/27/2002 | 460 | 0.2 U | 0.2 U | 0.2 J | 0.6 U | -- | -- |
| | 11/26/2002 | 460 | 1 U | 0.2 U | 0.2 U | 0.6 J | -- | -- |
| | 2/6/2003 | 390 | 1 U | 0.2 U | 0.26 J | 0.94 J | -- | -- |
| | 5/15/2003 | 400 | 1.6 | 1 J | 4.4 | 6.5 | -- | -- |
| | 8/20/2003 | 290 | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/14/2003 | 370 | 3.8 | 1.5 | 3 | 7.3 | -- | -- |
| | 2/26/2004 | 200 J | 0.2 J | 0.2 U | 0.2 U | 0.9 J | -- | -- |
| | 5/27/2004 | 200 J | 0.2 J | 0.3 J | 0.5 J | 1.2 J | -- | -- |
| | 8/30/2004 | 220 J | 0.4 J | 0.8 J | 5 U | 5 U | -- | -- |
| | 11/18/2004 | 390 | 1.3 | 0.9 J | 1.3 | 3.7 | -- | -- |
| | 2/24/2005 | 230 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 5/23/2005 | 550 | 2.3 | 5.3 | 17 | 30 | -- | -- |
| | 8/30/2005 | 170 J | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 11/29/2005 | 450 | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| 2/23/2006 | 270 | 2 U | 1.2 | 2.2 | 4.8 | -- | -- | |
| 8/24/2006 | 100 U | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 11/27/2006 | 102 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/12/2007 | 352 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/29/2007 | 190 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/11/2008 | 271 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 8/28/2008 | 314 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| 2/12/2009 | 239 | 1 U | 1 U | 1 U | 3 U | -- | -- | |
| W-4 | 3/2/1990 | -- | 7 | 17 | 7 | 15 | -- | -- |
| W-5 | 3/2/1990 | -- | 3.5 | 0.3 U | 0.3 U | 0.3 U | -- | -- |
| W-6 | 12/7/2000 | 3,400 | 0.2 U | 0.2 U | 1 U | 8 | -- | -- |
| | 3/19/2001 | 3,400 | 0.39 J | 20 U | 3.2 | 27 | -- | -- |
| | 5/16/2001 | 710 | 0.2 U | 2 U | 0.5 J | 3.5 | -- | -- |
| | 8/21/2001 | 2.2 | 1.1 | 7.3 | 0.2 U | 0.6 U | -- | -- |
| | 2/28/2002 | 120 J | 1.7 | 1.2 | 0.4 J | 3.5 | -- | -- |
| | 8/27/2002 | 850 | 1.8 | 0.2 U | 2.5 | 3 U | -- | -- |
| | 11/26/2002 | 2,300 | 1 | 1 U | 1 U | 10 U | -- | -- |
| | 2/6/2003 | 400 | 3.3 | 0.6 J | 0.89 J | 2.7 J | -- | -- |
| | 5/15/2003 | 400 | 4.7 | 1.7 | 9.4 | 11 | -- | -- |
| | 8/20/2003 | 530 | 1.4 | 1 U | 1.9 | 3 U | -- | -- |
| | 11/14/2003 | 700 | 12 | 7.9 | 14 | 39 | -- | -- |
| | 2/26/2004 | 150 J | 1 U | 2 U | 1 U | 3 J | -- | -- |
| | 5/27/2004 | 380 | 5 | 7.2 | 18 | 35 | -- | -- |
| | 8/30/2004 | 220 J | 0.9 J | 0.3 J | 1.6 | 2.2 J | -- | -- |
| 11/18/2004 | 79 J | 1.8 | 0.9 J | 1.5 | 3.9 | -- | -- | |

Table 6 Analytical Results for TPH as Gasoline, Benzene, Toluene, Ethylbenzene, Total Xylenes, and Lead in Groundwater

| Well ID | Date Sampled | TPH-Gas (µg/L) | Benzene (µg/L) | Ethylbenzene (µg/L) | Toluene (µg/L) | Total Xylene (µg/L) | Dissolved Lead (µg/L) | Total Lead (µg/L) |
|-----------------------------|--------------|----------------|----------------|---------------------|----------------|---------------------|-----------------------|-------------------|
| MTCA Method A Cleanup Level | | 1,000/800 | 5 | 700 | 1,000 | 1,000 | 15 | 15 |
| W-6 (continued) | 2/24/2005 | 230 J | 0.8 J | 1 U | 0.9 J | 3 J | -- | -- |
| | 5/23/2005 | 2,900 | 22 | 53 | 170 | 300 | -- | -- |
| | 8/30/2005 | 190 J | 1.2 | 0.2 U | 0.7 J | 0.6 U | -- | -- |
| | 11/29/2005 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 2/23/2006 | 48 U | 0.2 U | 0.2 U | 0.2 U | 0.6 U | -- | -- |
| | 8/24/2006 | 100 U | 1 U | 1 U | 2.33 | 3 U | -- | -- |
| | 11/27/2006 | 670 | 1 U | 1 U | 1 U | 3 U | -- | -- |
| | 2/12/2007 | 835 | 1.28 | 1 U | 1.32 | 3 U | -- | -- |
| | 8/29/2007 | 603 | 1.03 | 1 U | 1.08 | 3 U | -- | -- |
| | 2/21/2008 | 372 | 1.18 | 1 U | 1 U | 3 U | -- | -- |
| | 8/26/2008 | 1 U | 1 U | 1 U | 1 U | 3 U | -- | -- |
| 2/12/2009 | 280 | 1 U | 1 U | 1 U | 3 U | -- | -- | |

Notes:

J = The result is an approximation

µg/L = microgram per liter

MTCA = Model Toxics Control Act

TPH = Total Petroleum Hydrocarbon

U = Analyte was not detected above the reporting limit indicated

UJ = Analyte was not detected above the reporting limit. Indicated value is estimated reporting limit.

-- = Not analyzed

Bold and cell in orange = Result greater than MTCA Method A cleanup level

Bold and cell in yellow = Analyte not detected, but reporting limit is greater than MTCA Method A cleanup level.

Table 7 Analytical Results for Polycyclic Aromatic Hydrocarbons in Groundwater

| Well ID | Date Sampled | Acenaphthene (µg/L) | Acenaphthylene (µg/L) | Anthracene (µg/L) | Benzo(a)anthracene* (µg/L) | Benzo(a)pyrene* (µg/L) | Benzo(b)fluoranthene* (µg/L) | Benzo(g,h,i)perylene (µg/L) | Benzo(k)fluoranthene* (µg/L) | Chysene* (µg/L) | Dibenz(a,h)anthracene* (µg/L) | Fluoranthene (µg/L) | Fluorene (µg/L) | Indeno(1,2,3-cd)pyrene* (µg/L) | Naphthalene (µg/L) | Phenanthrene (µg/L) | Pyrene (µg/L) | cPAHs ¹ (µg/L) |
|--|--------------|---------------------|-----------------------|-------------------|----------------------------|------------------------|------------------------------|-----------------------------|------------------------------|-----------------|-------------------------------|---------------------|-----------------|--------------------------------|--------------------|---------------------|---------------|---------------------------|
| MTCA Method A Cleanup Level | | | | | | 0.1 | | | | | | | | | | | | 0.1 |
| MTCA Method B Cleanup Level Carcinogenic | | | | | | | | | | | | | | | | | 480 | |
| MTCA Method B Cleanup Level Non-Carcinogenic | | 960 | | 4,800 | | | | | | | | | | | 160 | | | |
| B-2_well | 12/1/1993 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| | 12/1/1995 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| MW-6 | 12/1/1993 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| MW-8 | 12/1/1993 | 1 U | 1 U | 1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 1 U | 0.1 U | 1 U | 1 U | 0.5 U | 0.0755 U |
| | 12/1/1995 | 5 U | 5 U | 5 U | 0.41 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 1.2 | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.123 |
| MW-9 | 12/1/1993 | 1 U | 1 U | 1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 1 U | 0.1 U | 1 U | 1 U | 0.5 U | 0.0755 U |
| | 12/1/1995 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| MW-10 | 12/1/1993 | 1 U | 1 U | 1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 1.2 | 1 U | 0.1 U | 1 U | 1 U | 1.1 | 0.0755 U |
| | 11/22/1995 | 5 U | 5 U | 5 U | 0.65 | 0.29 | 0.15 | 0.19 | 0.1 U | 3.7 | 0.28 | 1.5 | 5 U | 0.1 U | 5 U | 5 U | 1.6 | 0.445 |
| | 12/8/2000 | 8.1 U | 9.9 J | 2 | 2.75 | 2.07 | 1.73 | 2.1 J | 0.58 J | 10.3 | 0.3 U | 5.7 | 5 J | 2.36 J | 8.1 U | 13.1 | 19.2 | 2.93 |
| | 2/28/2002 | 3 J | 2 J | 0.4 | 0.1 | 0.1 | 0.1 J | 0.2 J | 0.05 J | 0.08 U | 0.04 U | 0.8 | 1 | 0.1 J | 1 U | 2 | 1 | 0.1374 |
| MW-11 | 12/1/1993 | 2.1 | 1 U | 1.1 | 4.9 | 1.4 | 0.1 U | 0.1 U | 0.45 | 1.3 | 0.1 U | 1.7 | 1.8 | 1 | 1 U | 4.1 | 3.8 | 2.058 |
| | 12/8/2000 | 0.76 U | 0.76 U | 0.028 U | 0.019 U | 0.019 U | 0.036 U | 0.095 U | 0.0095 U | 0.057 U | 0.028 U | 0.028 U | 0.16 U | 0.063 U | 0.76 U | 0.068 U | 0.16 U | 0.01756 |
| | 3/19/2001 | 0.76 U | 0.76 U | 0.038 J | 0.047 J | 0.03 J | 0.036 U | 0.095 U | 0.0095 U | 0.057 U | 0.028 U | 0.082 J | 0.16 U | 0.063 U | 0.76 U | 0.095 J | 0.16 U | 0.04181 |
| | 5/16/2001 | 0.8 U | 2.7 J | 0.11 J | 0.04 J | 0.04 J | 0.4 U | 0.09 U | 0.017 J | 0.19 J | 0.03 U | 0.054 J | 0.43 J | 0.07 J | 2.7 J | 0.07 U | 0.52 J | 0.0761 |
| | 8/21/2001 | 0.8 U | 0.8 U | 0.03 U | 0.05 J | 0.04 J | 0.04 U | 0.09 U | 0.01 J | 0.16 J | 0.03 U | 0.03 U | 0.2 U | 0.06 U | 0.8 U | 0.07 U | 0.2 U | 0.0541 |
| | 2/28/2002 | 0.8 U | 0.8 U | 0.04 U | 0.02 U | 0.02 U | 0.04 U | 0.1 U | 0.02 U | 0.08 U | 0.04 U | 0.04 U | 0.2 U | 0.08 U | 1 U | 0.08 U | 0.2 U | 0.0204 U |
| MW-12 | 12/1/1993 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.11 | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| | 11/22/1995 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 61 | 0.1 U | 0.22 | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.685 |
| MW-13 | 12/1/1993 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| | 11/22/1995 | 5 U | 5 U | 5 U | 0.76 | 2 | 1.4 | 2.2 | 0.72 | 2.5 | 0.83 | 2.2 | 5 U | 1.2 | 5 U | 5 U | 2 | 2.516 |
| MW-15 | 12/1/1993 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| MW-16 | 12/1/1993 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| MW-17 | 12/1/1993 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| MW-18 | 12/1/1993 | 17 | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 17 | 13 | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| | 12/1/1995 | 8 | 5 U | 5 U | 7.4 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 20 | 0.1 U | 13 | 13 | 0.1 U | 7.2 | 23 | 9.2 | 1.01 |
| | 2/28/2002 | 1 J | 3 J | 0.3 U | 0.03 J | 0.04 J | 0.04 U | 0.1 U | 0.02 U | 0.08 U | 0.04 U | 0.3 | 0.5 J | 0.08 U | 1 U | 0.4 | 0.8 U | 0.0524 |
| MW-19 | 12/7/2000 | 0.77 U | 2.6 J | 0.029 U | 0.019 U | 0.019 U | 0.037 U | 0.096 U | 0.0096 U | 0.123 J | 0.029 U | 0.029 U | 0.16 U | 0.064 U | 0.77 U | 0.067 U | 0.16 U | 0.01866 |
| | 3/19/2001 | 0.76 U | 4.29 J | 0.029 U | 0.019 U | 0.019 U | 0.036 U | 0.095 U | 0.0095 U | 0.057 U | 0.029 U | 0.029 U | 0.27 J | 0.064 U | 0.79 J | 0.067 U | 0.16 U | 0.01766 U |
| | 5/16/2001 | 0.6 U | 6.6 J | 0.17 J | 0.02 U | 0.02 U | 0.04 U | 0.09 U | 0.009 U | 0.06 U | 0.03 U | 0.03 U | 0.78 J | 0.06 U | 0.8 U | 0.7 U | 0.2 U | 0.01825 U |
| | 8/21/2001 | 0.8 U | 0.8 U | 0.03 U | 0.02 U | 0.02 U | 0.04 U | 0.09 U | 0.009 U | 0.06 U | 0.03 U | 0.03 U | 0.21 J | 0.06 U | 0.8 U | 0.06 U | 0.2 U | 0.01825 U |
| | 2/28/2002 | 0.8 U | 0.8 U | 0.04 U | 0.02 U | 0.02 U | 0.04 U | 0.1 U | 0.02 U | 0.08 U | 0.04 U | 0.04 U | 0.2 U | 0.08 U | 1 U | 0.08 U | 0.2 U | 0.0204 U |
| MW-20 | 12/7/2000 | 1.3 J | 2.53 J | 0.159 J | 0.02 U | 0.02 U | 0.037 U | 0.098 U | 0.0098 U | 0.059 U | 0.029 U | 0.047 J | 1.03 | 0.066 U | 2.47 J | 0.136 J | 0.58 J | 0.018385 U |
| | 3/19/2001 | 0.76 U | 0.76 U | 0.19 | 0.019 U | 0.019 U | 0.036 U | 0.095 U | 0.0095 U | 0.057 U | 0.028 U | 0.056 J | 1.05 | 0.064 U | 0.76 U | 0.144 J | 0.31 J | 0.01761 U |
| | 5/17/2001 | 0.9 J | 2.3 J | 0.3 | 0.02 J | 0.02 J | 0.04 U | 0.1 U | 0.01 J | 0.06 U | 0.035 J | 0.16 J | 1.3 | 0.073 J | 0.8 U | 0.35 | 1.4 | 0.0361 |
| | 2/28/2002 | 0.9 U | 0.9 U | 0.3 | 0.02 U | 0.02 U | 0.04 U | 0.1 U | 0.02 U | 0.09 U | 0.04 U | 0.06 J | 0.6 J | 0.09 U | 1 U | 0.09 J | 0.9 U | 0.01995 U |
| MW-21 | 2/28/2002 | 4 U | 4 U | 5 | 2 | 0.9 | 2 | 0.5 U | 0.3 J | 12 | 0.3 J | 1 | 6 | 0.9 J | 5 U | 7 | 1 U | 1.57 |
| MW-27 | 12/1/1995 | 5 U | 5 U | 5 U | 2.1 | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.8 | 0.1 U | 1.4 | 5 U | 0.1 U | 5 U | 5 U | 1.5 | 0.288 |
| MW-28 | 12/1/1993 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 | 0.0755 U |
| | 12/1/1995 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.18 | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0768 |
| MW-30 | 12/1/1993 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.0755 U |
| MW-35 | 12/8/2000 | 0.79 U | 0.81 J | 0.045 J | 0.02 U | 0.02 U | 0.037 U | 0.098 U | 0.0098 U | 0.294 J | 0.031 J | 0.029 U | 0.17 U | 0.066 U | 0.79 U | 0.069 U | 0.17 U | 0.02268 |
| | 3/19/2001 | 0.77 U | 0.77 U | 0.029 U | 0.02 J | 0.019 U | 0.037 U | 0.096 U | 0.0096 U | 0.064 J | 0.029 U | 0.029 U | 0.16 U | 0.064 U | 0.77 U | 0.067 U | 0.16 U | 0.01912 |
| MW-37 | 11/22/1995 | 5 U | 5 U | 5 U | 0.1 U | 0.1 U | 0.14 | 0.1 U | 0.1 U | 0.1 U | 2.8 | 0.1 U | 5 U | 0.1 U | 5 U | 5 U | 0.5 U | 0.3595 |

Table 7 Analytical Results for Polycyclic Aromatic Hydrocarbons in Groundwater

| Well ID | Date Sampled | Acenaphthene (µg/L) | Acenaphthylene (µg/L) | Anthracene (µg/L) | Benzo(a)anthracene* (µg/L) | Benzo(a)pyrene* (µg/L) | Benzo(b)fluoranthene* (µg/L) | Benzo(g,h,i)perylene (µg/L) | Benzo(k)fluoranthene* (µg/L) | Chysene* (µg/L) | Dibenz(a,h)anthracene* (µg/L) | Fluoranthene (µg/L) | Fluorene (µg/L) | Indeno(1,2,3-cd)pyrene* (µg/L) | Naphthalene (µg/L) | Phenanthrene (µg/L) | Pyrene (µg/L) | cPAHs ¹ (µg/L) |
|--|--------------|---------------------|-----------------------|-------------------|----------------------------|------------------------|------------------------------|-----------------------------|------------------------------|-----------------|-------------------------------|---------------------|-----------------|--------------------------------|--------------------|---------------------|---------------|---------------------------|
| MTCA Method A Cleanup Level | | | | | | 0.1 | | | | | | | | | | | | 0.1 |
| MTCA Method B Cleanup Level Carcinogenic | | | | | | | | | | | | | | | | | 480 | |
| MTCA Method B Cleanup Level Non-Carcinogenic | | 960 | | 4,800 | | | | | | | | | | | 160 | | | |
| MW-40R | 12/8/2000 | 3.8 U | 27.3 J | 0.6 J | 0.45 | 0.243 J | 0.18 U | 0.48 U | 0.048 U | 1.9 | 0.14 U | 0.73 J | 4 | 0.4 J | 4.4 J | 2.9 | 6.4 | 0.3654 |
| | 3/19/2001 | 7.7 U | 29.7 J | 0.93 J | 0.9 | 0.33 J | 0.37 U | 1 U | 0.097 U | 5.4 | 0.29 U | 0.95 J | 4.8 J | 0.89 J | 7.7 U | 3.9 | 1.6 U | 0.60085 |
| | 5/16/2001 | 4 U | 21 J | 0.76 J | 0.1 U | 0.2 J | 0.2 U | 0.5 J | 0.08 J | 0.3 U | 0.1 U | 1 | 5 | 0.63 J | 4 J | 2.1 | 13 | 0.2925 |
| | 8/21/2001 | 8 U | 8 U | 0.96 J | 1.4 | 0.6 J | 0.7 | 0.9 U | 0.2 J | 7.7 | 0.3 U | 1.5 J | 6.3 J | 0.68 J | 8 U | 5.7 | 21 | 0.99 |
| | 2/28/2002 | 4 U | 4 U | 0.2 U | 0.3 J | 0.3 J | 0.3 J | 0.5 U | 0.1 U | 0.4 U | 0.2 U | 1 | 3 J | 0.4 U | 5 U | 3 | 0.9 U | 0.397 |
| W-15R | 2/28/2002 | 50 J | 40 J | 78 | 9 | 5 | 4 | 3 J | 2 | 26 | 0.5 U | 51 | 90 | 3 J | 10 U | 200 | 2 U | 7.085 |
| W-17 | 12/7/2000 | 4.6 J | 5.6 J | 2.2 | 2 | 1.45 | 0.97 | 1.1 J | 0.4 | 8 | 0.14 U | 4 | 6.5 | 1.28 J | 3.8 U | 14.4 | 27.9 | 2.002 |
| | 3/19/2001 | 7.9 U | 7.9 U | 4.3 | 3.74 | 2.05 | 1.63 | 1.4 J | 0.473 J | 21.8 | 0.3 U | 5.8 | 10.1 | 0.66 U | 7.9 U | 25.5 | 58.8 | 2.9003 |
| | 5/16/2001 | 6 J | 6 J | 5 | 2.1 | 1.7 | 1.1 | 0.5 U | 0.7 | 7.6 | 0.46 J | 8 | 12 | 2.5 | 4 U | 7 | 95 | 2.462 |
| | 8/21/2001 | 8 U | 8 U | 5 | 4.4 | 2.1 | 1.9 | 0.9 U | 0.7 | 23 | 0.3 U | 9 | 19 | 0.6 U | 6 U | 37 | 120 | 3.075 |
| W-3 | 12/7/2000 | 1.2 J | 6.79 J | 0.191 J | 0.02 U | 0.02 U | 0.038 U | 0.1 U | 0.01 U | 0.06 U | 0.03 U | 0.03 U | 0.76 J | 0.067 U | 1.29 J | 0.071 J | 0.17 U | 0.01855 U |
| | 3/19/2001 | 1.1 J | 6.97 J | 0.53 | 0.019 U | 0.019 U | 0.036 U | 0.096 U | 0.0096 U | 0.057 U | 0.029 U | 0.029 J | 1.44 | 0.064 U | 1.35 J | 0.067 U | 0.16 U | 0.017665 U |
| | 5/17/2001 | 2.4 J | 20 | 0.3 | 0.02 U | 0.02 U | 0.04 U | 0.09 U | 0.013 J | 0.06 U | 0.03 U | 0.15 | 3.2 | 0.06 U | 13 | 1 | 0.31 | 0.0191 U |
| | 8/21/2001 | 0.9 J | 0.8 U | 0.03 U | 0.02 U | 0.02 U | 0.04 U | 0.09 U | 0.009 U | 0.06 U | 0.03 U | 0.03 U | 0.9 | 0.06 U | 1.2 J | 0.06 U | 0.2 U | 0.01825 U |
| | 3/1/2002 | 0.9 U | 0.9 U | 0.04 U | 0.02 U | 0.02 U | 0.04 U | 0.1 U | 0.02 U | 0.09 U | 0.04 U | 0.04 U | 0.5 J | 0.09 U | 1 U | 0.09 U | 0.2 U | 0.02095 U |
| W-6 | 12/7/2000 | 130 J | 118 J | 96 | 58.1 | 32 | 26.9 | 10 U | 5.9 J | 341 | 3 U | 110 | 242 | 31 | 80 U | 680 | 728 | 47.75 |
| | 3/19/2001 | 7.9 U | 14 J | 2.4 | 1.41 | 0.74 J | 0.57 J | 1 U | 0.098 U | 0.59 U | 0.3 U | 2.3 | 9.5 | 0.84 J | 7.9 U | 17.5 | 1.7 U | 1.04485 |
| | 5/16/2001 | 4 U | 4 U | 0.26 J | 0.2 J | 0.3 J | 0.26 J | 0.5 U | 0.14 J | 0.6 J | 0.16 J | 0.58 J | 0.8 U | 0.82 J | 4 U | 0.49 J | 12 | 0.464 |
| | 8/21/2001 | 8 U | 8 U | 0.34 J | 1.1 | 0.6 J | 0.7 | 0.9 U | 0.26 J | 7.2 | 0.3 U | 0.58 J | 2.6 J | 0.86 J | 6 U | 1.9 J | 22 | 0.979 |
| | 2/28/2002 | 4 U | 4 U | 0.2 U | 0.2 J | 0.3 J | 0.4 J | 0.5 U | 0.1 J | 0.4 U | 0.2 U | 0.5 J | 0.9 U | 0.8 J | 5 U | 0.8 J | 0.9 U | 0.462 |

Notes:

*Compound is cPAH constituent included in TEQ-adjusted total cPAH concentrations. Values for individual cPAH constituents are actual analytical results.

1. Total cPAH concentration expressed as TEQ-adjusted concentration adjusted using Toxicity Equivalency Factors for Maximum Required cPAHs (Table 708-2 under WAC 173-340-708).

cPAH = carcinogenic polycyclic aromatic hydrocarbon

J = The result is an approximation

µg/L = microgram per liter

MTCA = Model Toxics Control Act

TEQ = toxicity-equivalent quotient

U = Analyte not detected above the reporting limit indicated

-- = Not analyzed

Bold and cell in orange = Result greater than MTCA Method A cleanup level.

Table 8 Statistical Summary of Soil Analytical Results

| Parameter | CAS Number | Analyte | MTCA A Unrestricted (mg/kg) | MTCA A Industrial (mg/kg) | MTCA B Carcinogen (mg/kg) | MTCA B Noncarcinogen (mg/kg) | Indicator Hazardous Substance (yes/no) | Number Analyzed | Frequency of Detection (percent) | Maximum Detection Limit (mg/kg) | Minimum Detection Limit (mg/kg) | Maximum Result (mg/kg) | Minimum Result (mg/kg) | Average Result (mg/kg) | Number of Results Exceeding MTCA A Industrial | Number of Results Exceeding MTCA A Unrestricted | Number of Results Exceeding MTCA B Carcinogen | Number of Results Exceeding MTCA B Noncarcinogen |
|--------------------|-------------------|------------------------|-----------------------------|---------------------------|---------------------------|------------------------------|--|-----------------|----------------------------------|---------------------------------|---------------------------------|------------------------|------------------------|------------------------|---|---|---|--|
| Metals | 7439-92-1 | Lead | 250 | 1000 | | | no | 38 | 71 | 15 | 10 | 860 | 2.8 | 108 | 0 | 3 | 0 | 0 |
| SVOCs | 120-12-7 | Anthracene | | | | 24,000 | no | 22 | 18 | 2 | 0.1 | 4.9 | 0.1 | 1.4 | 0 | 0 | 0 | 0 |
| | 129-00-0 | Pyrene | | | | 2,400 | no | 22 | 32 | 2 | 0.02 | 1.35 | 0.0482 | 0.62 | 0 | 0 | 0 | 0 |
| | 191-24-2 | Benzo(g,h,i)perylene | | | | | no | 22 | 23 | 2 | 0.01 | 0.744 | 0.0728 | 0.31 | 0 | 0 | 0 | 0 |
| | 193-39-5 | Indeno(1,2,3-cd)pyrene | | | | | no | 22 | 27 | 2 | 0.1 | 1.43 | 0.0157 | 0.31 | 0 | 0 | 0 | 0 |
| | 205-99-2 | Benzo(b)fluoranthene | | | | | no | 22 | 27 | 2 | 0.1 | 0.468 | 0.0173 | 0.20 | 0 | 0 | 0 | 0 |
| | 206-44-0 | Fluoranthene | | | | 3,200 | no | 22 | 36 | 2 | 0.1 | 1.75 | 0.019 | 0.52 | 0 | 0 | 0 | 0 |
| | 207-08-9 | Benzo(k)fluoranthene | | | | | no | 22 | 23 | 2 | 0.01 | 0.16 | 0.0365 | 0.097 | 0 | 0 | 0 | 0 |
| | 208-96-8 | Acenaphthylene | | | | | no | 22 | 14 | 2 | 0.1 | 2.98 | 0.168 | 1.4 | 0 | 0 | 0 | 0 |
| | 218-01-9 | Chysene | | | | | no | 22 | 27 | 2 | 0.1 | 25.2 | 0.0597 | 6.9 | 0 | 0 | 0 | 0 |
| | 50-32-8 | Benzo(a)pyrene | 0.1 | 2 | 0.14 | | yes | 22 | 27 | 2 | 0.1 | 0.26 | 0.0106 | 0.10 | 0 | 3 | 2 | 0 |
| | 53-70-3 | Dibenz(a,h)anthracene | | | | | no | 22 | 14 | 2 | 0.01 | 0.409 | 0.0312 | 0.17 | 0 | 0 | 0 | 0 |
| | 56-55-3 | Benzo(a)anthracene | | | | | no | 22 | 23 | 2 | 0.01 | 4.25 | 0.0479 | 1.1 | 0 | 0 | 0 | 0 |
| | 83-32-9 | Acenaphthene | | | | 4,800 | no | 22 | 9 | 2 | 0.1 | 1.27 | 0.32 | 0.80 | 0 | 0 | 0 | 0 |
| | 85-01-8 | Phenanthrene | | | | | no | 22 | 41 | 0.5 | 0.1 | 4.9 | 0.12 | 1.0 | 0 | 0 | 0 | 0 |
| | 86-73-7 | Fluorene | | | | 3,200 | no | 22 | 18 | 2 | 0.1 | 3.52 | 0.17 | 1.6 | 0 | 0 | 0 | 0 |
| 91-20-3 | Naphthalene | | | | 1,600 | no | 22 | 5 | 2 | 0.1 | 1.1 | 1.1 | 1.1 | 0 | 0 | 0 | 0 | |
| 91-20-3 | cPAH ¹ | | 0.1 | 2 | 0.14 | | yes | 22 | 27 | 1.51 | 0.0755 | 0.6868 | 0.03818 | 0.33 | 0 | 4 | 4 | 0 |
| Oil and Grease TPH | TPH_O&G | Oil and Grease | | | | | na | 12 | 83 | 5 | 5 | 33,500 | 174 | 5,356 | 0 | 0 | 0 | 0 |
| | TPH | TPH | 2,000 | 2,000 | | | yes | 152 | 91 | 10 | 5 | 730,000 | 7 | 11,470 | 58 | 58 | 0 | 0 |
| | TPH-D | TPH-Diesel | 2,000 | 2,000 | | | yes | 67 | 82 | 10 | 2 | 27,100 | 7 | 1,627 | 11 | 11 | 0 | 0 |
| | TPH-G | TPH-Gas | 30 | 30 | | | yes | 50 | 50 | 50 | 1 | 6,050 | 1 | 632 | 17 | 17 | 0 | 0 |
| | TPH-O | TPH-Oil | 2,000 | 2,000 | | | yes | 37 | 76 | 471 | 25 | 52,300 | 41 | 2,438 | 3 | 3 | 0 | 0 |
| VOC | 71-43-2 | Benzene | 0 | 0 | | | yes | 80 | 30 | 34 | 0.01 | 15 | 0.04 | 2.70 | 3 | 3 | 0 | 0 |
| | 100-41-4 | Ethylbenzene | 6 | 6 | | | no | 80 | 15 | 8 | 0.01 | 5.3 | 0.02 | 0.90 | 0 | 0 | 0 | 0 |
| | 108-88-3 | Toluene | 7 | 7 | | | no | 80 | 26 | 30.5 | 0.015 | 12.975 | 0.26 | 4.07 | 4 | 4 | 0 | 0 |
| | 1330-20-7 | Total Xylene | 9 | 9 | | | no | 80 | 15 | 2.5 | 0.015 | 6.6 | 0.035 | 1.25 | 12 | 12 | 0 | 0 |

Notes:

1. Total cPAH concentration expressed as TEQ-adjusted concentration adjusted using Toxicity Equivalency Factors for Maximum Required cPAHs (Table 708-2 under WAC 173-340-708).

CAS = Chemical Abstract Service

cPAH = carcinogenic polycyclic aromatic hydrocarbons

mg/kg = microgram per kilogram

MTCA = Model Toxics Control Act

SVOC = Semivolatile Organic Compound

TPH = Total Petroleum Hydrocarbon

VOC = Volatile Organic Compound

Table 9 Statistical Summary of Groundwater Analytical Results

| Parameter | CAS Number | Analyte | MTCA A Groundwater (µg/L) | MTCA B Carcinogen (µg/L) | MTCA B Noncarcinogen (µg/L) | Indicator Hazardous Substance (yes/no) | Number Analyzed | Frequency of Detection (percent) | Maximum Detection Limit | Minimum Detection Limit | Maximum Result (µg/L) | Minimum Result (µg/L) | Average Result (µg/L) | Number of Results Exceeding MTCA A | Number of Results Exceeding MTCA B Carcinogen | Number of Results Exceeding MTCA B Noncarcinogen |
|--------------------|-------------|------------------------|---------------------------|--------------------------|-----------------------------|--|-----------------|----------------------------------|-------------------------|-------------------------|-----------------------|-----------------------|-----------------------|------------------------------------|---|--|
| Metals | 7439-92-1 | Total Lead | 15 | -- | -- | no | 20 | 100 | -- | -- | 230 | 10 | 65 | 17 | -- | -- |
| | 7439-92-1 | Dissolved Lead | 15 | -- | -- | yes | 20 | 75 | 2 | 2 | 12 | 2 | 4 | 0 | -- | -- |
| SVOCs | 120-12-7 | Anthracene | | | 4,800 | no | 64 | 44 | 5 | 0.028 | 96 | 0.028 | 4.9 | 0 | 0 | 0 |
| | 129-00-0 | Pyrene | | | 480 | no | 64 | 38 | 2 | 0.16 | 728 | 0.16 | 18.25 | 0 | 0 | 1 |
| | 191-24-2 | Benzo(g,h,i)perylene | | | | no | 64 | 13 | 10 | 0.09 | 10 | 0.09 | 0.51 | 0 | 0 | 0 |
| | 193-39-5 | Indeno(1,2,3-cd)pyrene | | | | no | 64 | 30 | 0.66 | 0.06 | 31 | 0.06 | 0.85 | 0 | 0 | 0 |
| | 205-99-2 | Benzo(b)fluoranthene | | | | no | 64 | 28 | 0.4 | 0.036 | 26.9 | 0.036 | 0.77 | 0 | 0 | 0 |
| | 206-44-0 | Fluoranthene | | | 640 | no | 64 | 56 | 0.1 | 0.028 | 110 | 0.028 | 3.84 | 0 | 0 | 0 |
| | 207-08-9 | Benzo(k)fluoranthene | | | | no | 64 | 31 | 0.1 | 0.009 | 5.9 | 0.009 | 0.248 | 0 | 0 | 0 |
| | 208-96-8 | Acenaphthylene | | | | no | 64 | 33 | 8 | 0.76 | 118 | 0.76 | 7.7 | 0 | 0 | 0 |
| | 218-01-9 | Chysene | | | | no | 64 | 41 | 0.59 | 0.057 | 341 | 0.057 | 8.9 | 0 | 0 | 0 |
| | 50-32-8 | Benzo(a)pyrene | 0.1 | | | yes | 64 | 41 | 0.1 | 0.019 | 32 | 0.019 | 0.89 | 20 | 0 | 0 |
| | 53-70-3 | Dibenz(a,h)anthracene | | | | no | 64 | 13 | 3 | 0.028 | 3 | 0.028 | 0.22 | 0 | 0 | 0 |
| | 56-55-3 | Benzo(a)anthracene | | | | no | 64 | 45 | 0.1 | 0.019 | 58.1 | 0.019 | 1.7 | 0 | 0 | 0 |
| | 83-32-9 | Acenaphthene | | | 960 | no | 64 | 23 | 8.1 | 0.6 | 130 | 0.6 | 6.46 | 0 | 0 | 0 |
| | 85-01-8 | Phenanthrene | | | | no | 64 | 44 | 5 | 0.06 | 680 | 0.06 | 18.0 | 0 | 0 | 0 |
| | 86-73-7 | Fluorene | | | 640 | no | 64 | 52 | 5 | 0.16 | 242 | 0.16 | 8.8 | 0 | 0 | 0 |
| 91-20-3 | Naphthalene | | | 160 | no | 64 | 16 | 80 | 0.76 | 80 | 0.76 | 5.0 | 0 | 0 | 0 | |
| | | cPAH ¹ | 0.1 | | 160 | yes | 64 | 56 | 0.0755 | 0.01761 | 47.75 | 0.01756 | 1.32 | 36 | 26 | 0 |
| Oil and Grease TPH | TPH_O&G | Oil and Grease | na | -- | -- | na | 12 | 100 | -- | -- | 132,000 | 2,700 | 31,150 | 12 | -- | -- |
| | TPH | TPH | 500 | -- | -- | yes | 56 | 66 | 1,000 | 500 | 1,058,000 | 1.1 | 38,955 | 0 | -- | -- |
| | TPH-D | TPH-Diesel | 500 | -- | -- | yes | 232 | 93 | 500 | 77 | 300,000 | 20 | 7,951 | 181 | -- | -- |
| | TPH-G | TPH-Gas | 800 | -- | -- | yes | 231 | 69 | 500 | 1 | 5,980 | 1 | 671 | 59 | -- | -- |
| | TPH-O | TPH-Oil | 500 | -- | -- | yes | 181 | 86 | 500,000 | 93.9 | 500,000 | 49 | 6,782 | 108 | -- | -- |
| VOC | 71-43-2 | Benzene | 5 | -- | -- | yes | 286 | 50 | 10 | 0.2 | 1,100 | 0.2 | 37.30 | 73 | -- | -- |
| | 100-41-4 | Ethylbenzene | 700 | -- | -- | no | 286 | 33 | 20 | 0.2 | 359 | 0.2 | 6.15 | 0 | -- | -- |
| | 108-88-3 | Toluene | 1000 | -- | -- | no | 286 | 43 | 7.45 | 0.2 | 351 | 0.2 | 7.47 | 0 | -- | -- |
| | 1330-20-7 | Total Xylene | 1000 | -- | -- | no | 286 | 50 | 31 | 0.3 | 1,941 | 0.3 | 26.7 | 2 | -- | -- |

Notes:

1. Total cPAH concentration expressed as TEQ-adjusted concentration adjusted using Toxicity Equivalency Factors for Maximum Required cPAHs (Table 708-2 under WAC 173-340-708).

CAS = Chemical Abstract Service

cPAH = carcinogenic polycyclic aromatic hydrocarbon

µg/L = microgram per liter

MTCA = Model Toxics Control Act

na = not available

SVOC = Semivolatile Organic Compound

TPH = Total Petroleum Hydrocarbon

VOC = Volatile Organic Compound

APPENDIX A

Sampling and Analysis Plan



SAMPLING AND ANALYSIS PLAN
ExxonMobil / ADC Property, Ecology Site ID 2728
2717/2731 Federal Avenue
Everett, Washington

Submitted to:

ExxonMobil Environmental Services
East Providence Terminal
1001 Wampanoag Trail
Riverside, Rhode Island 02915

and

American Distributing Company
13618 45th Avenue NE
Marysville, Washington 98271

Submitted by:

AMEC Earth & Environmental, Inc.
11810 North Creek Parkway North
Bothell, Washington 98011

September 4, 2009

AMEC Project No. 8-915-15716-C

TABLE OF CONTENTS

| | | <u>Page</u> |
|------|--|-------------|
| 1.0 | INTRODUCTION | 1 |
| 2.0 | OBJECTIVES | 1 |
| 3.0 | PROJECT ORGANIZATION AND RESPONSIBILITIES | 2 |
| 4.0 | DATA QUALITY OBJECTIVES | 3 |
| 5.0 | PRE- FIELD ACTIVITIES | 5 |
| 5.1 | Field Health and Safety Procedures | 5 |
| 6.0 | FIELD PROCEDURES | 6 |
| 6.1 | Utility Survey | 6 |
| 6.2 | Calibration of Field Equipment | 6 |
| 6.3 | Soil Borings | 7 |
| 6.4 | Soil Sample Collection | 7 |
| 6.5 | Sample Containers, Preservation and Storage | 8 |
| 6.6 | Sample Labeling..... | 8 |
| 6.7 | Soil Sample Analyses..... | 9 |
| 6.8 | Soil Geotechnical Analyses | 9 |
| 6.9 | Monitoring Well Installation and Development | 10 |
| 6.10 | Surveying of Monitoring Wells | 10 |
| 6.11 | Groundwater Level Measurements | 11 |
| 6.12 | Groundwater Sample Collection..... | 11 |
| 6.13 | Groundwater Sample Analyses | 12 |
| 6.14 | Equipment Decontamination | 13 |
| 6.15 | Investigation Derived Waste Management..... | 13 |
| 6.16 | Aquifer Testing | 13 |
| 6.17 | Tidal Study | 15 |
| 6.18 | Historic or Cultural Resources..... | 16 |
| 7.0 | DOCUMENTATION | 16 |
| 7.1 | Field Logbook..... | 16 |
| 7.2 | Labeling..... | 17 |
| 7.3 | Sample Chain of Custody..... | 17 |
| 8.0 | QUALITY CONTROL | 18 |
| 8.1 | Field Quality Control Samples | 18 |
| 8.2 | Laboratory Quality Control Samples..... | 19 |
| 8.3 | Field Variances..... | 19 |
| 8.4 | Data Management..... | 19 |
| 9.0 | REFERENCES | 19 |

LIST OF TABLES

| | |
|---------|---|
| Table 1 | DQO Objectives |
| Table 2 | Indicator Hazardous Substances |
| Table 3 | Proposed Soil and Groundwater Samples |
| Table 4 | Sample Containers, Preservation and Storage |
| Table 5 | Geotechnical Analyses |
| Table 6 | Natural Attenuation Parameters |
| Table 7 | Tidal Study Well Specifications |

LIST OF FIGURES

| | |
|----------|--|
| Figure 1 | Site Location Map |
| Figure 2 | Proposed Data Gap Investigation Exploration Plan |

LIST OF ATTACHMENTS

| | |
|---------------|--------------------------------------|
| Attachment A1 | Site-Specific Health and Safety Plan |
| Attachment A2 | Field Documentation Forms |

ACRONYMS AND ABBREVIATIONS

| | |
|------------|--|
| ADC | American Distributing Company |
| AMEC | AMEC Earth & Environmental, Inc. |
| bgs | below ground surface |
| BTEX | benzene, toluene, ethylbenzene, and xylenes |
| COC | chain-of-custodies |
| CSS | Colorado silica sand |
| DAHP | Washington State Department of Archaeology and Historic Preservation |
| DQIs | data quality indicators |
| DQOs | data quality objectives |
| Ecology | Washington State Department of Ecology |
| EDB | ethylene dibromide |
| EDC | 1,2-dichloroethane |
| EPA | U.S. Environmental Protection Agency |
| EPH | extractable petroleum hydrocarbons |
| ExxonMobil | ExxonMobil Oil Corporation |
| FFS | Focused Feasibility Study |
| HASP | Health and Safety Plan |
| HSA | hollow stem auger |
| IDW | investigation derived waste |
| mg/kg | milligram per kilograms |
| mg/L | milligram/liter |
| MDLs | method detection limits |
| MS/MSD | matrix spike/matrix spike duplicate |
| mV | millivolt |
| NTUs | nephelometric turbidity units |
| PAHs | polycyclic aromatic hydrocarbons |
| PID | photoionization detector |
| PPE | personal protective equipment |
| ppm | parts per million |
| PVC | polyvinyl chloride |
| Property | ExxonMobil/ADC Property |
| QA | quality assurance |
| QC | quality control |
| RPD | relative percent difference |
| SAP | Sampling and Analysis Plan |
| SD | standard deviation |
| TPH-D | total petroleum hydrocarbons–diesel |
| TPH-O | total petroleum hydrocarbons–oil |
| TPH-G | total petroleum hydrocarbons–gasoline |
| VOCs | volatile organic compounds |
| VPH | volatile petroleum hydrocarbons |
| WAC | Washington Administrative Code |
| WP | Work Plan |

1.0 INTRODUCTION

AMEC Earth & Environmental, Inc. (AMEC), has prepared this Sampling and Analysis Plan (SAP) as part of the Focused Feasibility Study (FFS) Work Plan (WP) on behalf of ExxonMobil Oil Corporation (ExxonMobil) and the American Distributing Company (ADC) for the ExxonMobil/ADC Property (the Property) located at 2717 and 2731 Federal Avenue in Everett, Washington (Figure 1). This SAP outlines supplemental field investigations that will be conducted at and near the Property to fill remaining data gaps and obtain the information required to complete the FFS for the Exxon Mobil/ADC Site (Washington State Department of Ecology [Ecology] Ecology Facility ID 2728). This SAP addresses the specific field sampling activities, chemical analyses, and quality assurance (QA) procedures that will be conducted during additional investigations at the Property.

2.0 OBJECTIVES

The objective of the soil and groundwater investigation is to collect additional data needed to define the nature and extent of contamination, support decisions regarding future environmental cleanup, and fill existing data gaps to provide the information necessary to complete the FFS. The soil and groundwater investigation will include the following activities.

1. Install four new shallow (15 feet deep) groundwater monitoring wells (MW-A3 through MW-A6), and one deep groundwater monitoring well (MW-A7) to define the western, northwestern, and northeastern limits of the dissolved-phase plume and to identify potential contamination associated with the former ADC Garage and Shop. Soil samples will be collected from each soil boring for laboratory analysis to ensure that additional petroleum hydrocarbon sources are not contributing to the existing plume (Figure 2).
2. Advance seven deep soil borings around the perimeter of the Property (AB-1 through AB-6) and off-Property to the northeast (MW-A7) to a maximum depth of 35 feet below ground surface (bgs) to determine if a silt layer is present beneath the fill and collect samples for geotechnical analysis. Deep boring MW-A7 will be backfilled to a depth of 13 feet bgs and converted to a shallow monitoring well screened from 3 to 13 feet bgs.
3. In addition, four of the six deep soil borings (AB-1, AB-2, AB-5, and AB-6) will be advanced around the perimeter of the Property to assist in evaluating the lateral extent of the secondary source areas 1, 2, and 4 (Section 7.2). Soil samples from borings AB-1 and AB-5 will be collected continuously from approximately 0.5 to 5 feet bgs. Shallow samples (above water table) with obvious signs of petroleum-hydrocarbon contamination will be analyzed for TPH-D and TPH-O.

4. Advance seven shallow soil borings (AP-1 through AP-7) to a maximum depth of 15 feet bgs. Six soil borings will be drilled east portion of the Property (near former General Petroleum Corporation's spur fuel loading racks) to define the lateral and vertical extent of soil contamination in the vicinity of MW-29. The seventh boring will be drilled in the area of the former ADC Garage and Shop to determine if any hydrocarbons are present in soils beneath the shop floor.
5. Perform four quarters of groundwater sampling in all new monitoring wells and in five existing wells for natural attenuation parameters. Groundwater sampling for chemistry parameters will be conducted to be representative of separate wet and dry seasons. During two of the four quarterly sampling events, the groundwater sampling program will include general chemistry water quality parameters (i.e., dissolved oxygen, total organic carbon, alkalinity), in addition to the standard suite of laboratory analytical methods in select monitoring wells.
6. Conduct aquifer testing in two monitoring wells to determine the hydraulic conductivity of off-Property aquifer materials. The aquifer testing will consist of slug tests conducted in newly constructed monitoring wells MW-A5 and MW-A6.
7. Undertake a comprehensive tidal influence study incorporating a temporary stilling well in Puget Sound as well as newly installed and existing groundwater monitoring wells.

3.0 PROJECT ORGANIZATION AND RESPONSIBILITIES

AMEC Earth & Environmental, Inc. (AMEC) is the environmental consultant for this project.

The project is organized as follows:

ExxonMobil and ADC are the owners of the Site.

- Gary Dupuy (phone number 206-342-1777) and Meg Strong (phone number 425-368-0966) are the client managers for the project
- Leah Vigoren (phone number 206-838-8470) is the project manager and is responsible for project management. Technical and administrative elements are included in her project management responsibilities.
- Stephen Dailey (phone number 206-342-1775) is the project engineer and is responsible for developing the site conceptual model and providing engineering input to the FFS.
- Anastasia Speransky (phone number 206-838-1776) is the task manager for the project and quality assurance manager for this project, which includes data quality objectives, and quality assurance/quality control (QA/QC) objectives.
- Heather Vick (phone number 206-838-8463) is the project hydrogeologist. She is responsible for hydrogeological field activities as well as health and safety.

- Test America, Inc., in Tacoma, Washington, is responsible for managing analyses of the samples collected. The laboratory is also responsible for sample preparation and ensuring that the QA/QC results from the laboratory are valid.

4.0 DATA QUALITY OBJECTIVES

Data Quality Objectives (DQOs) is a quality management tool developed by the U.S. Environmental Protection Agency (EPA) that is used to facilitate the planning of data collection activities. The DQO process provides a systematic procedure for defining criteria in the data collection design. The primary reference for the formal DQO process is EPA's guidance document (EPA 1994). The DQO process consists of the following seven key steps.

1. State the problem.
2. Identify the decision.
3. Identify the inputs to the decision.
4. Define the boundaries of the study.
5. Develop a decision rule.
6. Specify tolerable limits on decision errors.
7. Optimize the design for obtaining data.

DQOs are qualitative and quantitative statements, developed using the DQO process, that are intended to clarify study objectives, define an appropriate type of data, and specify tolerable levels of potential decision errors that will be used as the basis for establishing the quality and quantity of data needed to support decisions.

Table 1 provides the DQOs for the work described in this SAP. Table 2 provides a list of the indicator hazardous substances and their MTCA cleanup criteria.

Data Quality Indicators (DQI) (accuracy, precision, completeness, representativeness, comparability, and method detection limits) refer to quality control criteria established for various aspects of data gathering, sampling, or analysis activity. In defining DQIs specifically for the project, the level of uncertainty associated with each measurement is determined.

Accuracy is the degree of agreement of a measurement with a known or true value. To determine accuracy, a laboratory or field value is compared to a known or true concentration. Accuracy is determined by such quality control (QC) indicators as: matrix spikes (MS), surrogate spikes, laboratory control samples (blind spikes) and performance samples. The frequency of analysis of laboratory control samples will be as follows: Method NWTPH-Gx:1 every 20 samples; Method NWTPH-Dx:1 every 10 samples; Method NWTPH-VPH: 1 every 20 samples; Method NWTPH EPH: 1 every 20 samples; Method 8260B: 1 every 12 hours and Method 8270: 1 every 20 samples.

Precision is the degree of mutual agreement between or among independent measurements of a similar property (usually reported as a standard deviation [SD] or relative percent difference [RPD]). This indicator relates to the analysis of duplicate laboratory or field samples. An RPD of $\leq 50\%$ for water and $\leq 50\%$ for soil, depending upon the chemical being analyzed, is generally acceptable. Typically field precision is assessed by field duplicates and laboratory precision is assessed using laboratory duplicates, matrix spike duplicates, or laboratory control sample duplicates).

Completeness is expressed as percent of valid usable data actually obtained compared to the amount that was expected. Due to a variety of circumstances, sometimes either not all samples scheduled to be collected can be collected or else the data from samples cannot be used (for example, samples lost, bottles broken, instrument failures, laboratory errors, etc.). The minimum percent of completed analyses defined in this section depends on how much information is needed for decision making. Generally, completeness percent goals increase when the fewer the number of samples are collected per event or the more critical the data are for decision making. Goals in the 90 to 95% range are typical.

Representativeness is the expression of the degree to which data accurately and precisely represent a characteristic of an environmental condition or a population. It relates both to the area of interest and to the method of taking the individual sample. The idea of representativeness should be incorporated into discussions of sampling design. Representativeness is best assured by a comprehensive statistical sampling design, but it is recognized that this is usually outside the scope of most one-time events. Most one-time event SAPs focus on issues related to judgmental sampling and why certain areas are included or not included and the steps being taken to avoid either false positives or false negatives.

Comparability expresses the confidence with which one data set can be compared to another. The use of methods from EPA or "Standard Methods" or from some other recognized sources allows the data to be compared facilitating evaluation of trends or changes in a site, a river, groundwater, etc. Comparability also refers to the reporting of data in comparable units so direct comparisons are simplified (e.g., this avoids comparison of milligram/liter (mg/L) for nitrate reported as nitrogen to mg/L of nitrate reported as nitrate, or parts per million (ppm) vs. mg/L discussions).

Detection Limit(s) [usually expressed as method detection limits (MDLs) or Quantitation Limit(s)] for all analytes or compounds of interest for all analyses requested is presented on Table 1. These limits should be related to any decisions that will be made as a result of the data collection effort. A critical element to be addressed is how these limits relate to any regulatory or action levels that may apply.

Data Review and Management

Data management will commence during the field investigation. Each soil and groundwater sample collected will be recorded in a bound field book which will include a description of the location, depth, matrix, sample ID, and date and time of collection. Once data has returned from the laboratory, the electronic deliverables will be reviewed to ensure the receipt of all requested

analytes and again cross-checked with chain-of-custodies (COCs). Data will be tabulated in electronic spreadsheets and again checked to ensure proper entry before use in reporting.

Assessment Oversight

The project manager will ensure that sample methods and documentation are being practiced. Quality assurance (QA) systems will be emplaced at regular intervals during the data management process as described above. Finally, a peer review process by a senior technical staff will be conducted on the final reporting.

Corrective Actions

Corrective actions, if necessary, shall be completed. If acceptance criteria were not met and a corrective action was not successful or corrective action was not performed, data will be flagged appropriately. Requirements and procedures for documenting the need for corrective actions are described in this section.

Items requiring corrective action in the laboratory shall be documented by the use of a corrective action report. The QA coordinator or any other laboratory member can initiate the corrective action report request in the event QC results exceed acceptability limits, or upon identification of some other laboratory problem. Corrective actions can include reanalysis of the sample or samples affected, resampling and analysis, or a change in procedures, depending upon the severity of the problem.

5.0 PRE- FIELD ACTIVITIES

AMEC will arrange to clear the existing utilities in the project area prior to initiation of field activities. AMEC will contract a private utility locating service in addition to contacting the underground utilities location center (Call Before You Dig). Prior to field activities, AMEC will complete the following activities.

1. Prepare a site-specific Health and Safety Plan (HASP) (Attachment A1).
2. Mark the proposed boring and monitoring well locations.
3. Acquire appropriate permits for drilling and installing monitoring wells.

5.1 Field Health and Safety Procedures

Field personnel will adhere to the health and safety procedures detailed in the *Site-Specific Health and Safety Plan*. Potential hazards that may be encountered include heat stress, slips, trips, falls, and exposure to insects.

The hospital closest to the Site is Providence Hospital. An emergency contact list and a map illustrating the emergency route to Providence Hospital is located in the *Health and Safety Plan*.

It is anticipated that all fieldwork will be performed using Level D modified personal protective equipment (PPE), which includes safety glasses, steel-toed boots, and nitrile and/or leather gloves. At a minimum, each on-Site worker will be required to wear safety footwear (steel-toed boots), hard hat, hearing protection, eye protection, and a high visibility safety vest. PPE will be upgraded whenever there is a potential for direct contact with contaminated soil or groundwater. Changes in the required PPE will be based on changed work conditions and field observations. PPE upgrades may consist of the following:

- Nitrile gloves (surgical-type);
- Tyvek Coveralls – if a splash transfer is considered likely;
- Additional PPE upgrades that may be required, depending on breathing zone levels of petroleum hydrocarbons detected.

Eating, drinking, chewing gum or tobacco, smoking, or any practice that involves hand-to mouth contact increases the probability of contaminant ingestion and is prohibited in any area where the possibility of contamination exists.

Potential physical hazards that may be encountered include heat stress, slips, trips, and falls.

The AMEC field team will have current certifications for first aid, and a cell phone will be available at all times while personnel are in the field. All emergency response services will be reached by calling 911, from a land line if available.

6.0 FIELD PROCEDURES

This section presents the field investigation procedures for the soil and groundwater sampling effort. The field investigation will consist of drilling soil borings, installing monitoring wells, and collecting soil and groundwater samples. The proposed soil boring and monitoring well locations are illustrated on Figure 1. The proposed soil boring locations are listed in Table 3.

6.1 Utility Survey

AMEC will identify all aboveground and overhead power lines. Proposed boring locations that are within 25 feet of an overhead power line will be moved until clearance is achieved. AMEC will also oversee a geophysical survey conducted by a private utility locator to identify subsurface utilities within 25 feet of the proposed soil boring locations. The presence of below-grade utilities will be identified, and their inferred locations will be marked on the ground surface at the site. In addition, subsurface activity locations may be reviewed with the owner or the representative of the owner, if available at the time.

6.2 Calibration of Field Equipment

Field instrument calibration will occur daily at the beginning of field activities. Calibration results and times will be recorded in the field notes. Field equipment requiring calibration includes the photoionization detector (PID) and the Horiba U-22 (or equivalent) water quality meter.

Calibration instructions for the PID and water quality meter are included with the equipment manuals enclosed in the equipment cases. In general, the PID will be used to screen soil for the presence of lighter end petroleum hydrocarbons, such as gasoline and benzene. A Horiba U-22 water quality meter will be used to measure water quality parameters, such as dissolved oxygen, temperature, oxidation-reduction potential, and turbidity. The Horiba U-22 (or equivalent) will be calibrated daily in accordance with the manufacturer's instructions. A record of the daily calibration will be entered in the field log book.

6.3 Soil Borings

Proposed soil borings are listed in Table 3. Seven shallow soil borings (AP-1 through AP-7) will be advanced to a maximum depth of 15 feet bgs using direct-push technology drilling. These borings will be advanced in the vicinity of MW-29 and the former ADC Garage and Shop. Soil samples will be collected continuously from the surface to the total maximum depth of the borings. A soil sample will be collected at the soil/groundwater interface in each soil boring location. An additional sample will be collected based on odor, staining, PID readings, or sheen. If no soil samples exhibit any of these characteristics, the soil sample will be collected from the bottom of the boring to delineate the vertical extent of contamination.

Seven deep soil borings (AB-1 through AB-6 and MW-A7) will be advanced around the western and northern perimeter of the Property to a maximum depth of 35 feet bgs to determine the lithologic conditions underlying that portion of the Site. The borings will be completed at a depth of 35 feet bgs since any proposed slurry wall can be completed as a hanging wall if there is no silt confining layer to key the wall into. The borings will be advanced using a hollow-stem auger (HSA) rig. A soil sample will be collected at the soil/groundwater interface in each soil boring location. An additional sample will be collected based on odor, staining, PID readings, or sheen. If no soil samples exhibit any of these characteristics, the soil sample will be collected from the bottom of the boring to delineate the vertical extent of contamination.

Four soil borings (MW-A3, MW-A4, MW-A5, and MW-A6) will be advanced on the Port of Everett property and will be completed as shallow monitoring wells using a direct-push drill rig equipped with HSA. The wells will be used to determine the western extent of the dissolved plume. A deep soil boring (MW-A7) drilled to a depth of 35 feet will be backfilled to a depth such that MW-A7 will be installed as a shallow monitoring well which straddles the water table.

6.4 Soil Sample Collection

Soil samples will be collected from the proposed soil boring and proposed monitoring well locations shown on Figure 1. All soil boring and monitoring well locations are subject to change based on observed conditions in the field (aboveground and belowground utilities, existing equipment, etc.).

Soil samples from the proposed push-probe soil borings/monitoring wells will be collected continuously using a 4-foot stainless steel sampler with a disposable liner.

Soil samples from the five proposed deep soil borings will be collected continuously for lithologic characterization. AMEC will inspect all soil samples and screen the soil samples for volatile organic compounds (VOCs) using a PID.

Each soil sample will be examined and relevant sample information (e.g., depth of sample collection, date and time of sample acquisition, PID measurement, etc.) will be recorded. To prevent cross contamination, any equipment repeatedly in contact with the soil will be decontaminated before and after each individual sampling attempt.

AMEC will select at least two soil samples per soil boring for laboratory analyses. The sample will be selected at the discretion of AMEC on the basis of field observations including a sheen test. A soil sample will be collected for analysis at the soil/groundwater interface in each soil boring location. An additional sample will be collected based on odor, staining, PID readings or sheen. If no soil samples exhibit any of these characteristics, the soil sample will be collected from the bottom of the boring to delineate the vertical extent of contamination.

Samples will be selected from intervals exhibiting petroleum staining and/or elevated PID measurements, the capillary fringe, and/or within an artificial fill unit.

6.5 Sample Containers, Preservation and Storage

Soil and groundwater samples will be collected and placed into precleaned sample containers provided by the analytical laboratory in accordance with Table 4. Upon collection, sample containers will be sealed, labeled, chilled to 4°C in a cooler with ice, and maintained with AMEC's custody until delivery to the project analytical laboratory, Test America, Inc., in Tacoma, Washington.

6.6 Sample Labeling

Each sample container sent to the lab will have a unique sample identification label.

The following information will be included on the sample label:

- Project name and location;
- Project number;
- Sample identification number including sample collection depth;
- Sample depth;
- Date and time of collection;
- Analyses to be performed; and
- Initials of the sampler.

Each soil sample will be assigned a unique alphanumeric code that will be used to identify the source of the sample location. Soil samples will be identified by a label indicating the boring or

monitoring well number followed by a dash followed by the depth (feet) below the ground surface that the sample was collected.

6.7 Soil Sample Analyses

Selected soil samples will be submitted to the laboratory for the area-specific chemical analysis. The laboratory analysis will include one or more of the following:

- Total Petroleum Hydrocarbons as Gasoline (TPH-G) by Ecology Method Northwest Total Petroleum Hydrocarbon–Gasoline (NWTPH-G);
- TPH as Diesel and Oil (TPH-D and TPH-O) by Ecology Method NWTPH–Diesel Extended (NWTPH-Dx); TPH-Dx detections with chromatograms that will be run with a silica gel cleanup to remove any biogenic interference (typically from decaying plant matter);
- Benzene, toluene, ethylbenzene, and total xylenes (BTEX) and methyl tertiary butyl ether (MTBE) by U.S. Environmental Protection Agency (EPA) Method 8260B;
- Low-level polycyclic aromatic hydrocarbons (PAHs) by EPA method 8270D SIM;
- 1,2-Dichloroethane (EDC), ethylene dibromide (EDB), and n-hexane in select soil samples that exhibit contamination based on field screening;
- Extractable Petroleum Hydrocarbons (EPH) by Method NW-EPH;
- Volatile Petroleum Hydrocarbons (VPH) by Method NW-VPH.

Soil samples for TPH-G, VOC, and EPH/VPH analyses will be collected using a plastic syringe and placed into laboratory-supplied, preweighed volatile organic analyte vials in accordance with EPA soil sampling method 5035A. Soil samples for all other analyses will be placed in laboratory-supplied glass sample jars and securely fitted with Teflon-lined plastic lids. Particles greater than 2 centimeters in diameter will be removed from the samples and discarded with the drilling cuttings.

EPH and VPH analysis will be requested for soil samples with the highest concentrations of petroleum hydrocarbons and benzene.

Soil sample methods, required sample containers, preservation requirements, and holding times are provided in Table 4.

6.8 Soil Geotechnical Analyses

Two soil samples collected from the saturated zone of the perimeter borings will be analyzed for the following: total organic carbon, soil bulk density, porosity, volumetric water content, and permeability (Shelby tube). Samples of drill cuttings will be retained from each boring for use in slurry wall mix design, if necessary. Two 5-gallon buckets of drill cuttings from the 5- to 15-foot depth interval will be collected from each boring location. Shelby tube samples will be collected from fine-grained materials as undisturbed samples. The Shelby tube sampler will be pushed

into undisturbed soil following retrieval of a split-spoon sample that indicates that a fine-grained formation has been encountered. Data from this testing will be used to assist in the development of remedial alternatives. Geotechnical analytical methods are listed in Table 5.

6.9 Monitoring Well Installation and Development

One deep and four shallow monitoring wells (MW-A3, MW-A4, MW-A5, MW-A6, and MW-A7) will be installed using an HSA drill rig and equipment. Soil borings for the monitoring wells will be advanced using 8-inch inside diameter augers. Soil samples to be collected from the monitoring well borings are listed in Table 3. The monitoring wells will be installed in accordance with Washington Administrative Code (WAC) 173-160 Minimum Standards for Construction and Maintenance of Wells.

Each of the monitoring wells will be constructed using 2-inch-diameter, flush-threaded Schedule 40 polyvinyl chloride (PVC) with a 10-foot-long prepack slotted screen with 0.010-inch slots and a 12/20 Colorado silica sand (CSS) pack. A prepack screen is proposed in order to minimize turbidity that has been observed at other monitoring wells in the Site vicinity. The prepack screens also allow rapid construction, since the soil in the area has been observed to heave. The well screens will be installed to straddle the water table. Additional sand (10/20 CSS) will be placed in the annular space surrounding the prepack screens. The sand pack will extend to a height of at least 1 foot above the top of the screen. Placement of the well screen will be determined in the field based on drilling conditions. The wells will be completed with a grout seal to the ground surface. The surface completion will conform to State of Washington standards and will be an 8-inch-diameter, flush-mounted, traffic-rated well monument.

All monitoring wells will be fitted with water-tight locking well caps and locks that are keyed alike.

Following well installation, the monitoring wells will be developed by surging with a surge block, followed by removing water by pumping until the water is clear and free of suspended solids. A minimum of six well volumes will be removed from each newly installed monitoring well. If the well purges dry, well development will resume when the water in the well recharges to 80 percent of the original recorded volume. Well development will cease upon stabilization of temperature, pH, and specific conductivity and turbidity measurements and the removal of six well volumes or two cycles of purging dry, whichever occurs first. AMEC will record the volume of water removed and water quality parameters during well development. An objective of the well development will be to obtain a turbidity value of 5 nephelometric turbidity units (NTU) or as low as is practically possible. The monitoring well development water will be contained in 55-gallon drums and stored at the Property.

6.10 Surveying of Monitoring Wells

The horizontal locations and the elevations of the tops of inner and outer casings of the newly installed monitoring wells will be surveyed by a Washington licensed surveyor. Elevations will be established to the nearest 0.01 foot; locations to the nearest 0.1 foot. The monitoring wells will be surveyed to tie into the existing monitoring well network. Both horizontal and vertical controls

used for the new well survey will be consistent with horizontal and vertical controls used previously for surveying monitoring wells

6.11 Groundwater Level Measurements

Groundwater surface elevations will be used to make an initial assessment of the groundwater potentiometric surface, surface gradient, and direction of groundwater flow. During each groundwater sampling event, two groundwater elevation surveys will be conducted. One survey will be conducted during the high tidal stage, and one survey will be conducted during the low tidal stage.

The groundwater elevation will be measured with a decontaminated electronic water level meter or oil/water interface probe with an accuracy of plus or minus 0.01 feet. The groundwater elevation measurement will be made from a reference point on the top of the PVC well casing (to be surveyed and marked by land surveyors).

The water level probe will be decontaminated between each use, and wells with known or suspected contamination will be measured last.

6.12 Groundwater Sample Collection

Groundwater samples will be collected from the newly installed monitoring wells after a minimum of 7 days following development. Existing monitoring wells that do not have a history of containing liquid petroleum hydrocarbons (LPH) will also be sampled. Existing monitoring wells (MW-11, MW 19, MW40R, MW-A1 and MW-A2) and newly installed monitoring wells (MW-A3 through MW-A7) will be sampled using low-flow groundwater sampling techniques (Puls and Barcelona 1996). The groundwater sampling procedure will consist of the following steps.

1. Open well cap and allow well to equilibrate for several minutes.
2. Place an interface probe into the well to determine if LPH is present and measure thickness, if present. The well will not be sampled if LPH is present.
3. Measure depth to water from established top of casing measuring point and record on groundwater sampling field data sheet. Determine the middle depth of the water column that is within the screened interval.
4. Using dedicated (cutter used only for this purpose and kept in a plastic bag) tubing cutter, cut a length of new, low-density polyethylene tubing to extend to the middle depth of the water column in the well. Connect the end of the tubing to peristaltic pump using dedicated silicone or MasterflexTM tubing.
5. Connect additional tubing to pump discharge line and flow-through cell. Establish flow rate of less than 200 milliliters/minute.

6. Record readings every 3 to 5 minutes with Horiba U-22 or equivalent water quality meter of the following parameters: temperature, pH, specific conductance, dissolved oxygen, oxidation-reduction potential, and turbidity.
7. Also record every 3 to 5 minute measurements of flow rate and depth to water. If drawdown in well exceeds 0.30 feet, reduce flow rate.
8. Stabilization of water quality parameters is assumed when measured parameters are within the following ranges:
 - ± 10 percent pH (standard units)
 - ± 3 percent electrical conductivity (milli-Siemens per centimeter [mS/cm])
 - ± 10 percent oxidation-reduction potential (millivolt [mV])
 - ± 10 percent turbidity (Nephelometric Turbidity Units [NTUs])
 - ± 10 percent dissolved oxygen (milligram per liter [mg/L])
 - ± 10 percent temperature (degrees Centigrade)
9. After stabilization of water quality parameters is achieved, disconnect tubing from flow-through cell and begin sample collection directly from pump discharge tubing.
10. Reduce flow rate to minimal possible flow for collection of volatile organic compound fraction.

6.13 Groundwater Sample Analyses

Increased turbidity in groundwater samples is attributed to soil lithological characteristics, increased organic content and/or improper purging and sampling rates during groundwater sample collection. High concentrations of total metals such as lead occurring in groundwater samples is most likely due to increased organic content in the formation being sampled.

Select groundwater samples will be submitted to the laboratory for the area-specific chemical analysis. The laboratory analysis will include one or more of the following:

- TPH using Ecology methods NWTPH-G and NWTPH-Dx;
- BTEX and MTBE by U.S. EPA Method 8260B;
- EDC, EDB, and n-hexane by U.S. EPA 8260B Selected groundwater samples;
- Low-level PAHs by EPA method 8270D SIM;
- Dissolved lead by EPA Method 6020;
- Natural attenuation parameters (see Table 6).

6.14 Equipment Decontamination

Decontamination of sampling equipment will be performed to maintain data quality, to prevent cross contamination, and to prevent the potential introduction of contaminants into previously unimpacted areas. Reusable sampling equipment, including the drill rig, down-hole drilling equipment, and stainless-steel materials, will be decontaminated prior to each sampling event. General decontamination procedures for nondedicated soil sampling equipment and accessories are as follows.

- Physically remove soils using a nonphosphate detergent solution.
- Rinse with noncontaminated tap water.
- Rinse with deionized water.
- Rinse with Isopropyl alcohol.
- Air dry.

6.15 Investigation Derived Waste Management

Investigation Derived Waste (IDW) generated during the course of the field investigation will be labeled and securely stored on the Property in 55-gallon drums approved by the U.S. Department of Transportation. Drums will be stored at a designated location. The various waste streams will include the following:

- Potentially contaminated liquids, including fluids derived from purging, development of monitoring wells, and equipment decontamination water; and
- Potentially contaminated solids, principally soil cuttings

Each drum will be labeled with standardized IDW drum labels to indicate its contents, date of collection, location from which the IDW originated, and other pertinent information. In addition, all drums will also be labeled with indelible paint sticks or pens. AMEC will maintain an inventory of the drums. On completion of the project, the IDW will be disposed of at an appropriate off-site facility, following a review of the investigation analytical data.

6.16 Aquifer Testing

Aquifer testing will be performed to determine the horizontal hydraulic conductivity of water bearing materials at the Site. The hydraulic conductivity (K) is an important hydraulic parameter for estimating groundwater flow rates and other aquifer characteristics. Slug testing will be performed to estimate K using monitoring wells MW-A5 and MW-A6, which are located west of the site.

A slug test involves the instantaneous injection or withdrawal of a volume or slug of water or solid cylinder of known volume. This is accomplished by displacing a known volume of water from a well and measuring the artificial fluctuation of the groundwater level in the well. Water

level changes are usually measured with pressure transducers and recorded by an electronic data logger.

The following equipment will be used to perform the slug test:

- Tape measure (subdivided into tenths of feet)
- Pressure transducer and data logger
- Electronic water level indicator
- Stainless steel or copper slug of known volume
- Dedicated nylon twine for each well to be tested
- Watch or stopwatch with second hand
- Waterproof logbook and pen
- Laptop computer with data logger software preinstalled prior to field event;
- Supplies for decontaminating slug, includingalconox soap, scrub brush, deionized water, and tap water

The following procedure will be used for slug testing each monitoring well.

1. Open the monitoring well and allow several minutes for the well to equilibrate to atmospheric pressure.
2. Measure and record static water level in well. Be sure to allow time for equilibration with atmospheric pressure for wells with unvented caps. If a dedicated bailer or other sampling apparatus in place interferes with initial reading, minimize disturbance as much as possible, and allow time for re-equilibration. Wait and repeat measurement to confirm the well is at steady state.
3. Remove any equipment in the well that would interfere with placing the transducer or conducting the slug test.
4. Measure and record the total depth of the well to verify the well depth and verify that the well screen has not been partly silted in. Sediment in the well screen can affect the slug test results.
5. Place pressure transducer in well to appropriate depth (see depth limits for individual transducers, or manufacturers specifications). Use measuring tape to determine point on cable to set in well. Do not place transducer so that its range will be exceeded, or so that the transducer cable interferes with movement of the slug.
6. Place slug in well, above the transducer. If desired, a falling head test can be run at this point. It is often found in highly permeable materials, however, that the time required for the slug to fall through the water column may be comparable to the recovery time, and these data may therefore not be usable.

7. When the water level has returned to static height, initialize the data logger.
8. Remove the slug. Use auto-start feature if available, or start data logger by hand.
9. Test may be terminated after recovery is complete, or after 10 to 15 minutes for wells with slow recovery. If possible, screen data in the field to ensure data quality prior to demobilization.
10. Plot data using laptop computer to assure slug test is representative. If data are ambiguous or insufficient, repeat test.

The slug test data will be analyzed using the Bouwer and Rice method (Bouwer 1976, 1989a, 1989b) to obtain estimates of K for each monitoring well tested.

6.17 Tidal Study

A tidal influence study will be conducted to determine if groundwater beneath the Site is affected by tides. Permission will be requested from the Port of Everett to install a temporary stilling well on their dock. The stilling well will be in position for the duration of the Tidal Study at the Site.

Pressure transducers and data loggers will be installed in the four new groundwater monitoring wells on the Port of Everett property (MW-A3, MW-A4, MW-A5, MW-6) and in existing monitoring wells MW-A1, MW-A2, W-3, MW-11, W-17, W-18 MW-19, MW-28, and MW-40R to record groundwater levels in the zone that is potentially tidally influenced. Specifications of the wells are provided in Table 7. The wells were selected to provide upgradient, on-Site/middle of the site, and downgradient information and are also wells that do not have measured concentrations of free product that would clog the transducers. Monitoring well MW-40R may contain LPH and, if so, will not be used in the tidal influence study.

Elevation measurements will be recorded automatically every 6 minutes for a minimum period of 76 hours. Tidal measurements recorded at the stilling well, located approximately 540 yards to the west of the Site, will be compared to the transducer data.

The data collected from the automatic transducers will be stored in the data logger and downloaded to a computer at the end of the tidal study data collection period. An hour after installation of the in-well transducer, a computer will be linked up to check that it is accurately recording data. On completion, the downloaded data will be corrected for actual groundwater depth and correlated with data from the stilling well. Tidal time lag and tidal efficiencies will be calculated for each monitoring well location. In addition, the tidal study data will be analyzed to determine the mean hydraulic gradient at the site using the method described by Serfes (1991). The data and the results of the study will be presented in a report to the Washington State Department of Ecology, including maps showing the mean hydraulic gradient at low and high tide and data implications with respect to tidal influence.

6.18 Historic or Cultural Resources

Buried cultural artifacts such as chipped or ground stone, historic refuse, buildings foundations, or human bone could be discovered during subsurface activities, although this is highly unlikely. Initial field activities will include the installation of soil borings and monitoring wells which will result in a minimal amount of site disturbance. As such, a professional archaeologist may not be needed on-site during these activities. Cultural Resource review and the need for any on-site archaeologist will be determined by Ecology in communication with the Department of Archaeology and Historic Preservation (DAHP) and the concerned tribal government.

If any excavations (e.g., test pits) are required for the investigation, a separate cultural resources assessment and work plan will be developed in communication with DAHP and the concerned tribal governments pursuant to RCW 27.44 (Indian graves and records) and 27.53 (Archaeological sites and resources) and a professional archaeologist may required to be on-site to oversee the activities.

If any archaeological resources are discovered during field activities, work will be stopped immediately and Ecology, the DAHP, the City of Everett Planning and Community Development Department, and the Tulalip Tribes Cultural Resources Department will be notified by the close of business. A professional archaeologist will arrange an on-site inspection and invite the parties to attend. The professional archaeologist shall document the discovery and provide a professionally documented site form and report to the above listed parties. In the event of an inadvertent discovery of human remains, work will be immediately halted in the discovery area, the remains will be covered and secured against further disturbance, and the Everett Police Department and Snohomish County Medical Examiner will be immediately contacted, along with DAHP and authorized Tribal representatives. A treatment plan by the professional archaeologist shall be developed in consultation with the above listed parties consistent with RCW 27.44 and RCW 27.53 and implemented according to WAC 25-48.

7.0 DOCUMENTATION

The integrity of data obtained from samples collected during the field investigation depends on proper sample management and handling. Proper sample management includes sample labeling, which includes assignment of a specific identification number and affixing proper identification and markings to the collected samples. Proper handling includes proper packing and transport of the sample containers.

7.1 Field Logbook

The field logbook serves as the primary record of field activities. Entries shall be made chronologically and in sufficient detail to allow the writer or a knowledgeable reviewer to reconstruct the applicable events. The field logbook shall be bound with consecutively numbered and water repellent pages.

At a minimum, the following information will be recorded in either the field logbook or a separate sample log sheet during the collection of each sample:

- Sample location and description;
- Sampler's name(s);
- Date and time of sample collection;
- Type of sample (soil, groundwater, or surface water);
- Type of sampling equipment used;
- Field instrument readings and calibration; and
- Field observations and details related to analysis or integrity of samples (e.g., weather conditions, noticeable odors, colors, etc.).

7.2 Labeling

Each sample container sent to the lab will have a unique sample identification label. The following information will be included on the sample label:

- Project name and location;
- Project number;
- Sample identification number;
- Date and time of collection; and
- Initials of the sampler.

Each soil sample will be named by the location and depth of sample collection in feet. For example, a soil sample collected from soil boring A-1 at a depth of 2 feet will have a sample designation as "A-1-2." Groundwater samples will be named by the monitoring well location and the date of sample collection. For example, a groundwater sample collected from MW-A2 on October 8, 2009, would be named "XOMADC-100809-MWA2."

Duplicate samples will be sent to the laboratory blindly. However, the location of the sample will not be revealed to the laboratory. Instead, duplicate samples will be named sequentially as Dup-1 and Dup-2. The location of the duplicate sample collection will be recorded in the field notebook.

7.3 Sample Chain of Custody

COC forms will be completed at the end of each sampling day. The completed COC form(s) and samples will be kept in the possession of the field team until relinquishing the samples to the laboratory or courier service. One copy of the completed COC form will be kept by the field team, and the original COC form will be stored in a resealable plastic bag and transported in the sample container with the laboratory samples. Custody seals will be placed along the seal of each sample container in order to prevent tampering with the samples. A copy of the COC form is included in Attachment A2.

8.0 DATA VALIDATION

Data validation is the procedure of reviewing data against a known set of criteria to verify data validity prior to its use. Data validation procedures have been developed by the US EPA to standardize the validation process for analytical results for both water-quality and soil-quality investigations and are documented as the *US EPA Contract Laboratory Program National Functional Guidelines for Superfund Organic Methods Data Review*, US EPA, Office of Solid Waste and Emergency Response, Washington, D.C., Publication 9240.1-48, US EPA-540/R-08-01 (US EPA 2008). The Functional Guidelines are intended to be used as a guide for evaluation of data generated under statements of work for organic and inorganic analyses associated with the US EPA Contract Laboratory Program (CLP). The Functional Guidelines also provide general data validation guidelines that can be applied to data generated by non-CLP analytical methods.

One hundred percent (100%) of the analytical data for soil and groundwater investigation samples will be validated using EPA Stage 4 data validation level. Stage 4 validation includes an examination of sample and QC raw data and instrument printouts to check for technical, calculation, analyte identification, analyte quantitation, and transcription or reduction errors. At a minimum 10% of reported results on summary forms should be confirmed by recalculation. The data validation staff will review field documents and laboratory data report packages, and if needed, apply data qualifiers to the data. The data reviewer will determine if the project data quality objectives have been met, and will calculate the data completeness for the project.

9.0 QUALITY CONTROL

This SAP has been prepared to provide instructions and guidance to ensure the sample chemical data collected in support of the site soil and groundwater sampling activities are scientifically valid. Indicator hazardous substances at the Site are listed in Table 2. The sections below outline methods and processes to meet these objectives.

9.1 Field Quality Control Samples

To evaluate quality control (QC), two types of QC samples will be collected (trip blank and blind field duplicate). One trip blank will be collected daily and the field duplicate samples will be collected at a frequency of 5 percent of the samples for each matrix (soil and groundwater).

Two trip blank vials provided by the laboratory will be placed into the cooler designated to store samples to be analyzed for VOCs to evaluate the potential for cross-contamination. The trip blanks will be analyzed for TPH using method NWTPH-Gx and for BTEX and MTBE using EPA Method 8260B. Field duplicates are replicate samples collected at the same location during the same sampling session (roughly at the same time). The field duplicate samples will be collected in the same container types and handled and analyzed in the same manner, as all other soil and groundwater samples. The field duplicates will be analyzed for the same analytes as the primary sample.

9.2 Laboratory Quality Control Samples

Laboratory QC samples are analyzed as part of standard laboratory practice. The laboratory monitors the precision and accuracy of the results of its analytical procedures through analysis of QC samples. In part, laboratory QC samples consist of Matrix Spike/Matrix Spike Duplicate (MS/MSD) samples for organic analyses, and MS/MSD for inorganic analyses. The term "matrix" refers to use of the actual media collected in the field (e.g., routine soil and water samples). Laboratory QC samples are an aliquot (subset) of the field sample. They are not separate samples, but a special designation of an existing sample. The laboratory QC samples will be analyzed for the same analytes as the standard samples.

9.3 Field Variances

As conditions in the field may vary, it may become necessary to implement minor modifications to the sampling as presented in this plan. When appropriate, ExxonMobil, ADC, and Ecology will be notified and a verbal (followed by a written verification) approval will be obtained before implementing the changes. Modifications to the approved plan will be documented in the sampling project report.

9.4 Data Management

Data management will commence during the field investigation. Each soil and groundwater sample collected will be recorded on field logs, which will include a description of the location, depth, matrix, sample ID, and date and time of collection. All data submittals will be consistent with Ecology Policy 840 (dated March 31, 2008) Environmental Information Management (EIM) submittal requirement format. Once data have been provided by the laboratory, the electronic deliverables will be reviewed to ensure the receipt of all requested analytes and again cross-checked with COCs.

10.0 REFERENCES

- Bouwer, H. 1989. The Bouwer and Rice slug test-an update. *Ground Water*, vol. 27, no. 3, pp. 304-309.
- Bouwer, H. 1989a. Discussion of "The Bouwer and Rice slug test- an update. *Ground Water*, vol. 27, no. 5, p. 715.
- Bouwer, H. 1976. A slug test for determining hydraulic conductivity of unconfined aquifers with completely or partially penetrating wells. *Water Resources Research*, vol. 12, no. 3, pp. 423-428.
- EPA (U.S. Environmental Protection Agency). 1994. Guidance of the Data Quality Objectives Process. EPA QA/G-4. EPA/600/R-96/055. EPA Office of Research and Development, Washington, D.C. September
- Puls, R.W. and Barcelona, M.J. (1996). "Low-Flow (Minimal Drawdown) Groundwater Sampling Procedures," U.S. Environmental Protection Agency, EPA/540/S-95/504.

Serfes, M.E., 1991. "Determining the mean hydraulic gradient of ground water affected by tidal fluctuations", *Ground Water*, Vol 29, No. 4, pp. 549-555. July-August.

Washington State Department of Ecology (Ecology) (2001). Model Toxics Control Act Cleanup Regulation, Chapter 173-340 WAC. Publication No. 94-06.

Washington State Department of Ecology (Ecology) (2005). Guidance on Remediation of Petroleum-Contaminated Groundwater by Natural Attenuation. Version 1.0. Publication Number 05-09-091. Toxics Cleanup Program. July.

TABLES

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|--|-----------------------------|------|------|--------------|--------------|---------------|--------------|-----|-------------|-----|------------|
| | | | | | | | %R | RPD | %R | RPD | |
| SOIL | | | | | | | | | | | |
| NWTPH-Gx | | | | | | | | | | | |
| NWTPH-Gx | Gasoline Range Hydrocarbons | 0.5 | 5.00 | mg/kg dry wt | - | 50 | 10-145 | 50 | 80-120 | 50 | 8006-61-9 |
| NWTPH-Gx | a,a,a-Trifluorotoluene | | | Surrogate | 50-150 | - | - | - | - | - | 98-08-8 |
| NWTPH-Dx (w/o Acid/Silica Gel Clean-up) | | | | | | | | | | | |
| NWTPH-Dx | Diesel Range Hydrocarbons | 2.00 | 4.00 | mg/kg dry wt | - | 48 | 10-154 | 48 | 55-123 | 48 | 68476-34-6 |
| NWTPH-Dx | Lube Oil Range Hydrocarbons | 2.00 | 4.00 | mg/kg dry wt | - | 39 | 19-146 | 39 | 57-128 | 39 | NA |
| NWTPH-Dx | o-Terphenyl | | | Surrogate | 50-150 | - | - | - | - | - | 84-15-1 |
| Extractable Petroleum Hydrocarbons | | | | | | | | | | | |
| WA MTCA-EPH | C8-C10 Aliphatics | 1.90 | 5.00 | mg/kg dry wt | - | 25 | 50-150 | 25 | 50-150 | 25 | NA |
| WA MTCA-EPH | C10-C12 Aliphatics | 1.00 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C12-C16 Aliphatics | 1.40 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C16-C21 Aliphatics | 2.00 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C21-C34 Aliphatics | 3.20 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C8-C10 Aromatics | 2.50 | 5.00 | mg/kg dry wt | - | 25 | 50-150 | 25 | 50-150 | 25 | NA |
| WA MTCA-EPH | C10-C12 Aromatics | 0.60 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C12-C16 Aromatics | 1.70 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C16-C21 Aromatics | 3.10 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C21-C34 Aromatics | 4.40 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C-35 | | | Surrogate | 60-140 | - | - | - | - | - | 94-36-0 |
| WA MTCA-EPH | o-Terphenyl | | | Surrogate | 60-140 | - | - | - | - | - | 84-15-1 |
| WA MTCA-EPH | 2-Fluorobiphenyl | | | Surrogate | 60-140 | - | - | - | - | - | 321-60-8 |
| WA MTCA-EPH | 2-Bromonaphthalene | | | Surrogate | 60-140 | - | - | - | - | - | 580-13-2 |
| WA MTCA-EPH | 1-Chlorooctadecane | | | Surrogate | 60-140 | - | - | - | - | - | 3386-33-2 |
| Volatile Petroleum Hydrocarbons | | | | | | | | | | | |
| WA MTCA-VPH | C5-C6 Aliphatics | 2.00 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C6-C8 Aliphatics | 0.90 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C8-C10 Aliphatics | 2.25 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C10-C12 Aliphatics | 3.65 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C8-C10 Aromatics | 2.40 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C10-C12 Aromatics | 0.30 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C12-C13 Aromatics | 0.50 | 5.00 | mg/kg dry wt | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | 2,5-Dibromotoluene (FID) | | | Surrogate | 70-130 | - | - | - | - | - | 615-59-8 |
| WA MTCA-VPH | 2,5-Dibromotoluene (PID) | | | Surrogate | 70-130 | - | - | - | - | - | 615-59-8 |

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|---|-----------------------------|--------|---------|--------------|--------------|---------------|--------------|-----|-------------|-----|-----------|
| | | | | | | | %R | RPD | %R | RPD | |
| SOIL (continued) | | | | | | | | | | | |
| Volatile Organic Compounds (Selected List) | | | | | | | | | | | |
| EPA 8260B | Benzene | 0.67 | 2.00 | µg/kg dry wt | - | 50 | 42-141 | 50 | 78-126 | 50 | 71-43-2 |
| EPA 8260B | 1,2-Dibromethane (EDB) | 0.52 | 2.00 | µg/kg dry wt | - | 45 | 30-155 | 45 | 30-155 | 45 | 106-93-4 |
| EPA 8260B | 1,2-Dichloroethane (EDC) | 0.67 | 2.00 | µg/kg dry wt | - | 50 | 32-155 | 50 | 70-139 | 50 | 107-06-2 |
| EPA 8260B | Ethylbenzene | 0.67 | 2.00 | µg/kg dry wt | - | 50 | 21-165 | 50 | 79-130 | 50 | 100-41-4 |
| EPA 8260B | n-Hexane | 0.45 | 10.000 | µg/kg dry wt | - | 48 | 10-180 | 48 | 55-136 | 48 | 110-54-3 |
| EPA 8260B | Toluene | 0.400 | 2.00 | µg/kg dry wt | - | 50 | 45-145 | 50 | 76-126 | 50 | 108-88-3 |
| EPA 8260B | Total Xylenes | 1.30 | 5.00 | µg/kg dry wt | - | 50 | 31-159 | 50 | 80-130 | 50 | 1330-20-7 |
| Polynuclear Aromatic Hydrocarbons by GC/MS-SIM | | | | | | | | | | | |
| EPA 8270C-SIM | Acenaphthene | 0.0003 | 0.00333 | mg/kg dry wt | - | 32 | 42-120 | 32 | 44-120 | 40 | 83-32-9 |
| EPA 8270C-SIM | Acenaphthylene | 0.0004 | 0.00333 | mg/kg dry wt | - | 34 | 39-127 | 34 | 46-127 | 34 | 208-96-8 |
| EPA 8270C-SIM | Anthracene | 0.0007 | 0.00333 | mg/kg dry wt | - | 31 | 39-139 | 31 | 49-139 | 40 | 120-12-7 |
| EPA 8270C-SIM | Benzo(a)anthracene | 0.0003 | 0.00333 | mg/kg dry wt | - | 43 | 31-132 | 43 | 53-132 | 43 | 56-55-3 |
| EPA 8270C-SIM | Benzo(a)pyrene | 0.0004 | 0.00333 | mg/kg dry wt | - | 41 | 22-125 | 41 | 57-125 | 41 | 50-32-8 |
| EPA 8270C-SIM | Benzo(b)fluoranthene | 0.0016 | 0.00333 | mg/kg dry wt | - | 50 | 10-147 | 50 | 36-140 | 50 | 205-99-2 |
| EPA 8270C-SIM | Benzo(k)fluoranthene | 0.0003 | 0.00333 | mg/kg dry wt | - | 38 | 23-140 | 38 | 49-140 | 38 | 207-08-9 |
| EPA 8270C-SIM | Benzo(ghi)perylene | 0.0003 | 0.00333 | mg/kg dry wt | - | 50 | 10-151 | 50 | 54-139 | 50 | 191-24-2 |
| EPA 8270C-SIM | Chrysene | 0.0006 | 0.00333 | mg/kg dry wt | - | 40 | 20-139 | 40 | 47-139 | 40 | 218-01-9 |
| EPA 8270C-SIM | Dibenz(a,h)anthracene | 0.0004 | 0.00333 | mg/kg dry wt | - | 50 | 18-150 | 50 | 58-141 | 50 | 53-70-3 |
| EPA 8270C-SIM | Fluoranthene | 0.0004 | 0.00333 | mg/kg dry wt | - | 47 | 29-135 | 47 | 34-135 | 47 | 206-44-0 |
| EPA 8270C-SIM | Fluorene | 0.0005 | 0.00333 | mg/kg dry wt | - | 38 | 38-129 | 38 | 47-129 | 38 | 86-73-7 |
| EPA 8270C-SIM | Indeno(1,2,3-cd)pyrene | 0.0003 | 0.00333 | mg/kg dry wt | - | 46 | 13-146 | 46 | 53-142 | 46 | 193-39-5 |
| EPA 8270C-SIM | 1-Methylnaphthalene | 0.0004 | 0.00333 | mg/kg dry wt | - | 35 | 20-120 | 35 | 41-120 | 35 | 90-12-0 |
| EPA 8270C-SIM | 2-Methylnaphthalene | 0.0004 | 0.00333 | mg/kg dry wt | - | 38 | 28-124 | 38 | 48-121 | 38 | 91-57-6 |
| EPA 8270C-SIM | Naphthalene | 0.0007 | 0.00333 | mg/kg dry wt | - | 36 | 10-135 | 36 | 42-120 | 36 | 91-20-3 |
| EPA 8270C-SIM | Phenanthrene | 0.0004 | 0.00333 | mg/kg dry wt | - | 46 | 33-134 | 46 | 52-134 | 46 | 85-01-8 |
| EPA 8270C-SIM | Pyrene | 0.0003 | 0.00333 | mg/kg dry wt | - | 50 | 26-153 | 50 | 56-144 | 50 | 129-00-0 |
| EPA 8270C-SIM | Nitrobenzene-d5 | | | Surrogate | 17-120 | | | | | | 4165-60-0 |
| EPA 8270C-SIM | 2-Fluorobiphenyl | | | Surrogate | 14-120 | | | | | | 321-60-8 |
| EPA 8270C-SIM | p-Terphenyl-d14 | | | Surrogate | 18-120 | - | - | - | - | - | 1718-51-0 |
| GROUNDWATER | | | | | | | | | | | |
| NWTPH-Gx | | | | | | | | | | | |
| NWTPH-Gx | Gasoline Range Hydrocarbons | 40.0 | 100.0 | µg/L | - | 37 | 58-139 | 37 | 65-129 | 37 | 8006-61-9 |
| NWTPH-Gx | a,a,a-Trifluorotoluene | | | Surrogate | 50-150 | - | - | - | - | - | 98-08-8 |

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|--|-----------------------------|------|------|-----------|--------------|---------------|--------------|-----|-------------|-----|------------|
| | | | | | | | %R | RPD | %R | RPD | |
| GROUNDWATER (continued) | | | | | | | | | | | |
| NWTPH-Dx (w/o Acid/Silica Gel Clean-up) | | | | | | | | | | | |
| NWTPH-Dx | Diesel Range Hydrocarbons | 28.0 | 50.0 | mg/L | - | 41 | 10-134 | 41 | 50-123 | 41 | 68476-34-6 |
| NWTPH-Dx | Lube Oil Range Hydrocarbons | 28.0 | 50.0 | mg/L | - | 32 | 18-147 | 32 | 49-117 | 32 | NA |
| NWTPH-Dx | o-Terphenyl | | | Surrogate | 27-150 | - | - | - | - | - | 84-15-1 |
| Extractable Petroleum Hydrocarbons | | | | | | | | | | | |
| WA MTCA-EPH | C8-C10 Aliphatics | 3.0 | 20.0 | µg/L | - | 25 | 50-150 | 25 | 50-150 | 25 | NA |
| WA MTCA-EPH | C10-C12 Aliphatics | 2.0 | 10.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C12-C16 Aliphatics | 9.0 | 30.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C16-C21 Aliphatics | 12.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C21-C34 Aliphatics | 19.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C8-C10 Aromatics | 25.0 | 50.0 | µg/L | - | 25 | 50-150 | 25 | 50-150 | 25 | NA |
| WA MTCA-EPH | C10-C12 Aromatics | 1.0 | 10.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C12-C16 Aromatics | 3.0 | 40.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C16-C21 Aromatics | 4.0 | 30.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C21-C34 Aromatics | 7.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-EPH | C-35 | | | Surrogate | 60-140 | | | | | | 94-36-0 |
| WA MTCA-EPH | o-Terphenyl | | | Surrogate | 60-140 | - | - | - | - | - | 84-15-1 |
| WA MTCA-EPH | 2-Fluorobiphenyl | | | Surrogate | 60-140 | | | | | | 321-60-8 |
| WA MTCA-EPH | 2-Bromonaphthalene | | | Surrogate | 60-140 | | | | | | 580-13-2 |
| WA MTCA-EPH | 1-Chlorooctadecane | | | Surrogate | 60-140 | - | - | - | - | - | 3386-33-2 |
| Volatile Petroleum Hydrocarbons | | | | | | | | | | | |
| WA MTCA-VPH | C5-C6 Aliphatics | 1.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C6-C8 Aliphatics | 1.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C8-C10 Aliphatics | 3.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C10-C12 Aliphatics | 0.90 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C8-C10 Aromatics | 2.0 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C10-C12 Aromatics | 0.30 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | C12-C13 Aromatics | 0.30 | 50.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | NA |
| WA MTCA-VPH | 2,5-Dibromotoluene (FID) | | | Surrogate | 70-130 | - | - | - | - | - | 615-59-8 |
| WA MTCA-VPH | 2,5-Dibromotoluene (PID) | | | Surrogate | 70-130 | - | - | - | - | - | 615-59-8 |

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|---|--------------------------|-------|-------|-----------|--------------|---------------|--------------|-----|-------------|-----|-----------|
| | | | | | | | %R | RPD | %R | RPD | |
| GROUNDWATER (continued) | | | | | | | | | | | |
| Volatile Organic Compounds(Selected List) | | | | | | | | | | | |
| EPA 8260B | Benzene | 0.410 | 1.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | 71-43-2 |
| EPA 8260B | 1,2-Dibromethane (EDB) | 0.460 | 1.0 | µg/L | - | 10 | 70-152 | 10 | 80-135 | 10 | 106-93-4 |
| EPA 8260B | 1,2-Dichloroethane (EDC) | 0.350 | 1.0 | µg/L | - | 25 | 72-137 | 25 | 70-134 | 25 | 107-06-2 |
| EPA 8260B | Ethylbenzene | 0.350 | 1.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | 100-41-4 |
| EPA 8260B | n-Hexane | 0.230 | 2.0 | µg/L | - | 13 | 39-167 | 13 | 70-130 | 13 | 110-54-3 |
| EPA 8260B | Toluene | 0.350 | 1.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | 108-88-3 |
| EPA 8260B | Total Xylenes | 0.730 | 3.0 | µg/L | - | 25 | 70-130 | 25 | 70-130 | 25 | 1330-20-7 |
| Polynuclear Aromatic Compounds by GC/MS with High Volume Injection | | | | | | | | | | | |
| EPA 8270C-HVI | Acenaphthene | 0.029 | 0.100 | µg/L | - | 35 | 25-140 | 35 | 43-122 | 35 | 83-32-9 |
| EPA 8270C-HVI | Acenaphthylene | 0.031 | 0.100 | µg/L | - | 31 | 36-135 | 31 | 43-129 | 31 | 208-96-8 |
| EPA 8270C-HVI | Anthracene | 0.076 | 0.100 | µg/L | - | 38 | 20-145 | 38 | 50-125 | 38 | 120-12-7 |
| EPA 8270C-HVI | Benzo(a)anthracene | 0.018 | 0.100 | µg/L | - | 50 | 10-129 | 50 | 50-135 | 50 | 56-55-3 |
| EPA 8270C-HVI | Benzo(a)pyrene | 0.014 | 0.100 | µg/L | - | 50 | 10-136 | 50 | 46-136 | 50 | 50-32-8 |
| EPA 8270C-HVI | Benzo(b)fluoranthene | 0.044 | 0.100 | µg/L | - | 50 | 10-147 | 50 | 37-147 | 50 | 205-99-2 |
| EPA 8270C-HVI | Benzo(k)fluoranthene | 0.027 | 0.100 | µg/L | - | 50 | 10-135 | 50 | 47-135 | 50 | 207-08-9 |
| EPA 8270C-HVI | Benzo(ghi)perylene | 0.018 | 0.100 | µg/L | - | 50 | 10-145 | 50 | 30-145 | 50 | 191-24-2 |
| EPA 8270C-HVI | Chrysene | 0.020 | 0.100 | µg/L | - | 50 | 10-138 | 50 | 47-138 | 50 | 218-01-9 |
| EPA 8270C-HVI | Dibenz(a,h)anthracene | 0.018 | 0.100 | µg/L | - | 50 | 10-144 | 50 | 36-144 | 50 | 53-70-3 |
| EPA 8270C-HVI | Fluoranthene | 0.018 | 0.100 | µg/L | - | 40 | 28-143 | 40 | 51-139 | 40 | 206-44-0 |
| EPA 8270C-HVI | Fluorene | 0.035 | 0.100 | µg/L | - | 39 | 28-144 | 39 | 47-128 | 39 | 86-73-7 |
| EPA 8270C-HVI | Indeno(1,2,3-cd)pyrene | 0.023 | 0.100 | µg/L | - | 50 | 10-142 | 50 | 32-142 | 50 | 193-39-5 |
| EPA 8270C-HVI | 1-Methylnaphthalene | 0.030 | 0.100 | µg/L | - | 27 | 37-126 | 27 | 37-126 | 27 | 90-12-0 |
| EPA 8270C-HVI | 2-Methylnaphthalene | 0.028 | 0.100 | µg/L | - | 29 | 29-127 | 29 | 41-121 | 29 | 91-57-6 |
| EPA 8270C-HVI | Naphthalene | 0.028 | 0.100 | µg/L | - | 32 | 24-120 | 32 | 38-120 | 32 | 91-20-3 |
| EPA 8270C-HVI | Pentachlorophenol | 0.460 | 1.00 | µg/L | - | 32 | 34-163 | 32 | 34-147 | 32 | 87-86-5 |
| EPA 8270C-HVI | Phenanthrene | 0.051 | 0.100 | µg/L | - | 47 | 31-142 | 47 | 45-133 | 47 | 85-01-8 |
| EPA 8270C-HVI | Pyrene | 0.024 | 0.100 | µg/L | - | 37 | 10-158 | 37 | 50-146 | 37 | 129-00-0 |
| EPA 8270C-HVI | Nitrobenzene-d5 | | | Surrogate | 27-120 | - | - | - | - | - | 4165-60-0 |
| EPA 8270C-HVI | 2-Fluorobiphenyl | | | Surrogate | 29-120 | - | - | - | - | - | 321-60-8 |
| EPA 8270C-HVI | p-Terphenyl-d14 | | | Surrogate | 13-120 | - | - | - | - | - | 1718-51-0 |

Table 1 Data Quality Objectives

| Method | Analyte | MDL | MRL | Units | Surrogate %R | Duplicate RPD | Matrix Spike | | Blank Spike | | CAS # |
|---|----------------------------|------|------|-------|-----------------|------------------|--------------|-----|-------------|-----|------------|
| | | | | | | | %R | RPD | %R | RPD | |
| GROUNDWATER (continued) | | | | | | | | | | | |
| Dissolved Metals by EPA 6000/7000 Series Methods | | | | | | | | | | | |
| EPA 6020 - Diss | Lead; dissolved | 0.10 | 2.00 | mg/L | - | 20 | 75-125 | 20 | 80-120 | 20 | 7439-92-1 |
| Natural Attenuation Parameters | | | | | | | | | | | |
| EPA 300.0 | Sulfate | 0.11 | 1.00 | mg/L | - | 20 | 80-120 | 20 | 90-110 | 20 | 14808-79-8 |
| EPA 300.0 | Nitrate | 0.01 | 0.10 | mg/L | - | 20 | 80-120 | 20 | 90-110 | 20 | 14797-55-8 |
| EPA 6020 | Manganese (total; soluble) | 0.60 | 5.00 | mg/L | - | 20 | 75-125 | 20 | 80-120 | 20 | 7439-96-5 |
| RSK-175 | Methane | 10.0 | 26.0 | µg/L | 70-120 | 33 | 46-142 | 33 | 80-120 | 33 | 74-82-8 |
| EPA 310.1 | Alkalinity | 5.00 | 10.0 | mg/L | - | 20 | 80-120 | 20 | 90-110 | 20 | - |

Notes:

¹Titration method; no method detection limit

CAS = chemical Abstracts Service

FID = flame ionization detector

MDL = method detection limit

µg/L = micrograms per liter

µg/kg = microgram per kilograms

mg/kg = milligram per kilograms

mg/L = milligram per liter

MRL = method reporting limit

PID = photoionization detector

%R = percent Recovery

RPD = relative percent difference

VPH = volatile petroleum hydrocarbons

Table 2 Indicator Hazardous Substances

| Method | Analyte | MDL | MRL | Unit | MTCA Method A | | MTCA Method B | |
|--|-----------------------------|---------|---------|--------------|---------------------|---------------------|---------------|-----------------|
| | | | | | Unrestricted | Industrial | Carcinogenic | Noncarcinogenic |
| Petroleum Hydrocarbons by NWTPH-Gx and NWTPH-Dx in Soil | | | | | | | | |
| NWTPH-Gx | Gasoline Range Hydrocarbons | 1.40 | 5.00 | mg/kg dry wt | 30/100 ¹ | 30/100 ¹ | NR | NR |
| NWTPH-Dx | Diesel Range Hydrocarbons | 2.00 | 10.0 | mg/kg dry wt | 2,000 | 2,000 | NR | NR |
| NWTPH-Dx | Lube Oil Range Hydrocarbons | 4.00 | 25.0 | mg/kg dry wt | 2,000 | 2,000 | NR | NR |
| Volatile Organic Compounds per EPA Method 8260B in Soil | | | | | | | | |
| EPA 8260B | Benzene | 0.0004 | 0.0015 | µg/kg dry wt | 0.03 | 0.03 | 18 | 320 |
| EPA 8260B | Toluene | 0.0004 | 0.0015 | µg/kg dry wt | 7 | 7 | NR | 6,400 |
| EPA 8260B | Ethylbenzene | 0.0004 | 0.004 | µg/kg dry wt | 6 | 6 | NR | 800 |
| EPA 8260B | Total Xylenes | 0.0015 | 0.01 | µg/kg dry wt | | | | |
| EPA 8260B | Methyl tert-butyl ether | 0.0006 | 0.001 | µg/kg dry wt | | | | |
| EPA 8260B | 1,2-Dichloroethane (EDC) | 0.0006 | 0.00125 | µg/kg dry wt | NoD | NoD | 11 | 1,600 |
| EPA 8260B | 1,2-Dibromoethane (EDB) | 0.0006 | 0.005 | µg/kg dry wt | | | | |
| EPA 8260B | n-Hexane | 0.0008 | 0.005 | µg/kg dry wt | | | | |
| Polynuclear Aromatic Hydrocarbons by GC/MS-SIM in Soil | | | | | | | | |
| EPA 8270C-SIM | Acenaphthene | 0.00170 | 0.0100 | mg/kg dry wt | NoD | NoD | NR | 4,800 |
| EPA 8270C-SIM | Acenaphthylene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Anthracene | 0.00170 | 0.0100 | mg/kg dry wt | NoD | NoD | NR | 24,000 |
| EPA 8270C-SIM | Benzo(a)anthracene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | NR | NR |
| EPA 8270C-SIM | Benzo(a)pyrene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | 0.14 | NR |
| EPA 8270C-SIM | Benzo(b)fluoranthene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | Benzo(k)fluoranthene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | Benzo(b & k)fluoranthene | 0.00330 | 0.0200 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Benzo(ghi)perylene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Chrysene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | Dibenz(a,h)anthracene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | Fluoranthene | 0.00170 | 0.0100 | mg/kg dry wt | NoD | NoD | NR | 3,200 |
| EPA 8270C-SIM | Fluorene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Indeno(1,2,3-cd)pyrene | 0.00170 | 0.0100 | mg/kg dry wt | 2 | 0.1 | Tef | NR |
| EPA 8270C-SIM | 1-Methylnaphthalene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | 2-Methylnaphthalene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Naphthalene | 0.00170 | 0.0100 | mg/kg dry wt | 5 | 5 | NR | 1,600 |
| EPA 8270C-SIM | Pentachlorophenol | 0.0023 | 0.01 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Phenanthrene | 0.00170 | 0.0100 | mg/kg dry wt | | | | |
| EPA 8270C-SIM | Pyrene | 0.00170 | 0.0100 | mg/kg dry wt | NoD | NoD | NR | 24,000 |

Table 2 Indicator Hazardous Substances

| Method | Analyte | MDL | MRL | Unit | MTCA Method A | MTCA Method B | |
|--|-----------------------------|---------|--------|------|-----------------------|---------------|-----------------|
| | | | | | Unrestricted | Carcinogenic | Noncarcinogenic |
| Petroleum Hydrocarbons by NWTPH-Gx and NWTPH-Dx in Water | | | | | | | |
| NWTPH-Gx | Gasoline Range Hydrocarbons | 38.0 | 50.0 | µg/L | 800/1000 ¹ | NR | NR |
| NWTPH-Dx | Diesel Range Hydrocarbons | 2.00 | 10.0 | µg/L | 500 | NR | NR |
| NWTPH-Dx | Lube Oil Range Hydrocarbons | 4.00 | 25.0 | µg/L | 500 | NR | NR |
| Volatile Organic Compounds by EPA Method 8260B in Water | | | | | | | |
| EPA 8260B | Benzene | 0.0470 | 0.200 | µg/L | 5 | 0.8 | 32 |
| EPA 8260B | Toluene | 0.0210 | 0.200 | µg/L | 1,000 | NR | 640 |
| EPA 8260B | Ethylbenzene | 0.0660 | 0.200 | µg/L | 700 | NR | 800 |
| EPA 8260B | Total Xylenes | 0.247 | 0.750 | µg/L | 1,000 | NR | 1,600 |
| EPA 8260B | Methyl tert-butyl ether | 0.0930 | 1.00 | µg/L | 20 | 24 | 6,900 |
| EPA 8260B | 1,2-Dichloroethane (EDC) | 0.0420 | 0.200 | µg/L | 5 | 0.48 | 160 |
| EPA 8011 | 1,2-Dibromoethane (EDB) | 0.600 | 5.00 | µg/L | 0.01 | 0.00051 | NR |
| EPA 8260B | n-Hexane | 0.129 | 1.00 | µg/L | NoD | NR | 480 |
| Polynuclear Aromatic Compounds by GC/MS with High Volume Injection in Water | | | | | | | |
| EPA 8270C-HVI | Acenaphthene | 0.00600 | 0.100 | µg/L | NoD | NR | 160 |
| EPA 8270C-HVI | Acenaphthylene | 0.00700 | 0.100 | µg/L | | | |
| EPA 8270C-HVI | Anthracene | 0.00900 | 0.100 | µg/L | NoD | NR | 4,800 |
| EPA 8270C-HVI | Benzo(a)anthracene | 0.00500 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Benzo(a)pyrene | 0.00600 | 0.0100 | µg/L | 0.1 | 0.012 | NR |
| EPA 8270C-HVI | Benzo(b)fluoranthene | 0.00600 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Benzo(k)fluoranthene | 0.00600 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Benzo(ghi)perylene | 0.00700 | 0.100 | µg/L | | | |
| EPA 8270C-HVI | Chrysene | 0.00600 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Dibenz(a,h)anthracene | 0.00500 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | Fluoranthene | 0.00900 | 0.100 | µg/L | NoD | NR | 640 |
| EPA 8270C-HVI | Fluorene | 0.00800 | 0.100 | µg/L | NoD | NR | 640 |
| EPA 8270C-HVI | Indeno(1,2,3-cd)pyrene | 0.00600 | 0.0100 | µg/L | NoD | Tef | NR |
| EPA 8270C-HVI | 1-Methylnaphthalene | 0.00600 | 0.100 | µg/L | NR | NR | NR |
| EPA 8270C-HVI | 2-Methylnaphthalene | 0.00800 | 0.100 | µg/L | NR | NR | 32 |
| EPA 8270C-HVI | Naphthalene | 0.00600 | 0.100 | µg/L | 160 | NR | 160 |
| EPA 8270C-SIM | Pentachlorophenol | 0.0068 | 0.01 | µg/L | NoD | 0.73 | 480 |
| EPA 8270C-HVI | Phenanthrene | 0.00800 | 0.100 | µg/L | NR | NR | NR |
| EPA 8270C-HVI | Pyrene | 0.00700 | 0.100 | µg/L | NoD | NR | 480 |

Table 2 Indicator Hazardous Substances

| Method | Analyte | MDL | MRL | Unit | MTCA Method A | MTCA Method B | |
|--|----------------|----------|---------|------|---------------|---------------|-----------------|
| | | | | | Unrestricted | Carcinogenic | Noncarcinogenic |
| Dissolved Metals by EPA 6000/7000 Series Methods in Water | | | | | | | |
| EPA 6020 - Diss | Dissolved Lead | 0.000900 | 0.00100 | mg/L | 15 | NR | NR |

Notes:

1. TPH gasoline with benzene present/TPH gasoline without benzene present

MTCA = Model Toxics Control Act

NoD = No data

NR = Not researched

µg/kg = microgram per kilogram

µg/L = microgram per liter

mg/kg = milligram per kilogram

mg/L = milligram per liter

Tef = Toxic equivalency factor

Table 3 Soil and Groundwater Sampling Locations

| Sample Location | Soil Sample Label | Drilling Method | Maximum Depth (feet) | No. of Soil Samples | Screen Elevation ¹ | No. of Groundwater Samples |
|---|-----------------------|-----------------|----------------------|---------------------|-------------------------------|----------------------------|
| Soil Borings | | | | | | |
| AP-1 | AP-1-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-2 | AP-2-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-3 | AP-3-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-4 | AP-4-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-5 | AP-5-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-6 | AP-6-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| AP-7 | AP-7-(depth in feet) | Direct push | 15 | 2 | N/A | 0 |
| Duplicate soil sample ² | DUP-S-1 | | | 1 | | |
| AB-1 | AB-1-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-2 | AB-2-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-3 | AB-3-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-4 | AB-4-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-5 | AB-5-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-6 | AB-6-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| AB-7 | AB-7-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| MW-A7 | MW-A7-(depth in feet) | HSA | 35 | 2 | N/A | 0 |
| Duplicate soil sample ² | DUP-S-2 | | | 1 | | |
| Monitoring Wells | | | | | | |
| MW-A3 | MW-A3-(depth in feet) | HSA | 15 | 2 | 0 to 10 | 4 |
| MW-A4 | MW-A4-(depth in feet) | HSA | 15 | 2 | 0 to 10 | 4 |
| MW-A5 | MW-A5-(depth in feet) | HSA | 15 | 2 | 0 to 10 | 4 |
| MW-A6 | MW-A6-(depth in feet) | HSA | 15 | 2 | 0 to 10 | 4 |
| MW-A7 | (3) | HSA | 15 | (3) | 0 to 10 | 4 |
| Duplicate groundwater sample ⁴ | DUP-GW-1 | | | | | 4 |
| Total Samples | | | | 40 | | 24 |

Notes:

1. Approximate elevation in feet above mean sea level.
2. Duplicate samples will be collected from intervals exhibiting evidence of potential contamination, such as staining or odor.
3. Soil samples for this boring are listed under soil borings.
4. A duplicate groundwater sample will be collected each quarter.

HSA = hollow-stem auger
N/A = not applicable

Table 4 Sample Containers, Preservation and Storage

| Analysis | Method | Sample Container | Number of Containers | Preservation and Storage | Holding Times |
|---|------------------------|--|----------------------|--------------------------|-----------------------|
| Soil | | | | | |
| Hydrocarbon Identification | NWTPH-HCID | 8 oz. CWM jar with PTFE lid | 1 | 4° C | 14 days |
| Gasoline Range Organics | NWTPH-Gx | VOA vial w/MeOH | 1 | 10 mL MeOH | 14 days |
| Diesel Range Organics ¹ | NWTPH-Dx | 8 oz. CWM jar ² with PTFE lid | 1 | 4° C | 14 days |
| EPH | MTCA-NW EPH | 8 oz. CWM jar ² with PTFE lid | 1 | HCl pH<2; 4° C | 14 days |
| VPH | MTCA-NW VPH | 8 oz. CWM jar ² with PTFE lid | 1 | HCl pH<2; 4° C | 14 days |
| Volatile Organic Compounds ^{3,4} | EPA 8260B | VOA vial w/stir bar ⁵ | 2 | Freeze within 48 hrs | 14 days |
| Polycyclic Aromatic Hydrocarbons | EPA 8270D | 8 oz. CWM jar ² with PTFE lid | 1 | 4° C | 14 days |
| Water | | | | | |
| Gasoline Range Organics | NWTPH-Gx | VOA vial w/MeOH | 3 | HCl pH<2, 4° C | 14 days |
| Diesel Range Organics | NWTPH-Dx | 500-mL amber bottle | 2 | HCl pH<2, 4° C | 14 days |
| Volatile Organic Compounds ^{3,4} | EPA 8260B ⁶ | VOA vial | 3 | HCl pH<2, 4° C | 14 days |
| Polycyclic Aromatic Hydrocarbons | EPA 8270D | 1-Liter Amber | 2 | None | 7 days |
| Dissolved Lead ⁷ | EPA 6020 | 500-mL polyethylene | 1 | None | 180 days ⁸ |

Notes:

1. Silica gel cleanup will be performed on samples where the chromatograph indicates a possible biogenic influence.
2. Sample fraction would come from the same 8 oz jar that was collected for NWTPH-HCID.
3. Includes benzene, toluene, ethylbenzene, total xylenes, and methyl tertiary-butyl ether.
4. Includes 1,2-dichloroethane, 1,2-dibromoethane, and n-hexane for selected samples that appear to be contaminated based on field screening.
5. Sample volume = 5 ounces
6. 1,2-Dibromoethane will be analyzed using EPA Method 8011.
7. Sample to be filtered in the lab.
8. Sample must be filtered within 48 hours of collection for this holding time to apply.

CWM jar = Clear, wide-mouth glass jar

EPH = Extractable petroleum hydrocarbons

HCl = Hydrochloric acid

MeOH = Methanol

PTFE = teflon

VOA = volatile organic analysis

VPH = Volatile petroleum hydrocarbons

Table 5 Geotechnical AnalysesPRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT

| Geotechnical Parameter | Analytical Method | Sample Container and Volume | Number of Containers | Preservation and Storage | Holding Time |
|-------------------------------|--------------------------|------------------------------------|-----------------------------|---------------------------------|---------------------|
| Fraction organic carbon | Organic content burn | 5-gallon bucket | 2 | None | 180 days |
| Soil bulk density | Unit weight/volume | 5-gallon bucket | 2 | None | 180 days |
| Total soil porosity | (1) | 5-gallon bucket | 2 | None | 180 days |
| Volumetric water content | (2) | 5-gallon bucket | 2 | None | 180 days |
| Permeability | | Shelby tube | 1 | Seal ends and store upright | 180 days |
| Volumetric air content | | 5-gallon bucket | 2 | None | 180 days |

Notes:

1. Calculated w/ bulk density and particle density.
2. Calculated w/ gravimetric water content.

Table 6 Natural Attenuation Parameter Sampling Containers, Preservation, and Storage

| Natural Attenuation Parameter Analysis ¹ | Method | Sample Container | Number of Containers | Preservation and Storage | Holding Time |
|---|----------------|--------------------------------------|----------------------|--------------------------|--------------|
| Dissolved oxygen (DO) | Field-measured | N/A | N/A | N/A | N/A |
| Oxidation-reduction potential (ORP) | Field-measured | N/A | N/A | N/A | N/A |
| pH | Field-measured | N/A | N/A | N/A | N/A |
| Specific conductance | Field-measured | N/A | N/A | N/A | N/A |
| Temperature | Field-measured | N/A | N/A | N/A | N/A |
| Sulfate | EPA 300.0 | 500 mL unpreserved polyethylene | 1 | none | 28 days |
| Nitrate | EPA 300.0 | 500 mL unpreserved polyethylene | 1 | none | 2 days |
| Ferrous iron (soluble) | Field-measured | N/A | N/A | N/A | N/A |
| Manganese (soluble) | EPA 6020 | 500 mL HNO ₃ polyethylene | 1 | HNO ₃ | 180 days |
| Methane | RSK175 | 40 mL HCl Vials | 3 | HCl | 14 days |
| Alkalinity | EPA 310.1 | 500 mL unpreserved polyethylene | 1 | none | 14 days |

Notes

¹Ecology, 2005

HCl = hydrochloric acid

HNO₃ = nitric acid

NA = not applicable

VOAs = volatile organic analysis

Table 7 Tidal Study Well Specifications

| Well No. | Date Installed | Well Depth (feet) | Screened Interval (feet) | TOC Elevation ¹ | Depth to Water ² | Groundwater Elevation ³ | Summary of Lithology |
|----------|----------------|--------------------|--------------------------|----------------------------|-----------------------------|------------------------------------|---|
| W-3 | Feb-90 | 22.9 ⁴ | 3 to 23 | 13.27 | 5.88 | 7.39 | sand; H ₂ S odor |
| W-6 | Feb-90 | 6.5 ⁴ | | 14.95 | 2.83 | 12.12 | sand; organic clay; H ₂ S odor |
| MW-11 | Mar-88 | 18.72 ⁴ | NS in log | 16.28 | 2.71 | 13.57 | sand (fill); peat |
| MW-19 | Mar-91 | 5.26 ⁴ | NS in log | 12.79 | 2.76 | 10.03 | sand |
| MW-28 | June-91 | 12.18 ⁴ | 2.5 to 11.5 | 13.86 | 1.25 | 12.61 | silty sand; peat |
| MW-40R | No log | 12.51 ⁴ | No log | 15.56 | 3.35 | 12.21 | No log |
| MW-A1 | Feb-08 | 15.5 | 5.5 to 15.5 | 14.07 | 7.18 ⁵ | 6.89 | sand & gravel (fill) |
| MW-A2 | Feb-08 | 15.5 | 5.5 to 15.5 | 12.56 | 5.82 ⁵ | 6.74 | sand & silt (fill) |
| MW-A3 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |
| MW-A4 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |
| MW-A5 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |
| MW-A6 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |
| MW-A7 | TBI | TBD | 25 to 35 ⁶ | TBD | TBD | TBD | TBD |


Notes:

1. TOC elevation is in feet above mean sea level.
2. Depth to water in feet below ground surface measured prior to installation of pressure transducer on February 21, 2008.
3. Groundwater elevation is in feet above mean sea level measured prior to installation of pressure transducer on February 21, 2008.
4. Total depth of well measured on February 21, 2008.
5. Depth to water measured on February 24, 2009.
6. Screened interval depth is approximate as wells have not been installed.

H₂S = hydrogen sulfide
 NS = Not specified
 TBI = To be installed
 TBD = To be determined

FIGURES

JOB NO.: 9-915-15716-C | DWG DATE: 3-27-2009 10:50am | SCALE: 1"=60' | DESIGN BY: JRS | FILE NAME: 15716-C-01.dwg

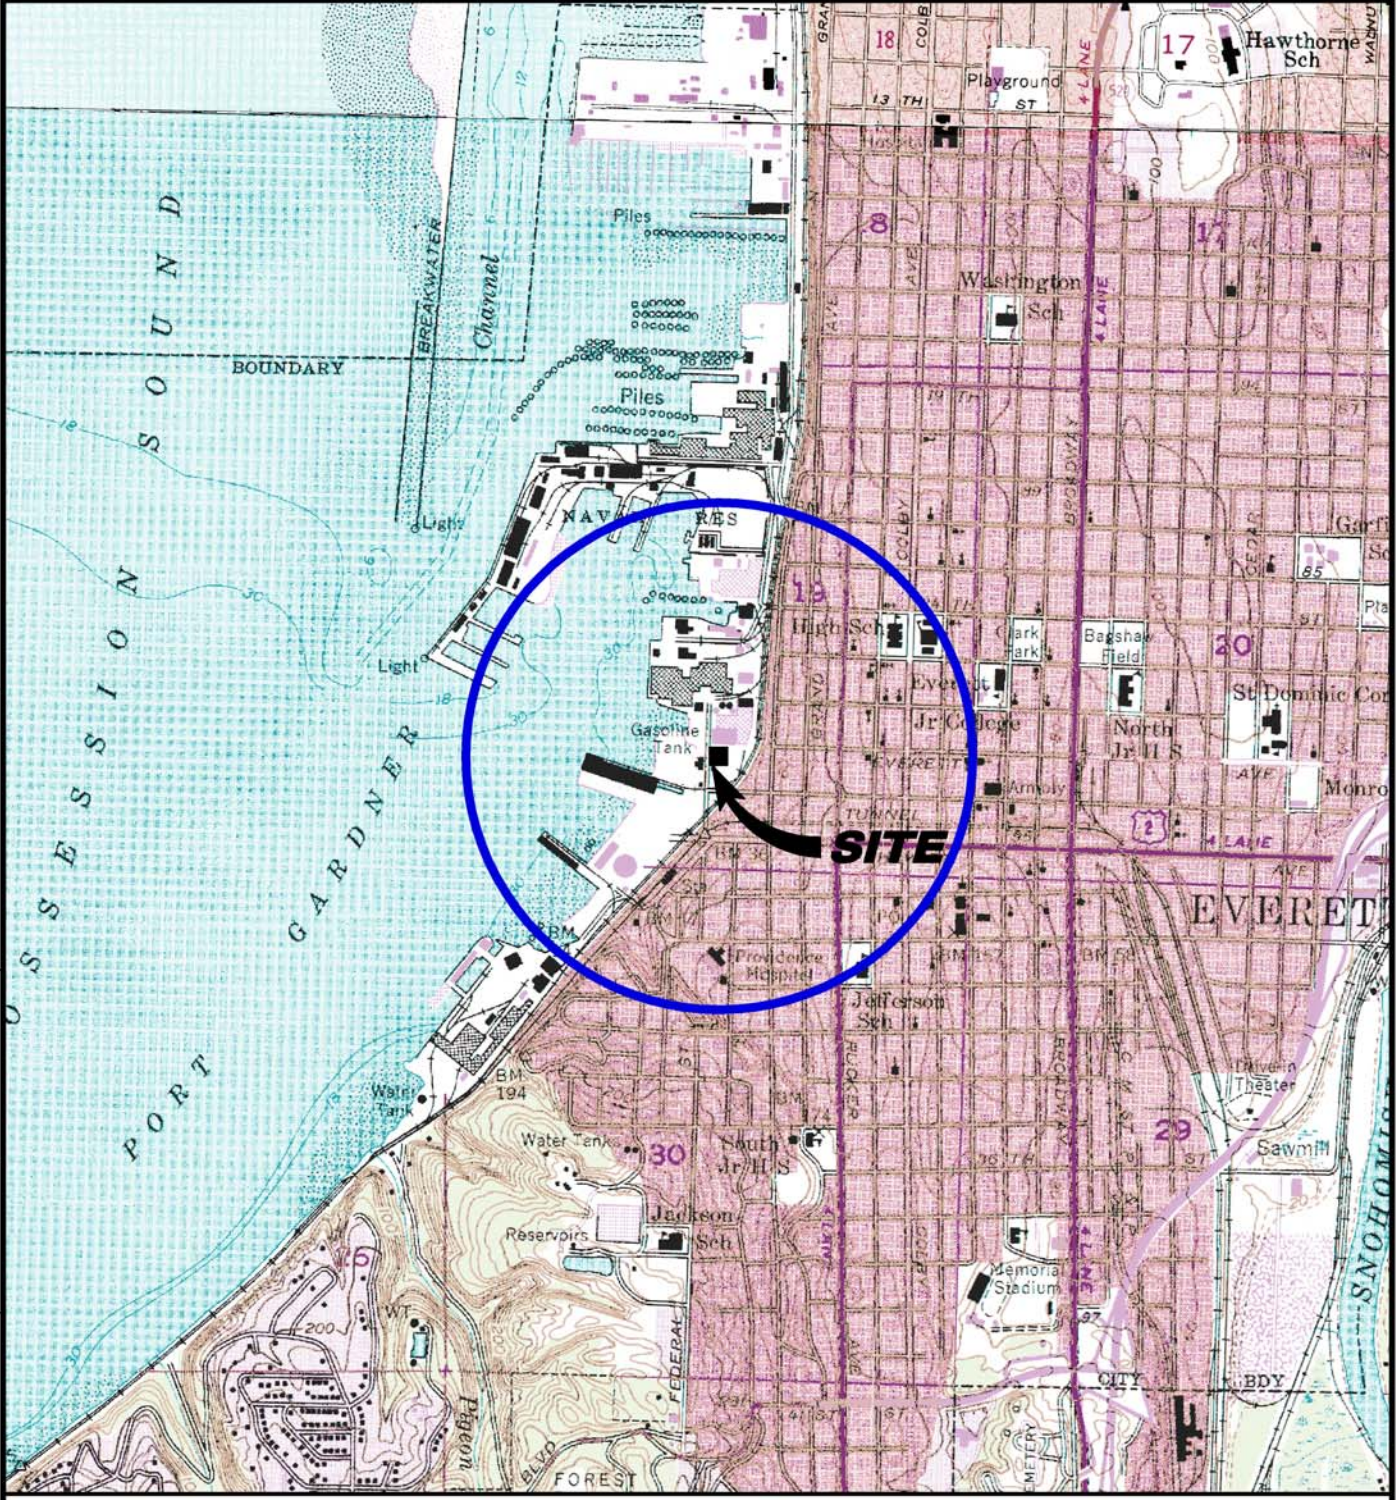

EXPLANATION



1/2-MILE RADIUS CIRCLE



0 2000 4000 Feet

SCALE: 1:24,000

SOURCE: USGS Quad Topo of Everett and Marysville, Photorevised 1973.




AMEC EARTH & ENVIRONMENTAL, INC.
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201

SITE LOCATION MAP

EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728
2717/2731 FEDERAL AVENUE
EVERETT, WASHINGTON

FIGURE

1

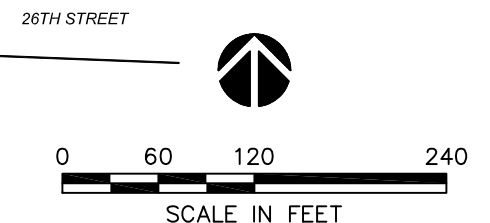

LEGEND

| | |
|------------------|---|
| MW-A7 | PROPOSED MONITORING WELL LOCATION AND NUMBER |
| AP-6 | PROPOSED DEEP BORING LOCATION AND NUMBER |
| AP-7 | PROPOSED PUSH-PROBE BORING LOCATION AND NUMBER |
| BB-1 | PREVIOUS EXPLORATION LOCATION, PLEASE REFER TO FIGURE 3 FOR DETAILS |
| TP-3 | |
| GP-8 | |
| PROBE-15 KC-2 | |
| AD-5 | |
| LP4 | |
| - - - | PROPERTY LINE |
| [Solid Line] | EXISTING BUILDINGS |
| [Dashed Line] | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| -x-x- | FENCE |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:
**EXXONMOBIL
AMERICAN DISTRIBUTING CO.**

AMEC Earth & Environmental
11810 North Creek Parkway N
Bothell, WA, U.S.A. 98011-8201



DWN BY: JRS
CHK'D BY: AS/MS
DATUM: NONE
PROJECTION: NONE
SCALE: AS SHOWN

PROJECT
**EXXONMOBIL/ADC PROPERTY
ECOLOGY ID 2728**

TITLE
**PROPOSED DATA GAP INVESTIGATIONS
EXPLORATION PLAN**

DATE:
AUGUST 2009
PROJECT NO.:
9-915-15716-C
REV. NO.:
FIGURE No.
2

ATTACHMENT A1

Site-Specific Health and Safety Plan

SITE SPECIFIC HEALTH AND SAFETY PLAN

Project Name: ExxonMobil/ADC Property, Ecology Site ID 2728
Project Location: 2717/2731 Federal Avenue, Everett, Washington
Project Number: 9-91-51571-6C

THIS SITE SPECIFIC HEALTH AND SAFETY PLAN APPLIES ONLY TO AMEC PERSONNEL.

All site personnel must have completed the 8-hour ExxonMobil LPS Training prior to undertaking any field work at the site.

A PRE-ENTRY BRIEFING MUST BE HELD PRIOR TO INITIATING ANY SITE ACTIVITY AND AT OTHER TIMES AS NECESSARY TO ENSURE EMPLOYEES ARE APPRISED OF THE SITE HEALTH AND SAFETY PLAN.

SAFETY PERSONNEL:

| | |
|---------------------------------|--|
| Health and Safety Coordinators: | Leah Vigoren and Anastasia Speransky |
| Project Engineers: | Leah Vigoren and Stephen Dailey |
| Project Managers: | Meg Strong and Gary Dupuy |
| Site Safety Coordinator (SSC): | Leah Vigoren |
| Client Contact: | Joe Abel: ExxonMobil Environmental Services (EMES) |

EMERGENCY CONTACTS:

| | | |
|----------------------------|----------------------------------|---------------------|
| Hospital / Emergency Room: | Providence Medical Center | 425-258-7555 |
|----------------------------|----------------------------------|---------------------|

Map showing shortest route to Hospital is attached to this document.

| | |
|--|----------------|
| Fire: | 911 |
| Police: | 911 |
| Poison Control Center: | 1-800-222-1222 |
| Emergency Water Shut-off: Everett | 1-425-257-8821 |
| Electric Utility: Snohomish County PUD | 1-877-783-1000 |
| Washington State Patrol: | 911 |

| | |
|--|------------------|
| Health and Safety Coordinator: Leah Vigoren (Cell Phone: 206-351-9449) | 206-342-1760 (w) |
| Project Manager: Meg Strong (Cell Phone: 425-864-2096) | 425-368-0966 (w) |

AMEC Earth & Environmental, Inc.
11810North Creek Parkway
Bothell, Washington
USA 98011
(425) 368-1000 Phone
(425) 368-1001 Facsimile

SITE HISTORY

The approximate 1-acre site was purchased by ExxonMobil's historic predecessors in 1922, and was utilized as a petroleum bulk storage distribution facility between 1922 and 1974. In 1974, the then Mobile Company sold two thirds of the site (northern portion) to A.P. Miller (Miller), for use by the American Distributing Company (ADC). In 1987, Mobile discontinued petroleum storage and dispensing operations on their portion of the site and removed all storage tanks and ancillary equipment. In 1990, petroleum distribution was discontinued on the ADC parcel, and some improvements and tanks were removed from the parcel. Since then, the site has been turned into a parking lot and is leased to the Kimberly Clark facility located to the north of the site. Activities that have occurred on the site since this time have been environmental investigations and remedial activities to address petroleum impacts to soil and groundwater.

In 1985, site characterization activities were initiated to define the nature and extent of petroleum impacts beneath the site. Between 1988 and 1996, a variety of Interim Remedial Action Measures (IRAMs) were implemented to address the free product. In 1998, a Remedial Investigation/Focused Feasibility Study (RI/FFS) was performed in coordination of the Washington State Department of Ecology (Ecology) under the Consent Order. Remedial Action Objectives (RAOs) were developed for the site based on the RI data and baseline human health risk assessment. The remedy selected to achieve RAOs included the following.

- 1) Construction of an interceptor trench along the down gradient margins of the site (entire western and northern boundaries) to mitigate the off-site migration of the light non-aqueous phase liquid (LNAPL) present on the shallow water table.
- 2) Placement of low-permeability cap across the entire site surface
- 3) Ongoing removal and disposal of recovered LNAPL from site monitoring wells and interceptor trench; and
- 4) Quarterly groundwater monitoring.

ORGANIZATIONAL STRUCTURE

Project Manager(s):

Gary Dupuy (phone number 206-342-1777) and Meg Strong (phone number 425-368-0966) are the client managers for the project. Responsibilities include remaining in contact with regulatory agencies such as the Department of Ecology, overseeing the Project and ensuring client satisfaction from commencement to closeout.

Site Safety and Health Supervisor:

Leah Vigoren (phone number 206-838-8470) and Anastasia Speransky (phone number 206-838-1776) are the acting Health and Safety Coordinators (HSCs). Primarily the duties of the HSC entail coordination with the Project manager for preparation of site health and safety plans, assessment of chemical hazards and selection of safety / monitoring equipment.

The HSC will also take on the duties of the Site Safety Coordinator. The SSC has the responsibility of implementing the Site Health and Safety Plan while at the Site. The SSC / HSC will be involved with the Project Manager in preparation of the Site Health and Safety Plan. If the plan is not being implemented or if unanticipated situations arise, the SSC / HSC may stop all proceedings and see that all personnel depart the site. The SSC / HSC will have charge of all instruments and see to their proper use and function.

Project Engineer:

Stephen Dailey (phone number 206-342-1775) is the project engineer and is responsible for developing the site conceptual model and providing engineering input to the FFS.

Field Technicians:

Joseph C. Petrick, and Danah Palik are the Field Technicians whose responsibilities include obtaining groundwater samples and other data, as required, from monitoring wells. Keeping field records (I.e. Daily Field Logs) describing field activities, observations and site events. Supplying daily reports and reporting all incidents to the Project Engineer.

Subcontractor

Transport and disposal company (Clear Harbors: AWSL Subcontractor) is responsible for removing all waste from the jobsite and transferring it to a certified facility for disposal.

Drilling company "Cascade Drilling, Inc." is responsible for the advancement of soil borings and the installation of monitoring wells on the site.

ON SITE TASKS

AMEC to remove light non-aqueous phase liquid (LNAPL) monthly and continue the quarterly groundwater monitoring program at the site. Groundwater samples will be collected and analyzed for diesel and heavy oil range organics using Method Northwest Total Petroleum Hydrocarbons Diesel Extended (NWTPH: NWTPH-D, which includes NWTPH-oil (O) with Silica Gel clean-up), gasoline range organic compounds using Method NWTPH-gasoline Extended (Gx), and benzene, toluene, ethyl benzene, and total xylenes (BTEX) using U.S. Environmental Protection Agency (EPA) Method 8260B.

During monthly O&M events LNAPL is collected by AMEC personnel and stored in two 55-gallon drums within a secured shed on the project site. To mitigate spill hazards, and possible drum failure, these drums are placed on a secondary containment platform which would collect any spilled free liquids. When the drums are full a certified waste transporter and disposal company (ASWL Subcontractor) is contacted to transport the drums for disposal.

AMEC will oversee the advancement of 18 soil borings and the installation of 5 new monitoring wells on the site. Cascade Drilling of Woodinville Washington will conduct the drilling on the site and provide all equipment and personnel necessary. This work will require utility clearances prior to the initiation of drilling. Drilling involves the use of heavy equipment which will require safety precautions during set up and operation. Drilling and sampling at the site brings potentially-contaminated subsurface materials to the surface where Cascade drilling personnel or AMEC personnel overseeing the drilling may be exposed. Soil samples will be collected from each soil boring; a total of 2 samples per boring will be submitted for analyses including NWTPH-Dx, NWTPH-Gx, and BTEX by 8260B. After monitoring well installation, the 5 new wells will be sampled as part of AMEC's ongoing quarterly groundwater monitoring program at the site.

AMEC will be conducting a tidal influence study in which a stilling well will need to be installed on a portion of the Everett pier. The stilling well will need to extend into the water such that the lower portion of it is always submerged. The tidal influence study will consist of programming and installing pressure transducers and data loggers in approximately 12 monitoring wells which will measure water level fluctuations which will be analyzed for the presence and extent of tidal influence.

SAFETY & HEALTH HAZARDS ANALYSIS

a) Physical Hazards

Physical hazards that may be encountered during site activities include noise, manual lifting, powerful moving parts and weather related hazards (cold, heat stress, wind). Hard hats, safety glasses, hearing protection and steel-toed boots will be required for all personnel working in the vicinity of heavy equipment.

Identified hazards may be mitigated by using safe work practices at all times. The SSC has total responsibility for ensuring that all AMEC personnel on-site perform work tasks in a safe and sensible manner. If at any time the SSC determines that safe work practices are not followed, the tasks will be suspended and corrective actions will be taken.

Because of the potential of explosion hazard presented during groundwater monitoring (i.e., W-2) **SMOKING WILL NOT BE ALLOWED WITHIN 50 FEET OF THE WORK ZONE.**

The following are all additional site related hazards:

- 1) **Traffic**
 - a. Cones will be set out around the work area and safety reflective vests will be worn.
- 2) **Personnel or property damage from vehicle movement.**
 - a. When moving vehicles the following precautions must be taken
 - b. Equipment must be stowed and secured
 - c. A spotter must be used due to the presence of blind spots in the driver's field of vision.
 - d. The spotter must identify any surface obstruction / anomalies
 - e. Audible warning signals and hand signals must be used.
 - f. Operator must yield to pedestrians.
- 3) **Personal injury from handling heavy objects.**
 - a. Use proper lifting techniques; keeping back straight and lift with arms and legs; keep load near body; avoid reaching.
 - b. Do not attempting to lift anything that weighs more than 60 pounds.
 - c. Use mechanical equipment such as a cart to carry / lift large, heavy or awkward loads.
- 4) **Slips, trips and falls.**
 - a. Scan area prior to start of work.
 - b. Group all equipment and waste in one designated area.
 - c. Return tools not in use to storage.
- 5) **Pinch points on drum and well covers.**
 - a. Personnel will wear leather gloves when working with well and drum covers.
- 6) **Broken Glassware**
 - a. Personnel will use bubble wrap and blue ice when transporting samples in glass containers.
 - b. Personnel will not overtighten caps on glass bottles.

b) Chemical Hazards

Chemical hazards that could possibly be encountered include Gasoline, BTEX, hydrogen sulfide (H₂S), and methane (CH₄). The Permissible Exposure Limit (PEL) for Gasoline, BTEX, and hydrogen sulfide, and the Threshold Limit Value (TLV) for methane are listed in the attached table. The nature of this project precludes continuous exposure to any potential contaminant.

Per past anecdotal evidence, monitoring well (MW) 30 occasionally has contained small amounts of hydrogen sulfide gas. In addition, during installation, well (W) 2 contained methane gas exceeding the lower explosive limit (LEL). AMEC will conduct initial air monitoring using a multi-gas combustible gas

indicator (CGI) upon opening wells for sampling. Ensure that the atmosphere is less than 10% LEL, contains between 19.5% and 23.5% oxygen, less than 10 parts per million (ppm) H₂S and less than 10 ppm carbon monoxide prior to proceeding with sampling. Each well will be continuously monitored during sampling. The CGI will alarm if atmospheric concentrations exceed the levels required for entry. (Subsequent air monitoring for the year following installation indicates that no hazardous amounts of CH₄ have been detected in or nearby W2 since installation.

- 1) **Personal Injury from chemical contact / exposure / inhalation.**
 - a. Inspect drums before handling to ensure they are not leaking or bulging, or show any signs of loss of integrity.
 - b. AMEC personnel will place themselves upwind when opening monitoring wells.
- 2) **Personal injury from vapor ignition.**
 - a. AMEC personnel will use metal buckets when collecting and moving product.

c) Biological Hazards

The project site is a flat graded parking lot which eliminates most biological hazards. Current biological hazards are limited to the possibility of insects and / or rodents residing within the monitoring wells. AMEC personnel will take caution when opening the wells and will be wearing leather gloves to mitigate this hazard.

TRAINING

All AMEC personnel will review the site specific Health and Safety plan before accessing the site. Personnel onsite will also have current 40-Hour Hazardous Waste Operations and Emergency Response (HAZWOPER) Certification.

Certificates of HAZWOPER completion will be maintained at the Kirkland office and will be available to regulatory personnel upon request. All Personnel shall carry current 40-hour HAZWOPER training cards or appropriate paperwork while working onsite. The SSC / HSC shall be first aid and CPR trained.

In addition all site personnel must have completed the **8 hour ExxonMobil LPS Training** prior to undertaking any field work.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

AMEC will wear Level D PPE which consists of steel-toed, chemical resistant rubber boots, inner glove of PVC or latex, outer gloves of Nitrile or equivalent, safety glasses, Tyvek coveralls, and a hard hat. During construction activities, minimal PPE hearing protection will consist of soft foam ear-bud style plugs.

MEDICAL SURVEILLANCE

Evidence of a current physical examination in the form of a letter from an examining physician will be maintained at the Bothell office and will be available to regulatory personnel upon request.

Air Monitoring

AMEC will conduct initial air monitoring using a photoionization detector (PID) upon opening wells for sampling. PID utilizes ultraviolet light to ionize gas molecules and is commonly employed in the detection of volatile organic compounds (VOCs). AMEC will ensure that the concentrations of VOCs are less than 5 parts per million (ppm) in breathing zone prior to proceeding with sampling. Each well will be continuously monitored during sampling. The

PID will alarm if VOC concentrations exceed the levels required for breathing.
AMEC will calibrate the PID both pre and post site visits using Isobutylene calibration gas with compatible regulator.

Air monitoring will be conducted during drilling and soil sampling activities.

Decontamination

Disposable PPE will be stored in a secured 55-gallon drum onsite. Monthly, a certified waste transporter and disposal company (ASWL Subcontractor) is contacted to transport the drum for disposal.

Water depth meters will be decon'd between depth recordings of individual monitoring wells using a clean metal bucket with distilled water and 1/10 parts cleaning solution.

Site Control

AMEC personnel will be provided with a site map and be required to review the Health and Safety plan prior to entry into the site. A copy of this HASP shall be on hand at all times with emergency contact numbers and directions to the nearest medical facilities easily accessible. When necessary (e.g. quarterly sampling), cones, caution tape or a suitable alternative will be used to deny public access to the work area. Cones will also be used to define an exclusion zone redirecting motorists and pedestrians away from the work area.

In all emergencies AMEC is to document the action taken and notify the HSC, Project Manager and client official of the event and subsequent response.

In the Event of an Injury

If an injury is life-threatening, follow steps 1 through 8 below. If the injury is not life threatening, perform necessary first aid and consider the need for decontamination prior to transport. The SSC shall be first aid and CPR trained.

- 1) Perform first aid necessary to determine victim(s) medical status
- 2) Call emergency transport.
- 3) Give specific directions to location of emergency
- 4) Give phone from which you are calling;
- 5) Tell emergency services what happened. Inform that victim(s) may be wearing contaminated clothing.
- 6) Inform emergency services how many persons need help.
- 7) Inform emergency services what is being done for the victim(s)
- 8) Stay on telephone until told to hang up.

Transport to hospital, if possible.

Work Permits

Copies of the permits will be available onsite during drilling activities. Cascade Drilling will obtain start cards required for drilling from the Washington State Department of Ecology.

Security


No unauthorized persons will be allowed in the work zone. Unauthorized persons are those without appropriate training, without proof of medical surveillance, and those with no business on the site.

EMERGENCY MEDICAL ROUTE DIRECTIONS

2717 Federal Avenue, Everett, WA 98201

1. Head south on Federal Avenue towards Terminal Avenue.
2. Turn left at Terminal Avenue.
3. Continue on Everett Avenue/WA-529.
4. Turn left on Grand Avenue.
5. Turn right at 14th Street.
6. Turn left at Colby Avenue.

1321 Colby Avenue, Everett, WA 98201

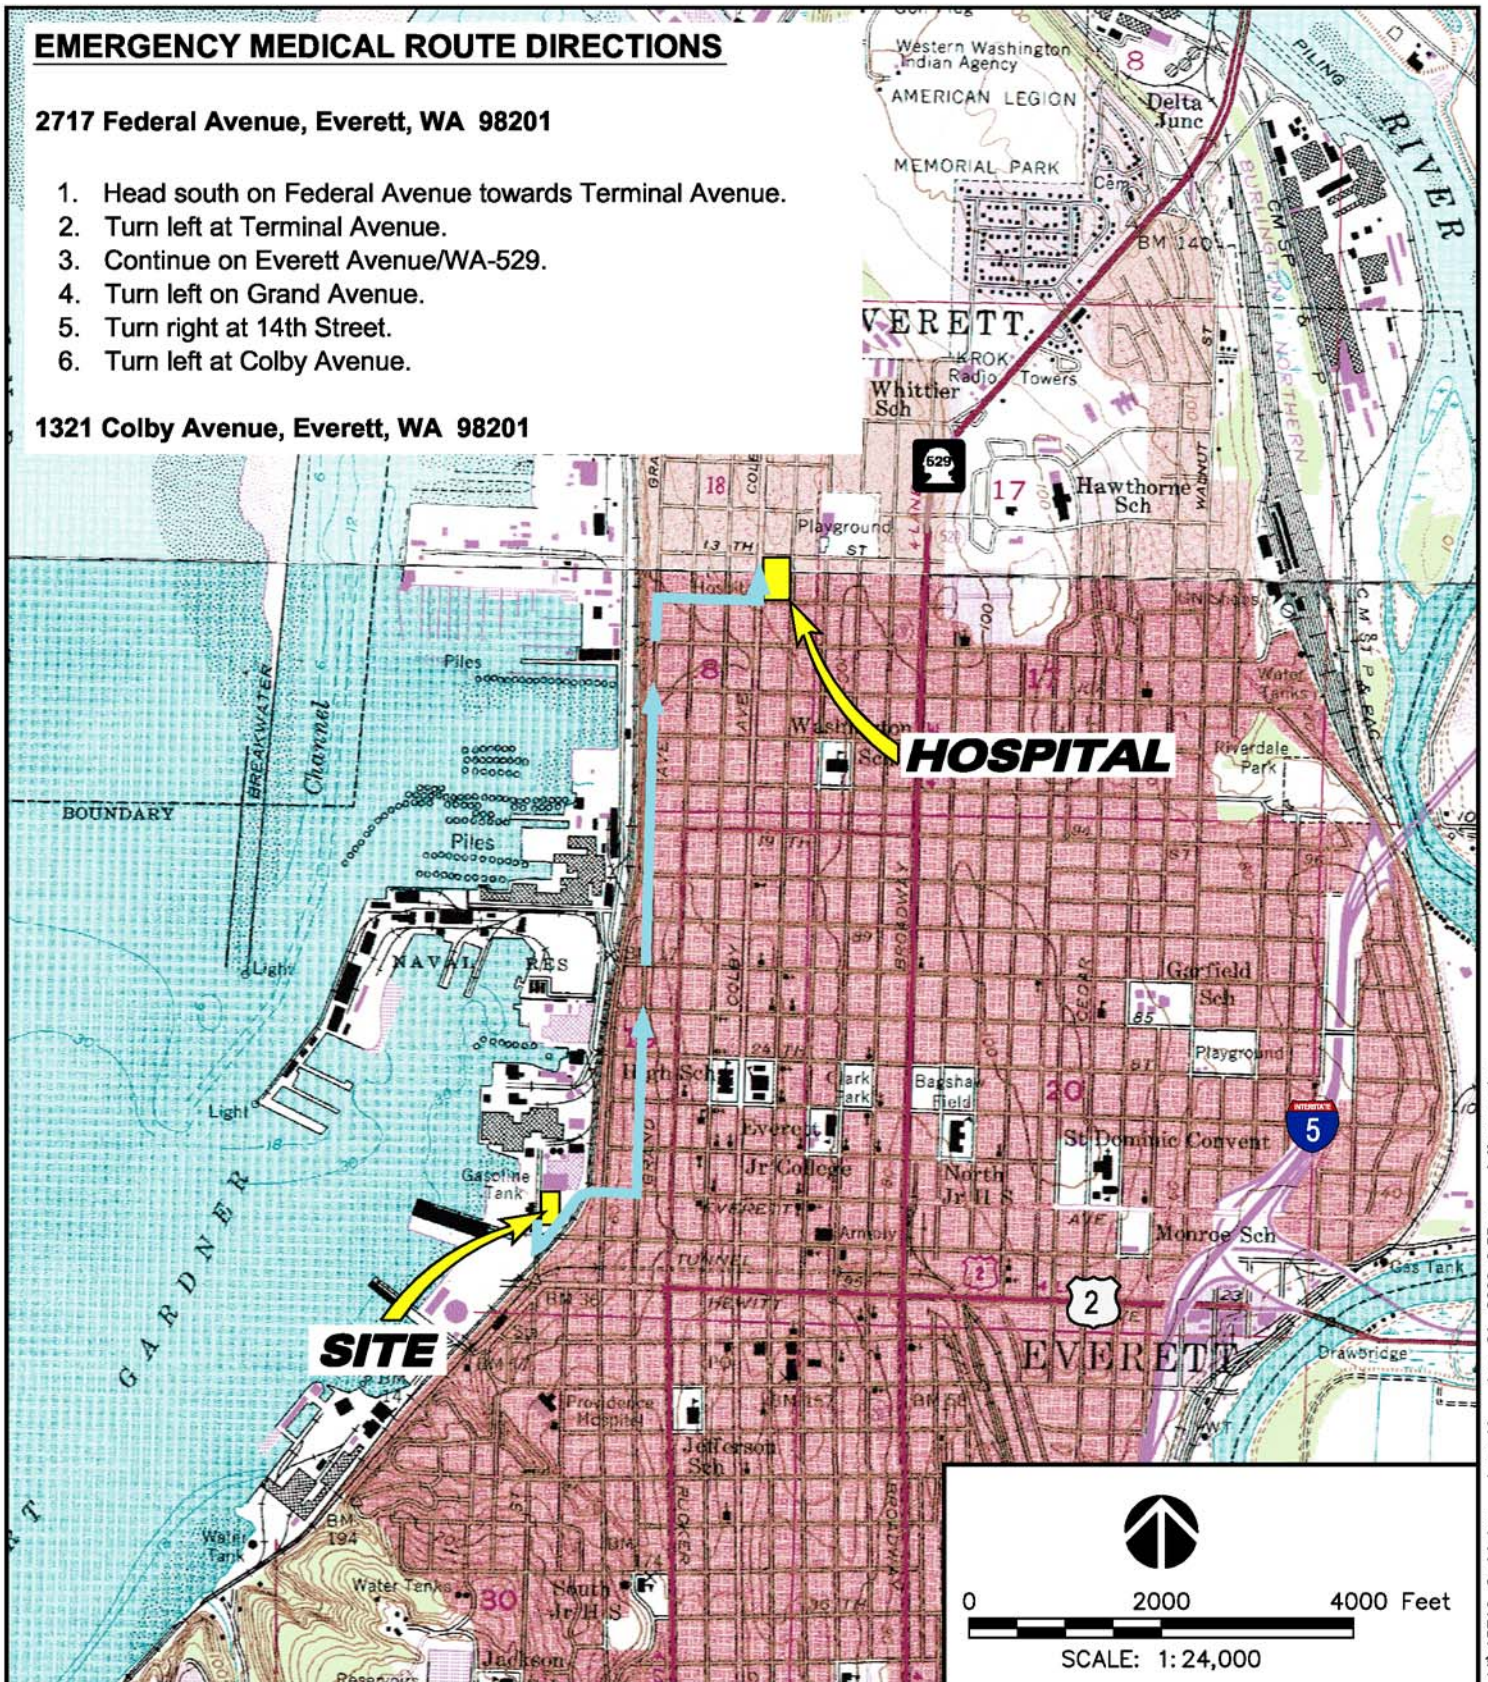

AMEC Earth & Environmental

11335 N.E. 122nd Way, Suite 100
Kirkland, WA, U.S.A. 98034-6918



CLIENT LOGO

CLIENT

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**

PROJECT: EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728

DWN BY:

JRS

DATUM:

NAD83

DATE: JUNE 2009

TITLE

EMERGENCY MEDICAL ROUTE

CHK'D BY:

AS

REV. NO.:

PROJECT NO:
9-915-15716-C

PROJECTION:
WA STATE PLANE

SCALE:
AS SHOWN

FIGURE No.

1

ATTACHMENT A2

Field Documentation Forms

**AMEC Earth & Environmental, Inc.**11810 North Creek Parkway N
Bothell, Washington 98011Tel (425) 368-1000
Fax (425) 368-1001**DAILY FIELD REPORT**

| | | | |
|---|---------------------------------------|------------------------------------|------------------|
| PROJECT NAME Mobil/ADC Everett Facility | | PROJECT NO. 9915-15716-0 | FIELD REPORT NO. |
| ADDRESS 2717/2731 Federal Avenue | | DATE | PAGE OF |
| CITY OR COUNTY Everett, WA | PERMIT NO. | ARRIVAL TIME | DEPARTURE TIME |
| CLIENT ExxonMobil | AMEC PROJECT MANAGER/PHONE NO. | | |
| GENERAL CONTRACTOR | AMEC FIELD REPRESENTATIVE/ MOBILE NO. | | |
| SUBCONTRACTOR | WEATHER | | |
| TYPE OF WORK PERFORMED | | | |
| EQUIPMENT USED | | | |

COMMENTS

| |
|--|
| |
|--|



LOW-FLOW GROUNDWATER SAMPLING LOG

WELL NO: _____ LOCATION: _____ PROJECT NO: _____
 DATE: _____ TIME: _____ CLIMATIC CONDITIONS: _____
 OVA/PID READING WHEN WELL OPENED: _____ DEPTH TO PRODUCT (TOC): _____
 STATIC WATER LEVEL (TOC): _____ TOTAL DEPTH OF WELL (TOC): _____

METHOD OF REMOVAL: _____ PUMPING RATE: _____

| WELL | DTW | Time | Gallons Removed | Temp. (C°) | pH | Sp. Cond. (mS/cm) | Turbidity (NTU) | DO (mg/L) | REDOX (mv) |
|-------|-------|-------|--------------------|---------------|-------|----------------------|--------------------|--------------|---------------|
| PURGE | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| DATA | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |

SAMPLE WITHDRAWAL METHOD: _____ SAMPLED BY: _____
 SAMPLE NUMBER(S) AND TIME: _____

NOTES: _____

LAB ANALYSIS PARAMETERS AND PRESERVATIVES: _____

NUMBER AND TYPES OF SAMPLE CONTAINERS USED: _____

DECON. PROCEDURES: _____

SAMPLES DELIVERED TO: _____ TRANSPORTER: _____
 DATE: _____ TIME: _____

CAPACITY OF CASING (GALLONS/LINEAR FOOT)
 2" - 0.16 • 4" - 0.65 • 6" - 1.47 • 8" - 2.61 • 10" - 4.08 • 12" - 5.57

Seattle

11720 North Creek Parkway N
 Suite 400
 Bothell, WA 98011
 phone 425.420.9200 fax 425.420.9210

Chain of Custody Record



TestAmerica Laboratories, Inc.

| | | | | |
|-------------------------------------|--|-----------------------------------|-----------------|------------------------|
| Client Contact | Project Manager: Leah Vigoren | Site Contact: Leah Vigoren | Date: | COC No: |
| AMEC Earth & Environmental, Inc. | Tel/Fax: (206) 838-8470 | Lab Contact: | Carrier: | _____ of _____ COCs |
| 600 University Street Suite 1020 | Analysis Turnaround Time | | | Job No. |
| Seattle, WA 98101 | Calendar (C) or Work Days (W) _____ | | | SDG No. |
| (206) 342-1760 Phone | TAT if different from Below _____ | | | |
| (206) 342-1761 FAX | <input type="checkbox"/> 2 weeks <input type="checkbox"/> 1 week <input type="checkbox"/> 2 days <input type="checkbox"/> 1 day | | | |
| Project Name: ExxonMobil/ADC | | | | Sample Specific Notes: |
| Site: Everett | | | | |
| P O # 9915-15716C | | | | |

| Sample Identification | Sample Date | Sample Time | Sample Type | Matrix | # of Cont. | Filtered Sample | | | | | | | | | | | | | | | | |
|-----------------------|-------------|-------------|-------------|--------|------------|-----------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |

Preservation Used: 1= Ice, 2= HCl; 3= H2SO4; 4=HNO3; 5=NaOH; 6= Other _____

Possible Hazard Identification
 Non-Hazard Flammable Skin Irritant Poison B Unknown _____

Sample Disposal (A fee may be assessed if samples are retained longer than 1 month)
 Return To Client Disposal By Lab Archive For _____ Months

Special Instructions/QC Requirements & Comments: Send electronic data to leah.vigoren@amec.com

| | | | | | |
|------------------|----------|------------|--------------|----------|------------|
| Relinquished by: | Company: | Date/Time: | Received by: | Company: | Date/Time: |
| | | | | | |
| Relinquished by: | Company: | Date/Time: | Received by: | Company: | Date/Time: |
| | | | | | |
| Relinquished by: | Company: | Date/Time: | Received by: | Company: | Date/Time: |
| | | | | | |



| | | | | |
|-----------------------------|---------------|------------|-------------------|--|
| WELL DEVELOPMENT LOG | PROJECT _____ | | WELL NO. _____ | |
| | JOB NO. _____ | DATE _____ | PREPARED BY _____ | |

| | | |
|--|--|--|
| METHOD OVERPUMPAGE _____ BAILER _____ SURGE _____ BLOCK _____ AIR LIFT _____ OTHER _____ | INITIAL WATER LEVEL _____ FINAL WATER LEVEL _____ | REMARKS: |
| | CAPACITY OF CASING (GALLONS/LINEAR FOOT) 2" = 0.16 4" = 0.65 6" = 1.47 | VOLUME BETWEEN CASING AND HOLE (GALLONS/LINEAR FOOT) (ASSUMING 40% POROSITY) 2" CASING AND 6" HOLE - 0.52 2" CASING AND 8" HOLE - 0.98 4" CASING AND 10" HOLE = 1.37 4" CASING AND 12" HOLE - 2.09 |

| | | |
|---|--|--|
| HOLE DIAMETER d_h = _____ WELL CASING INSIDE DIAMETER d_wID = _____ OUTSIDE DIAMETER d_wOD = _____ DEPTH TO: WATER LEVEL H = _____ BASE OF SEAL S = _____ BASE OF WELL TD = _____ EST. FILTER PACK POROSITY P = _____ | | WELL VOLUME CALCULATION: $CASING VOLUME = V_c = \Pi \left(\frac{d_wID}{2} \right)^2 (TD - H) = 3.14 \left(\frac{\quad}{2} \right)^2 (\quad - \quad) = \quad$ $FILTER PACK PORE VOLUME = V_f = \Pi \left[\left(\frac{d_h}{2} \right)^2 - \left(\frac{d_wOD}{2} \right)^2 \right] (TD - (S \text{ or } H * (P))) = \quad$ (*if $S > H$, use S ; if $S < H$, use H) $= 3.14 \left[\left(\frac{\quad}{2} \right)^2 - \left(\frac{\quad}{2} \right)^2 \right] (\quad - \quad) (\quad) = \quad$ TOTAL WELL VOLUME = $V_T = V_c + V_f = \quad + \quad = \quad \text{ft.}^3 \times 7.48 = \quad \text{gal.}$ |
|---|--|--|

| DEVELOPMENT LOG: | | | | | CUMULATIVE WATER REMOVED GALLONS | WATER QUALITY | | | | | | COMMENTS |
|------------------|----------------|--------|--------------|-----------------|----------------------------------|---------------|------|--------------|-------|-------|-----------|----------|
| DTW | TIME BEGIN/END | METHOD | ELAPSED TIME | FLOW RATE (gpm) | | pH | TEMP | CONDUCTIVITY | D.O.* | REDOX | TURBIDITY | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

* = Dissolved Oxygen

APPENDIX B

Historical Maps and Documentation

INSURANCE MAPS of **NEW YORK** WASHINGTON Published in 1902 by the **SANBORN MAP COMPANY** 11 Broadway, New York

Scale of 1 inch to 17 1/2 miles

COPYRIGHT, 1902, by the SANBORN MAP COMPANY

THE LIBRARY OF
 THE CONGRESS
 FEB 1 1902
 DISTRICT OF COLUMBIA


INDEX

| | | | | | | | | | | | | |
|-------------|----------------|---------------|------------|---------------|---------------|---------------|--------------|---------------|----------------|---------------|------------------------|----|
| 115-2877 24 | Brett Ave., | 3500-3610 *41 | Hoyt Ave., | 2700-2838 *10 | Pacific Ave., | 1000-1224 *38 | Summit Ave., | 5000-5058 *40 | Twenty-second, | 1900-1921 33 | Bell-Yelton Mill Co., | 51 |
| 00-2833 43 | " | 3301-3323 *35 | " | 2701-2838 *19 | " | 1001-1123 *3 | " | 2210-2235 *39 | " | 1500-1731 23 | Blackman, C.A., & Co., | 46 |
| 00-2950 2 | " | 3601-3615 *39 | " | 2800-2832 *9 | " | 1201-1425 *9 | " | 2501-2537 *40 | " | 1801-1808 *28 | Shoemaker, | 51 |
| 27-2838 28 | " | 3612-3610 *45 | " | 2901-3035 *16 | " | 1400-1424 *4 | " | 2500-2631 *38 | " | 1901-1909 *22 | Carpenter Bros., | 28 |
| | St., at Lowel, | | " | 3100-3214 *4 | " | 1600-1724 *17 | " | 2700-2838 *41 | " | 1810-2109 28 | Shingler Mill, | 28 |
| | | | " | 3101-3233 *11 | " | 1801-1723 *16 | " | | " | 2700-2723 *54 | Casadio Steam Laundry, | 28 |
| | | | " | | " | | " | | " | | | |

4

5

2

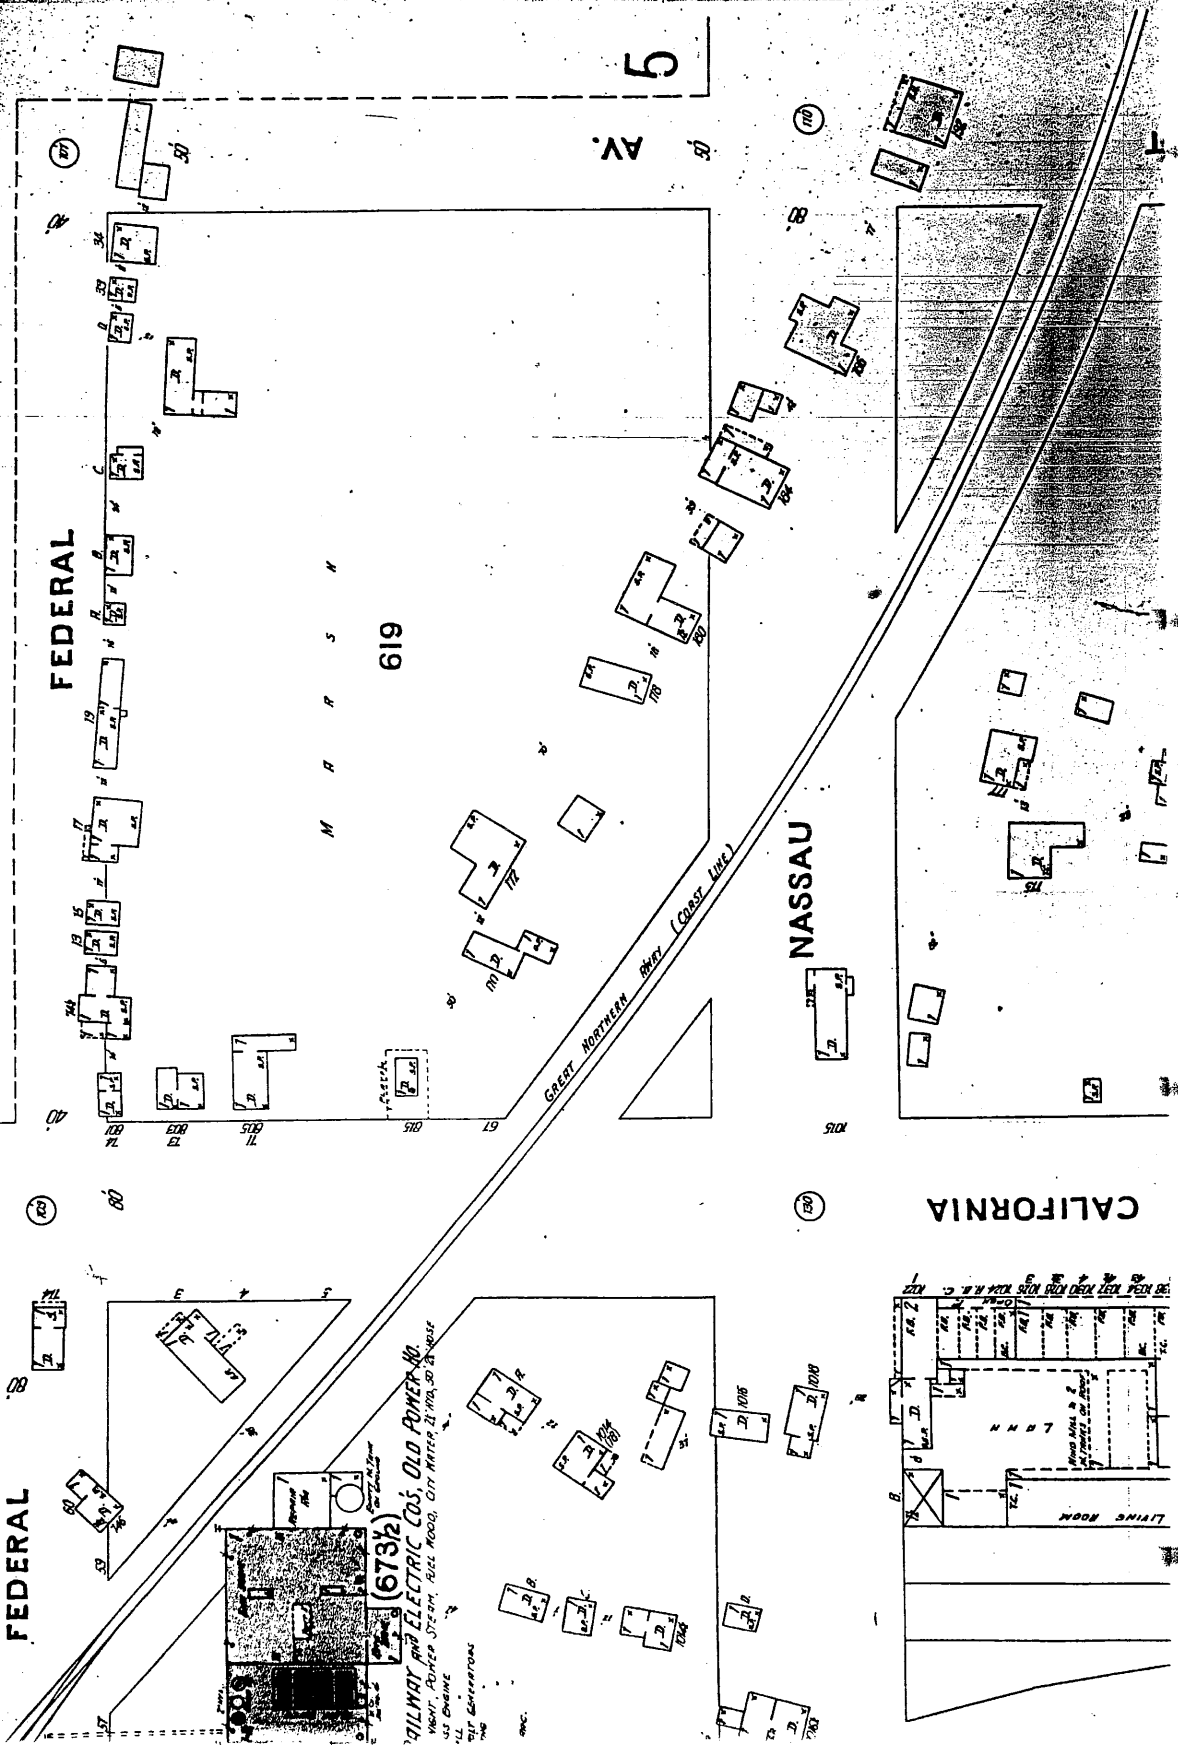

FEDERAL

FEDERAL

619

MARRISON

GREAT NORTHERN R.R. (CROSSING)

NASSAU

CALIFORNIA

RAILWAY and ELECTRIC CO'S. OLD POWER HO. (673 1/2)
 WOOD SHED
 LIVING ROOM
 AIR COMPRESSOR
 440 V. ENGINE
 OIL WATER 2170A, 50 HP MOTOR
 STEAM, FUEL HOOD

LIVING ROOM

WOOD SHED

INSURANCE

JUN 10 1914

MAPS OF

REPORT

INCLUDING

LOWELL

WASHINGTON


PUBLISHED BY THE

Sanborn Map Company

11 BROADWAY, NEW YORK

1914

Copyright 1914 by the Sanborn Map Company

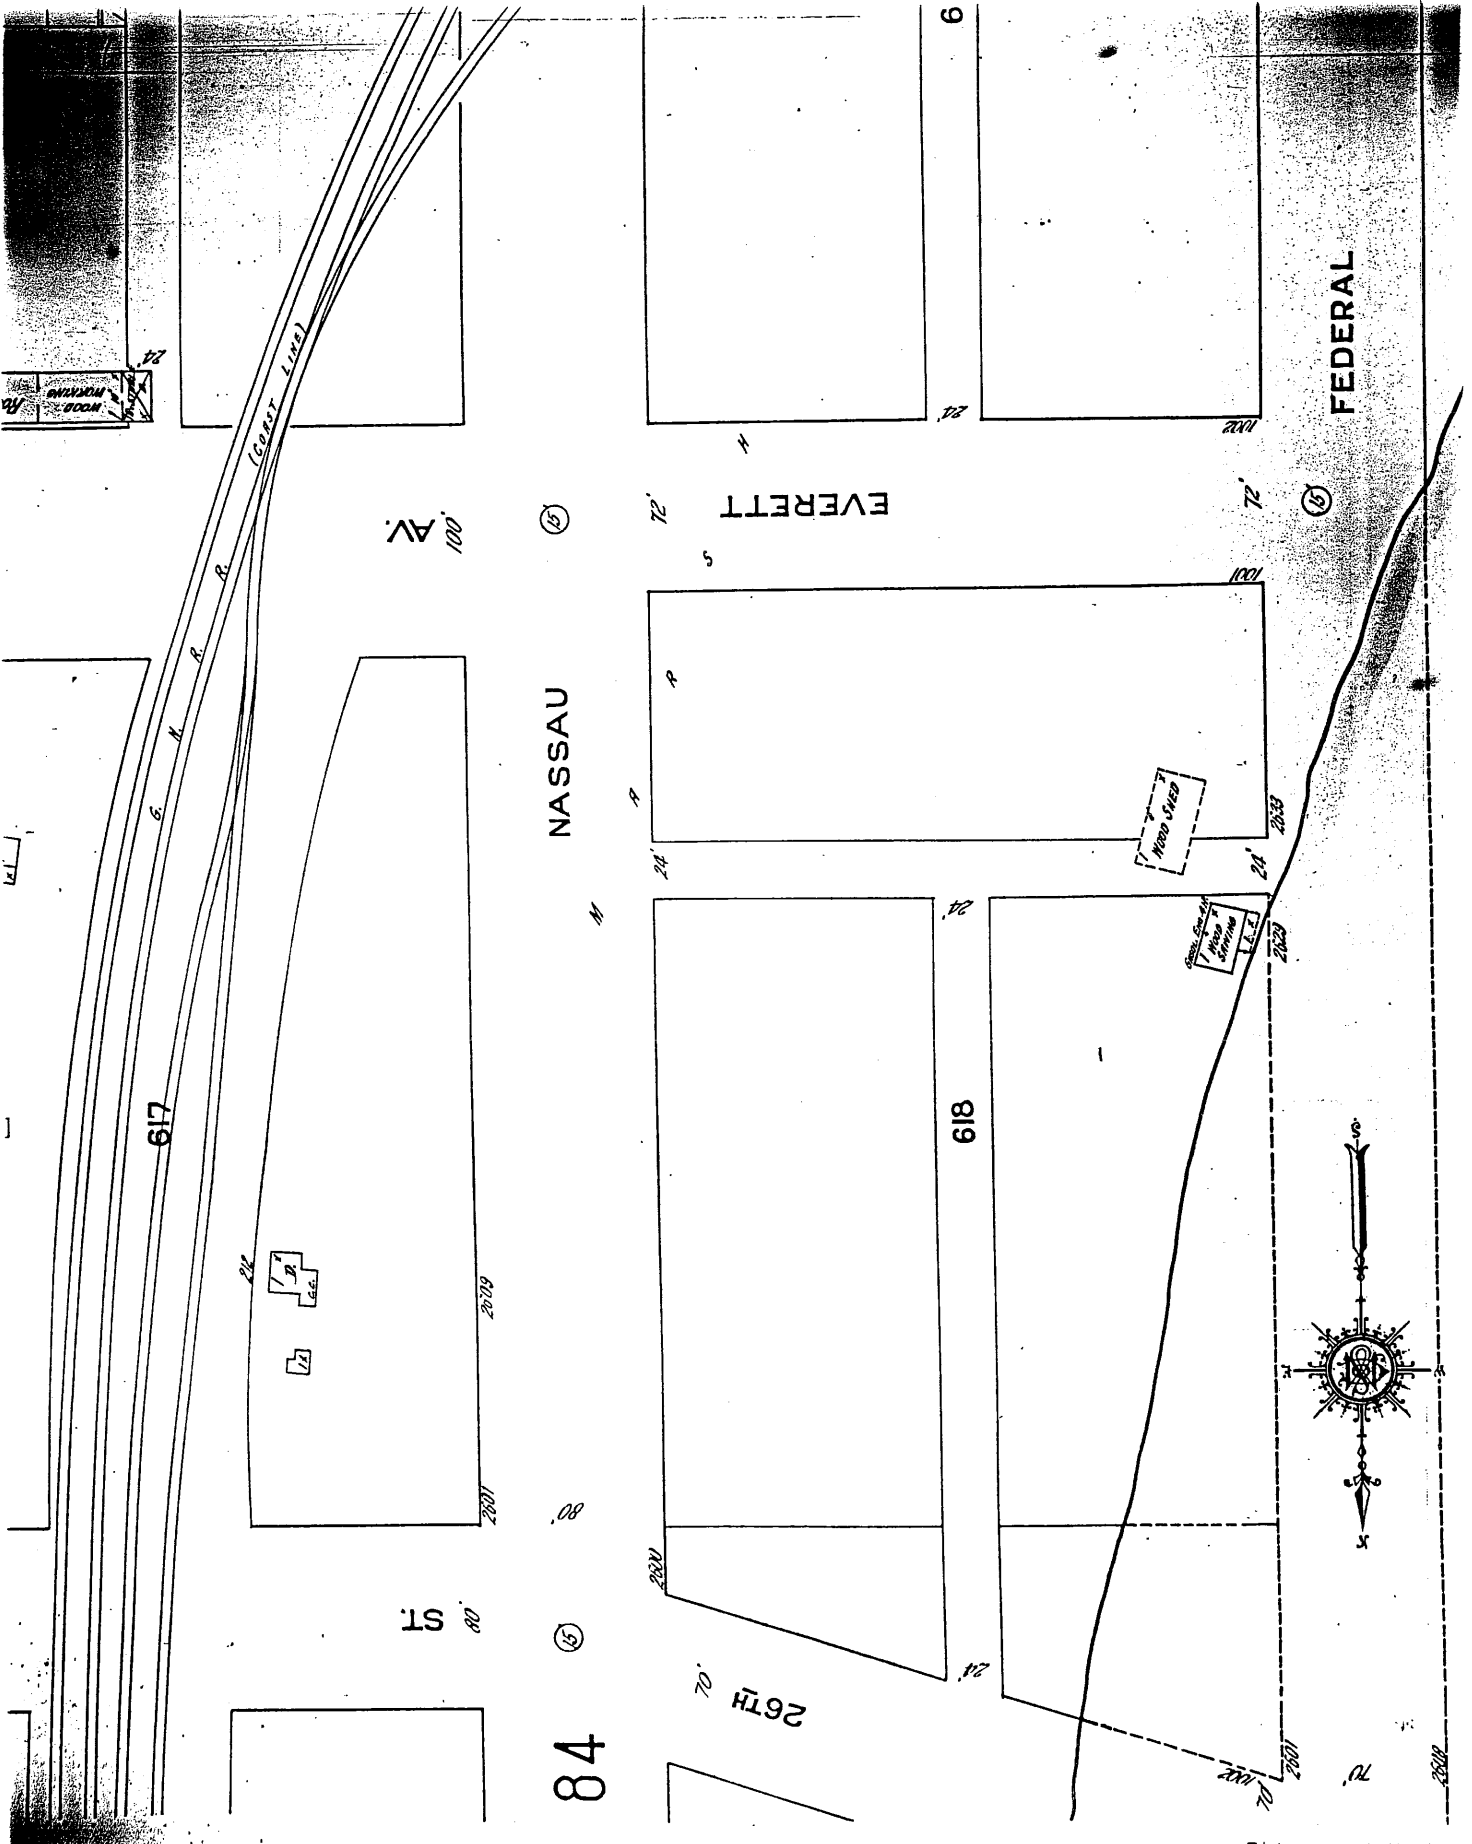

FEDERAL

EVERETT

NASSAU

100 AV

617

618

6

26TH ST

84


26TH ST

WOOD SHED

WOOD SHED

WOOD SHED




WOOD SHED



141'

WOOD SHED

CONCRETE LINE

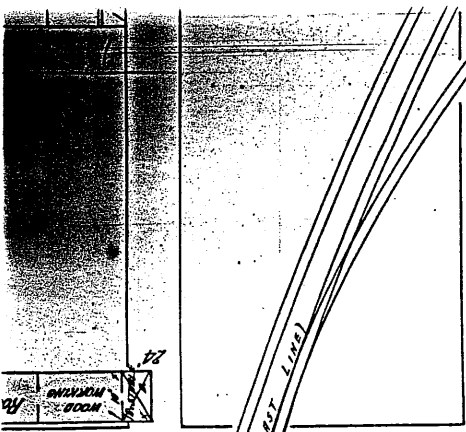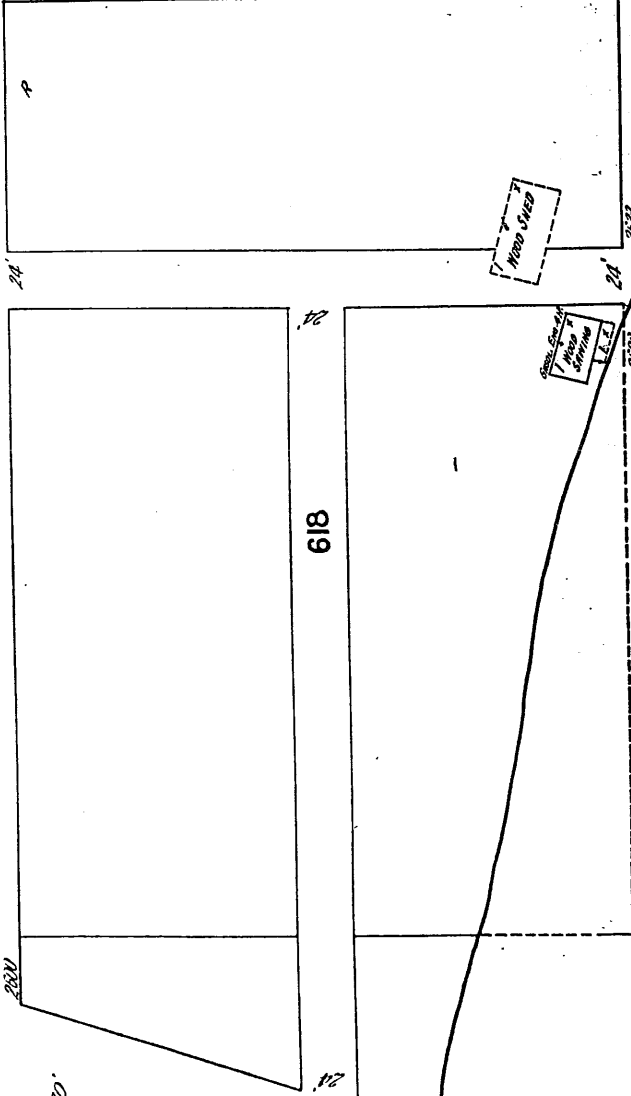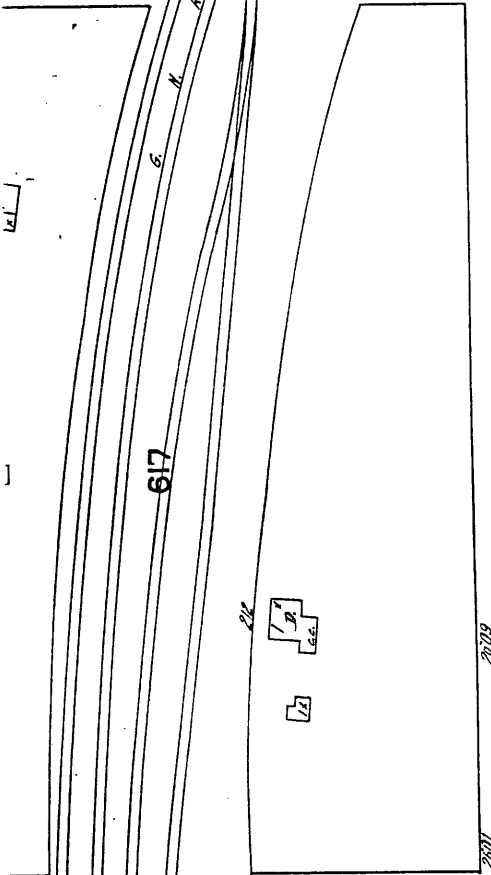

American Oil
Drilling Company Site

FEDERAL ST

Edge of road along beach 90 to 91

2' Section for Exp. Dist. only

14

13

12

11

10

9

8

7

6

5

4

3

2


1

Swamp Elev. 87-

EVERETT AVE

NASSAU ST

3' Section for Exp. Dist. only

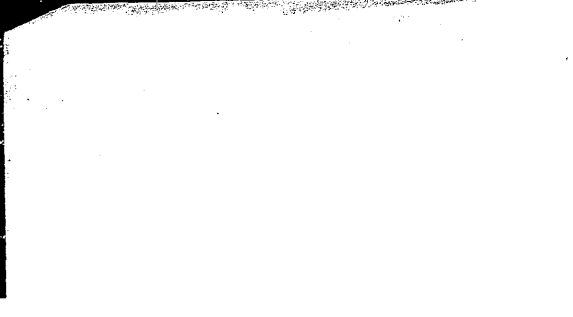

The regular Administrative Session of the City Council was held August 16, 1915, at 10:30 A.M. with Mayor Clay in the Chair and Commissioners Clay, Kelly and Salter present at roll call.

On motion minutes approved as of record.

Moved by Kelly, seconded by Salter, that bills of A. C. Chilson for \$6.00 and H. J. Linden for \$11.65 for services as registration clerks be allowed and ordered paid.

Carried unanimously

Moved by Kelly, seconded by Salter that the City Attorney be instructed to prepare an ordinance covering the installation of oil tanks north of the G. N. Dock.

Carried unanimously

Moved by Kelly, seconded by Clay that the City Attorney be instructed to prepare an ordinance regulating the speed of Street Railway cars to conform to the speed allowed autos.

Carried unanimously

On motion Council adjourned at 11:00 A. M.

Louis Lee
City Clerk

EXHIBIT

D

ORDINANCE NO. 1674

An ordinance granting to the Standard Oil Company, a corporation, a permit to locate, erect, operate and maintain a warehouse or tankage, or both, and other necessary buildings, on a certain tract of land in the city of Everett described as follows: Lot 1, block 619, Plat of Everett, at the corner of Everett Avenue and Federal Street, for the storage and distribution of petroleum and its products, and other kinds of merchandise, by said company, and declaring an emergency.

THE CITY OF EVERETT DOES ORDAIN:

Section 1: That the Standard Oil Company, a corporation, be and it is hereby granted permission to locate, erect, operate and maintain a warehouse or tankage, or both, and other necessary buildings, upon that certain tract of land in the city of Everett described as follows: Lot 1, block 619, Plat of Everett, at the corner of Everett Avenue and Federal Street, for the storage and distribution of petroleum and its products, and other kinds of merchandise handled by said company, said warehouse, tankage and buildings to be constructed in accordance with the plans and specifications therefor filed by said company with the city clerk of the city of Everett and now on file in the office of said clerk.

Section 2: WHEREAS, it is desirous to begin the construction of said warehouse, tankage and buildings immediately, an emergency is declared to exist, and this ordinance shall take effect upon its passage and publication.


W. H. Lay
Mayor.

Passed AUG 24 1915

Attest Louis Lill
City Clerk.

EXHIBIT E


Published AUG 26 1915

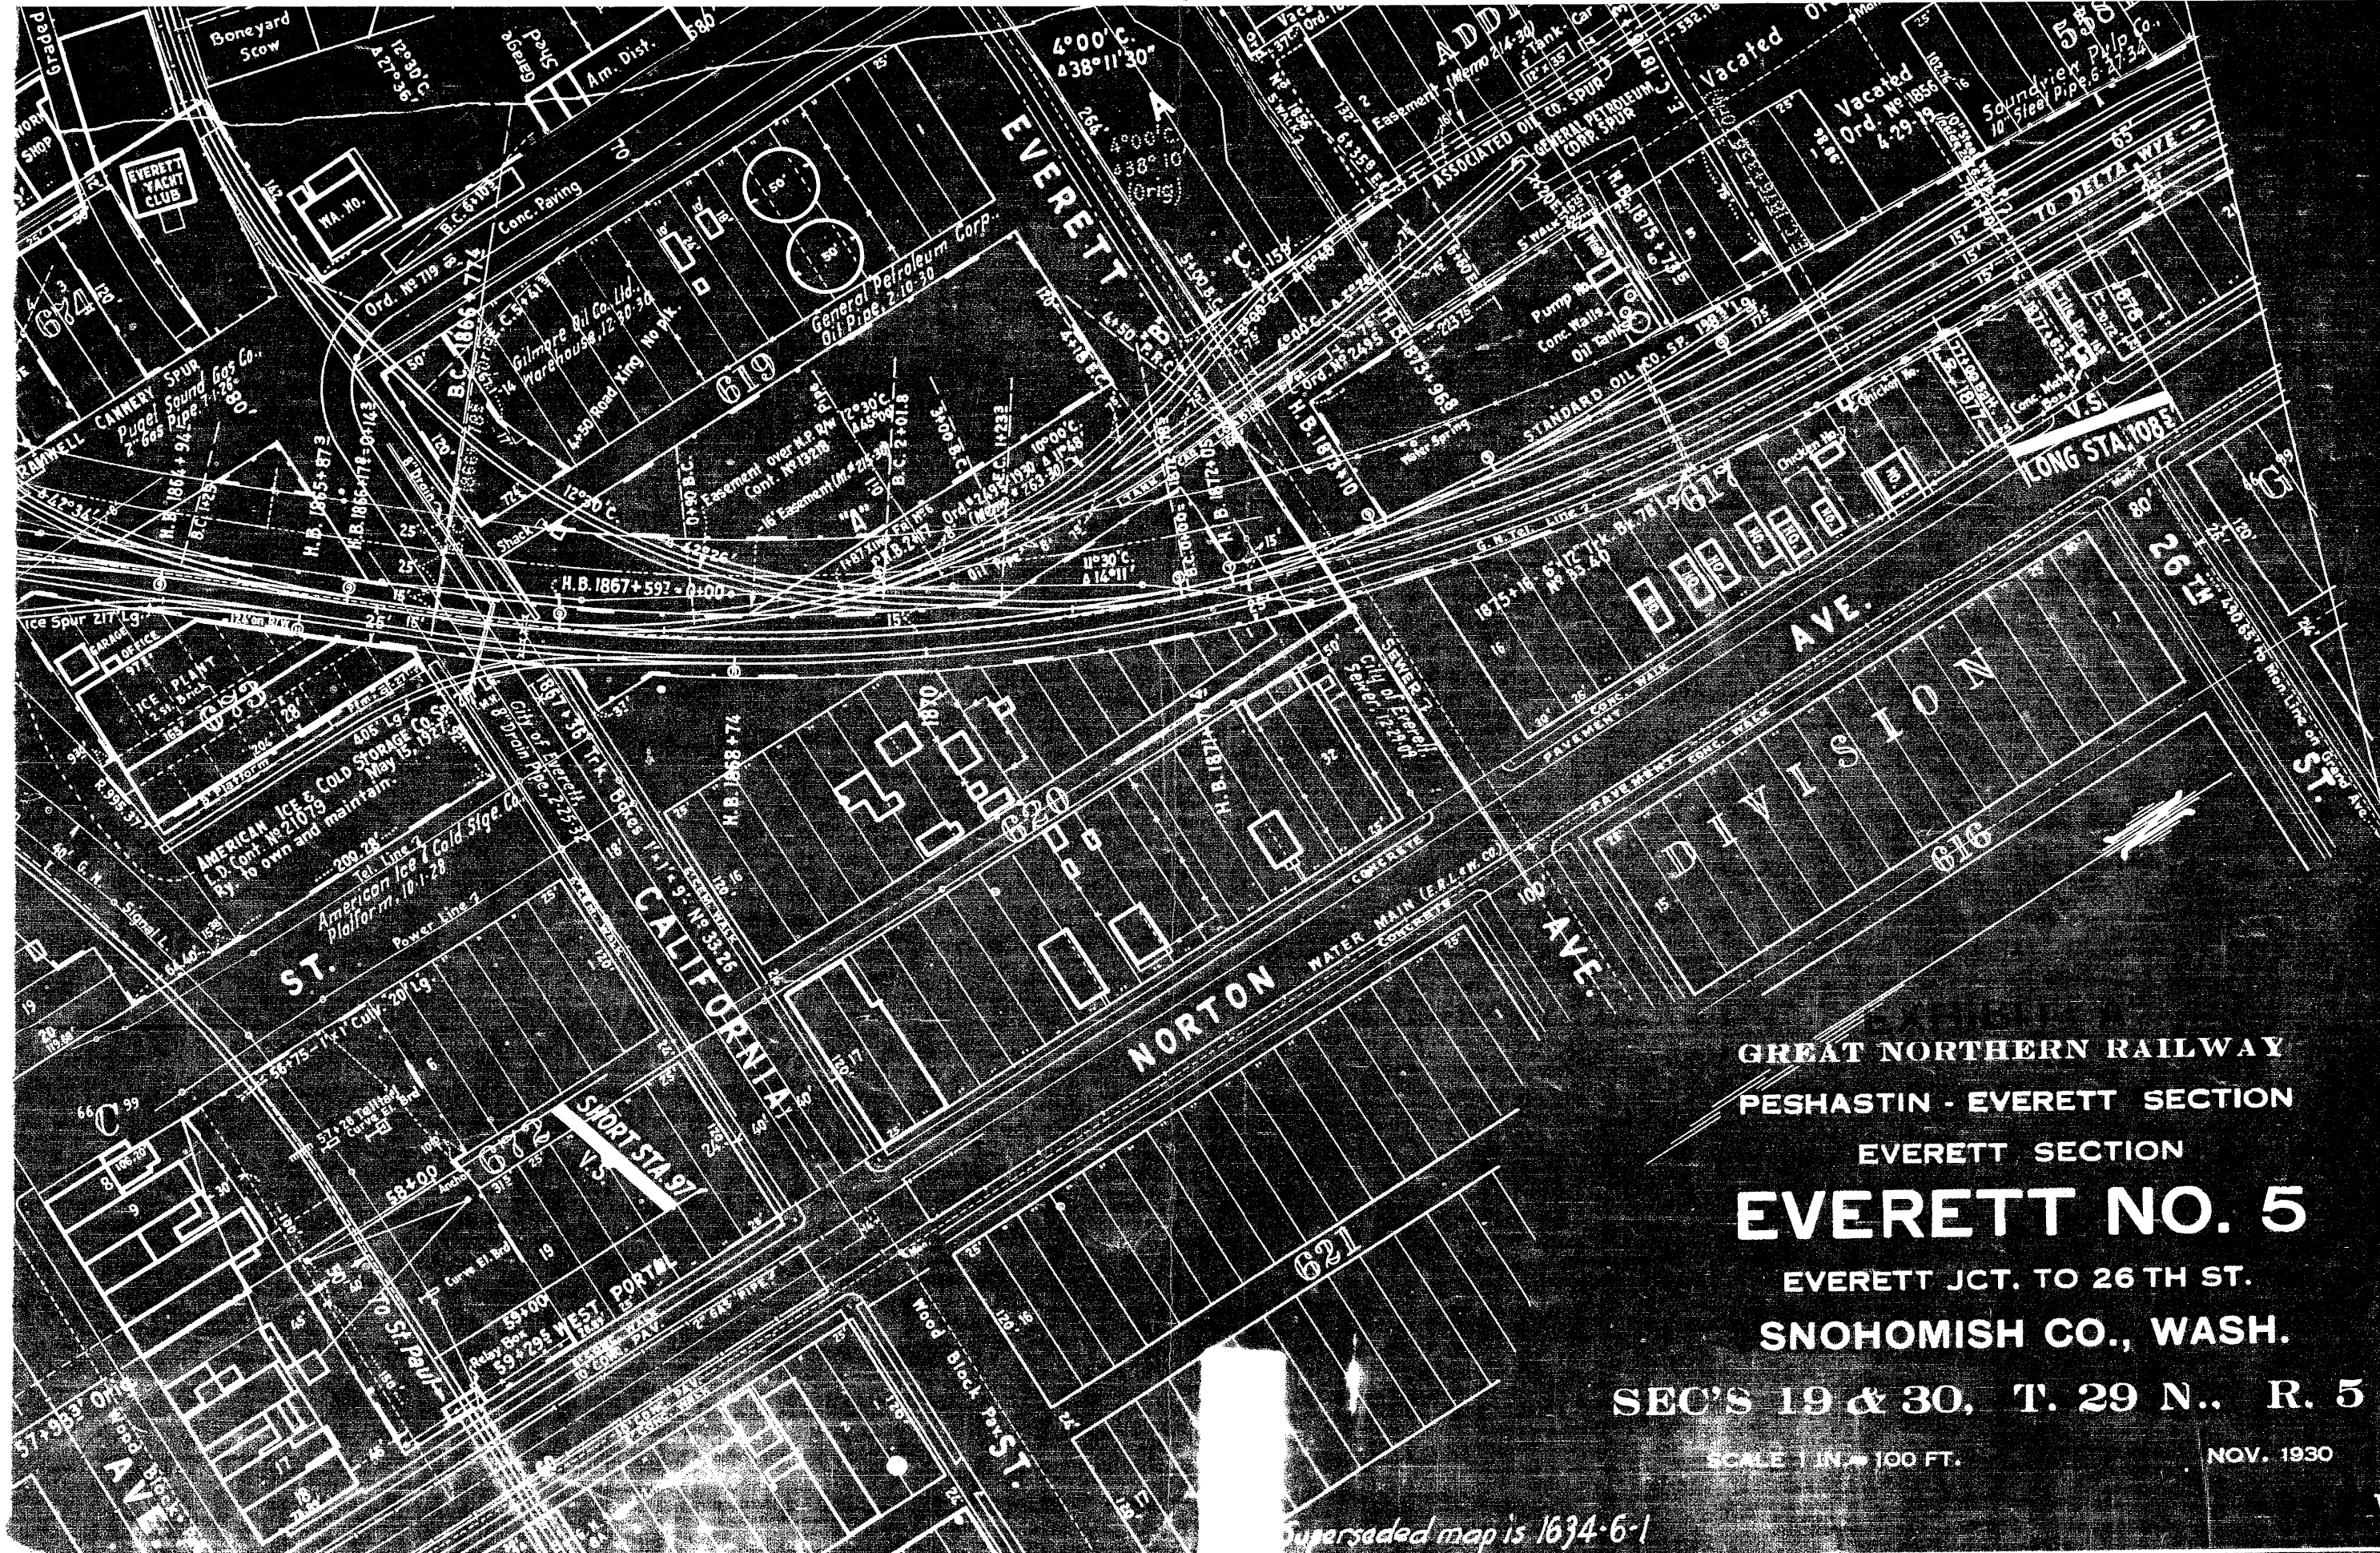

GREAT NORTHERN RAILWAY
 PESHASTIN - EVERETT SECTION
 EVERETT SECTION
EVERETT NO. 5
 EVERETT JCT. TO 26 TH ST.
 SNOHOMISH CO., WASH.
 SEC'S 19 & 30, T. 29 N., R. 5 E.

SCALE 1 IN. = 100 FT. NOV. 1930

Superseded map is 1634-6-1

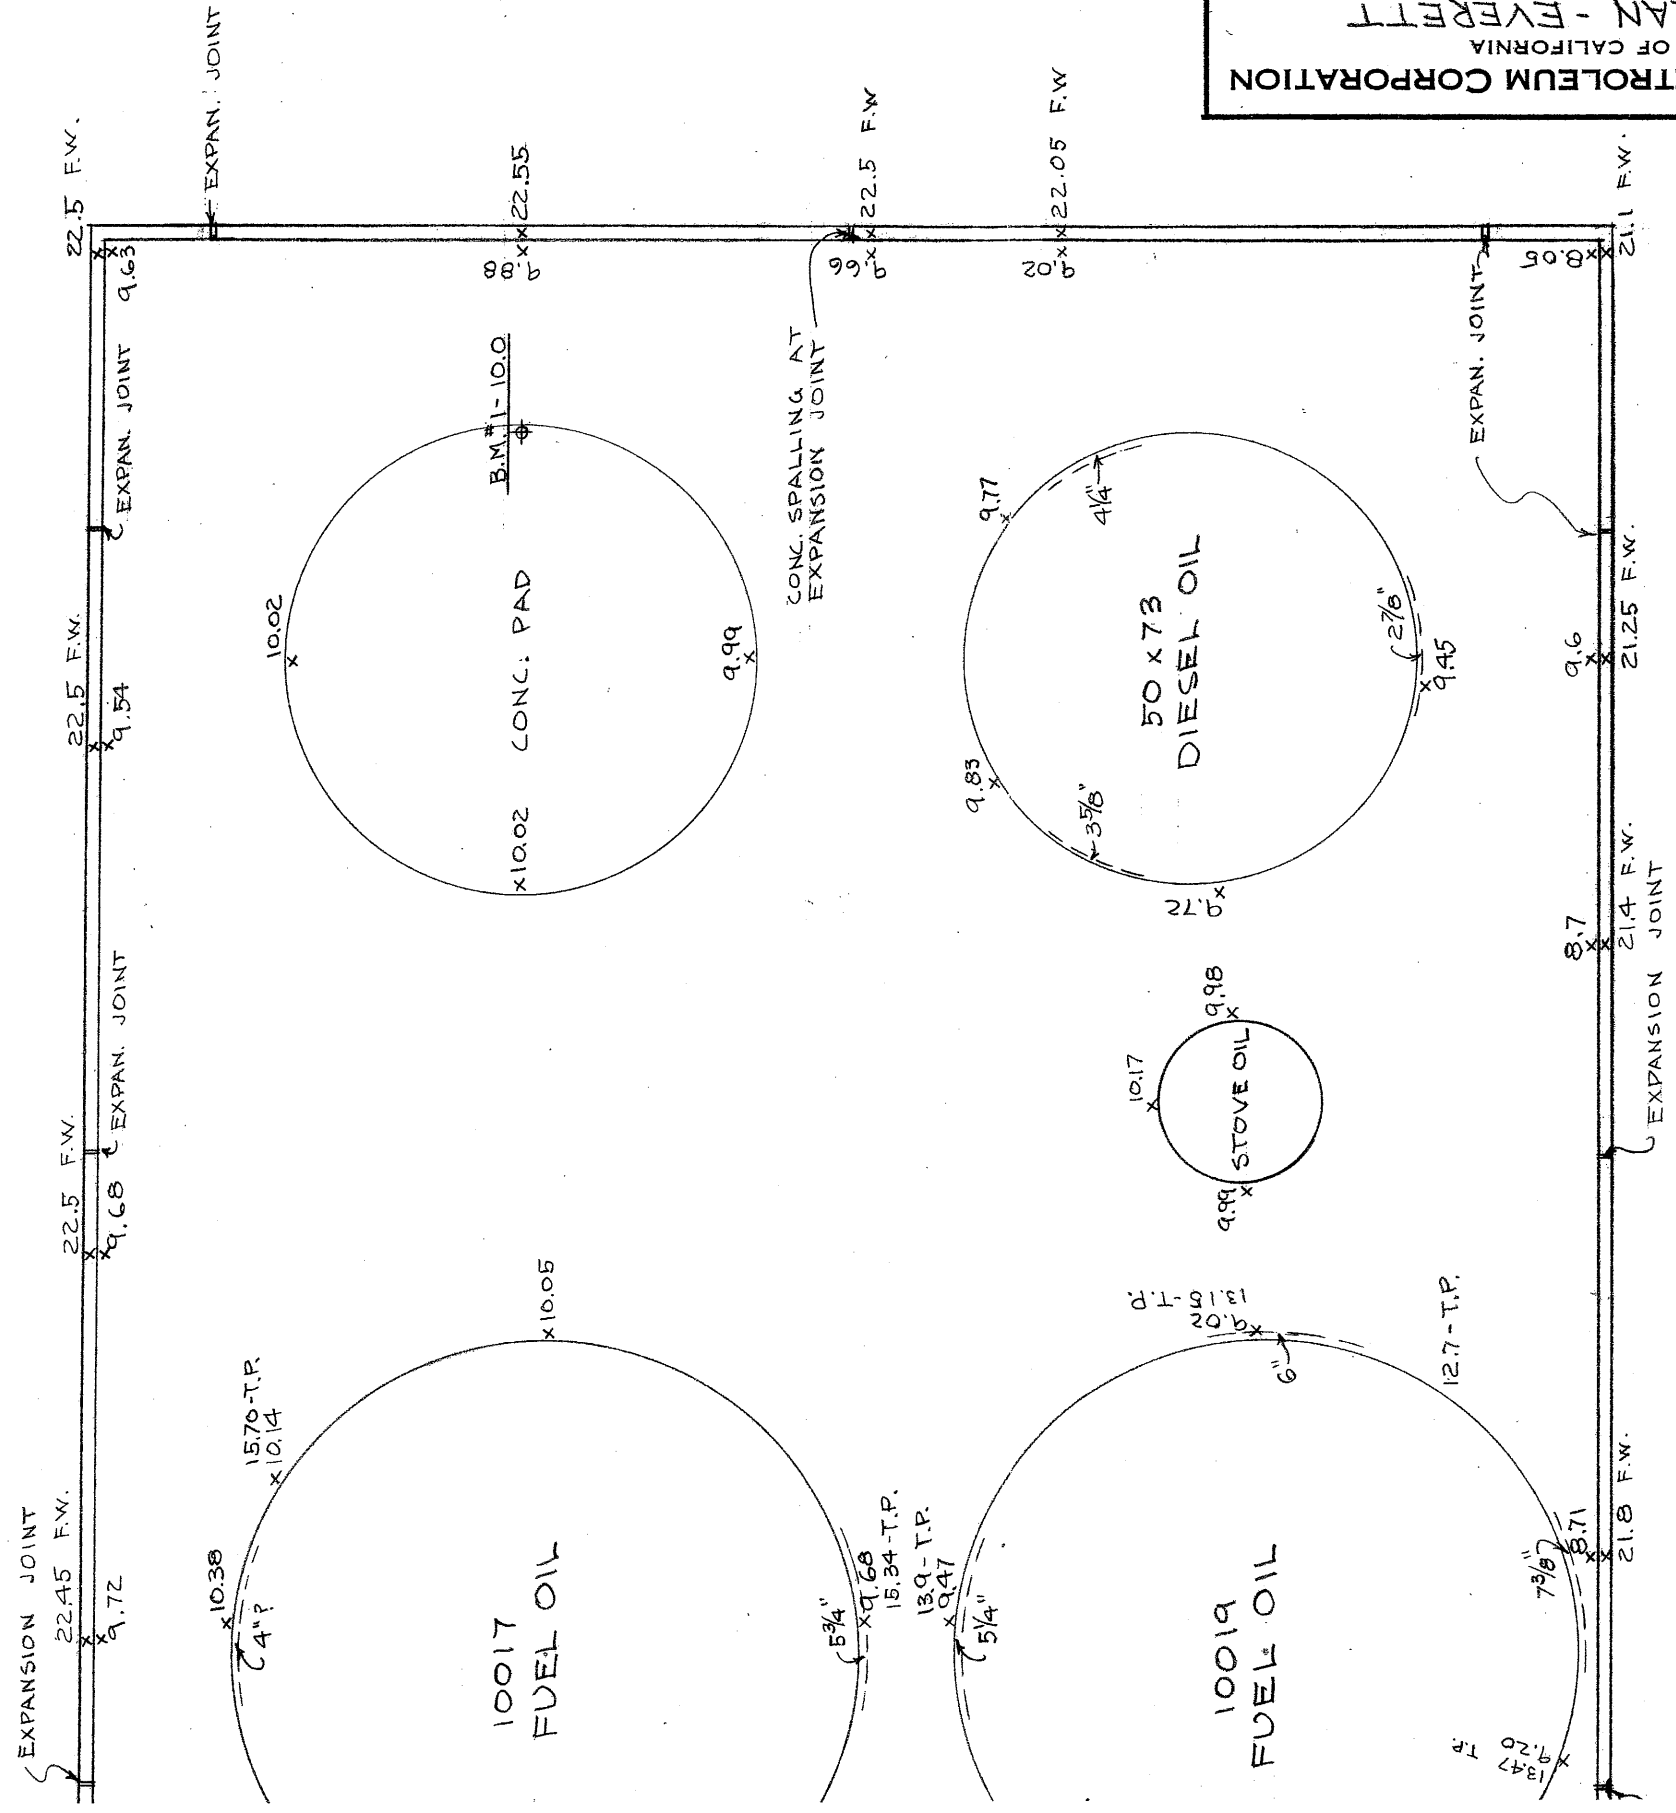

| IND | DESCRIPTION | BY | DATE | APPROVED |
|-----|-------------|----|------|----------|
| | | | | |
| | | | | |
| | | | | |

DWG. NO. 2M-371

APPROVED

DATE

BY

DESCRIPTION

DATE

CHECKED

DATE

4-8-46

DRAWN

J.D.D.

SCALE

1/8" = 1.0"

GENERAL PETROLEUM CORPORATION


OF CALIFORNIA

PLOT PLAN - EVERETT

TANK ELEVATIONS

WASHINGTON DIVISION


SEATTLE, WASH.

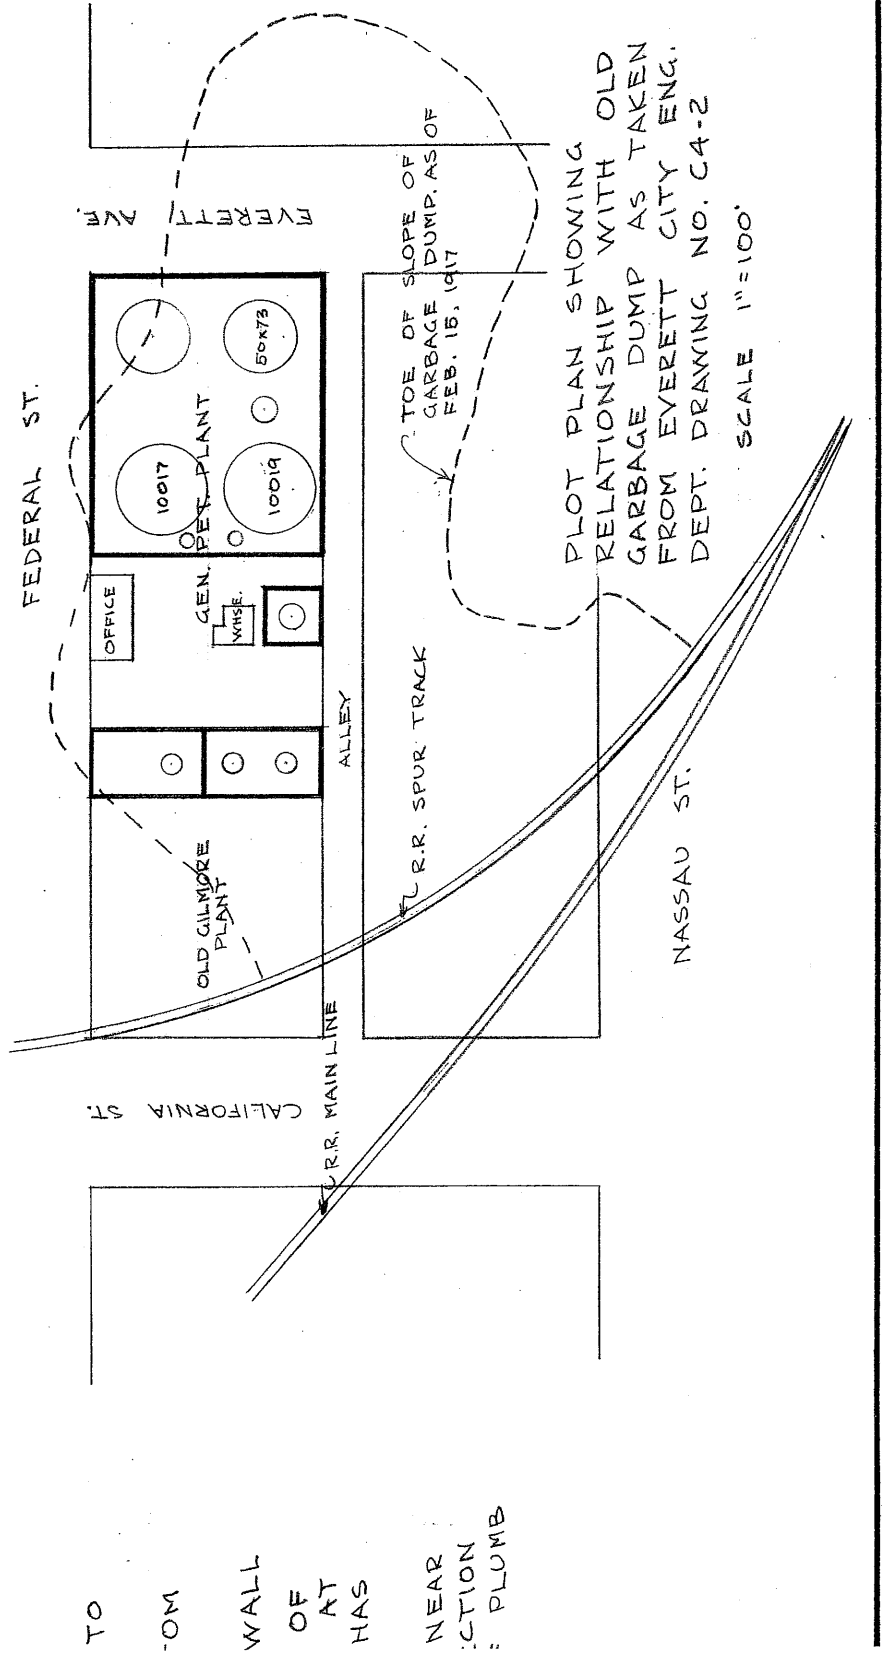

GEN. DET. EVERETT CITY DATUM
ELEV.


| | | |
|------------|---|--------|
| B.M. 10.00 | = | 108.92 |
| 7.74 | = | 106.66 |
| 4.24 | = | 103.16 |
| -6.24 | = | 92.68 |
| -10.24 | = | 88.68 |

EXTREME HIGH WATER
MEAN HIGH WATER
MEAN LOWER LOW WATER
EXTREME LOW WATER

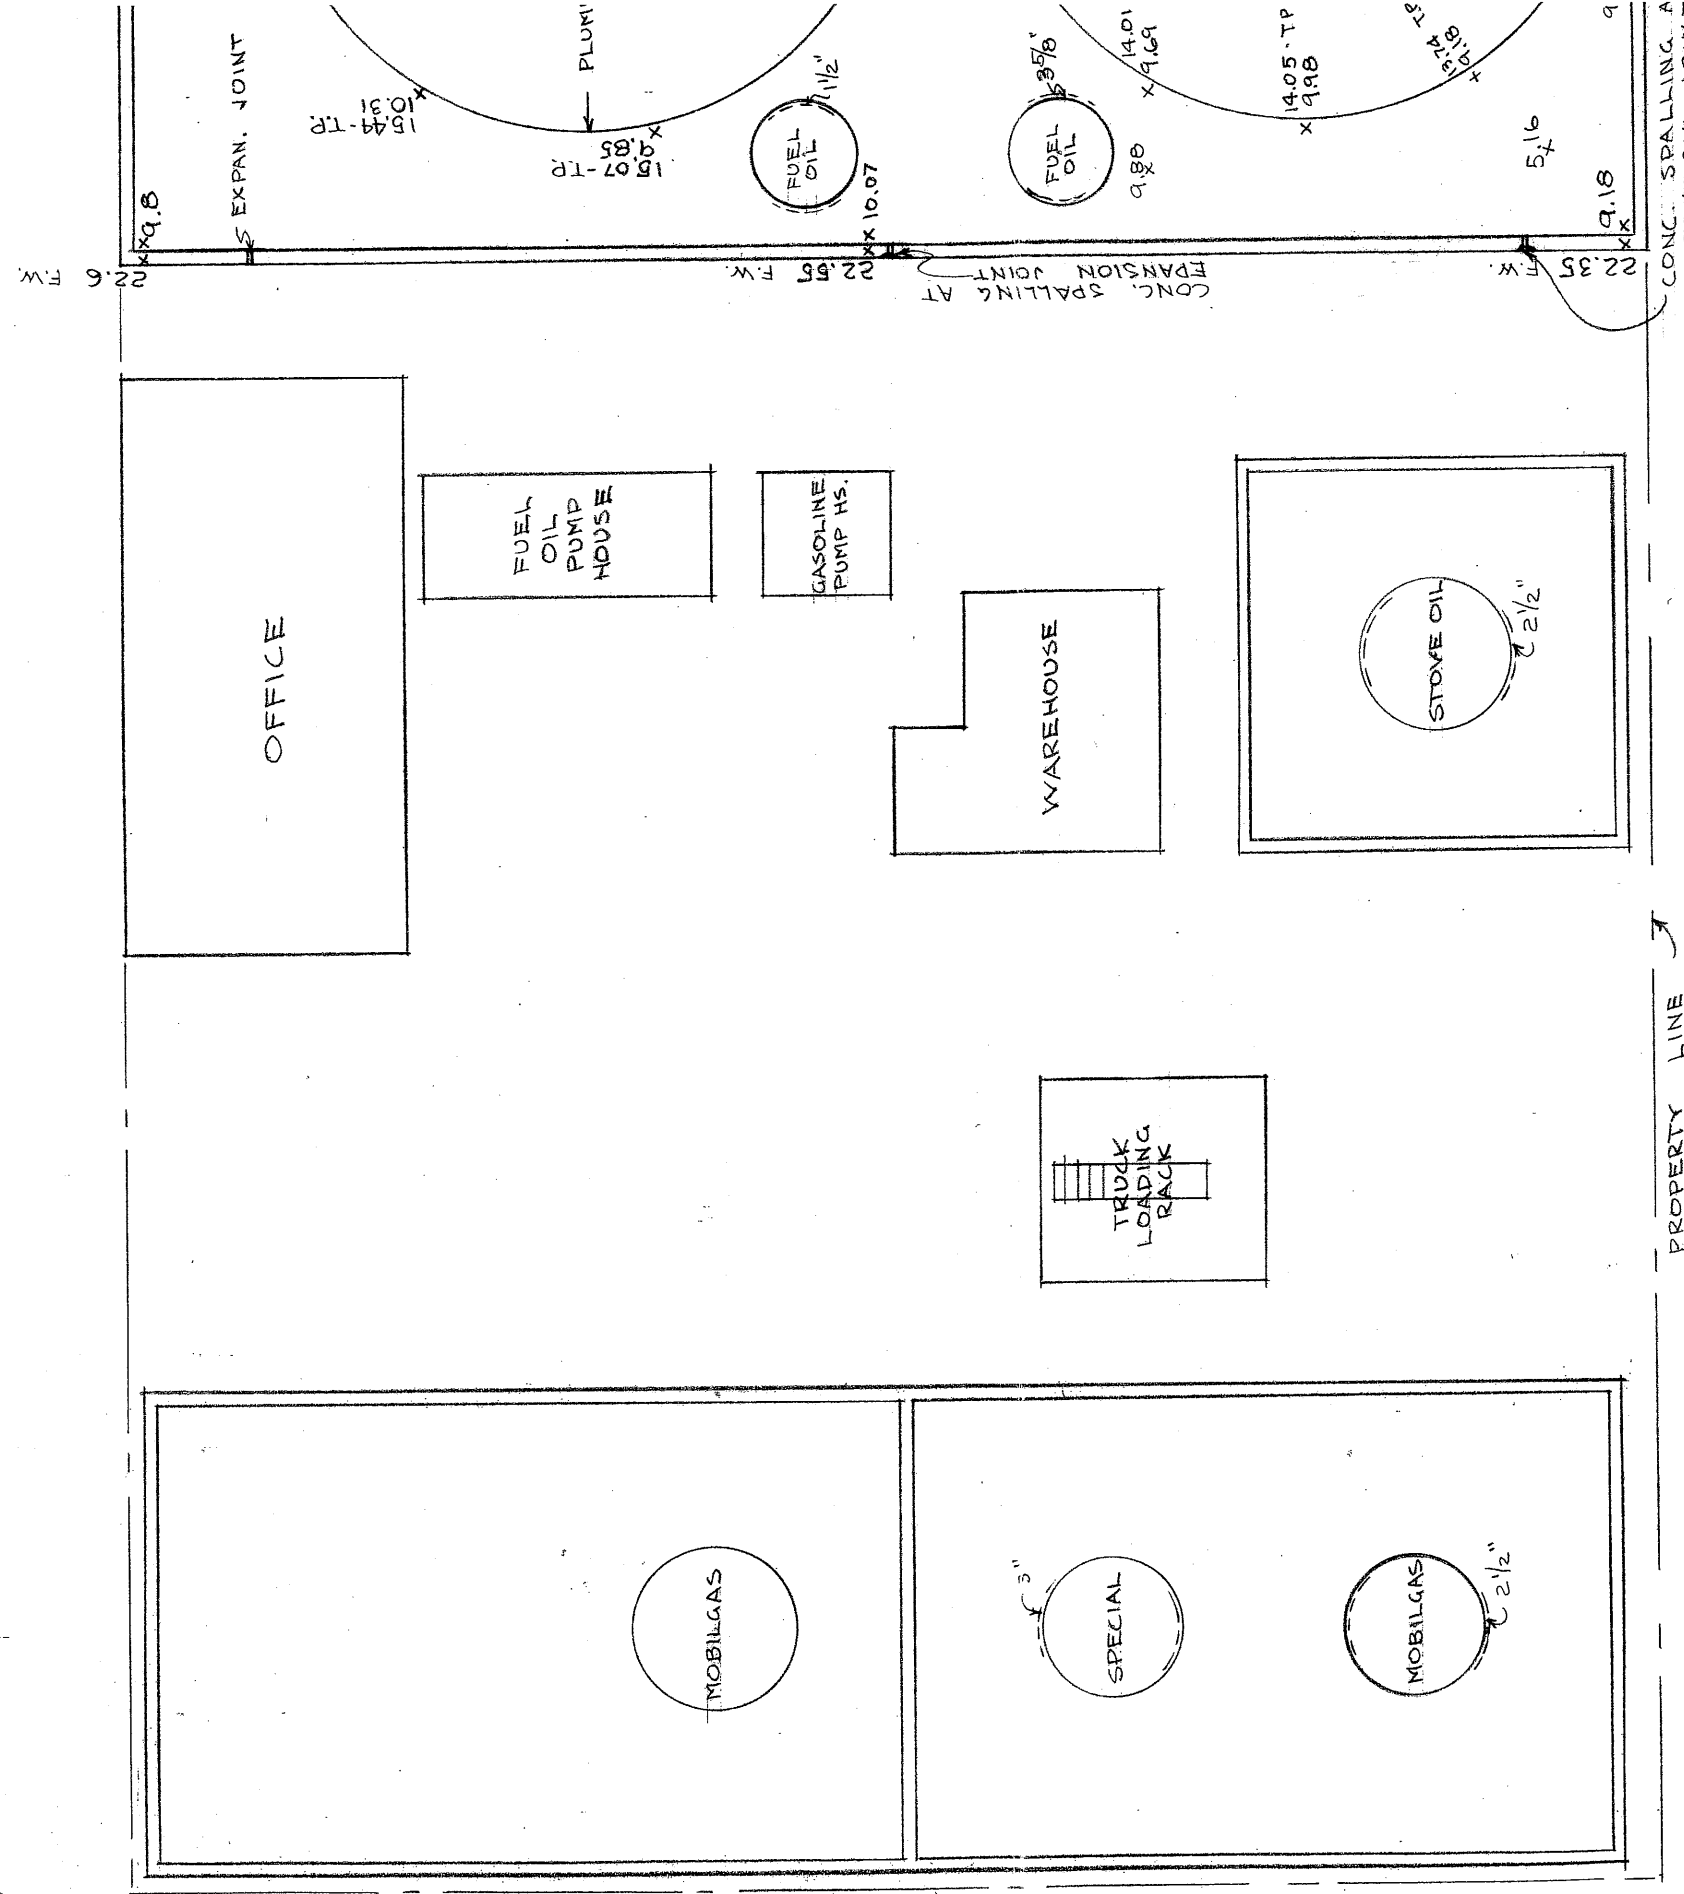

NOTES

ELEVATIONS EXCEPT AS INDICATED BELOW ARE
YARD GROUND LEVELS
T.P. INDICATES ELEVATION AT TOP OF
5' PLATE COURSE
F.W. INDICATES ELEVATION AT TOP OF F
ELEVATIONS SHOWN AROUND OUTSIDE EDGE
TANKS ARE TO TOP OF CONC. PAD EXCEPT
TANK NO. 10019 WHERE ORIGINAL RING PAD
SUNK AND BEEN COVERED WITH DIRT
DOTTED LINES AND DIMENSIONS IN INCHES
OUTSIDE EDGE OF TANKS INDICATE THE
AND DISTANCE IN WHICH THEY ARE OUT

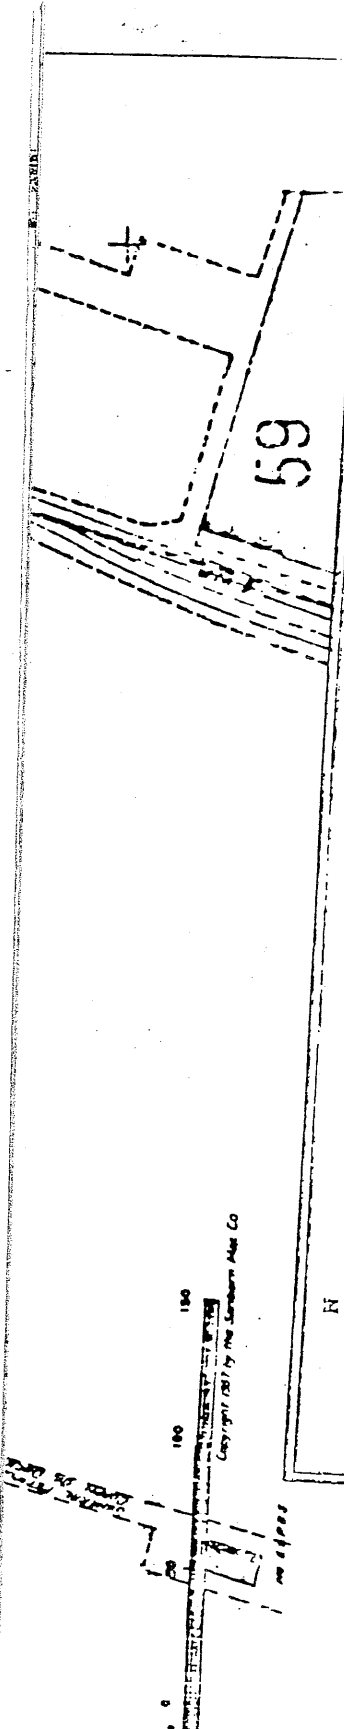

100 150
 Copyright 1957 by The Sanborn Map Co


EDR Sanborn, Inc.

This SanbornTM map is a carbon copy produced by EDR Sanborn, Inc. from its archives. Information on this map is derived from Sanborn field surveys conducted in:


© 1957
 Year

RAC

EDR Sanborn, Inc. Research Associates




Reproduction in whole or in part of any EDR SanbornTM particular from EDR Sanborn, Inc.

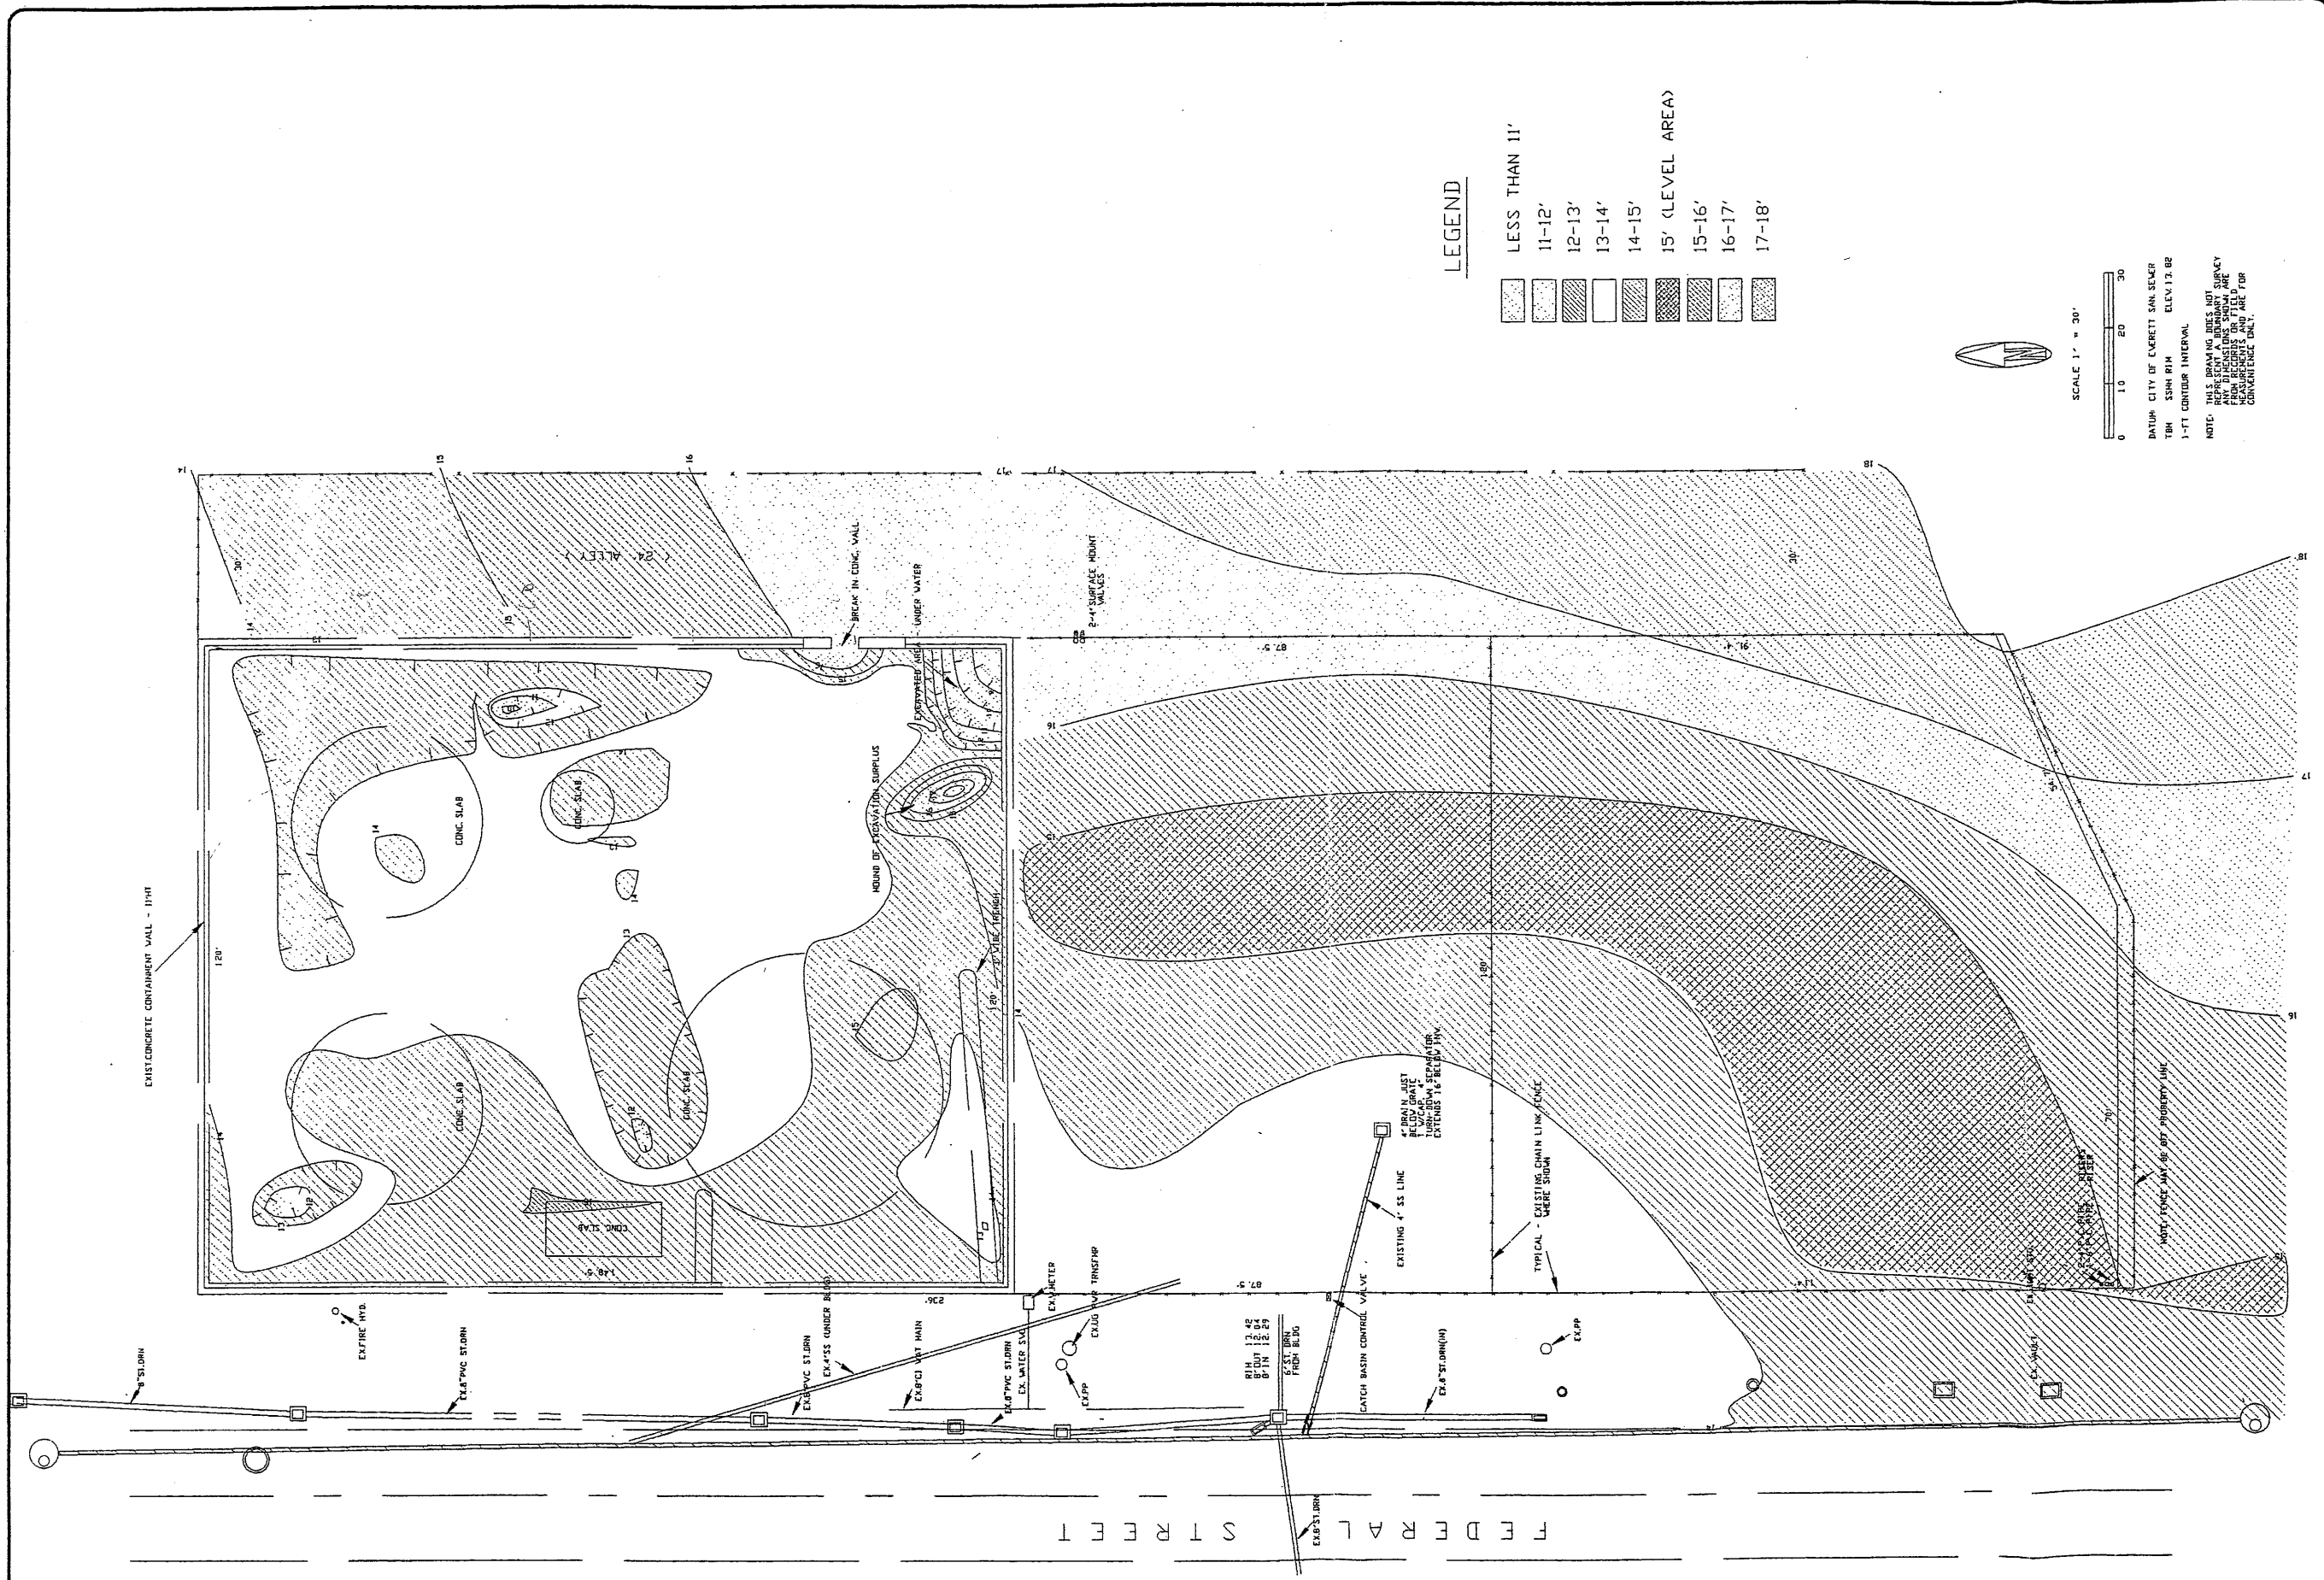

LEGEND

- LESS THAN 11'
- 11-12'
- 12-13'
- 13-14'
- 14-15'
- 15' (LEVEL AREA)
- 15-16'
- 16-17'
- 17-18'



SCALE 1" = 30'
 DATUM: CITY OF EVERETT SAN SEWER
 TBM SSIM RIM ELEV. 12.82
 1'-FT CONTOUR INTERVAL

NOTE: THIS DRAWING DOES NOT REPRESENT A BOUNDARY SURVEY AND IS NOT TO BE USED FOR MEASUREMENTS AND ARE FOR CONVEYANCE ONLY.



Mobil Oil
 ADC/Miller Property
 2701-2717 Federal Avenue
 Everett, Washington
 Project: 60-1914-08
 11/11/98

**EXISTING TOPOGRAPHIC
 CONTOURS**

FIGURE
 11



PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT

December 27, 2006
6-914-15716-0

ExxonMobil–Global Remediation
4580 Klahanie Drive SE PMB 507
Issaquah, Washington 98029

Attention: Mr. Tim Strawn

**Subject: Forensic Evaluation of Petroleum
Hydrocarbons ExxonMobil and ADC/Miller
Parcel**
2717/2731 Federal Avenue
Everett, Washington

Dear Mr. Strawn:

AMEC Earth & Environmental, Inc. (AMEC) has prepared this letter in response to the request from ExxonMobil to review forensic data from NewFields Environmental Practice, LLC (NewFields) for the former Mobil Oil/American Distribution Corporation (ADC) Terminal at 2717/2713 Federal Avenue, Everett, Washington (the Site).

AMEC chemists reviewed the report titled *Chemical Characterization of NAPL Samples Former Mobil Oil Terminal (46-108), Everett, Washington* (NAPL Report), prepared by NewFields dated May 31, 2006, along with data supplied by NewFields from chemical analysis performed by Alpha Analytical Woods Hole Laboratory of Woods Hole, Massachusetts (AWHL). A copy of the New Fields report and AWHL data are attached as Exhibit 1. The NAPL Report presents an evaluation of data generated by AWHL for three light nonaqueous phase liquid (LNAPL) samples, designated MW-29, W-1, and W-2. Sample MW-29 and sample W-1 were collected from monitoring wells at the Site, while sample W-2 was collected from an off-site location. A map of the Site, showing the location of the groundwater monitoring wells is attached to this letter as Exhibit 2.

This review was performed by AMEC on behalf of ExxonMobil in order to evaluate whether findings presented in the NAPL Report were consistent with the analytical data from AWHL, and to identify whether the analytical data was suggestive of the possible presence of off-site sources of the petroleum hydrocarbons in LNAPL samples collected.

Based on examination of the data included with the NAPL Report, AMEC concludes that LNAPL samples collected from on-site wells MW-29 and W-1 are similar to each other, but different from LNAPL collected from off-site well W-2, and that the presence of LNAPL in W-2 is not a result of transport of petroleum hydrocarbons from the on-site wells, MW-29 and W-1, to the off-site well, W-2.

**PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT**

The remainder of this letter will present specific details of AMEC's evaluation of the NAPL Report. The associated data, as related to the visual examination of bulk composition using chromatograms from whole oil analysis LNAPL samples, and a discussion of the specific diagnostic ratios of biomarkers and sulfur-bearing compounds taken from the detailed chemical analyses performed by AWHL for Newfields (as shown in the NAPL Report) will also be presented.

Evaluation of Bulk Composition of LNAPLs from On-site and Off-site Wells

Based on AMEC's inspection of whole oil chromatograms from samples MW-29, W-1 and W-2, as presented in the Newfields Report (see Page 3 of Exhibit 1), the following conclusions about bulk composition of LNAPL from the three samples can be drawn:

- The two on-site LNAPL samples (MW-29 and W-1) appear to be predominantly mixtures of degraded diesel mixed with degraded gasoline and small amounts of residual-range hydrocarbons. The diesel-range chromatograms for the on-site samples exhibit a non-typical diesel pattern, which is likely the result of gasoline present in LNAPL and enhanced solubilization of organic materials from the surrounding soil caused by the gasoline, as opposed to straight diesel.
- LNAPL from the off-site sample (W-2) appears to consist predominantly of highly degraded diesel with only a trace amount of gasoline. Based on visual examination of the whole oil chromatograms, the diesel in sample W-2 appears much more degraded than the diesel in the on-site samples, and is likely from a much older release.
- NAPL samples from MW-29, W-1, and W-2 all contain residual-range hydrocarbons. No quantitative results for gasoline, diesel, or residual-range petroleum hydrocarbons were included in the NAPL report, but based on visual examination of the whole oil chromatograms, relative concentrations of residual-range hydrocarbons appear to be higher in the on-site samples (MW-29, and W-1) than the off-site sample (W-2), possibly due to enhanced solubilization of asphalt or other high molecular weight petroleum hydrocarbons from soil or fill due to the presence of gasoline.
- In the professional opinion of AMEC, based on the visual inspection of the two Total Petroleum Hydrocarbon (TPH) chromatograms for MW-29 and W-1, LNAPL collected from MW-29 appears less degraded than LNAPL collected from W-1. LNAPL collected from MW-29 also appears to have a higher abundance of gasoline-range compounds relative to diesel-range compounds than LNAPL collected from MW-1. As stated above, both on-site LNAPL samples appear to be less degraded than LNAPL collected from off-site well W-2.

**PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT**

Examination of Diagnostic Ratios Related to Sulfur Content, and Select Biomarkers

The most direct evidence that LNAPL samples collected from on-site wells MW-29 and W-1 are similar to each other, but different from LNAPL collected from off-site well W-2, involves comparison of relative sulfur concentrations in LNAPLs from the three wells using diagnostic ratios of the concentrations of dibenzothiopenes (sulfur-containing polycyclic aromatic hydrocarbons [PAH] analogs) to phenanthrenes (sulfur-free PAHs). In the NAPL Report, ratios of C₂-substituted dibenzothiopenes to the sum of C₂-substituted dibenzothiopenes and C₂-substituted phenanthrenes were plotted against ratios of C₃-substituted dibenzothiopenes to the sum of C₃-substituted dibenzothiopenes and C₃-substituted phenanthrenes in order to allow comparison of relative sulfur abundances between the three LNAPL samples. The resulting plots (see Exhibit 1, page 6, Figure 3) demonstrate that LNAPL samples collected from MW-29 and W-1 had sulfur abundances similar to each other, but distinct from, and lower than, the sulfur abundance for LNAPL collected from W-2. Based on this analysis, LNAPLs in MW-29 and W-1 are derived from a petroleum source that has a lower sulfur concentration than the petroleum source from which LNAPL in W-2 is derived.

Alkylcyclohexanes are a family of petroleum constituents that are resistant to degradation, and that have been used as forensic markers in multiple investigations involving diesel fuels, as their concentration in diesel fuels is typically greater than the concentrations of many other biomarker families. Inspection of the m/z 83 ion chromatograms (see pages 33–36 of Exhibit 1), which corresponds to the molecular weight of the base ion for alkylcyclohexane compounds, also reinforces the assertion that LNAPL samples collected from MW-29 and W-1 are similar to each other, but distinct from LNAPL collected at W-2. The chromatographic traces from MW-29 and W-1 exhibited unresolved chromatographic envelopes (UCEs) with similar retention times, but slightly differing peak patterns. The peak pattern for LNAPL collected from MW-29 exhibits higher relative contributions by early-eluting peaks than the peak pattern from LNAPL collected at W-1, and although enhancement of lower molecular weight alkylcyclohexanes can sometimes be related to degradation of higher molecular weight alkylcyclohexanes (a sign of a more highly degraded material), the pattern of peaks in this case does not support that assertion, but is strongly indicative of a less degraded sample. The m/z 83 ion chromatogram for the LNAPL sample collected from W-2, on the other hand, shows nearly universal decreases in peak height for all the alkylcyclohexanes compared to the matching peaks for sample MW-29 and W-1, again indicating that the diesel component of LNAPL in W-2 originated from an older release.

Retene is a naturally-occurring PAH often associated with coniferous resins or other higher plant matter. The retene concentration detected in the LNAPL collected from W-1 is more than two-fold higher than the retene concentration in LNAPL collected from MW-29, and more than four-fold higher than the retene concentration in LNAPL collected from W-2 (570 mg/kg in W-1 versus 230 mg/kg in MW-29 and 130 mg/kg in W-2). It is also inconsistent with the retene concentrations in these two samples. Considering the known disposal of wood waste on the Site, the anomalous retene concentration may be a result of solubilization of retene from wood waste by the mixture of

**PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT**

diesel fuel and gasoline, but it could also indicate that the diesel fuel contained in sample W-1 is derived from a source distinctly different from the diesel in LNAPL from MW-29.

Finally, as stated above, the gasoline and diesel in LNAPL collected from MW-29 appears less degraded than the gasoline and diesel in LNAPL collected from W-1. In addition, MW-29 is located at a distance from W-1 and near the upgradient side of the property. It is possible that the gasoline in LNAPL, collected from MW-29, originates from an off-site source.

In conclusion, based on examination of information provided in the NAPL Report, AMEC concludes that:

- 1) LNAPLs from MW-29 and W-1 are derived from sources with lower sulfur concentrations than the source from which LNAPL in W-2 is derived.
- 2) LNAPLs from MW-29 and W-1 consist predominantly of a mixture of weathered diesel and weathered gasoline, while LNAPL from W-2 consists predominantly of diesel fuel with small amounts of gasoline.
- 3) LNAPLs from all three locations contain small amounts of residual range petroleum hydrocarbons, which are likely related to solubilization of asphalt or other high molecular weight petroleum hydrocarbons from soil or fill at the site.
- 4) LNAPL in W-2 is more highly weathered, and therefore, likely older than LNAPLs in MW-29 and W-1.
- 5) LNAPL in W-1 contains two-fold higher levels of retene than LNAPL in MW-29, which may indicate different sources or may be the result of the presence of higher plant matter in the soil in the area in which W-1 is located.
- 6) LNAPL in W-1 contains anomalously high levels of decalins and C1-naphthalenes compared to LNAPL in MW-29, which suggests influence of a distinct source or release.
- 7) Diesel in LNAPL from MW-29 appears to be less highly weathered than the diesel in LNAPL from W-1, and LNAPL from MW-29 also contains more gasoline than LNAPL from W-1.

Chromatographic patterns, relative sulfur abundances, and PAH analyses all point to similarities between LNAPL collected from MW-29 and LNAPL collected from W-1, and differences between these LNAPLs and LNAPL collected from W-2. Samples MW-29 and W-1 appear to consist primarily of degraded mixtures of gasoline and diesel with a small residual-range component, while LNAPL collected from W-2 appears to be degraded diesel with trace amounts of gasoline-range and residual-range compounds. The diesel-range analytes in MW-29 and W-1 are similar enough to indicate a common original source, but are different enough to exclude a common release. The diesel-range analytes detected in W-2 are different from both MW-29 and W-1. AMEC was unable to evaluate the gasoline component of LNAPL samples because of a lack of additional analyses of gasoline-range organics.

PRIVILEGED AND CONFIDENTIAL
ATTORNEY-CLIENT COMMUNICATION
ATTORNEY WORK PRODUCT

ExxonMobil-Global Remediation
December 27, 2006

6-914-15716-0
Page 5

Based on these conclusions and the location of MW-29, distant from W-1 and near the upgradient property boundary, the origin of at least some portion of LNAPL in MW-29 from a source distinct from W-1 cannot be ruled out. If viable third-party sources can be identified in the vicinity of W-1 or W-29, AMEC recommends that Exxon-Mobil/ADC may wish to consider the acquisition of new LNAPL samples from wells at the Site, and analysis of a forensic suite that includes analyses that will yield more information related to the gasoline-range component of LNAPL.


If you have any questions or require further information, please do not hesitate to contact us.

Sincerely,

AMEC Earth & Environmental, Inc.



Sean Gormley, EAC, CHMM Chemist
sea.gormley@amec.com
Senior Associate/Environmental Chemist



Meg Strong
meg.strong@amec.com
L.G. Senior Technical Manager

cc: William Joyce, Salter Joyce Ziker PLLC
Diana Martin, Bingham McCutchen, LLP

FRIEDMAN & BRUYA, INC.

ENVIRONMENTAL CHEMISTS

Andrew John Friedman
James E. Bruys, Ph.D.
(206) 285-8282

3012 16th Avenue West
Seattle, WA 98119-2029
FAX: (206) 283-5044

November 27, 1995

Tim Peter, Project Leader
AGRA Earth & Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, WA 98034-6918

Dear Mr. Peter:

Enclosed are the results from the testing of material submitted on November 22, 1995 from your 11-04658-07 project.

Samples MW-30 and MW-29 contained a heavy fuel oil such as Bunker C, or alternatively, a weathered crude oil. The two samples were very similar, and could easily be from the same source. Sample B-1 contained a heavily weathered Diesel fuel or heating oil. B-1 did not contain the high boiling fraction seen MW-29 and MW-30.

Sample Manhole appeared to contain the water soluble fraction of a middle or heavy petroleum distillate. The GC/FID trace showed patterns of C₃-benzenes, naphthalene, methylnaphthalenes, and dimethylnaphthalenes. These components tend to be the more water soluble fraction of middle and heavy distillates. A small amount of whole product may also be present, but the water soluble compounds dominate the GC/FID trace.

MW-29, MW-30 and B-1 may have all been sources to Manhole. It is also possible that Manhole has an entirely different source, origin unknown.

We appreciate this opportunity to be of service to you and hope you will call if you should have any questions.

Sincerely,

FRIEDMAN & BRUYA, INC.

Beth Albertson

Beth Albertson
Chemist

keh

Enclosures

FAX: 821-3914
AEE127R.D00

Date of Report: November 27, 1995

Date Received: November 22, 1995

Project: 11-04558-07

Date Samples Extracted: November 24, 1995

**RESULTS FROM THE ANALYSIS OF PRODUCT SAMPLES
FOR FINGERPRINT CHARACTERIZATION
BY CAPILLARY GAS CHROMATOGRAPHY
USING A FLAME IONIZATION DETECTOR (FID)
AND ELECTRON CAPTURE DETECTOR (ECD)**

Sample ID

B-1

GC Characterization

The GC trace using the flame ionization detector (FID) showed the presence of medium boiling compounds. The patterns displayed by these peaks are indicative of diesel fuel or heating oil.

The medium boiling compounds appeared as a pattern of peaks eluting from $n\text{-C}_6$ to $n\text{-C}_{24}$ showing a maximum near $n\text{-C}_{17}$. The material appears to have undergone chemical/biological degradation due to the presence of a broad unresolved hump of peaks and to the loss of the n -alkane peaks.

The large peak seen near 25 minutes on the GC/FID trace is pentacosane, added as a quality assurance check for this GC analysis. There is a second internal standard peak seen on the GC/ECD trace at about 26 minutes which is dibutyl chlorodate.

MW-30

The GC trace using the flame ionization detector (FID) showed the presence of low, medium and high boiling compounds. The patterns displayed by these peaks are indicative of a heavy fuel oil such as Bunker C or a crude oil.

The low, medium and high boiling compounds appeared as a ragged pattern of peaks eluting from $n\text{-C}_6$ to $n\text{-C}_{24}$ showing a maximum near $n\text{-C}_{17}$. A lack of a dominant pattern of n -alkanes was seen. n -Alkanes are preferentially consumed by microorganisms, and a lack of n -alkanes may be correlated to biological weathering.

The large peak seen near 25 minutes on the GC/FID trace is pentacosane, added as a quality assurance check for this GC analysis. There is a second internal standard peak seen on the GC/ECD trace at about 26 minutes which is dibutyl chlorodate.

FRIEDMAN & BRUYA, INC.

ENVIRONMENTAL CHEMISTS

Date of Report: November 27, 1995

Date Received: November 22, 1995

Project: 11-04558-07

Date Samples Extracted: November 24, 1995

RESULTS FROM THE ANALYSIS OF PRODUCT SAMPLES
FOR FINGERPRINT CHARACTERIZATION
BY CAPILLARY GAS CHROMATOGRAPHY
USING A FLAME IONIZATION DETECTOR (FID)
AND ELECTRON CAPTURE DETECTOR (ECD)

Sample ID

MW-29

GC Characterization

The GC trace using the flame ionization detector (FID) showed the presence of low, medium and high boiling compounds. The patterns displayed by these peaks are indicative of a heavy fuel oil such as Bunker C or a crude oil.

The low, medium and high boiling compounds appeared as a ragged pattern of peaks eluting from n -C₆ to n -C₃₄ showing a maximum near n -C₁₇. A lack of a dominant pattern of n -alkanes was seen. n -Alkanes are preferentially consumed by microorganisms, and a lack of n -alkanes may be correlated to biological weathering. The material present is very similar, though not identical, to the product in MW-30.

The large peak seen near 25 minutes on the GC/FID trace is pentacosane, added as a quality assurance check for this GC analysis. There is a second internal standard peak seen on the GC/ECD trace at about 26 minutes which is dibutyl chlorodate.

Date of Report: November 27, 1995

Date Received: November 22, 1995

Project: 11-04558-07

Date Samples Extracted: November 24, 1995

**RESULTS FROM THE ANALYSIS OF WATER SAMPLES
FOR FINGERPRINT CHARACTERIZATION
BY CAPILLARY GAS CHROMATOGRAPHY
USING A FLAME IONIZATION DETECTOR (FID)
AND ELECTRON CAPTURE DETECTOR (ECD)**

Sample ID

Manhole

GC Characterization

The GC trace using the flame ionization detector (FID) showed the presence of medium boiling compounds. The patterns displayed by these peaks are indicative of the water soluble fraction of a petroleum product.

The medium boiling compounds appeared as a ragged pattern of peaks eluting from *n*-C₆ to *n*-C₂₃ on the GC/FID trace. An irregular pattern of *n*-alkanes is seen from *n*-C₁₁ to *n*-C₁₉. *n*-Alkanes have poor solubility in water. It is possible that small amounts of whole product are mixed into the water phase. The major peaks seen between eight and fourteen minutes are likely to be alkylated benzenes, naphthalene, and alkylated naphthalenes. These compounds typically dominate the water soluble fraction of diesels and heavy heating oils. The material present was seen in low concentration, making product identification tentative. The detection limit for this analysis is 200, 400 and 800 ppb (µg/L) for gasoline, diesel and motor oil, respectively.

The large peak seen near 25 minutes on the GC/FID trace is pentacosane, added as a quality assurance check for this GC analysis. There is a second internal standard peak seen on the GC/ECD trace at about 26 minutes which is dibutyl chlorodate.

NRW-1

The GC trace using the flame ionization detector (FID) and the GC electron capture detector (ECD) trace showed an absence of volatile and semi-volatile compounds. The detection limit for this analysis is 500, 1,000, and 2,000 ppb (µg/L) for gasoline, diesel and motor oil, respectively.

AGRA Earth & Environmental
 11336 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-G
 First Sample #: B511431-02

Sampled: Nov 21, 1996
 Received: Nov 22, 1996
 Analyzed: Nov 26-27, 1996
 Reported: Nov 27, 1996

TOTAL PETROLEUM HYDROCARBONS-GASOLINE RANGE

| Sample Number | Sample Description | Sample Result µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-------------------------|
| B511431-02 | MW-31 | N.D. | 80 |
| B511431-03 | MW-33 | N.D. | 80 |
| B511431-04 | MW-36 | N.D. | 80 |
| B511431-05 | MW-32 | N.D. | 84 |
| B511431-06 | MW-8 | N.D. | 85 |
| B511431-07 | MW-16 | N.D. | 86 |
| B511431-08 | B-2 | N.D. | 88 |
| B511431-09 | MW-18 | 4,800 | S-2 |
| B511431-10 | MW-17 | N.D. | 82 |
| B511431-11 | MW-18 | 4,000 G-1 | 8-2 |

Reporting Limit:


50

4-Bromofluorobenzene surrogate recovery control limits are 50 - 150 %.
 Volatile Total Petroleum Hydrocarbons are quantitated as Gasoline Range Organics (toluene - dodecane).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.

Please Note:

S-2 = The Surrogate Recovery for this sample cannot be accurately quantified due to interference from coeluting organic compounds present in the sample.


 Stowell
 Project Manager

AGRA Earth & Environmental
 11936 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-G
 First Sample #: B511431-12

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS-GASOLINE RANGE

| Sample Number | Sample Description | Sample Result µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-------------------------|
| B511431-12 | MW-8 | 110 | 105 |
| B511431-13 | MW-9 | N.D. | 88 |
| B511431-14 | MW-27 | 160 G-1 | 92 |
| B511431-15 | MW-28 | N.D. | 85 |
| B511431-16 | MW-10 11/22/95 | 1,300 | S-2 |
| B611431-17 | MW-11 11/22/95 | 790 | S-2 |
| B511431-18 | MW-12 11/22/95 | N.D. | 83 |
| B511431-18 | MW-15 11/22/95 | 120 | 95 |
| B511431-20 | MW-35 11/22/95 | N.D. | 77 |
| B511431-21 | MW-37 | N.D. | 70 |

Reporting Limit: 50

4-Bromofluorobenzene surrogate recovery control limits are 50 - 150 %.
 Volatile Total Petroleum Hydrocarbons are quantitated as Gasoline Range Organics (toluene - dodecane).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.

Please Note:
 S-2 - The Surrogate Recovery for this sample cannot be accurately quantified due to interference from coeluting organic compounds present in the sample.


 Shannon Stowell
 Project Manager

511431.AGR <4>

AGRA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Method Blank
 Analysis Method: WTPH-G
 First Sample #: BLK112695

Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS-GASOLINE RANGE


| Sample Number | Sample Description | Sample Result µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-------------------------|
| BLK112695 | Method Blank | N.D. | 78 |

Reporting Limit:

50

4-Bromofluorobenzene surrogate recovery control limits are 50 - 150 %.
 Volatile Total Petroleum Hydrocarbons are quantitated as Gasoline Range Organics (toluene - dodecane).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

GRA Earth & Environmental
 1335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-G
 Units: µg/L (ppb)

Analyst: B. Christlieb
 F. Shino
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

HYDROCARBON QUALITY CONTROL DATA REPORT

ACCURACY ASSESSMENT Laboratory Control Sample

Gasoline

Spike Conc. Added: 100
 Spike Result: 95
 % Recovery: 95
 Upper Control Limit %: 132
 Lower Control Limit %: 58

PRECISION ASSESSMENT Sample Duplicate

Gasoline Range Organics

| Sample Number: | B511431-10 | B511431-18 |
|-------------------|------------|------------|
| Original Result: | N.D. | N.D. |
| Duplicate Result: | N.D. | N.D. |
| Maximum RPD: | 50 | 50 |

Relative % Difference: Relative Percent Difference values are not reported at sample concentration levels less than 10 times the Detection Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

$$\% \text{ Recovery} = \frac{\text{Spike Result}}{\text{Spike Concentration Added}} \times 100$$

$$\text{Relative \% Difference} = \frac{\text{Original Result} - \text{Duplicate Result}}{(\text{Original Result} + \text{Duplicate Result}) / 2} \times 100$$

AGFA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: EPA 8020
 First Sample #: B511431-02

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995


BTEX DISTINCTION

| Sample Number | Sample Description | Benzene µg/L (ppb) | Toluene µg/L (ppb) | Ethyl Benzene µg/L (ppb) | Xylenes µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------|--------------------------|--------------------------------|--------------------------|-------------------------|
| B511431-02 | MW-31 | N.D. | N.D. | N.D. | N.D. | 76 |
| B511431-03 | MW-33 | N.D. | N.D. | N.D. | N.D. | 74 |
| B511431-04 | MW-36 | N.D. | N.D. | N.D. | N.D. | 73 |
| B511431-05 | MW-32 | N.D. | N.D. | N.D. | N.D. | 78 |
| B511431-06 | MW-6 | N.D. | N.D. | N.D. | N.D. | 78 |
| B511431-07 | MW-15 | N.D. | N.D. | N.D. | N.D. | 80 |
| B511431-08 | B-2 | 0.78 | N.D. | N.D. | N.D. | 80 |
| B511431-09 | MW-16 | 640 | 9.8 | 28 | 140 | 127 |
| B511431-10 | MW-17 | 66 | 0.83 | N.D. | N.D. | 78 |
| B511431-11 | MW-18 | 170 | N.D. (R.L. = 2.0) | 5.8 | 3.7 | 105 |

| | | | | |
|--------------------------|------|------|------|-----|
| Reporting Limits: | 0.50 | 0.50 | 0.50 | 1.0 |
|--------------------------|------|------|------|-----|

4-Bromofluorobenzene surrogate recovery control limits are 59 - 144 %.
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

AGRA Earth & Environmental
 11395 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Pater

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: EPA 8020
 First Sample #: B511431-12

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

BTEX DISTINCTION

| Sample Number | Sample Description | Benzene µg/L (ppb) | Toluene µg/L (ppb) | Ethyl Benzene µg/L (ppb) | Xylenes µg/L (ppb) | Surrogate Recovery % |
|---------------|--------------------|--------------------------|--------------------------|--------------------------------|--------------------------|-------------------------|
| B511431-12 | MW-8 | 7.7 | N.D. | N.D. | N.D. | 88 |
| B511431-13 | MW-9 | 1.3 | N.D. | N.D. | N.D. | 79 |
| B511431-14 | MW-27 | N.D. | N.D. | N.D. | N.D. | 83 |
| B511431-15 | MW-28 | N.D. | N.D. | N.D. | N.D. | 79 |
| B511431-16 | MW-10 11/22/95 | 1.3 | N.D. | N.D. | 2.0 | 5-2 |
| B511431-17 | MW-11 11/22/95 | 36 | 0.80 | 1.8 | 1.6 | 109 |
| B511431-18 | MW-12 11/22/95 | 9.2 | N.D. | N.D. | 1.0 | 77 |
| B511431-19 | MW-13 11/22/95 | 5.2 | N.D. | N.D. | N.D. | 88 |
| B511431-20 | MW-35 11/22/95 | 2.7 | N.D. | N.D. | 1.7 | 74 |
| B511431-21 | MW-37 | 0.50 | N.D. | N.D. | N.D. | 89 |

| | | | | |
|--------------------------|------|------|------|-----|
| Reporting Limits: | 0.50 | 0.50 | 0.50 | 1.0 |
|--------------------------|------|------|------|-----|

4-Bromofluorobenzene surrogate recovery control limits are 50 - 142%.
 Analytes reported as N.D. were not detected above the stated Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

Please Note:
 5-2 - The Surrogate Recovery for this sample cannot be accurately quantified due to interference from co-eluting organics present in the sample.

AGRA Earth & Environmental
 11336 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: EPA 8020
 Units: µg/L (ppb)
 QC Sample #: B511431-02

Analyst: B. Christlieb
 F. Shino
 Analyzed: Nov 26, 1995
 Reported: Nov 27, 1995

MATRIX SPIKE QUALITY CONTROL DATA REPORT

| ANALYTE | Ethyl Benzene | | | |
|-----------------------------|---------------|---------|---------------|---------|
| | Benzene | Toluene | Ethyl Benzene | Xylenes |
| Sample Result: | N.D. | N.O. | N.D. | N.D. |
| Spike Conc. Added: | 10.0 | 10.0 | 10.0 | 30.0 |
| Spike Result: | 9.7 | 9.5 | 9.9 | 31.4 |
| Spike % Recovery: | 97% | 95% | 99% | 105% |
| Spike Dup. Result: | 9.4 | 9.83 | 9.6 | 30.5 |
| Spike Duplicate % Recovery: | 94% | 98% | 96% | 102% |
| Upper Control Limit %: | 115 | 110 | 122 | 122 |
| Lower Control Limit %: | 82 | 81 | 85 | 85 |
| Relative % Difference: | 3.1% | 1.4% | 3.1% | 2.9% |
| Maximum RPD: | 16 | 16 | 16 | 17 |

NORTH CREEK ANALYTICAL


 Shannon
 Project Manager

$$\text{Relative \% Difference} = \frac{\text{Spike Result} - \text{Sample Result}}{\text{Spike Conc. Added}} \times 100$$

$$\text{Relative \% Difference} = \frac{\text{Spike Result} - \text{Spike Dup. Result}}{(\text{Spike Result} + \text{Spike Dup. Result}) / 2} \times 100$$

AGRA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-D Extended
 First Sample #: B511431-02

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Extracted: Nov 22-26, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS - DIESEL RANGE EXTENDED

| Sample Number | Sample Description | Diesel Result mg/L (ppm) | Heavy Oil Result mg/L (ppm) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-----------------------------------|-------------------------|
| B511431-02 | MW-31 | 0.47 | N.D. | 79 |
| B511431-03 | MW-33 | 0.79 | N.D. | 81 |
| B511431-04 | MW-36 | 0.71 | N.D. | 76 |
| B511431-05 | MW-32 | 0.40 | N.D. | 78 |
| B511431-06 | MW-8 | 0.80 | 1.4 | 72 |
| B511431-07 | MW-16 | 0.77 | 1.2 | 74 |
| B511431-08 | B-2 | 4.4 | 3.9 | 80 |
| B511431-09 | MW-15 D-1 | 1.7 | 1.7 | 83 |
| B511431-10 | MW-17 | 0.49 | 0.97 | 81 |
| B511431-11 | MW-18 | 1.6 | 4.4 | 111 |

Reporting Limit:

0.25

0.75

2-Fluorobiphenyl surrogate recovery control limits are 50 - 150%.
 Extractable Hydrocarbons are quantitated as Diesel Range Organics (C12 - C24) and Heavy Oil Range Organics (>C24).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.

Shannon Stowell
 Project Manager

AGRA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-D Extended
 First Sample #: B511431-12

Sampled: Nov 21, 1995
 Received: Nov 22, 1995
 Extracted: Nov 22-26, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS - DIESEL RANGE EXTENDED

| Sample Number | Sample Description | Diesel Result mg/L (ppm) | Heavy Oil Result mg/L (ppm) | Surrogate Recovery % |
|---------------|--------------------|--------------------------|-----------------------------|----------------------|
| B511431-12 | MW-8 | 3.3 | 3.1 | 91 |
| B511431-13 | MW-9 | 3.3 | 3.3 | 90 |
| B511431-14 | MW-27 | 4.7 | 4.4 | 98 |
| B511431-15 | MW-28 | 3.4 | 3.7 | 94 |
| B511431-16 | MW-10 11/22/95 | 4.2 | 6.0 | 84 |
| B511431-17 | MW-11 11/22/95 | 2.4 | 1.2 | 93 |
| B511431-18 | MW-12 11/22/95 | 2.1 | 3.6 | 84 |
| B511431-19 | MW-13 11/22/95 | 6.7 | 3.1 | 98 |
| B511431-20 | MW-38 11/22/95 | 0.33 | 1.1 | 93 |
| B511431-21 | MW-37 | 1.6 | 2.4 | 84 |

Reporting Limit:

0.25

0.75

2-Fluorobiphenyl surrogate recovery control limits are 80 - 150%.
 Extractable Hydrocarbons are quantitated as Diesel Range Organics (C12 - C24) and Heavy Oil Range Organics (>C24).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

511431.AGR <12>

IRA Earth & Environmental
 335 NE 122nd Way, #100
 Portland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Method Blank
 Analysis Method: WTPH-D Extended
 First Sample #: BLK112295

Sampled: Nov 22, 1995
 Received: Nov 22, 1995
 Extracted: Nov 22-26, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

TOTAL PETROLEUM HYDROCARBONS - DIESEL RANGE EXTENDED

| Sample Number | Sample Description | Diesel Result mg/L (ppm) | Heavy Oil Result mg/L (ppm) | Surrogate Recovery % |
|---------------|--------------------|--------------------------------|-----------------------------------|-------------------------|
| BLK112295 | Method Blank | N.D. | N.D. | 84 |
| BLK112695 | Method Blank | N.D. | N.D. | 85 |

Reporting Limit:

0.25

0.75

2-Fluorobiphenyl surrogate recovery control limits are 50 - 150%.
 Extractable Hydrocarbons are quantitated as Diesel Range Organics (C12 - C24) and Heavy Oil Range Organics (>C24).
 Analytes reported as N.D. were not detected above the stated Reporting Limit.

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

AGRA Earth & Environmental
 11335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-D
 Units: mg/L (ppm)

Analyst: T. Fitzgibbon
 Extracted: Nov 22, 1995
 Analyzed: Nov 26-27, 1995
 Reported: Nov 27, 1995

HYDROCARBON QUALITY CONTROL DATA REPORT

ACCURACY ASSESSMENT Laboratory Control Sample

Diesel

Spike Conc. Added: 2.04
 Spike Result: 1.91
 % Recovery: 94
 Upper Control Limit %: 107
 Lower Control Limit %: 69

PRECISION ASSESSMENT

Sample Duplicate

| | |
|-----------------------|-----------------------|
| Diesel Range Organics | Diesel Range Organics |
|-----------------------|-----------------------|

| | | |
|------------------------|--|------------|
| Sample Number: | B511431-09 | B511398-02 |
| Original Result: | 1.7 | 1.9 |
| Duplicate Result: | 1.4 | 2.2 |
| Relative % Difference: | Relative Percent Difference values are not reported at sample concentration levels less than 10 times the Reporting Limit. | |
| Maximum RPD: | 44 | 44 |

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

$$\% \text{ Recovery} = \frac{\text{Spike Result}}{\text{Spike Concentration Added}} \times 100$$

$$\text{Relative \% Difference} = \frac{\text{Original Result} - \text{Duplicate Result}}{(\text{Original Result} + \text{Duplicate Result}) / 2} \times 100$$

IGRA Earth & Environmental
 1335 NE 122nd Way, #100
 Kirkland, WA 98034
 Attention: Tim Peter

Client Project ID: Mobil Everett
 Sample Matrix: Water
 Analysis Method: WTPH-D
 Units: mg/L (ppm)

Analyst: T. Fitzgibbon
 Extracted: Nov 26, 1995
 Analyzed: Nov 28-27, 1995
 Reported: Nov 27, 1995

HYDROCARBON QUALITY CONTROL DATA REPORT

ACCURACY ASSESSMENT Laboratory Control Sample

Diesel

Spike Conc. Added: 2.04

Spike Result: 1.61

% Recovery: 79

Upper Control Limit %: 107

Lower Control Limit %: 69

PRECISION ASSESSMENT

Sample Duplicate

Diesel Range Organics

Sample Number: B511431-19

Original Result: 6.7

Duplicate Result: 5.7

Relative % Difference: 16

Maximum RPD: 44

NORTH CREEK ANALYTICAL Inc.


 Shannon Stowell
 Project Manager

% Recovery: $\frac{\text{Spike Result}}{\text{Spike Concentration Added}} \times 100$
 Relative % Difference: $\frac{\text{Original Result} - \text{Duplicate Result}}{(\text{Original Result} + \text{Duplicate Result}) / 2} \times 100$

HYDROCARBON ANALYSIS FOOTNOTES


2/94, Rev. 3

VOLATILE HYDROCARBONS - GASOLINE RANGE ORGANICS

- G 1 This sample appears to contain extractable diesel range organics.
- G 2 The chromatogram for this sample does not resemble a typical gasoline pattern. Please refer to the sample chromatogram.
- G 3 The total hydrocarbon result on this sample is primarily due to an individual compound(s) eluting in the volatile hydrocarbon range. Identification and quantitation by EPA 8010, 8021 or 8240 is recommended.
- G 4 This sample contains compound(s) not identified as Benzene, Toluene, Ethyl benzene or Xylene.
- G 5 This sample appears to contain or be saturated with gasoline product.

EXTRACTABLE HYDROCARBONS - DIESEL RANGE ORGANICS

- D 1 This sample appears to contain volatile gasoline range organics.
- D 2 The hydrocarbons present in this sample resemble heavy, non-resolvable oil range organics. Quantitation by TPH-Diesel Extended or TPH 418.1 is recommended.
- D 3 The hydrocarbon concentration result in this sample is partially due to an individual peak(s) eluting in the diesel / motor oil carbon range.
- D 4 The hydrocarbons present in this sample are a complex mixture of diesel range and heavy oil range organics.
- D 5 The hydrocarbon result shown is an estimated (greater than) value due to the high concentration. Reanalysis is being performed to yield a quantitative result. An amended report will follow.
- D 6 The sample chromatographic pattern does not resemble the fuel standard used for quantitation. A fuel fingerprint is advised.
- D 7 This sample appears to contain or be saturated with diesel product.

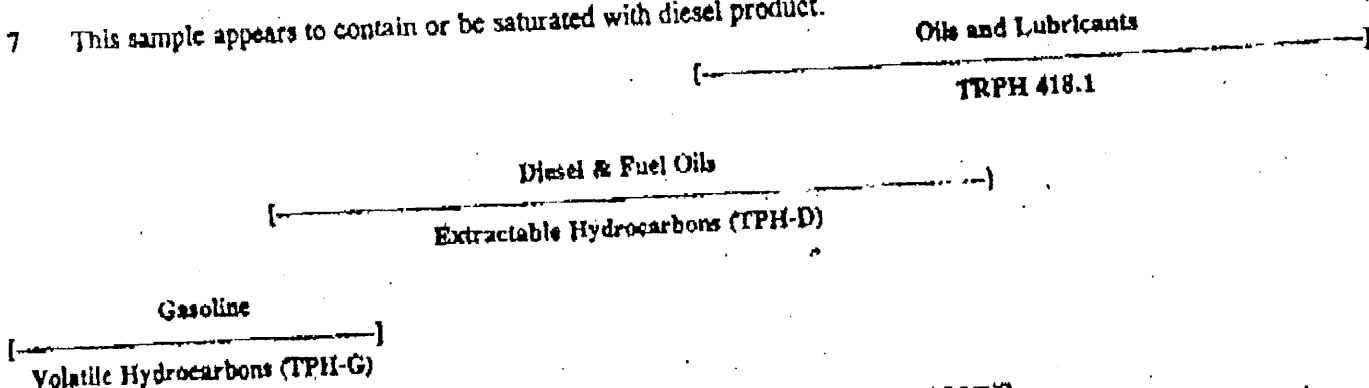


HYDROCARBON BOILING POINT RANGE

LOW LOW TO MEDIUM MEDIUM MEDIUM TO HIGH VERY HIGH

CARBON RANGE:

6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31+

OIL SAMPLE ANALYSIS REPORT
MARINE SAFETY OFFICE PUGET SOUND
CASE NUMBER MC95015622
MARINE SAFETY LABORATORY
CASE NUMBER 96-013

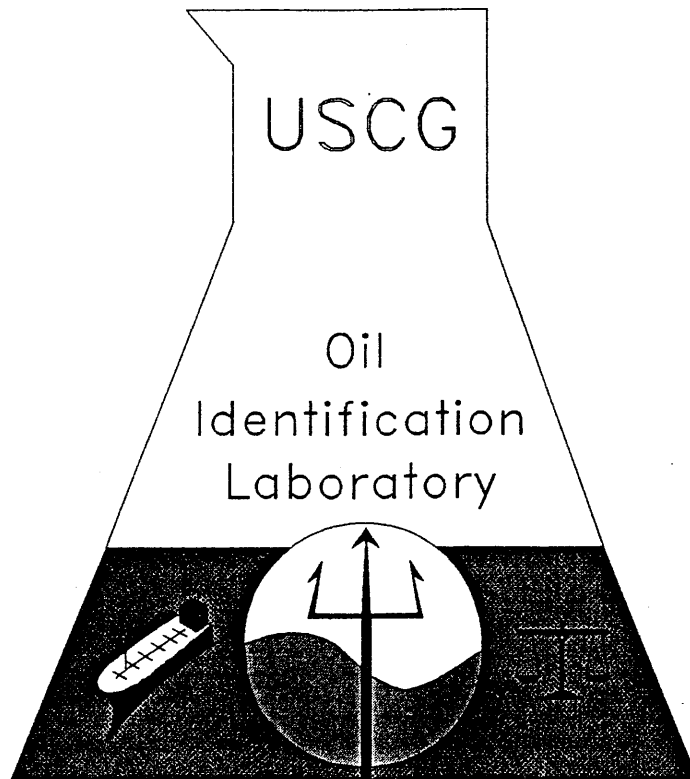

U.S. Department
of Transportation

United States
Coast Guard



Commanding Officer
U. S. Coast Guard
Marine Safety
Laboratories

1082 Shennecossett Road
Groton, CT 06340-6094
Phone: (860) 441-2645
Fax: (860) 441-2641

16400

OCT 18 1995

From: Commanding Officer, Marine Safety Laboratories
To: Commanding Officer, Marine Safety Office Puget Sound

Subj: OIL SAMPLE ANALYSIS REPORT, MSO PUGET SOUND CASE# MC95015622
MSL CASE #96-013

1. The laboratory analysis of this case has been completed and our report is forwarded. The technical data supporting the report (spectrograms and chromatograms) have been archived at our facility and are available upon request. We will maintain the oil samples in refrigerated storage pending final case disposition.

2. Questions concerning this report or the analytical methods used should be directed to the Supervisor of Analysis, Dr. Hendrick.

Margaret Hendrick

M. S. HENDRICK
By direction

Encl: (1) MSL Report 96-013
(2) OIS Addendum

UNITED STATES COAST GUARD
OIL IDENTIFICATION LABORATORY

OIL SPILL IDENTIFICATION REPORT

LABORATORY CASE NUMBER: 96-013

REQUESTOR: MSO PUGET SOUND
UNIT CASE NUMBER: MC95015622
RECEIVED: 16OCT95 VIA: U.S. MAIL

NUMBER OF SAMPLES: TEN (10)
LAB NO. OF SPILLS: 1,2,5,6 AND 7
LAB NO. OF SUSPECTS: 3,4,8,9 AND 10

ANALYSIS METHODS:

GAS CHROMATOGRAPHY (GC)
GAS CHROMATOGRAPHY/MASS SPECTROMETRY (GC/MS)

RESULTS:

1. Samples 1,2,5,6 and 7 were specified to have been representative of spilled oil. Analysis indicates:

a. Samples 1,2,5 and 6 are similar and contain a severely biodegraded and evaporatively weathered heavy fuel oil mixed with lubricating oil.

b. Sample 7 contains only traces of a severely biodegraded heavy fuel oil mixed with lubricating oil. The characteristics of sample 7 are similar to those expected for a severely weathered version of samples 1,2,5 and 6.

2. Suspected source sample 8 is observed to contain a heavy fuel oil with characteristics similar to those of the heavy fuel oil component of the spilled oil. Most differences are consistent with biodegradative and evaporative weathering of the spilled oil; However, this sample contains no lubricating oil.

3. Suspected source samples 3 and 4 are observed to contain biodegraded light fuel oil with characteristics different from those of the spilled oil.

4. Suspected source samples 9 and 10 are observed to contain mixtures of fuel oil and lubricating oil with characteristics different from those of the spilled oil.

CONCLUSIONS:

1. Spill samples 1,2,5,6 and 7 represent different portions of the same spilled oil.

2. The heavy fuel oil in suspected source sample 8 and the spill samples 1,2,5,6 and 7 may be derived from a common source. Biodegradation, as noted in the spilled oil samples, is characteristic of oil that has been retained in a contaminated

CONTINUATION OF OIL SPILL IDENTIFICATION REPORT 96-013

environment for an extended period of time. Not all differences noted are consistent with biodegradative weathering of the spilled oil. It should be noted that lubricating oil contamination is very common in sewers. For this reason, the area in proximity to the location from which sample 8 was collected should be investigated further as the most likely source of the spilled oil.

3. None of suspected source samples 3,4,9 or 10 are derived from a common source of the spill samples 1,2,5 and 6.

Martha Hendrick

SUPERVISOR OF ANALYSIS M. S. HENDRICK, Ph.D. DATE: 18OCT95
Chemist

11/89

UNITED STATES COAST GUARD
OIL IDENTIFICATION LABORATORY

SAMPLE CHECK-IN LOG, COIL CASE NUMBER: 96-013

REQUESTOR: MSO PUGET SOUND

UNIT CASE# MC95015622

| | | METHOD OF DELIVERY | | DATE RECEIVED |
|---------|-----------------|--------------------|-------|---------------|
| US MAIL | | MESSENGER | OTHER | |
| NUMBER | DATE MAILED O/A | | | |
| N/A | 11 OCT 95 | | | 16 OCT 95 |

Samples were observed to be: broken NO, tampered with NO, leaking NO, or subject to contamination NO. For these and other unusual conditions, place an asterisk (*) next to the sample(s) in question and describe condition of sample(s) in remarks below.

| LAB NO. | SAMPLE DESCRIPTION | SPILL | SUSPECT |
|-----------|---|-------|---------|
| 96-013-1 | [1] OIL FROM PIPE OF SEWER OUTFALL AT BREAK WALL 02 OCT 95 0845 | XXXXX | |
| 96-013-2 | [2] SAMPLE OF FUEL IN THE WATER 02 OCT 95 0850 | XXXXX | |
| 96-013-3 | [3] POSSIBLE SOURCE FROM HOLE IN GROUND AT AMERICAN DISTRIBUTING 02 OCT 95 1010 | | XXXXX |
| 96-013-4 | [4] POSSIBLE SOURCE AMERICAN DISTRIBUTING HOLE IN GROUND 02 OCT 95 1012 | | XXXXX |
| 96-013-5 | [5] DRAIN LINE IN YARD DOCK. BY FENCE LINE IN LOG YARD 05 OCT 95 1155 | XXXXX | |
| 96-013-6 | [6] SEWER OUTFALL IN YARD DOCK BY FENCE LINE IN LOG YARD 05 OCT 95 1200 | XXXXX | |
| 96-013-7 | [7] SEWER OUTFALL UNDER LOG ROLE IN LOG YARD 02 OCT 95 1615 | XXXXX | |
| 96-013-8 | [8] POSSIBLE SOURCE OF BLACK OIL IN PIPE IN IN GARAGE OLD ENGINE ROOM 05 OCT 95 1210 | | XXXXX |
| 96-013-9 | [9] BILGE SIDE OF TANK AT DUNLAP TOWING 05 OCT 95 1233 | | XXXXX |
| 96-013-10 | [10] BILGE TANK OF POSSIBLE SOURCE OF TANK DUNLAP TOWING 05 OCT 95 1233 | | XXXXX |
| | | | |
| | | | |
| | | | |
| | | | |

REMARKS:

Samples checked-in by: [Signature] Date: 16 OCT 95
Sample Custodian: [Signature] Date: 16 OCT 95
Supervisor of Analysis: Martha Hendrick Date: 17 Oct 95

11 OCT 95
Date

From: COMMANDING OFFICER, MARINE SAFETY OFFICE PUGET SOUND
To: Commanding Officer, Marine Safety Laboratories

Subj: REQUEST FOR OIL SAMPLE ANALYSIS

1. Request analysis of the samples listed on attached Chain of Custody Record to assist in our investigation of spill case
FPN 13-6001 MC95015622
(Federal Project Number and Marine Casualty "MC" number)

2. Questions concerning this case should be directed to
Bmt CHRIS P. SCARBERRY COMMERCIAL# 206-217-6232

3. The spill samples were collected from SEWER OUTFALL FACILITY
SEWER DRAIN AND BAY
(river, outfall, shore, etc)

4. Estimated number of gallons spilled 50; Estimated cost of cleanup \$3,000.

5. Wind conditions: ___ mild breeze; ___ Very Windy; Calm.

6. Air Temperature: ___ below 32F; 32 to 60F; ___ 60 to 85F
___ 85 to 95F; ___ over 95F.

7. Sky conditions: Overcast; ___ Bright Sun; ___ Rain;
Other (specify) _____

8. Spill involves seepage of oil through the soil: ___ Yes No.
If Yes, estimated distance to the nearest possible suspected source:

9. List any possible non-petroleum contamination sources in the area NONE

10. Are all samples involved in this case being sent to the laboratory? YES If not, explain _____

11. Have all possible suspect sources been sampled, YES If NO, include a detailed explanation of possible sources not sampled. Provide any additional information about the samples or overall situation which may be helpful to lab personnel: _____

12. Specify prosecution type: Class 1; ___ Class 2; ___ DOJ.

(SIGNATURE)

MSO Hon [Signature]

UNITED STATES COAST GUARD
CHAIN OF CUSTODY RECORD

COMMANDING OFFICER

(UNIT AND ADDRESS)

U.S. COAST GUARD
MARINE SAFETY OFFICE
PUGET SOUND
1519 ALASKAN WAY SOUTH
SEATTLE, WA. 98134-1192

| SPILL | SOURCE | SAMPLE NO. | DESCRIPTION OF SAMPLES FOR CASE# <u>MC95015622</u> |
|-------|--------|------------|--|
| XXX | | 1 | OIL FROM PIPE OF SEWER OUTFALL AT BREAKWALL |
| XXX | | 2 | SAMPLE OF FUEL IN THE WATER |
| | XXX | 3 | POSSIBLE SOURCE FROM HOLE IN GROUND AT AMERICAN DIS |
| | XXY | 4 | POSSIBLE SOURCE FROM AMERICAN DISTRIBUTING HOLE IN GRA |
| XXX | | 5 | DRAIN LINE IN YARD DOCK BY FENCE LINE. LOG YARD |
| XXX | | 6 | SEWER OUTFALL IN YARD DOCK BY FENCE LINE. LOG YARD |
| XXX | | 7 | SEWER OUTFALL UNDER LOG RAKE IN LOG YARD |
| XXX | | 8 | POSSIBLE SOURCE OF BLACK OIL IN GARAGE OF OLD EMERSON |
| | XXX | 9 | BILGE-SIDE OF TANK Dunlap Towing OIL SIDE |
| | XXX | 10 | BILGE TANK OF Dunlap Towing Bilge Side |

| PERSON ASSUMING RESPONSIBILITY FOR SAMPLES | | | | | TIME/DATE |
|--|--|---------------------|---|---------------------|------------------------------|
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-10 | <i>[Signature]</i> Bm2 G.R. Scanberry | 08 OCT 1995 1503 | <i>[Signature]</i> MST3 LAISURE | 02 OCT 1995 1700 | STORAGE |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-10 | <i>[Signature]</i> MST3 DON LAISURE | 11 OCT 1995 1430 | <i>[Signature]</i> Bm2 G.P. Scanberry | 11 OCT 1995 1430 | Ship to Coil |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-10 | <i>[Signature]</i> Bm2 Scanberry | 11 OCT 1995 1433 | <i>[Signature]</i> TROYER HAMMER MST3 ATMSL | 16 OCT 1995 0730 | |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |

**MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY**

SAMPLE PREPARATION SHEET

COIL CASE NUMBER: 96-013

DATE PREPARED: 16 OCT 95

Oil samples were obtained using preparation techniques listed below. The samples were then placed into a vial and identified with the COIL case number and sample number along with the corresponding preparation code(s).

Oil samples eliminated by IR screening method: _____

The Quality Control sample is a duplicate of sample: 96-013-8

| SAMPLE NUMBERS (sequential portion only) | PREPARATION CODE | RATIO |
|--|------------------|-------|
| 1,2,3,4,8,9,10,OC | 2 | |
| 5,6,7 | 4,7 | |
| | | |
| | | |
| | | |
| | | |

PREPARATION CODES

1. Portion of neat sample taken from sample jar (clean fuel oils).
2. Portion of sample taken from sample jar, anhydrous $MgSO_4$ added, then centrifuged.
3. Portion of sample taken from sample jar, diluted with cyclohexane, anhydrous $MgSO_4$ added, then centrifuged.
4. Entire sample extracted with cyclohexane, anhydrous $MgSO_4$ added, then centrifuged.
5. Entire sample extracted with two separate 10 ml portions of cyclohexane, anhydrous $MgSO_4$ added to the combined cyclohexane solution, then centrifuged.
6. Cyclohexane Solution: ratio of oil to cyclohexane is known and shown in "ratio" column.
7. Cyclohexane Solution of unknown concentration.
8. Solvent evaporated with heat and a stream of N_2 . Sample of unknown concentration.
9. Others: _____

Preparer's Signature: Bruce Altman Date: 16 OCT 95

UNITED STATES COAST GUARD
MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY

QUALITY CONTROL SHEET

COIL CASE NUMBER: 96-013 DATE PREPARED: 16 OCT 95

1. A Quality Control (QC) sample was analyzed along with the other samples in this case.

X The Quality Control (QC) is a duplicate of sample 96-013-8
Due to limited sample quantity in all samples involved in the case, reference oil _____ from the COIL Library was used for the Quality Control (QC) and it's duplicate sample.
Infrared Spectroscopy used for screening samples before final sample preparation. No QC sample available during IR screening.

2. ANALYTICAL METHODS.

INFRARED SPECTROSCOPY

GAS CHROMATOGRAPHY

FLUORESCENCE SPECTROSCOPY

GAS CHROMATOGRAPHY/MASS SPECTROMETRY

| SAT | N/A |
|-----|-----|
| | X |
| X | |
| | X |
| X | |

3. The data and conclusions for the QC and it's duplicate were identical:

Yes X No _____

COMMENTS:

SUPERVISOR OF ANALYSIS:

Margaret Hendrick

DATE: 18 OCT 95

UNITED STATES COAST GUARD
MARINE SAFETY LABORATORY

OIL SPILL IDENTIFICATION ANALYSES
COST RECOVERY DOCUMENTATION

LABORATORY CASE NUMBER: 96-013

REQUESTOR: MARINE SAFETY OFFICE PUGET SOUND

UNIT CASE NUMBER: MC95015622


NUMBER OF SAMPLES: 10

NUMBER OF ANALYSES: 18

COST PER ANALYSIS: \$97.00

TOTAL COSTS: \$1746.00

This documentation is provided for purposes of Phase IV - Documentation and Cost Recovery under the National Oil and Hazardous Substances Pollution Contingency Plan(40 CFR Part 300).



MARTHA S. HENDRICK DATE: 18OCT95
Chemist

OIL SPILL IDENTIFICATION SYSTEM (OIS)**RELEVANCE TO SPILL SOURCE DETERMINATION**

Petroleum is a complex mixture of thousands of different organic compounds formed from a variety of organic materials that are chemically converted under differing geological conditions over long periods of time. The infinitely variable nature of these factors results in distinct chemical differences between oils formed under dissimilar conditions and/or environments. While oil from one crude oil field is readily distinguishable from another, differences in the makeup of oils from the same crude oil field can sometimes be observed as well. Refined oils are fractions usually derived by distillation of crude oil. Two refined oils of the same type differ because of dissimilarities in the characteristics of their crude oil feed stocks as well as variations in refinery processes and any subsequent contact with other oils mixed in during transfer operation from residues in tanks, ships, pipes, hoses etc... Thus, all petroleum oils, to some extent have chemical compositions that differ from each other.

The characteristic properties of an oil can be explored by a variety of analytical methods. The results of analysis by any of these methods can be presented in graph form. In general, when the graphical data for two oils produced by a particular method are compared, the differences between the graphs reflect differences between the oils.

The OIS System, developed during the mid-1970s at the Coast Guard Research and Development Center, is based on a multi-method approach to "fingerprinting" oils. In 1978, the Central Oil Identification Laboratory (COIL) was established as the operating facility to implement the OIS. In 1988, COIL was renamed the Marine Safety Laboratories (MSL), though the acronym COIL is still widely used. OIS is designed to determine the unique, intrinsic chemical properties of oils via analytical techniques and establish whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. Since 1978, MSL/COIL has analyzed over 39,000 samples, involving more than 5,700 spill cases, in support of oil pollution investigations.

DATA PRODUCTION AND INTERPRETATION

Oil sample preparation, testing and storage are conducted in accordance with American Society for Testing and Materials (ASTM) consensus standards. MSL/COIL currently utilizes three primary analytical techniques: Gas Chromatography (GC) (ASTM D-3328), Fluorescence Spectroscopy (FL) (ASTM D 3650), Infrared Spectroscopy (IR) (ASTM D-3414), and Gas Chromatography-Mass Spectrometry (GC-MS) (ASTM D-5739) that is used as a complementary analytical method. A rigorous laboratory quality assurance program monitors both instrument performance and sample preparation to ensure that data are accurate and reproducible.

All samples in a given case are initially analyzed by one method to determine the class of petroleum product. Samples can be excluded from further analysis based on results from the initial analysis. Further analyses are performed on samples which are potential matches to the source of the oil.

The Supervisor of Analysis interprets the data from all test methods performed and draws conclusions concerning whether or not certain spilled oil and suspected source samples were derived from the same chemical source. Data interpretation in oil spill source identification is non-trivial and fundamentally different from typical chemical analyses because the chemical properties of spilled oil are altered when oil is introduced into the environment. From the moment oil enters the environment, evaporation, dissolution, photochemical oxidation, biodegradation and other forces begin to alter the oil's characteristics or "fingerprint". These combined processes are termed weathering and can significantly complicate data interpretation. Contamination of the spilled oil with other oils or substances is another complicating factor. The experienced oil spill analyst is familiar with the complexities of the weathering processes and is able to distinguish real differences between two oils from those apparent differences resulting from weathering alterations. Interferences from contaminants can usually be recognized as such and discounted when weighing the test results. However, at times, severe weathering and/or contamination can mask many of the inherent differences between oils of a similar type.

REPORTING

The typical MSL/COIL OIS Report consists of four parts: case identifying information, a listing of analysis techniques performed, the results section and the conclusions section. The results section describes the types of petroleum observed in the samples provided, and comments on chemical similarities or dissimilarities between spill samples and/or between spill and suspected source samples. In all cases the Supervisor of Analysis bases the written results on interpretations from the aggregate of all data generated.

The conclusions section establishes whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. There are two outcomes most frequently found in the conclusions section of the typical MSL/COIL OIS Report: "derived from a common source" and "not derived from a common source". However, to maintain the high degree of reliability for both "common source" and "not a common source" determinations, it is necessary to exclude some comparisons from these categories. Oil spill cases vary widely in possible explanations for why a determination could not be made. Instead of using only a statement of "inconclusive", the comments will concisely explain the reason for the outcome for each individual case. For example, some sources are highly inhomogeneous, and a sample of such a spill may not reflect the composition of the product remaining in such a source. The spill may contain very little oil, or it may be excessively weathered or contaminated. Of important note, MSL/COIL conclusions address chemical comparisons and not physical aspects of evidence. Additionally, chemical evidence provided in a MSL/COIL conclusion that is other than "common source" might still be used by the investigating officer, when combined with physical evidence to establish a preponderance of the evidence argument against an alleged responsible party.

MSL/COIL OIS Reports are submitted to Marine Safety Offices (MSO's) for inclusion, as chemical evidence, in Marine Violation/Casualty Reports. The outcomes in the conclusions section of the OIS Report define the nature of the chemical evidence provided. MSO personnel are advised to combine the chemical evidence provided in the MSL/COIL OIS Reports with physical and circumstantial evidence developed during the investigation when writing Marine Violation Reports. Inquiries challenging the technical content of MSL/COIL OIS Reports by representatives of the alleged responsible party should be handled at the Hearing Officer level. Explicit guidance describing the communications process between the Hearing Officer and the MSL/COIL Supervisor of Analysis on technical issues involving chemical evidence is given in Commandant (G-LMI) memorandum 16460 dated 26 January 1981.

PERSONNEL QUALIFICATIONS

MSL/COIL laboratory technicians performing sample preparation and testing are graduates of the Coast Guard Marine Science Technician School. Each MSL/COIL technician has successfully completed a comprehensive training program at the MSL/COIL facility. Additionally, many have received supplemental training at leading civilian institutions in their specialty area.

The Supervisor of Analysis monitors all aspects of the analysis, certifies and interprets the test results, and prepares the final MSL/COIL report. This individual is a professionally trained chemist experienced in oil spill source identification. Individuals currently qualified to perform this function are:

Lieutenant Commander Kristy L. Plourde, U.S. Coast Guard
Commanding Officer
B.S. Physical Sciences, 1983, US Coast Guard Academy
M.S. Chemistry, 1989, University of Connecticut

Dr. Martha Hendrick
Chemist
B.A. Chemistry, 1969, Rhodes College
M.A. Education, 1974, Stanford University
Ph.D. Analytical Chemistry, 1985, University of Connecticut
Chair, ASTM Subcommittee D19.31, Waterborne Oils


REFERENCES

A more technical description of the OIS is contained in Report CG-D-52-77 "Oil Spill Identification System", Final Report, June 1977, USCG R&D Center. This document is available through the National Technical Information Service, Springfield, VA 22161.

For information concerning the ASTM standards used in Oil Spill Identification, consult "Oil in the Environment", Martha S. Hendrick, Ph.D., ASTM Standardization News, April 1991.

For additional information regarding the applicability of the Coast Guard's OIS, see "Chemical Identification of Oil Spill Sources", Allen P. Bentz, Ph.D., The Forum, Volume XIII, Number 2, Winter 1978. Dr. Bentz is a research scientist at the Coast Guard Research and Development Center and a recognized expert in the field of oil spill source identification. He has been closely involved with most of the development work leading to the present state-of-the-art.

OIL SAMPLE ANALYSIS REPORT
MARINE SAFETY OFFICE PUGET SOUND
CASE NUMBER MC95015622
MARINE SAFETY LABORATORY
CASE NUMBER 96-097

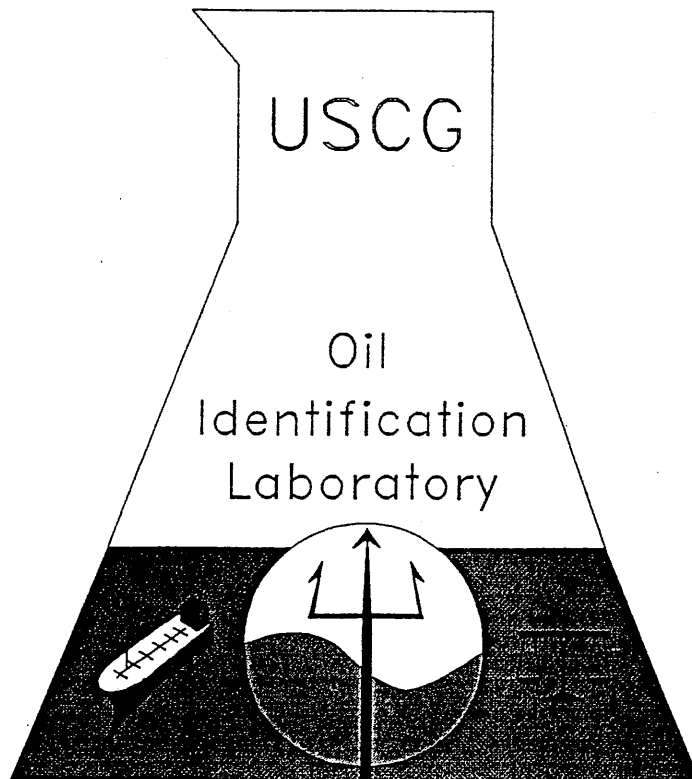

U.S. Department
of Transportation

United States
Coast Guard



Commanding Officer
U. S. Coast Guard
Marine Safety
Laboratories

1082 Shennecossett Road
Groton, CT 06340-6094
Phone: (860) 441-2645
Fax: (860) 441-2641

16400

DEC 20 1995

From: Commanding Officer, Marine Safety Laboratories
To: Commanding Officer, Marine Safety Office Puget Sound
Subj: OIL SAMPLE ANALYSIS REPORT, MSO PUGET SOUND CASE# MC95015622
MSL CASE #96-097

1. The laboratory analysis of this case has been completed and our report is forwarded. The technical data supporting the report (spectrograms and chromatograms) have been archived at our facility and are available upon request. We will maintain the oil samples in refrigerated storage pending final case disposition.

2. Questions concerning this report or the analytical methods used should be directed to the Supervisor of Analysis, Dr. Hendrick.

Mantha Hendrick

M. S. HENDRICK
By direction

Encl: (1) MSL Report 96-097
(2) OIS Addendum

UNITED STATES COAST GUARD MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY

OIL SPILL IDENTIFICATION REPORT

LABORATORY CASE NUMBER: 96-097

REQUESTOR: MSO PUGET SOUND

UNIT CASE NUMBER: MC95015622

RECEIVED: 14DEC95 VIA: CERTIFIED MAIL (# P 902 422 199)

NUMBER OF SAMPLES: FIVE (05)

LAB NO. OF SPILLS: 3 AND 4

LAB NO. OF SUSPECTS: 1,2 AND 5

ANALYSIS METHODS:

GAS CHROMATOGRAPHY (GC)

GAS CHROMATOGRAPHY/MASS SPECTROMETRY (GC/MS)

SPECIAL INSTRUCTIONS:

1. Compare the samples submitted with spill samples from COIL Case 96-013.

RESULTS:

1. Samples 96-097-3 and 4 were specified to have been representative of spilled oil. Analysis indicates they do not contain a detectable quantity of petroleum oil.

2. Samples 96-013-1,2,5,6 and 7 were specified to have been representative of previously spilled oil. Analysis indicates:

a. Samples 96-013-1,2,5 and 6 are similar and contain a severely biodegraded and evaporatively weathered heavy fuel oil mixed with lubricating oil.

b. Sample 96-013-7 contains only traces of a severely biodegraded heavy fuel oil mixed with lubricating oil. The characteristics of sample 96-013-7 are similar to those expected for a severely weathered version of samples 96-013-1,2,5 and 6.

3. Suspected source sample 96-097-2 is observed to contain a severely biodegraded and evaporatively weathered heavy fuel oil mixed with lubricating oil. The characteristics are similar to those of the heavy fuel oil component of the spilled oil. However, this sample contains significantly less lubricating oil than the spill samples.

4. Suspected source sample 96-097-5 is observed to contain a heavy fuel oil with characteristics different from those of the spilled oil.

5. Suspected source sample 96-097-1 is observed to contain only traces of petroleum oil. Results are of no value for comparison purposes.

*where
was
taken from #7*

CONTINUATION OF OIL SPILL IDENTIFICATION REPORT 96-097

CONCLUSIONS:

1. Comparison of spill samples 96-097-3 and 4 is inconclusive because they do not contain a sufficient quantity of petroleum oil for comparison purposes.
2. Suspected source sample 96-097-2 and the spill samples 96-013-1, 2, 5, 6 and 7 are closely related and appear to be derived from common sources of petroleum oil. Sample 96-097-2 appears to represent another portion of spilled oil, rather than the origin of the spill. The difference in the proportion of lubricating oil indicates that more than one source is probably responsible for the problem. Biodegradation, as noted in these oil samples, is characteristic of oil that has been retained in a contaminated environment for an extended period of time. The source from which sample 96-013-8 (previously discussed in case 96-013) was collected is a likely source of the fuel oil portion of the spilled oil.
3. Suspected source sample 96-096-5 is not derived from a common source of the spilled oil. *Slot tail.*
4. Comparison of suspected source sample 96-097-1 is inconclusive because they do not contain a sufficient quantity of petroleum oil for comparison purposes.

Mantel as Hendrick

SUPERVISOR OF ANALYSIS M. S. HENDRICK, Ph.D. DATE: 20DEC95
Chemist

U. S. COAST GUARD
MARINE SAFETY LABORATORIES

MSL CASE #: 96-097 REQUESTOR MSO PUGET SOUND UNIT CASE MC95015622
 METHOD OF DELIVERY: CERTIFIED MAIL TRACKING #: P 902 422 199 FPN: 13-6001
 DATE MAILED: 07-Dec-95 DATE RECEIVED: 14-Dec-95 SAMPLES TAMPERED WITH? No
 SAMPLES BROKEN? No SAMPLES LEAKING? No NETS? No CRIMINAL? No

| MSL # | DESCRIPTION | DATE/TIME TAKEN | SPILL/SOURCE |
|----------|---|-----------------|--------------|
| 96-097-1 | 1 WELL ON RIGHT SIDE OF ROAD NEAR FENCE LINE MOBIL WELL | 06 DEC 95 1200 | SOURCE |
| 96-097-2 | 2 BACK NE WELL INSIDE CONTAINMENT AREA OF AMERICAN DISTRIBUTING | 06 DEC 95 1225 | SOURCE |
| 96-097-3 | 3 FROM WATER OUTLET AT DUNLAP TOWING | 06 DEC 95 1340 | SPILL |
| 96-097-4 | 4 SAMPLE OF OUTFALL AT DUNLAP TOWING | 06 DEC 95 1345 | SPILL |
| 96-097-5 | 5 NO 3 TANK SCOTT PAPER IN CONTAINMENT YARD #6 FUEL | 06 DEC 95 1315 | SOURCE |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

REMARKS: COMPARE TO CASE 96-013

Samples checked in by: James P. Grigg Date: 15 DEC 95
 Sample Custodian: [Signature] Date: 15 DEC 95
 Supervisor of analysis: Manthos Hendrick Date: 18 Dec 95

12-7-95
Date

From: Commanding Officer, MARINE SAFETY OFFICE PUGET SOUND
To: Commanding Officer, Marine Safety Laboratories

Subj: REQUEST FOR OIL SAMPLE ANALYSIS

1. Request analysis of the 5 samples listed on attached Chain of Custody Record to assist in our investigation of spill case
FPS 13-6001 MC95015622
(Federal Project Number and Marine Casualty "MC" number)

2. Questions concerning this case should be directed to
BMT2 CHRIS P. SCARBORRY COMMERCIAL# 206-217-6232.

3. The spill samples were collected from SEWER OUTFALL, MOBILE
WELL, AMERICAN DISTRIBUTING WELL, FUEL TANK
(river, outfall, shore, etc)

4. Estimated number of gallons spilled 50; Estimated cost of cleanup 35,000.

5. Wind conditions: ___ mild breeze; ___ Very Windy; X Calm.

6. Air Temperature: ___ below 32F; X 32 to 60F; ___ 60 to 85F
___ 85 to 95F; ___ over 95F.

7. Sky conditions: X Overcast; ___ Bright Sun; ___ Rain;
Other (specify) _____.

8. Spill involves seepage of oil through the soil: X Yes ___ No.
If Yes, estimated distance to the nearest possible suspected source:

300 YARDS

9. List any possible non-petroleum contamination sources in the area NONE

10. Are all samples involved in this case being sent to the laboratory? YES If not, explain _____.

11. Have all possible suspect sources been sampled, YES If NO, include a detailed explanation of possible sources not sampled. Provide any additional information about the samples or overall situation which may be helpful to lab personnel: _____.

PLEASE SAMPLE SEPARATE THEN COMPARE TO CASE
96-013

12. Specify prosecution type: X Class 1; ___ Class 2; ___ DOJ.

(SIGNATURE)
MST3 Don LaSore, Don LAISORE

**UNITED STATES COAST GUARD
CHAIN OF CUSTODY RECORD**

| | |
|--------------------|--|
| (UNIT AND ADDRESS) | COMMANDING OFFICER U.S. COAST GUARD MARINE SAFETY OFFICE PUGET SOUND 1519 ALASKAN WAY SOUTH SEATTLE, WA. 98134-1192 |
|--------------------|--|

| SPILL | SOURCE | SAMPLE NO. | DESCRIPTION OF SAMPLES FOR CASE# <u>MC95015622</u> |
|-------|--------|------------|---|
| | XXV | 1 | WELL ON RIGHT SIDE OF ROAD NEAR FENCE LINE mobile well |
| | XXX | 2 | BACK WE WELL INSIDE CONTAINMENT AREA OF AMERICAN DISTRIBUTING |
| XXX | | 3 | FROM WATER OUTLET AT DUNLAP TOWING |
| XXX | | 4 | FROM WATER OUTLET AT DUNLAP TOWING |
| | XXX | 5 | FROM CONTAINER YARD AT SCOTT PAPER #3 TANK CONTAINING #6 FUEL OIL |

| PERSON ASSUMING RESPONSIBILITY FOR SAMPLES | | | | | TIME/DATE |
|--|---|-----------------|---|----------------------|------------------------------|
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-5 | <i>Chris P. Sealy</i> Bm2 C.P. SCARBORRY | 12-6-95 1654 | <i>Don</i> DON LAISURE, USCG | 12-6-95 1654 | STORAGE |
| 1-5 | <i>Don</i> DON LAISURE, USCG | 12-7-95 0700 | CHRIS, P. SCARBORRY Bm2 Chris P. Sealy | 12-7-95 0700 | SHIP TO COIL |
| 1-5 | <i>Chris P. Sealy</i> Bm2 CHRIS P. SCARBORRY | 12-7-95 0704 | <i>David Paperrier</i> | 14 DEC 95 0930 | |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |

SAMPLE PREPARATION SHEET

COIL CASE NUMBER: 96-097

DATE PREPARED: 15 DEC 95

Oil samples were obtained using preparation techniques listed below. The samples were then placed into a vial and identified with the COIL case number and sample number along with the corresponding preparation code(s)

Oil samples eliminated by IR screening method: _____

The Quality Control sample is a duplicate of sample: 96-097-2

| SAMPLE NUMBERS (sequential portion only) | PREPARATION CODE | RATIO |
|--|------------------|-------|
| 1, 3, 4 | 5, 7 | |
| 2, QC | 2 | |
| 5 | 3, 7 | |
| | | |
| | | |
| | | |

PREPARATION CODES

1. Portion of neat sample taken from sample jar (clean fuel oils).
2. Portion of sample taken from sample jar, anhydrous MgSO₄ added, then centrifuged.
3. Portion of sample taken from sample jar, diluted with cyclohexane, anhydrous MgSO₄ added, then centrifuged.
4. Entire sample extracted with cyclohexane, anhydrous MgSO₄ added, then centrifuged.
5. Entire sample extracted with two separate 10 ml portions of cyclohexane, anhydrous MgSO₄ added to the combined cyclohexane solution, then centrifuged.
6. Cyclohexane Solution: ratio of oil to cyclohexane is known and shown in "ratio" column.
7. Cyclohexane Solution of unknown concentration.
8. Solvent evaporated with heat and a stream of N₂. Sample of unknown concentration.
9. Others: _____

Preparer's Signature: James P. Griffin

Date: 15 DEC 95

QUALITY CONTROL SHEET

COIL CASE NUMBER: 96-097

DATE PREPARED: 15 DEC 95

1. A Quality Control (QC) sample was analyzed along with the other samples in this case.

The Quality Control (QC) is a duplicate of sample 96-097-2
 Due to limited sample quantity in all samples involved in the case, reference oil _____ from the COIL Library was used for the Quality Control (QC) and its duplicate sample.
 Infrared Spectroscopy used for screening samples before final sample preparation. No QC sample available during IR screening

2. ANALYTICAL METHODS.

INFRARED SPECTROSCOPY

GAS CHROMATOGRAPHY

FLUORESCENCE SPECTROSCOPY

GAS CHROMATOGRAPHY/MASS SPECTROMETRY

| SAT | N/A |
|-----|-----|
| | X |
| X | |
| | X |
| X | |

3. The data and conclusions for the QC and its duplicate were identical:

Yes X No _____

COMMENTS:

SUPERVISOR OF ANALYSIS: Martha Hendrick

DATE: 20 Dec 95

UNITED STATES COAST GUARD
MARINE SAFETY LABORATORY

OIL SPILL IDENTIFICATION ANALYSES
COST RECOVERY DOCUMENTATION

LABORATORY CASE NUMBER: 96-097
REQUESTOR: MARINE SAFETY OFFICE PUGET SOUND
UNIT CASE NUMBER: MC95015622
NUMBER OF SAMPLES: 05
COST PER SAMPLE PREPARED: \$20.00
TOTAL COSTS OF SAMPLE PREPARATION: \$100.00
NUMBER OF ANALYSES: 15
COST PER ANALYSIS: \$85.98
TOTAL COSTS FOR ANALYSIS: \$1289.70
TOTAL COSTS: \$1389.70

This documentation is provided for purposes of Phase IV - Documentation and Cost Recovery under the National Oil and Hazardous Substances Pollution Contingency Plan(40 CFR Part 300).

Martha S. Hendrick

MARTHA S. HENDRICK DATE: 20DEC95
Chemist

OIL SPILL IDENTIFICATION SYSTEM (OIS)

RELEVANCE TO SPILL SOURCE DETERMINATION

Petroleum is a complex mixture of thousands of different organic compounds formed from a variety of organic materials that are chemically converted under differing geological conditions over long periods of time. The infinitely variable nature of these factors results in distinct chemical differences between oils formed under dissimilar conditions and/or environments. While oil from one crude oil field is readily distinguishable from another, differences in the makeup of oils from the same crude oil field can sometimes be observed as well. Refined oils are fractions usually derived by distillation of crude oil. Two refined oils of the same type differ because of dissimilarities in the characteristics of their crude oil feed stocks as well as variations in refinery processes and any subsequent contact with other oils mixed in during transfer operation from residues in tanks, ships, pipes, hoses etc... Thus, all petroleum oils, to some extent have chemical compositions that differ from each other.

The characteristic properties of an oil can be explored by a variety of analytical methods. The results of analysis by any of these methods can be presented in graph form. In general, when the graphical data for two oils produced by a particular method are compared, the differences between the graphs reflect differences between the oils.

The OIS System, developed during the mid-1970s at the Coast Guard Research and Development Center, is based on a multi-method approach to "fingerprinting" oils. In 1978, the Central Oil Identification Laboratory (COIL) was established as the operating facility to implement the OIS. In 1988, COIL was renamed the Marine Safety Laboratories (MSL), though the acronym COIL is still widely used. OIS is designed to determine the unique, intrinsic chemical properties of oils via analytical techniques and establish whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. Since 1978, MSL/COIL has analyzed over 39,000 samples, involving more than 5,700 spill cases, in support of oil pollution investigations.

DATA PRODUCTION AND INTERPRETATION

Oil sample preparation, testing and storage are conducted in accordance with American Society for Testing and Materials (ASTM) consensus standards. MSL/COIL currently utilizes three primary analytical techniques: Gas Chromatography (GC) (ASTM D-3328), Fluorescence Spectroscopy (FL) (ASTM D 3650), Infrared Spectroscopy (IR) (ASTM D-3414), and Gas Chromatography-Mass Spectrometry (GC-MS) (ASTM D-5739) that is used as a complementary analytical method. A rigorous laboratory quality assurance program monitors both instrument performance and sample preparation to ensure that data are accurate and reproducible.

All samples in a given case are initially analyzed by one method to determine the class of petroleum product. Samples can be excluded from further analysis based on results from the initial analysis. Further analyses are performed on samples which are potential matches to the source of the oil.

The Supervisor of Analysis interprets the data from all test methods performed and draws conclusions concerning whether or not certain spilled oil and suspected source samples were derived from the same chemical source. Data interpretation in oil spill source identification is non-trivial and fundamentally different from typical chemical analyses because the chemical properties of spilled oil are altered when oil is introduced into the environment. From the moment oil enters the environment, evaporation, dissolution, photochemical oxidation, biodegradation and other forces begin to alter the oil's characteristics or "fingerprint". These combined processes are termed weathering and can significantly complicate data interpretation. Contamination of the spilled oil with other oils or substances is another complicating factor. The experienced oil spill analyst is familiar with the complexities of the weathering processes and is able to distinguish real differences between two oils from those apparent differences resulting from weathering alterations. Interferences from contaminants can usually be recognized as such and discounted when weighing the test results. However, at times, severe weathering and/or contamination can mask many of the inherent differences between oils of a similar type.

REPORTING

The typical MSL/COIL OIS Report consists of four parts: case identifying information, a listing of analysis techniques performed, the results section and the conclusions section. The results section describes the types of petroleum observed in the samples provided, and comments on chemical similarities or dissimilarities between spill samples and/or between spill and suspected source samples. In all cases the Supervisor of Analysis bases the written results on interpretations from the aggregate of all data generated.

The conclusions section establishes whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. There are two outcomes most frequently found in the conclusions section of the typical MSL/COIL OIS Report: "derived from a common source" and "not derived from a common source". However, to maintain the high degree of reliability for both "common source" and "not a common source" determinations, it is necessary to exclude some comparisons from these categories. Oil spill cases vary widely in possible explanations for why a determination could not be made. Instead of using only a statement of "inconclusive", the comments will concisely explain the reason for the outcome for each individual case. For example, some sources are highly inhomogeneous, and a sample of such a spill may not reflect the composition of the product remaining in such a source. The spill may contain very little oil, or it may be excessively weathered or contaminated. Of important note, MSL/COIL conclusions address chemical comparisons and not physical aspects of evidence. Additionally, chemical evidence provided in a MSL/COIL conclusion that is other than "common source" might still be used by the investigating officer, when combined with physical evidence to establish a preponderance of the evidence argument against an alleged responsible party.

MSL/COIL OIS Reports are submitted to Marine Safety Offices (MSO's) for inclusion, as chemical evidence, in Marine Violation/Casualty Reports. The outcomes in the conclusions section of the OIS Report define the nature of the chemical evidence provided. MSO personnel are advised to combine the chemical evidence provided in the MSL/COIL OIS Reports with physical and circumstantial evidence developed during the investigation when writing Marine Violation Reports. Inquiries challenging the technical content of MSL/COIL OIS Reports by representatives of the alleged responsible party should be handled at the Hearing Officer level. Explicit guidance describing the communications process between the Hearing Officer and the MSL/COIL Supervisor of Analysis on technical issues involving chemical evidence is given in Commandant (G-LMI) memorandum 16460 dated 26 January 1981.

PERSONNEL QUALIFICATIONS

MSL/COIL laboratory technicians performing sample preparation and testing are graduates of the Coast Guard Marine Science Technician School. Each MSL/COIL technician has successfully completed a comprehensive training program at the MSL/COIL facility. Additionally, many have received supplemental training at leading civilian institutions in their specialty area.

The Supervisor of Analysis monitors all aspects of the analysis, certifies and interprets the test results, and prepares the final MSL/COIL report. This individual is a professionally trained chemist experienced in oil spill source identification. Individuals currently qualified to perform this function are:

Lieutenant Commander Kristy L. Plourde, U.S. Coast Guard
Commanding Officer
B.S. Physical Sciences, 1983, US Coast Guard Academy
M.S. Chemistry, 1989, University of Connecticut

Dr. Martha Hendrick
Chemist
B.A. Chemistry, 1969, Rhodes College
M.A. Education, 1974, Stanford University
Ph.D. Analytical Chemistry, 1985, University of Connecticut
Chair, ASTM Subcommittee D19.31, Waterborne Oils

REFERENCES


A more technical description of the OIS is contained in Report CG-D-52-77 "Oil Spill Identification System", Final Report, June 1977, USCG R&D Center. This document is available through the National Technical Information Service, Springfield, VA 22161.

For information concerning the ASTM standards used in Oil Spill Identification, consult "Oil in the Environment", Martha S. Hendrick, Ph.D., ASTM Standardization News, April 1991.

For additional information regarding the applicability of the Coast Guard's OIS, see "Chemical Identification of Oil Spill Sources", Allen P. Bentz, Ph.D., The Forum, Volume XIII, Number 2, Winter 1978. Dr. Bentz is a research scientist at the Coast Guard Research and Development Center and a recognized expert in the field of oil spill source identification. He has been closely involved with most of the development work leading to the present state-of-the-art.

OIL SAMPLE ANALYSIS REPORT
MARINE SAFETY OFFICE PUGET SOUND
CASE NUMBER MC95015622

MARINE SAFETY LABORATORY
CASE NUMBER 96-117

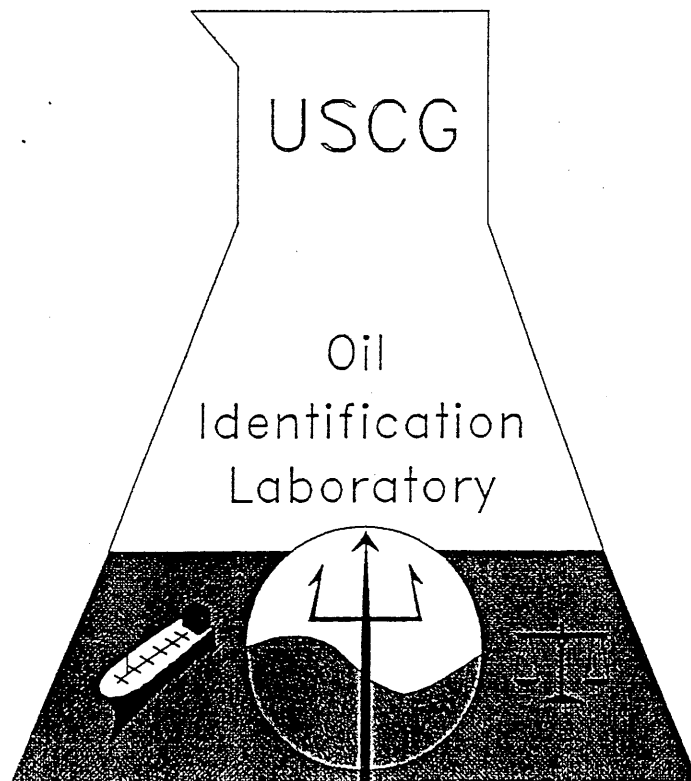

U.S. Department
of Transportation

United States
Coast Guard



Commanding Officer
U. S. Coast Guard
Marine Safety
Laboratories

1082 Shennecossett Road
Groton, CT 06340-6094
Phone: (860) 441-2645
Fax: (860) 441-2641

16400

JAN 16 1996

From: Commanding Officer, Marine Safety Laboratories
To: Commanding Officer, Marine Safety Office Puget Sound
Subj: OIL SAMPLE ANALYSIS REPORT, MSO PUGET SOUND CASE# MC95015622
MSL CASE #96-117

1. The laboratory analysis of this case has been completed and our report is forwarded. The technical data supporting the report (spectrograms and chromatograms) have been archived at our facility and are available upon request. We will maintain the oil samples in refrigerated storage pending final case disposition.

2. Questions concerning this report or the analytical methods used should be directed to the Supervisor of Analysis, LCDR Plourde.

Handwritten signature of K. L. Plourde in cursive script.
K. L. PLOURDE

Encl: (1) MSL Report 96-117
(2) OIS Addendum

UNITED STATES COAST GUARD MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY

OIL SPILL IDENTIFICATION REPORT

LABORATORY CASE NUMBER: 96-117

REQUESTOR: MARINE SAFETY OFFICE PUGET SOUND

UNIT CASE NUMBER: MC95015622

RECEIVED: 12JAN96 VIA: CERTIFIED MAIL (# P 902 422 187)

NUMBER OF SAMPLES: FIVE (05)

LAB NO. OF SPILLS: 96-117-1

LAB NO. OF SUSPECTS: 96-117-3, 4 AND 5

LAB NO. OF CLEAN WATER: 96-117-2

ANALYSIS METHODS:


GAS CHROMATOGRAPHY (GC)

RESULTS:

1. Sample 1 was specified to have been representative of spilled oil. Analysis indicates that it contains a slightly weathered and severely biodegraded petroleum oil.
2. Suspected source samples 3, 4, and 5 are observed to contain heavy fuel oils with characteristics different than those observed for the spilled oil sample.
3. Sample 2 was designated as a clean water sample. No petroleum oil was detectable by Gas Chromatography.

CONCLUSIONS:

1. Because of the severely biodegraded condition of spill sample 1, comparison with suspected source samples 3, 4 and 5 is inconclusive. Suspected source samples 3, 4, and 5 do not appear to be the source of spill sample 1. The slightly weathered and severely biodegraded condition of sample 1 is characteristic of an oil that has been retained in a contaminated environment, such as soil, for an extended period of time.
2. Sample 2 represents essentially oil-free water.


SUPERVISOR OF ANALYSIS K. L. FLOURDE, LCDR, USCG DATE: 16JAN96
Commanding Officer/Chemist

11/89

UNITED STATES COAST GUARD
OIL IDENTIFICATION LABORATORY

SAMPLE CHECK-IN LOG, COIL CASE NUMBER: 96-117

REQUESTOR: MSO PUGET SOUND

UNIT CASE#: MC95015622

| METHOD OF DELIVERY | | | DATE RECEIVED |
|-------------------------------------|-----------------|-----------|---------------|
| XXXXXXXXXX/CERTIFIED MAIL NUMBER | DATE MAILED O/A | MESSENGER | OTHER |
| P 902 422 187 | 09 JAN 96 | | 12 JAN 96 |

Samples were observed to be: broken NO, tampered with NO, leaking YES, or subject to contamination NO. For these and other unusual conditions, place an asterisk (*) next to the sample(s) in question and describe condition of sample(s) in remarks below.

| LAB NO. | SAMPLE DESCRIPTION | SPILL | SUSPECT |
|----------------|--|-------|---------|
| 96-117-1 | [1] OIL RECOVERED IN THE WATER 08 JAN 96 1503 | XXXXX | |
| 96-117-2 | [2] FRESH WATER SAMPLE 08 JAN 96 1529 | XXXXX | |
| 96-117-3 | [3] PIPE OUTSIDE PUMP STATION 08 JAN 96 1400 | | XXXXX |
| ** 96-117-4 | [4] SOUTH WALL FUEL YARD MIDDLE 08 JAN 96 1410 | | XXXXX |
| 96-117-5 | [5] MIDDLE SOUTH WALL STAND PIPE 08 JAN 96 1415 | | XXXXX |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

REMARKS:
** SAMPLE 96-117-4 WAS RECEIVED LEAKING

Samples checked-in by: [Signature] Date: 12 JAN 96

Sample Custodian: [Signature] Date: 17 JAN 96

Supervisor of Analysis: KE Plomdo Date: 16 JAN 96

From: Commanding Officer, MARINE SAFETY OFFICE Puget Sound
To: Commanding Officer, Marine Safety Laboratories

Subj: REQUEST FOR OIL SAMPLE ANALYSIS

1. Request analysis of the 5 samples listed on attached Chain of Custody Record to assist in our investigation of spill case
13-6001 MC95015622
(Federal Project Number and Marine Casualty "MC" number)

2. Questions concerning this case should be directed to
Bm2 CHRIS P. SCARBERRY COMMERCIAL# 206 219-6232

3. The spill samples were collected from OUTFALL, BAY, SAWHOLE PIPE SHORE
(river, outfall, shore, etc)

4. Estimated number of gallons spilled 200; Estimated cost of cleanup 10,000.

5. Wind conditions: mild breeze; Very Windy; X Calm.

6. Air Temperature: below 32F; X 32 to 60F; 60 to 85F
 85 to 95F; over 95F.

7. Sky conditions: X Overcast; Bright Sun; Rain;
Other (specify) BUT PARTLY SUNNY

8. Spill involves seepage of oil through the soil: X Yes No.
If Yes, estimated distance to the nearest possible suspected source:
200 YARDS

9. List any possible non-petroleum contamination sources in the area NONE

10. Are all samples involved in this case being sent to the laboratory? YES If not, explain

11. Have all possible suspect sources been sampled, YES If NO, include a detailed explanation of possible sources not sampled. Provide any additional information about the samples or overall situation which may be helpful to lab personnel:
NEED MOST ALKYLATIC TEST DONE. NEED GAS
CHROMATOGRAPHY SENT TO UNIT FOR ECOLOGY STUDY

12. Specify prosecution type: X Class 1; Class 2; DOJ.

(SIGNATURE)
MST3

UNITED STATES COAST GUARD
 CHAIN OF CUSTODY REPORT
 U.S. COAST GUARD

(UNIT AND ADDRESS)

ENGINE SAFETY OFFICE
 PUGET SOUND
 1515 ALASKAN WAY SOUTH
 SEATTLE, WA. 98134-1192

| SPILL | SOURCE | SAMPLE NO. | DESCRIPTION OF SAMPLES FOR CASE# <u>MC9501SG22</u> |
|-------|--------|------------|--|
| XXY | | 1 | OIL RECOVERED FROM WATER |
| XXY | | 2 | FRESH WATER SAMPLE 100 YARDS FROM SPILL |
| | XXY | 3 | PIPE OUTSIDE PUMP STATION |
| | XXY | 4 | SOUTH WALL FUEL YARD MIDDLE |
| | XXX | 5 | SOUTH WALL FUEL YARD STAND PIPE |


| PERSON ASSUMING RESPONSIBILITY FOR SAMPLES | | | | | TIME/DATE |
|--|--|------------------|---------------------------|-------------------|------------------------------|
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-5 | <i>[Signature]</i> BM2 G.P. Seaberg | 9 JAN 96 1800 | MST <i>[Signature]</i> | | STORAGE |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-5 | MST <i>[Signature]</i> BM2 Seaberg | | <i>[Signature]</i> | 6 JAN 96 6700 | SHIP TO COIL |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| 1-5 | <i>[Signature]</i> BM2 Chi P. Seaberg | 9 JAN 96 0800 | TROY FREIHANMER AT 132 | 12 JAN 96 0915 | |
| SAMPLE NUMBER | RELINQUISHED BY: | DATE/TIME | RECEIVED BY: | DATE/TIME | REASON FOR CHANGE OF CUSTODY |
| | | | | | |

Bill No. Returned CODs Registered Return Rcpt. for Merchandise Mail for **Coast Guard**
 Insured Certified Int'l. Recorded Delivery Svc.

| No. of Article | * Code | Office of Origin Use ONLY for International | No. of Article | * Code | Office of Origin Use ONLY for International |
|----------------|--------|--|----------------|--------|--|
| 1 | | Seattle WA | 11 | | A.S. Russell |
| 2 | | | 12 | | |
| 3 | | | 13 | | |
| 4 | | | 14 | | |
| 5 | | | 15 | | |
| 6 | | | 16 | | |
| 7 | | | 17 | | |
| 8 | | | 18 | | |
| 9 | | | 19 | | |
| 10 | | | 20 | | |

*CODE: R = Return Receipt Requested. OS = Officially Sealed. RE = Re-enveloped. SD = Special Delivery.
 RW = Returned to Writer. DC = Received in Damaged Condition.

Date of Delivery: **1-12-96**
 Delivered by (Clerk or Carrier): **Jm**
 Received the: **1**
 Pieces Described Above:
 Addressee: **Agent Helen R Nelson**



COIL CASE NUMBER: 96-117

DATE PREPARED: 12 JAN 96

Oil samples were obtained using preparation techniques listed below. T samples were then placed into a vial and identified with the COIL case number and sample number along with the corresponding preparation code(

Oil samples eliminated by IR screening method: _____

The Quality Control sample is a duplicate of sample: 96-117-3

| SAMPLE NUMBERS (sequential portion only) | PREPARATION CODE | RATIO |
|--|------------------|-------|
| 1, 4, 5 | 3, 7 | |
| 2 | 4, 7 | |
| 3, QC | 2 | |
| | | |
| | | |
| | | |

PREPARATION CODES

1. Portion of neat sample taken from sample jar (clean fuel oils).
2. Portion of sample taken from sample jar, anhydrous MgSO₄ added, then centrifuged
3. Portion of sample taken from sample jar, diluted with cyclohexane, anhydrous MgSO₄ added, then centrifuged.
4. Entire sample extracted with cyclohexane, anhydrous MgSO₄ added, then centrifuge
5. Entire sample extracted with two separate 10 ml portions of cyclohexane, anhydro MgSO₄ added to the combined cyclohexane solution, then centrifuged.
6. Cyclohexane Solution: ratio of oil to cyclohexane is known and shown in "ratio" column.
7. Cyclohexane Solution of unknown concentration.
8. Solvent evaporated with heat and a stream of N₂. Sample of unknown concentration
9. Others: _____

Preparer's Signature: [Signature] Date: 12 JAN 96

QUALITY CONTROL SHEET

COIL CASE NUMBER: 96-117

DATE PREPARED: 12 JAN 96

1. A Quality Control (QC) sample was analyzed along with the other samples in this case.

✓ The Quality Control (QC) is a duplicate of sample 96-117-3
Due to limited sample quantity in all samples involved in the case, reference oil _____ from the COIL Library used for the Quality Control (QC) and it's duplicate sample.
Infrared Spectroscopy used for screening samples before final sample preparation. No QC sample available during IR screening.

2. ANALYTICAL METHODS.

INFRARED SPECTROSCOPY

GAS CHROMATOGRAPHY

FLUORESCENCE SPECTROSCOPY

GAS CHROMATOGRAPHY/MASS SPECTROMETRY

| SAT | N/A |
|-----|-----|
| | X |
| X | |
| | X |
| | X |

3. The data and conclusions for the QC and it's duplicate were identical:

Yes X No _____

COMMENTS:

SUPERVISOR OF ANALYSIS: JC Plande

DATE: 16 JAN 96

**UNITED STATES COAST GUARD MARINE SAFETY LABORATORIES
OIL IDENTIFICATION LABORATORY
GAS CHROMATOGRAPHY (GC) WORKSHEET**

Case Number: 96-117 Instrument: ANA 2 Date of Analysis: 16 JAN 96

| | Comparison Spills | | | | | | | | | | cyclo- hexane soln. (unk. conc.) | |
|---|-------------------|---|--|--|--|--|--|--|--|--|--|---|
| | 1 | 2 | | | | | | | | | | |
| 1 | / | - | | | | | | | | | | X |
| 2 | - | / | | | | | | | | | | X |
| 3 | I | - | | | | | | | | | | X |
| 4 | I | - | | | | | | | | | | X |
| 5 | I | - | | | | | | | | | | X |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

1. Method/Analytical Conditions: **ASTM D 3328**
 HP program used:
 OIL Method
 GAS Method
 OTHER: _____

SOP: **MSLINST 5200.8**
 Column Used: FRONT / REAR
 Column: DB-5, 30m x 0.32mm ID
 Film Thickness: 0.1 micron
 Column Number: 3768943


2. Sample Preparation: Solvent: Cyclohexane
 Concentration: 3.0 µL oil / 1000.0 µL solvent Other: _____

3. Comments: Do comparisons show all spill samples the same? Yes No N/A

Analyst: [Signature]
 Supervisor: [Signature]


Date: 16 JAN 96
 Date: 16 JAN 96
 Page 1 of 1

Data File: C:\INSTRUMENTS\DATA\0112\96 11:00:54
Injection Date: 1/12/96 9:59:13 PM Seq. Line: 8
Acq. Method: OIL1.M Vial No.: 8
Operator: *m.l.w.* *PEL* Inj. No.: 1
Sample Name: 96-081-BLANK Inj. Vol.: not available
Comments:

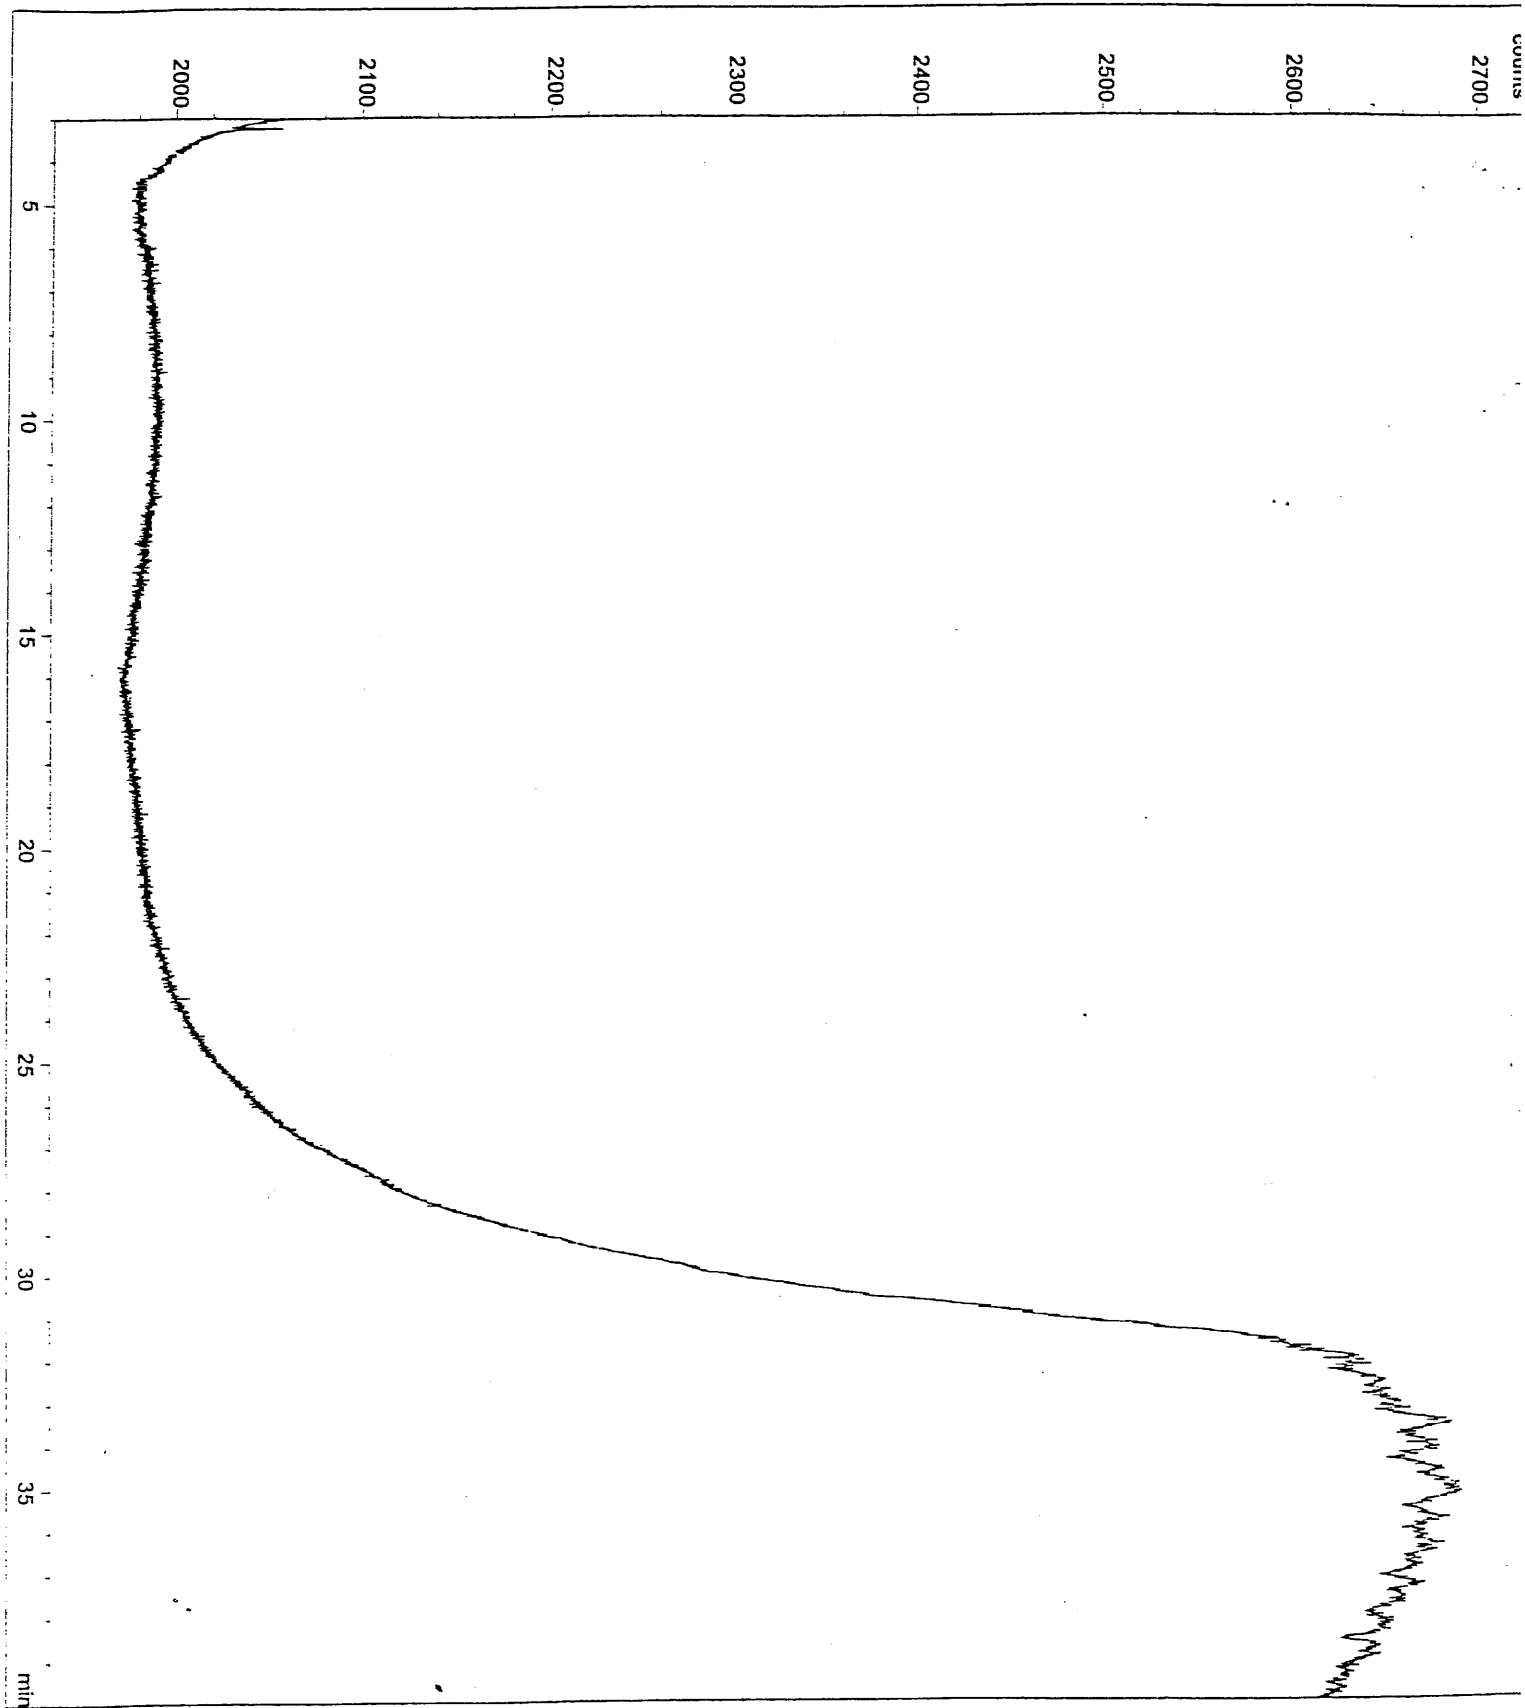


Injection Date: 1/12/96 8:52:03 PM
Acq. Method: OIL1.M
Operator: *[Signature]*
Sample Name: 96-117-QC
Comments:

Seq. Line: 7
Vial No.: 7
Inj. No.: 1
Inj. Vol.: not available

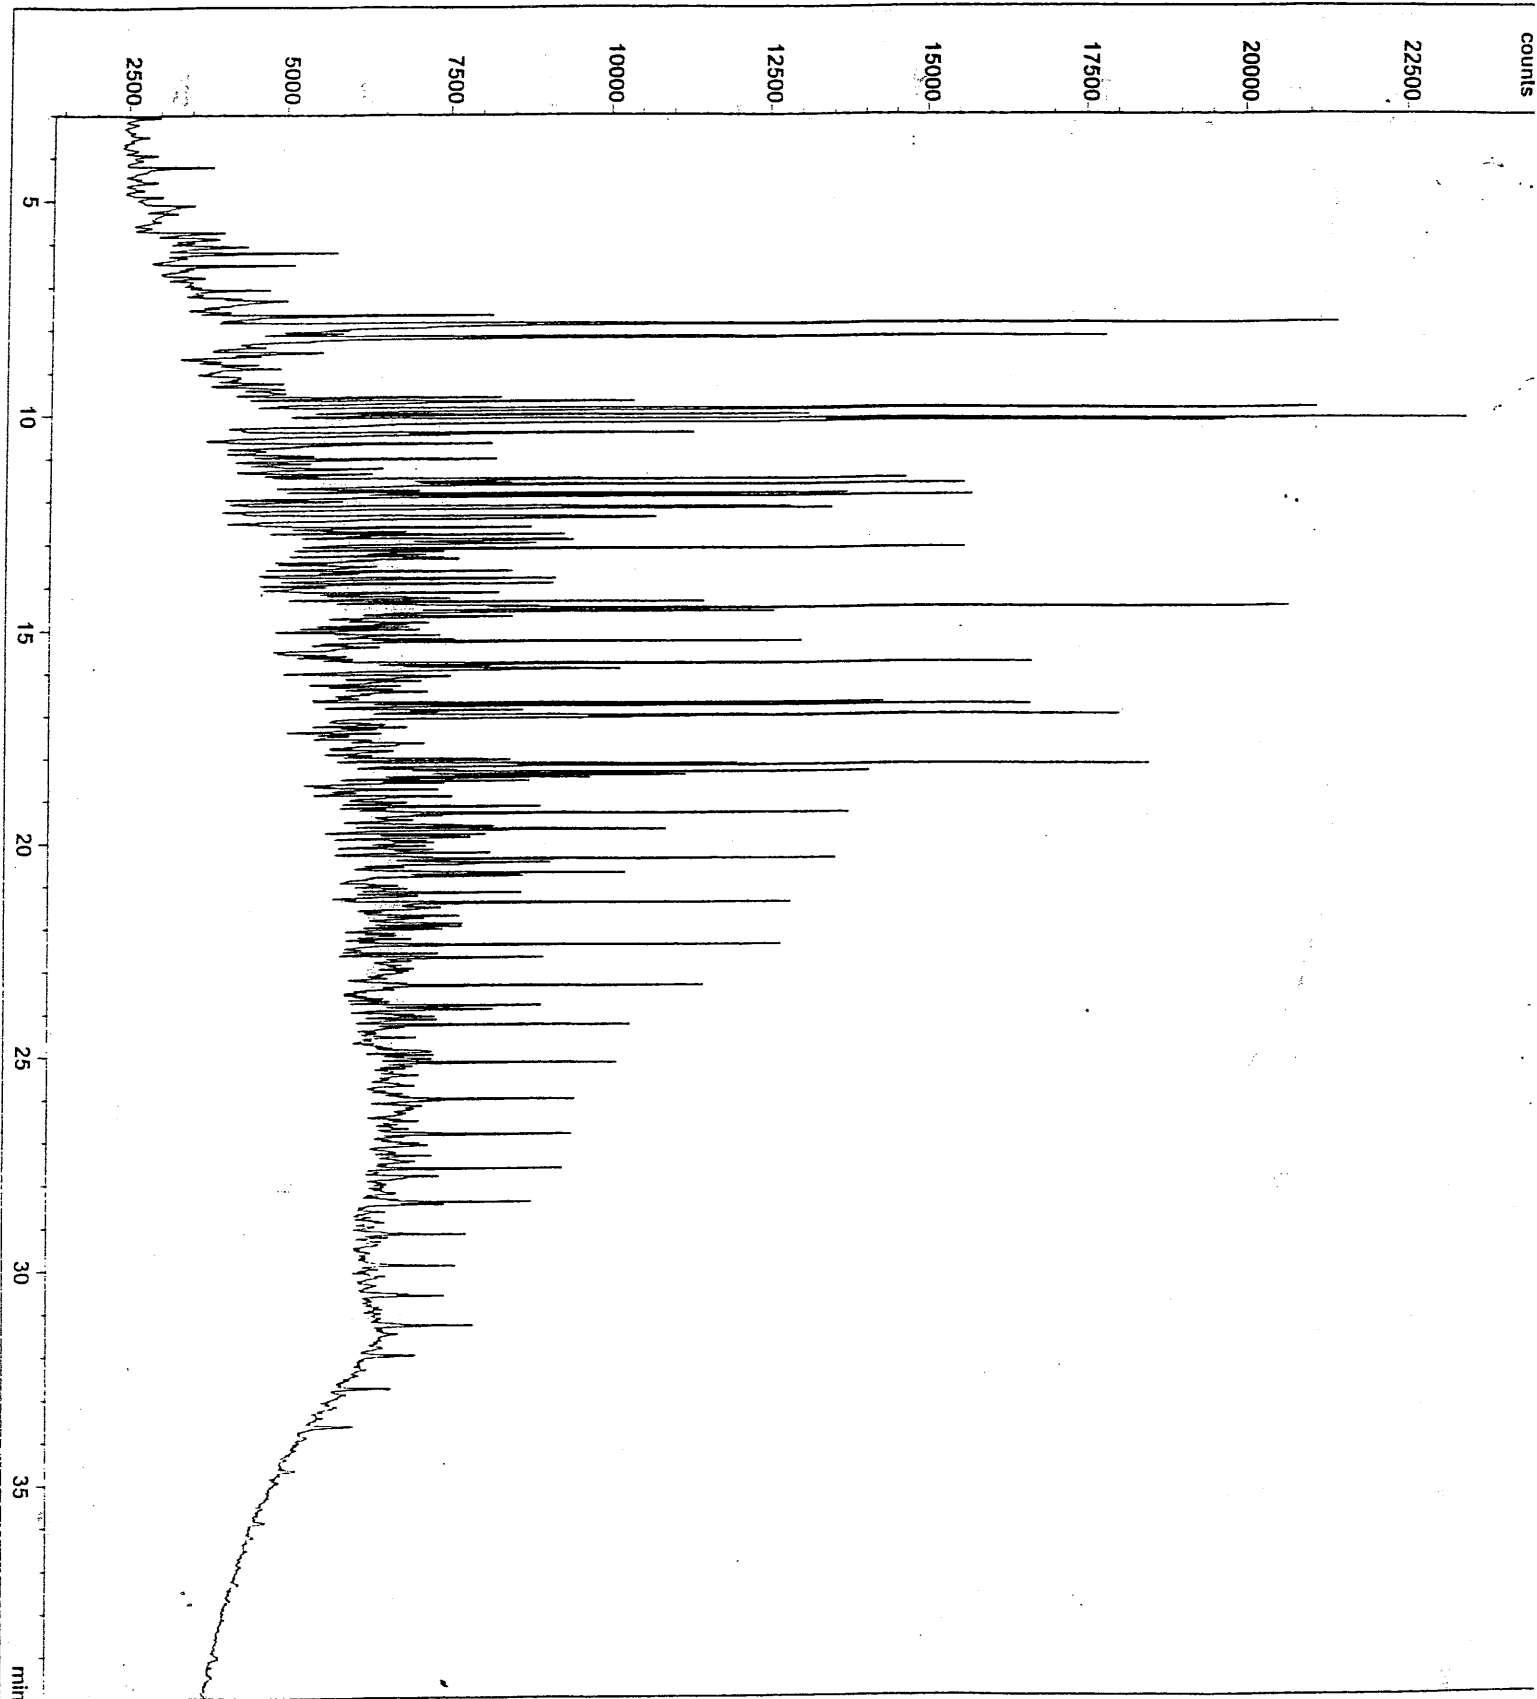


Data File: C:\MPCHEM\2\DATA\0112\96\117\021.D
Injection Date: 1/12/96 3:16:33 PM Seq. Line: 2
Acq. Method: OIL1.M Vial No.: 2
Operator: *[Signature]* Inj. No.: 1
Sample Name: 96-117-03, QCM Inj. Vol.: not available
Comments:

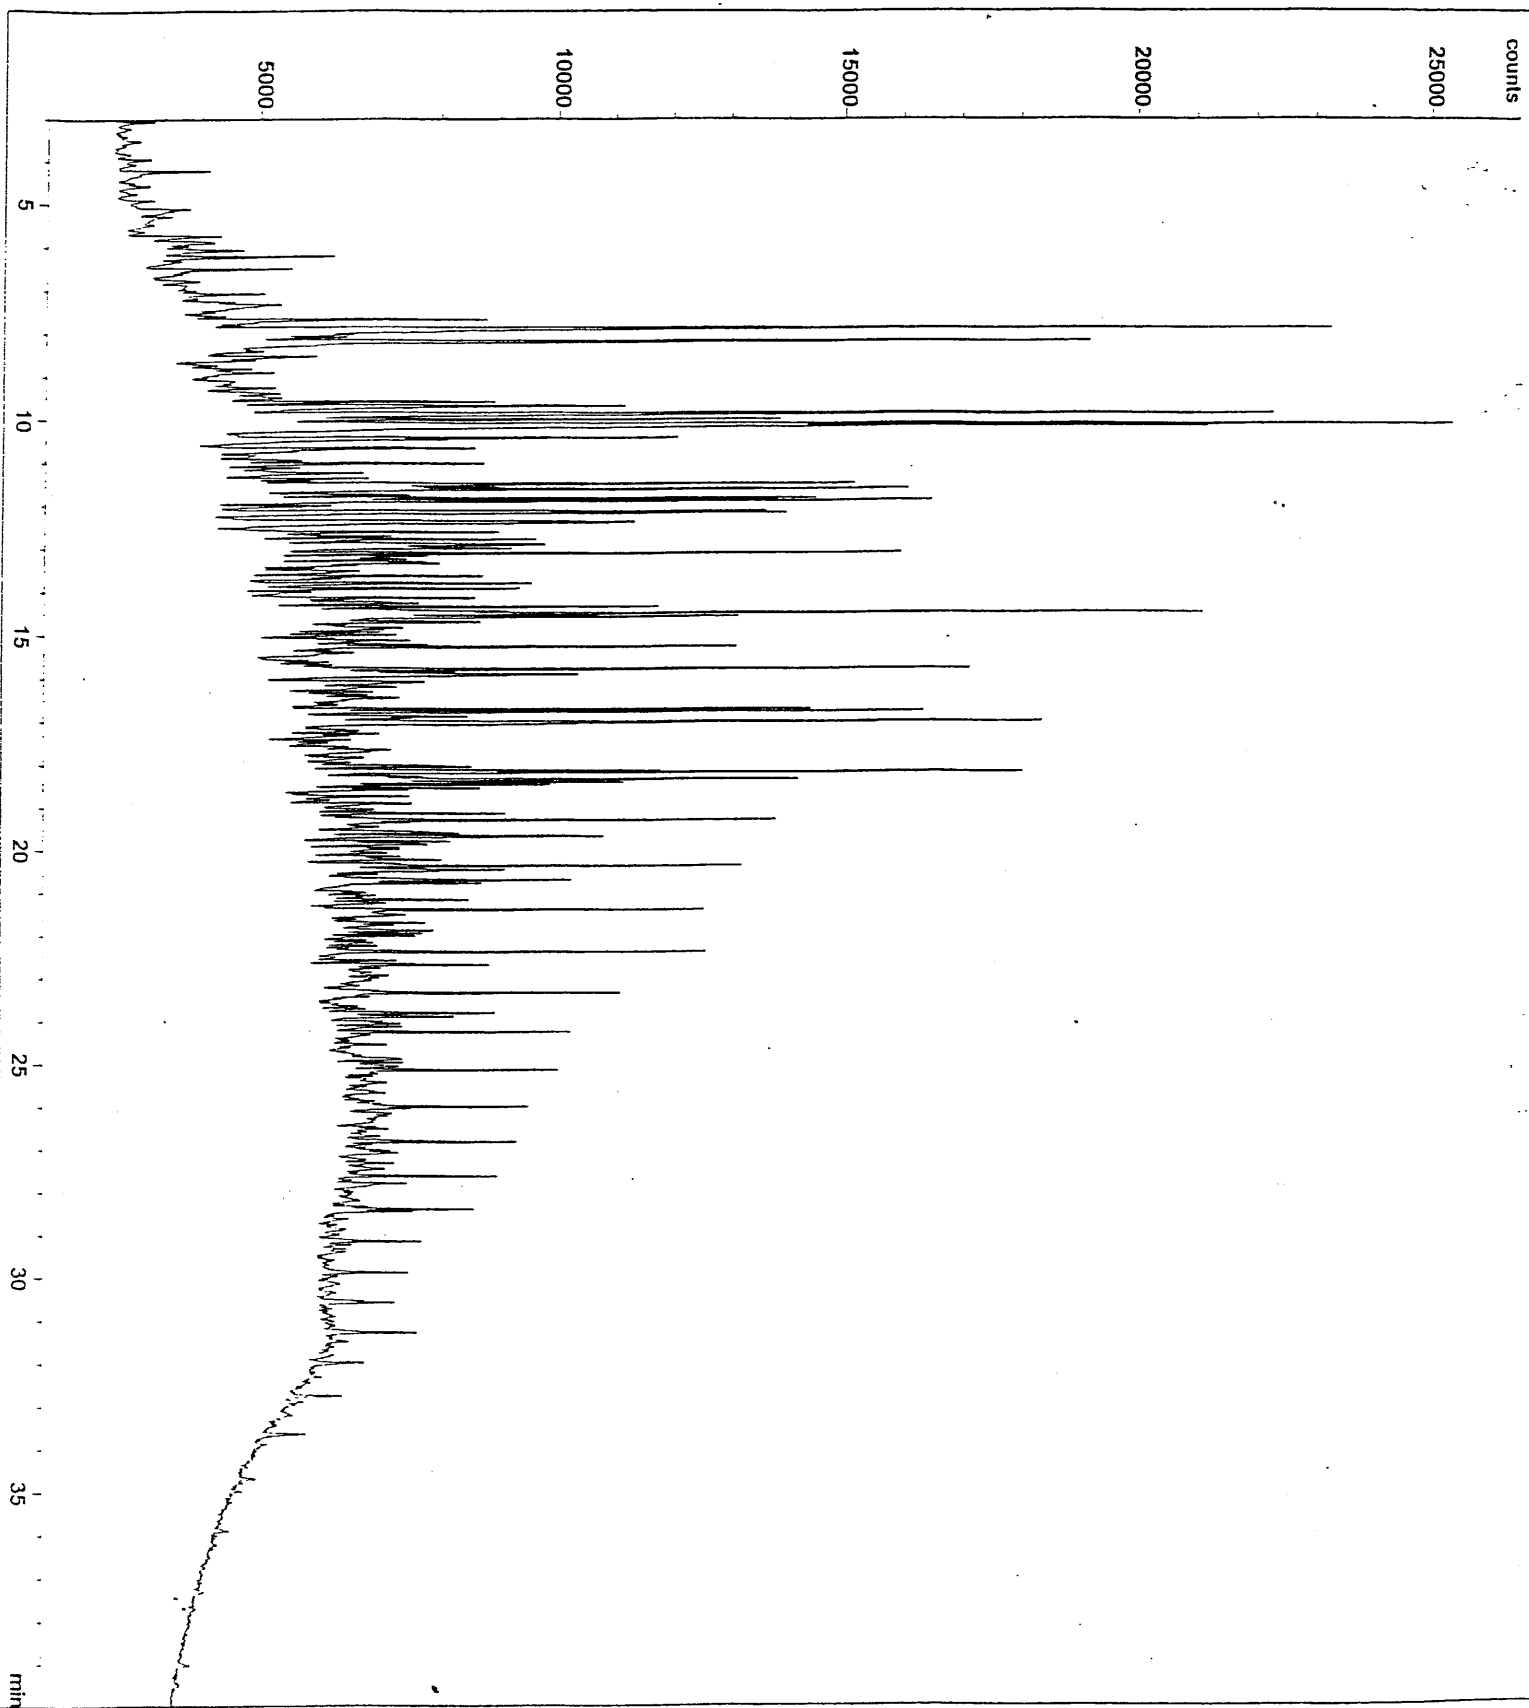


Data File:
Injection Date: 1/12/96 4:23:38 PM
Acq. Method: OIL1.M
Operator: *[Signature]*
Sample Name: 96-117-01, SPILL
Comments:


Seq. Line: 3
Vial No.: 3
Inj. No.: 1
Inj. Vol.: not available

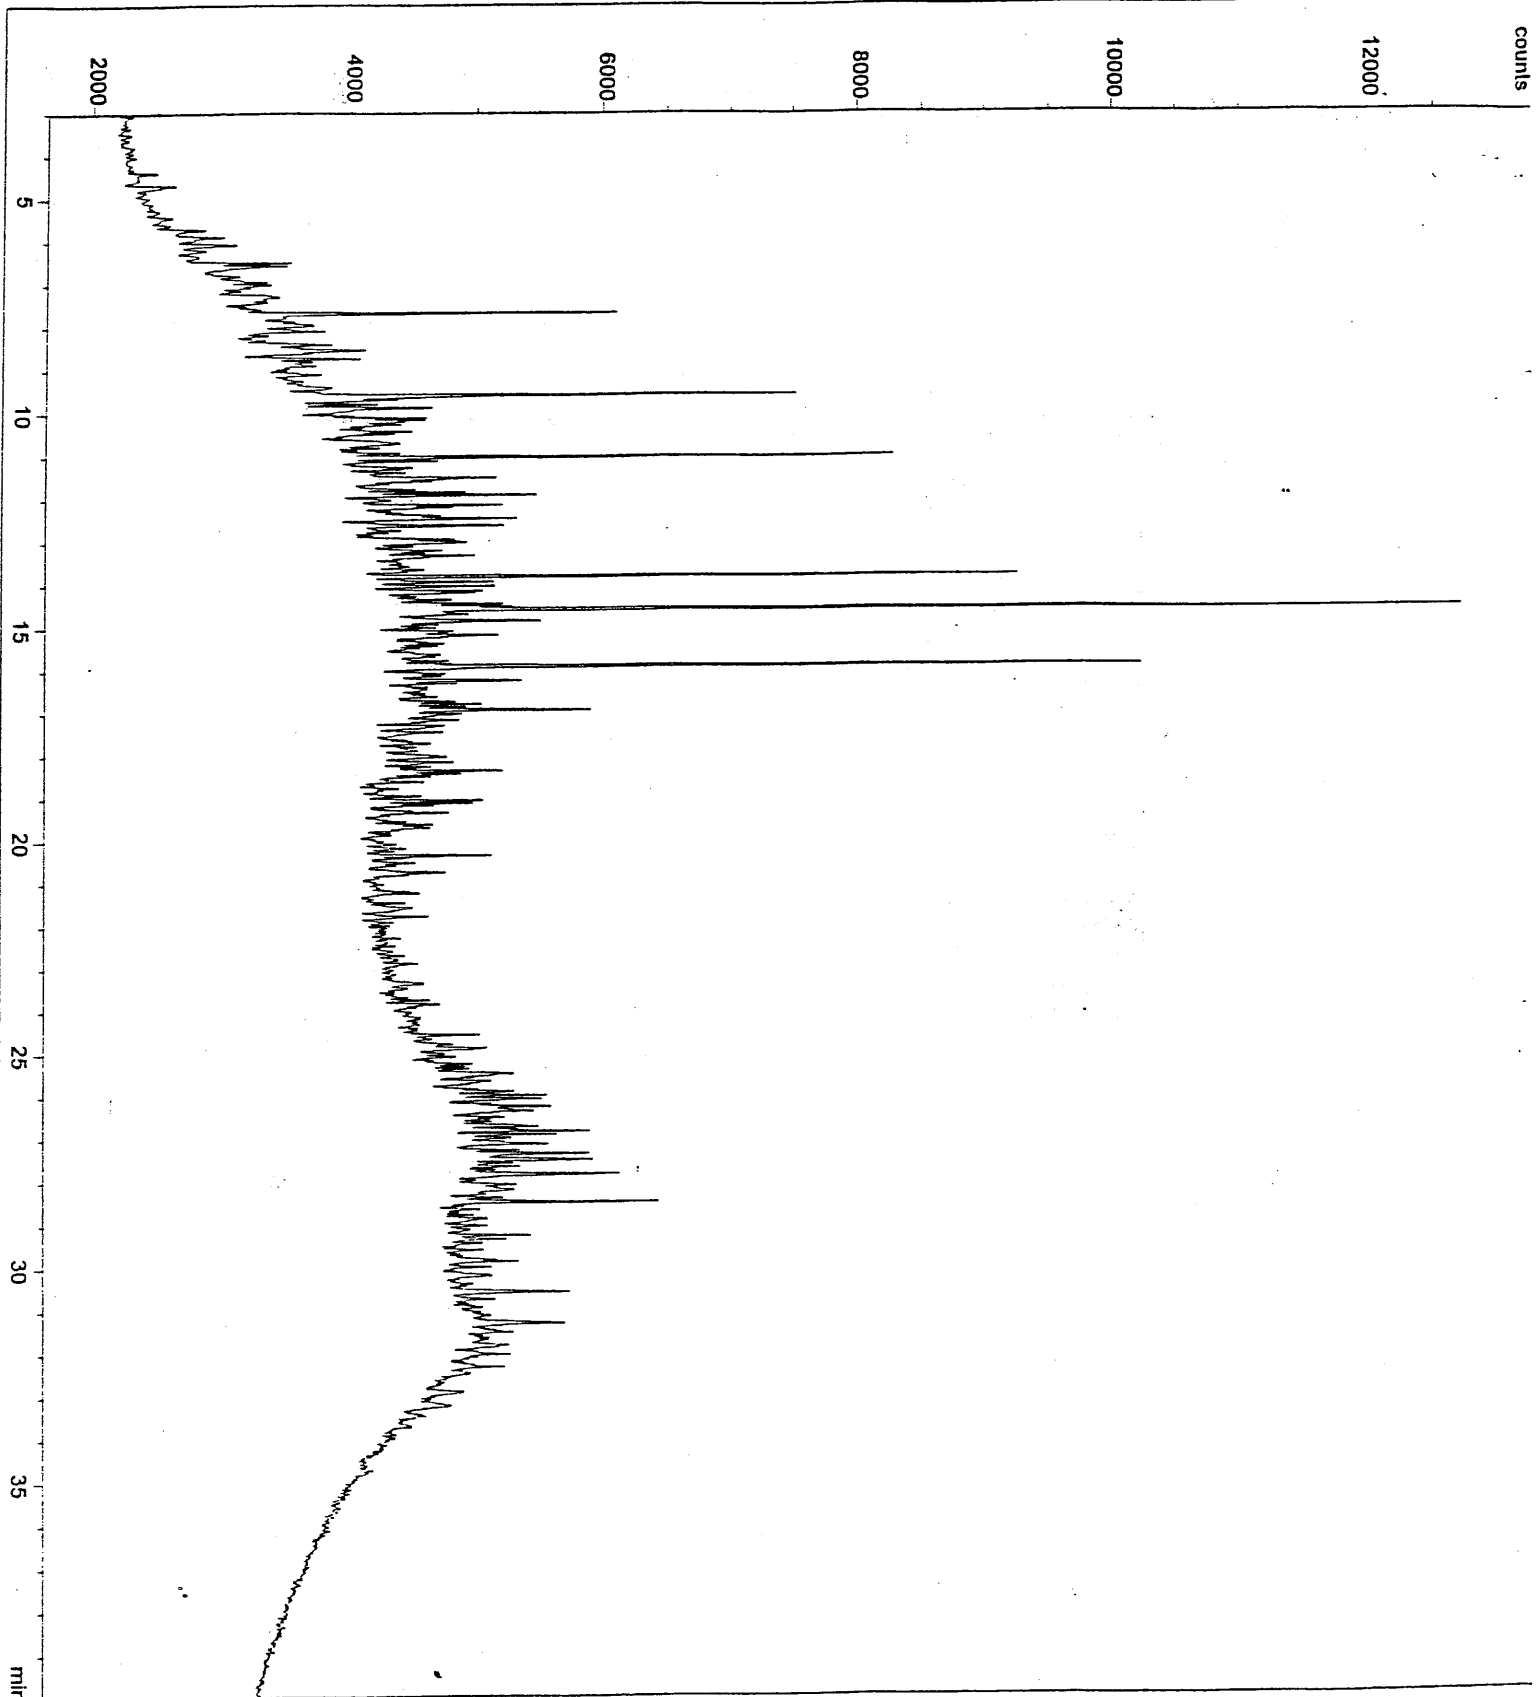


Data File: C:\INSTRUMENTS\DATA\OIL2\96-117-02
Injection Date: 1/12/96 5:30:45 PM Seq. Line: 4
Acq. Method: OIL1.M Vial No.: 4
Operator: *[Signature]* Inj. No.: 1
Sample Name: 96-117-02, SPILL Inj. Vol.: not available
Comments:

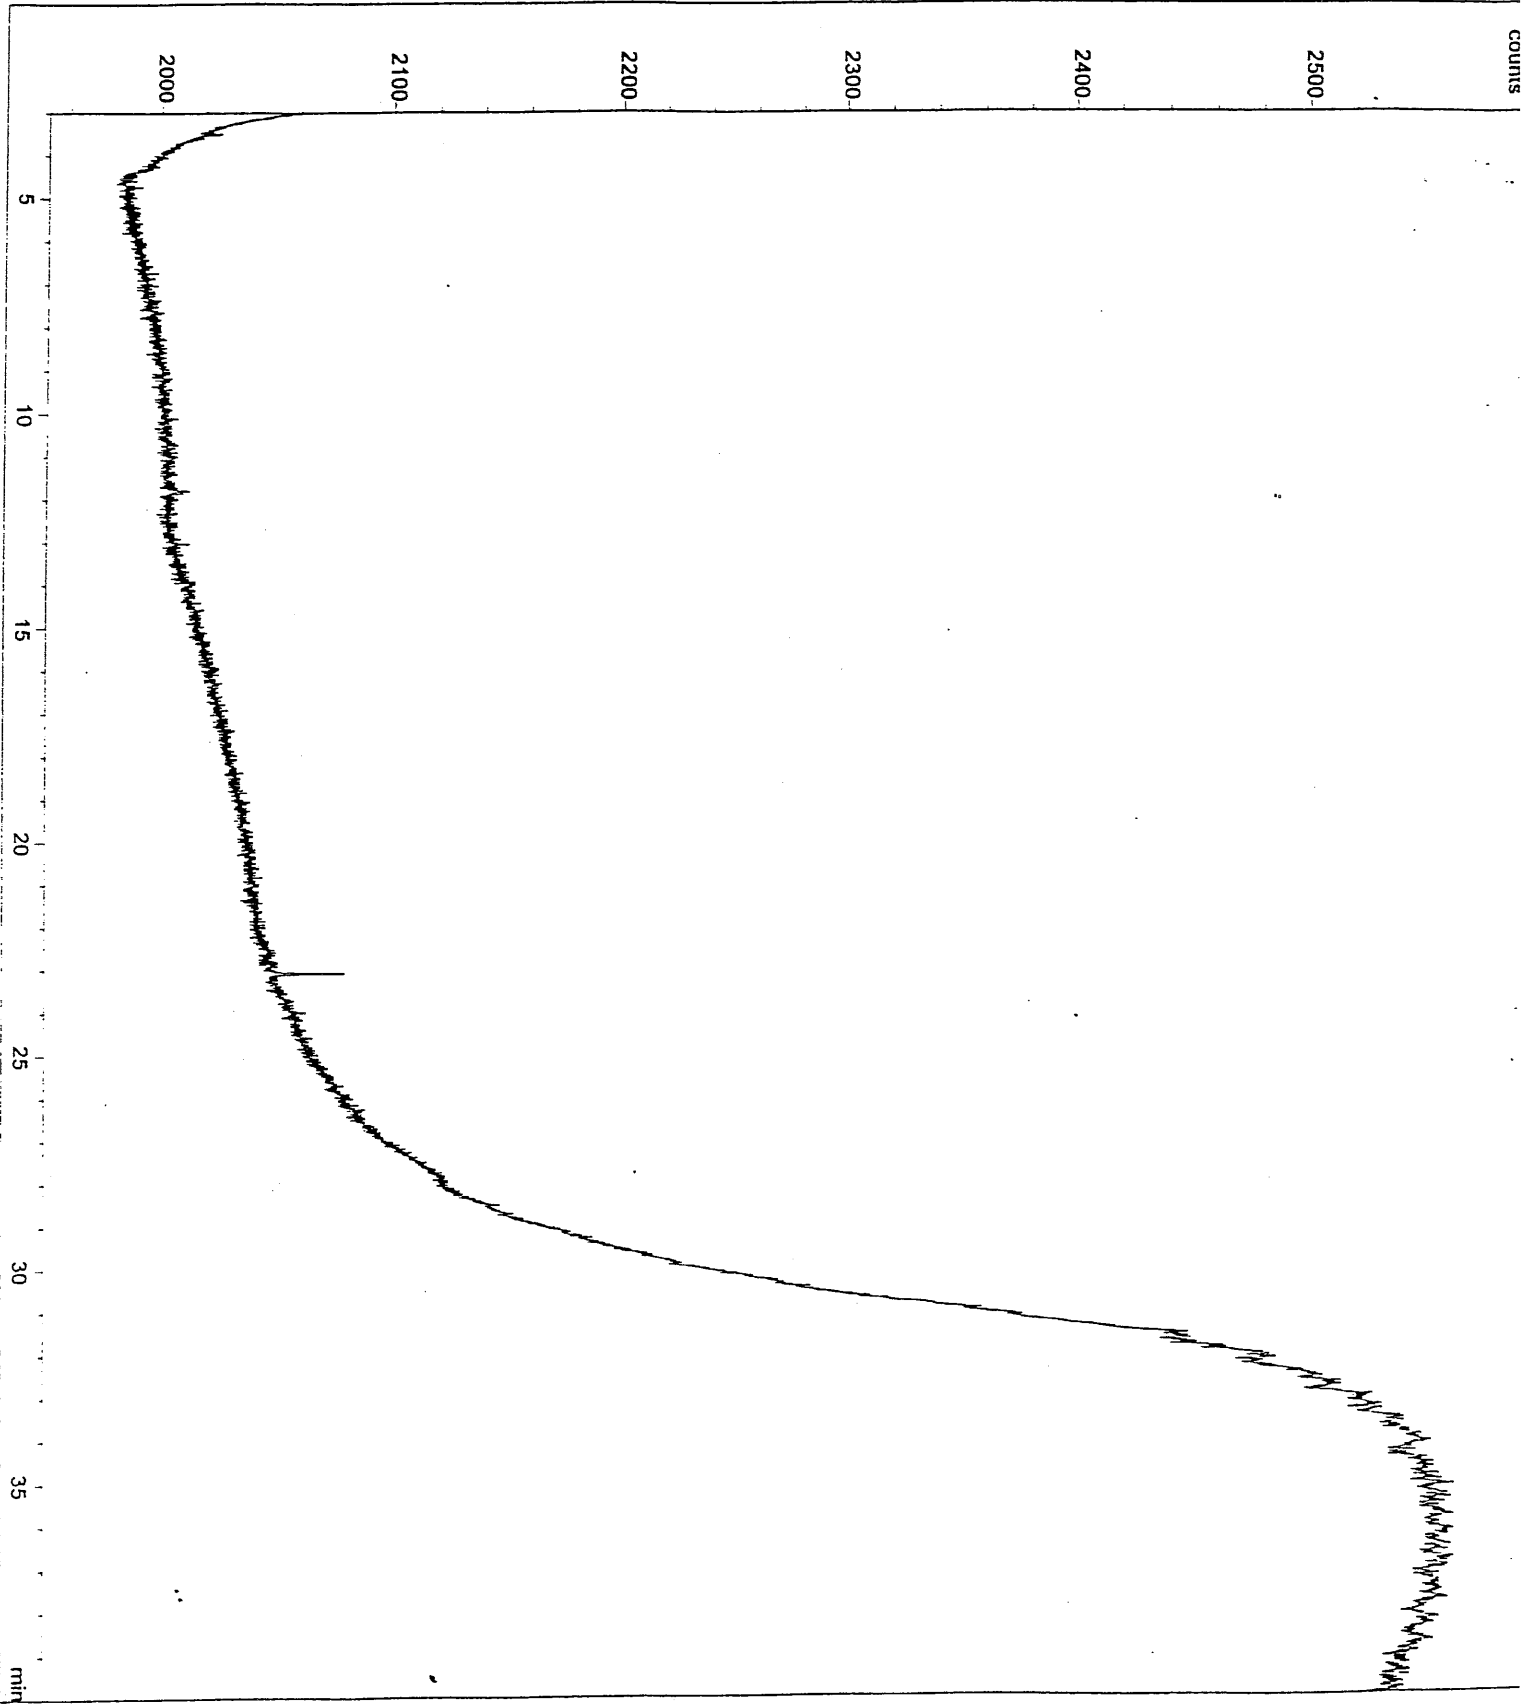

Data File: C:\MSDCHEM\2\DATA\96-117-04.D
Injection Date: 1/12/96 6:37:49 PM Seq. Line: 5
Acq. Method: OIL1.M Vial No.: 5
Operator: *[Signature]* Inj. No.: 1
Sample Name: 96-117-04 Inj. Vol.: not available
Comments:

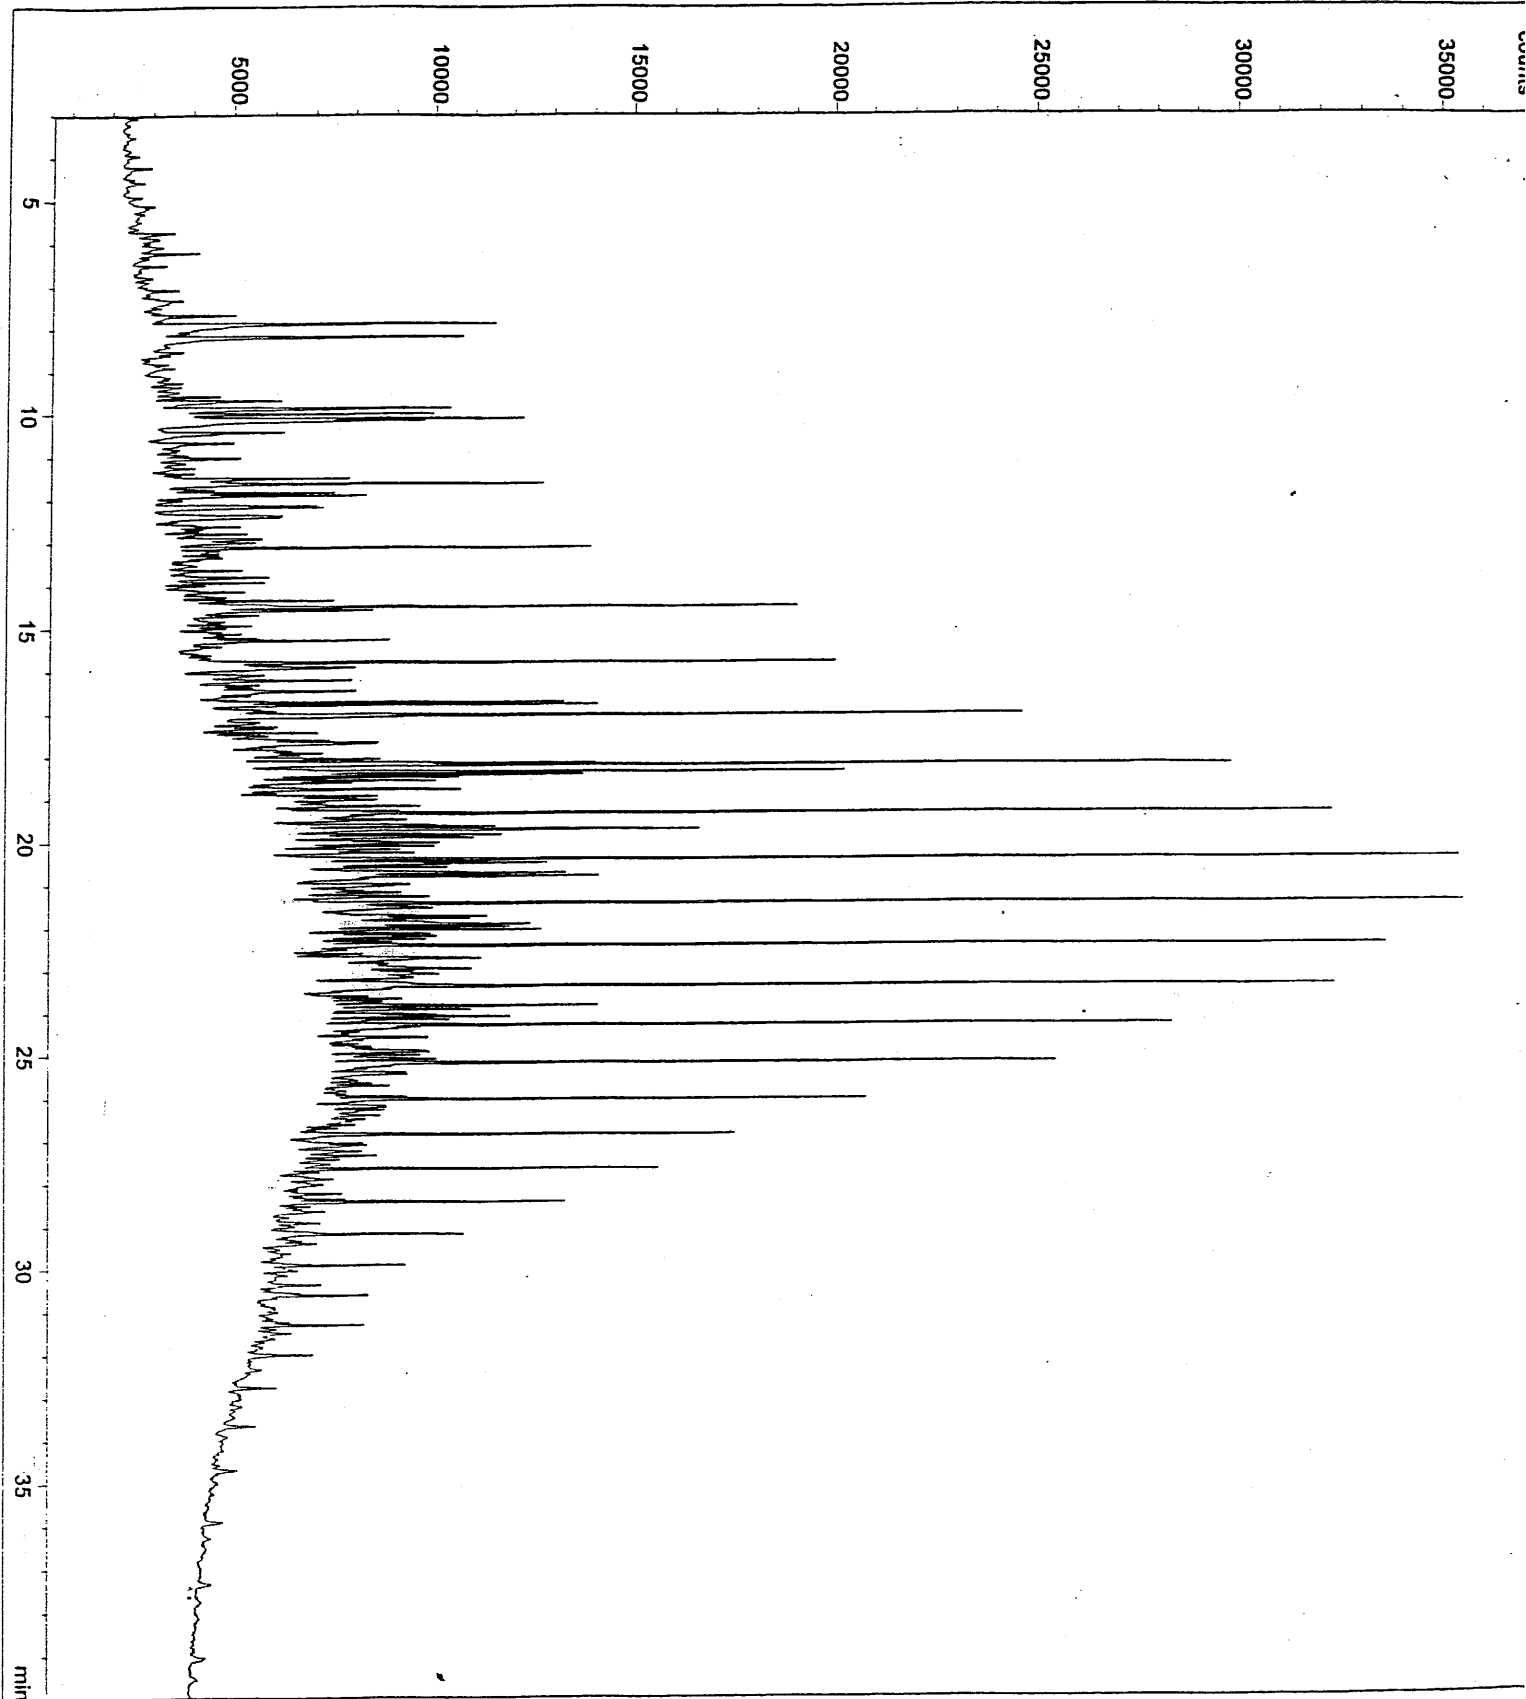

Data File: C:\HPCHEM1\2\DATA\0112\96-11706.D
Injection Date: 1/12/96 7:44:55 PM Seq. Line: 6
Acq. Method: OIL1.M Vial No.: 6
Operator: *[Signature]* Inj. No.: 1
Sample Name: 96-117-05 Inj. Vol.: not available
Comments:

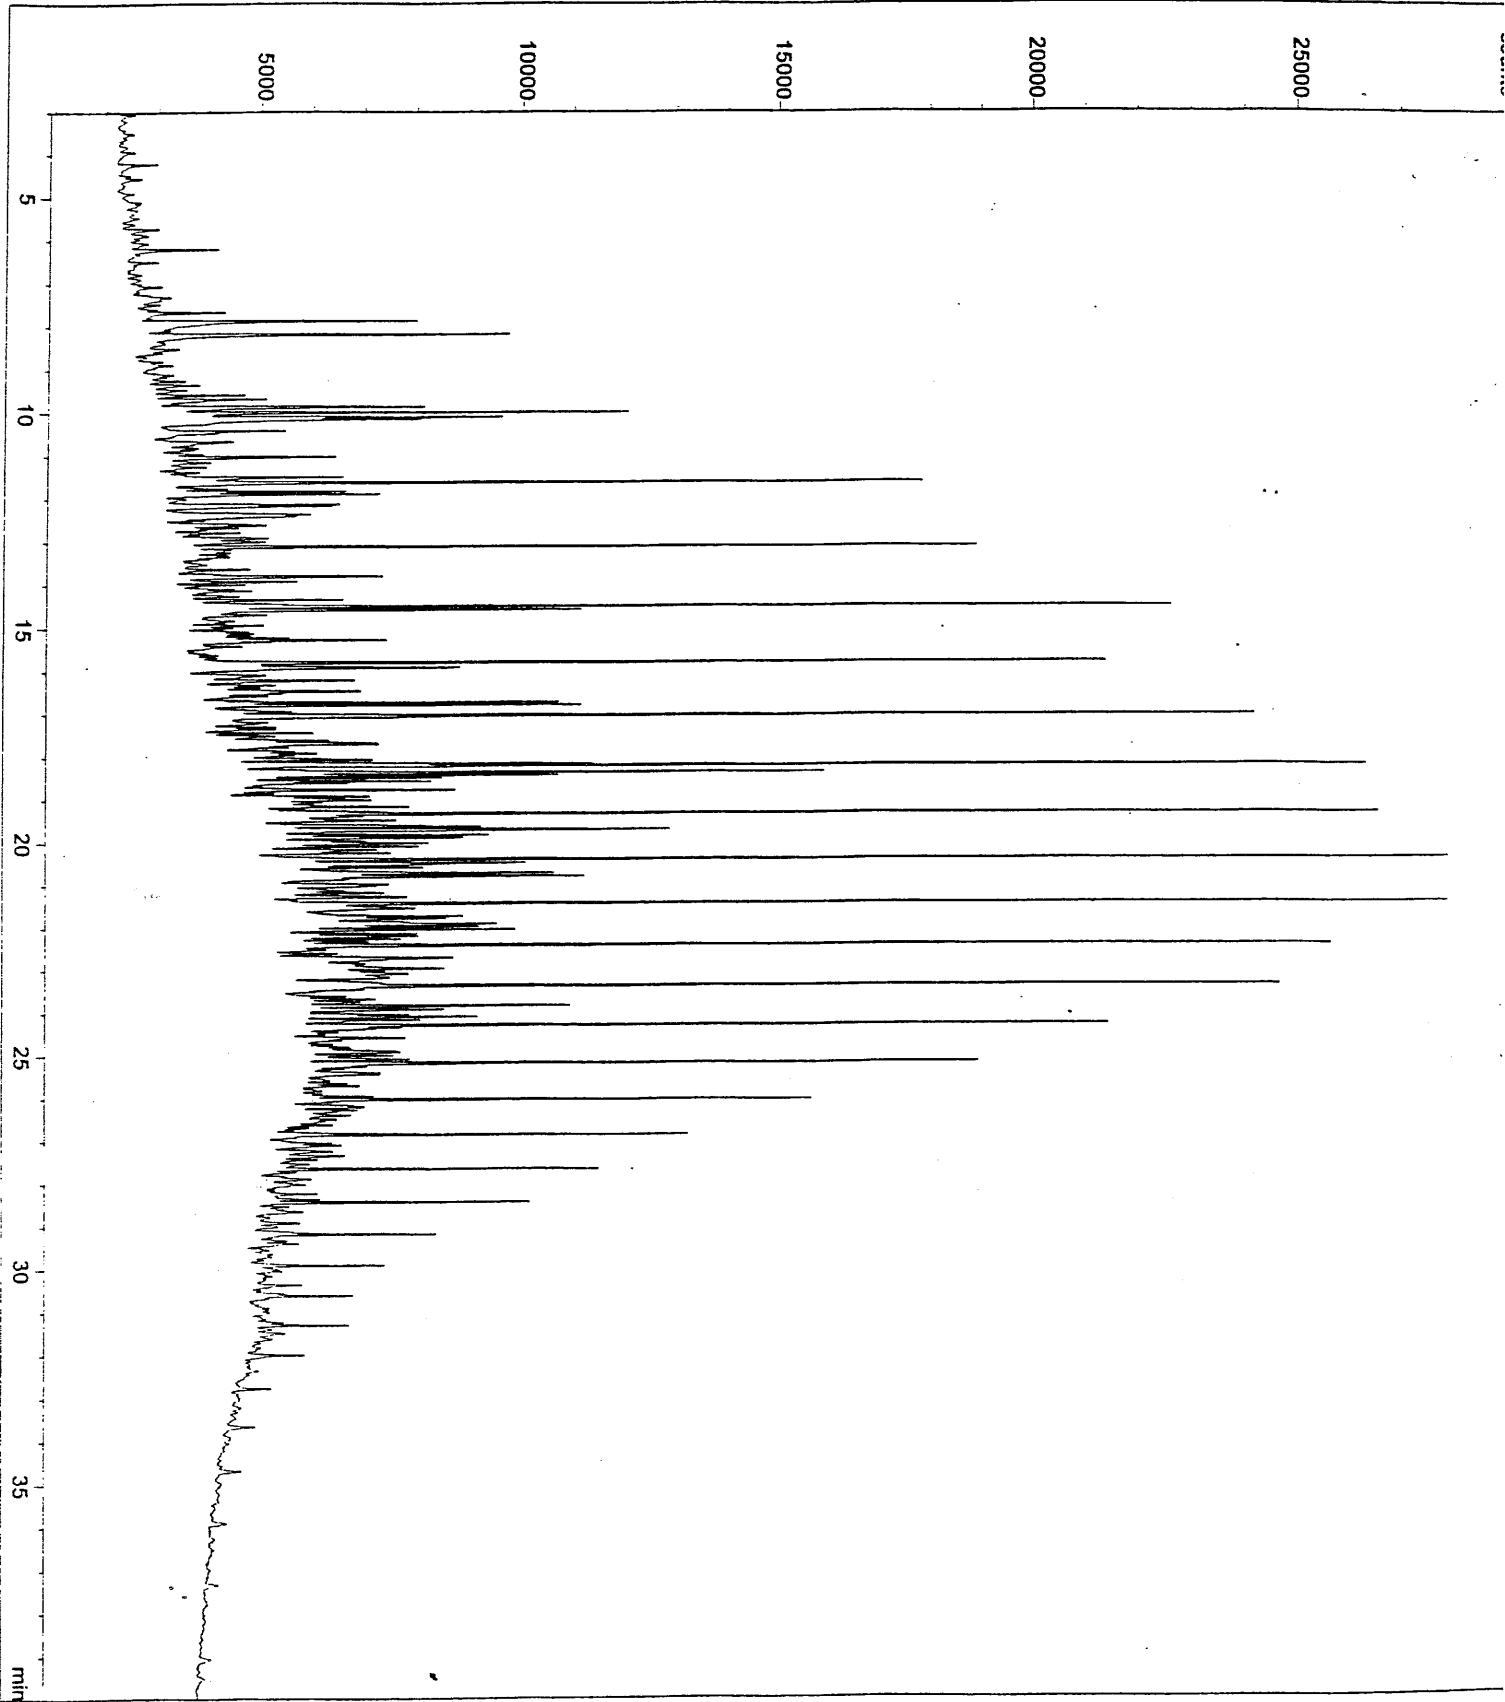

UNITED STATES COAST GUARD
MARINE SAFETY LABORATORY

OIL SPILL IDENTIFICATION ANALYSES
COST RECOVERY DOCUMENTATION

LABORATORY CASE NUMBER: 96-117

REQUESTOR: MARINE SAFETY OFFICE PUGET SOUND

UNIT CASE NUMBER: MC95015622

NUMBER OF SAMPLES: 05

COST PER SAMPLE PREPARED: \$20.00

TOTAL COSTS OF SAMPLE PREPARATION: \$100.00

NUMBER OF ANALYSES: 06

COST PER ANALYSIS: \$85.98

TOTAL COSTS FOR ANALYSIS: \$515.88

TOTAL COSTS: \$615.88

This documentation is provided for purposes of Phase IV - Documentation and Cost Recovery under the National Oil and Hazardous Substances Pollution Contingency Plan(40 CFR Part 300).


K. L. PLOURDE DATE: 16JAN96
Commanding Officer

OIL SPILL IDENTIFICATION SYSTEM (OIS)**RELEVANCE TO SPILL SOURCE DETERMINATION**

Petroleum is a complex mixture of thousands of different organic compounds formed from a variety of organic materials that are chemically converted under differing geological conditions over long periods of time. The infinitely variable nature of these factors results in distinct chemical differences between oils formed under dissimilar conditions and/or environments. While oil from one crude oil field is readily distinguishable from another, differences in the makeup of oils from the same crude oil field can sometimes be observed as well. Refined oils are fractions usually derived by distillation of crude oil. Two refined oils of the same type differ because of dissimilarities in the characteristics of their crude oil feed stocks as well as variations in refinery processes and any subsequent contact with other oils mixed in during transfer operation from residues in tanks, ships, pipes, hoses etc... Thus, all petroleum oils, to some extent have chemical compositions that differ from each other.

The characteristic properties of an oil can be explored by a variety of analytical methods. The results of analysis by any of these methods can be presented in graph form. In general, when the graphical data for two oils produced by a particular method are compared, the differences between the graphs reflect differences between the oils.

The OIS System, developed during the mid-1970s at the Coast Guard Research and Development Center, is based on a multi-method approach to "fingerprinting" oils. In 1978, the Central Oil Identification Laboratory (COIL) was established as the operating facility to implement the OIS. In 1988, COIL was renamed the Marine Safety Laboratories (MSL), though the acronym COIL is still widely used. OIS is designed to determine the unique, intrinsic chemical properties of oils via analytical techniques and establish whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. Since 1978, MSL/COIL has analyzed over 39,000 samples, involving more than 5,700 spill cases, in support of oil pollution investigations.

DATA PRODUCTION AND INTERPRETATION

Oil sample preparation, testing and storage are conducted in accordance with American Society for Testing and Materials (ASTM) consensus standards. MSL/COIL currently utilizes three primary analytical techniques: Gas Chromatography (GC) (ASTM D-3328), Fluorescence Spectroscopy (FL) (ASTM D 3650), Infrared Spectroscopy (IR) (ASTM D-3414), and Gas Chromatography-Mass Spectrometry (GC-MS) (ASTM D-5739) that is used as a complementary analytical method. A rigorous laboratory quality assurance program monitors both instrument performance and sample preparation to ensure that data are accurate and reproducible.

All samples in a given case are initially analyzed by one method to determine the class of petroleum product. Samples can be excluded from further analysis based on results from the initial analysis. Further analyses are performed on samples which are potential matches to the source of the oil.

The Supervisor of Analysis interprets the data from all test methods performed and draws conclusions concerning whether or not certain spilled oil and suspected source samples were derived from the same chemical source. Data interpretation in oil spill source identification is non-trivial and fundamentally different from typical chemical analyses because the chemical properties of spilled oil are altered when oil is introduced into the environment. From the moment oil enters the environment, evaporation, dissolution, photochemical oxidation, biodegradation and other forces begin to alter the oil's characteristics or "fingerprint". These combined processes are termed weathering and can significantly complicate data interpretation. Contamination of the spilled oil with other oils or substances is another complicating factor. The experienced oil spill analyst is familiar with the complexities of the weathering processes and is able to distinguish real differences between two oils from those apparent differences resulting from weathering alterations. Interferences from contaminants can usually be recognized as such and discounted when weighing the test results. However, at times, severe weathering and/or contamination can mask many of the inherent differences between oils of a similar type.

REPORTING

The typical MSL/COIL OIS Report consists of four parts: case identifying information, a listing of analysis techniques performed, the results section and the conclusions section. The results section describes the types of petroleum observed in the samples provided, and comments on chemical similarities or dissimilarities between spill samples and/or between spill and suspected source samples. In all cases the Supervisor of Analysis bases the written results on interpretations from the aggregate of all data generated.

The conclusions section establishes whether or not a common source relationship exists between samples of spilled oil and samples of oil from a suspected source. There are two outcomes most frequently found in the conclusions section of the typical MSL/COIL OIS Report: "derived from a common source" and "not derived from a common source". However, to maintain the high degree of reliability for both "common source" and "not a common source" determinations, it is necessary to exclude some comparisons from these categories. Oil spill cases vary widely in possible explanations for why a determination could not be made. Instead of using only a statement of "inconclusive", the comments will concisely explain the reason for the outcome for each individual case. For example, some sources are highly inhomogeneous, and a sample of such a spill may not reflect the composition of the product remaining in such a source. The spill may contain very little oil, or it may be excessively weathered or contaminated. Of important note, MSL/COIL conclusions address chemical comparisons and not physical aspects of evidence. Additionally, chemical evidence provided in a MSL/COIL conclusion that is other than "common source" might still be used by the investigating officer, when combined with physical evidence to establish a preponderance of the evidence argument against an alleged responsible party.

MSL/COIL OIS Reports are submitted to Marine Safety Offices (MSO's) for inclusion, as chemical evidence, in Marine Violation/Casualty Reports. The outcomes in the conclusions section of the OIS Report define the nature of the chemical evidence provided. MSO personnel are advised to combine the chemical evidence provided in the MSL/COIL OIS Reports with physical and circumstantial evidence developed during the investigation when writing Marine Violation Reports. Inquiries challenging the technical content of MSL/COIL OIS Reports by representatives of the alleged responsible party should be handled at the Hearing Officer level. Explicit guidance describing the communications process between the Hearing Officer and the MSL/COIL Supervisor of Analysis on technical issues involving chemical evidence is given in Commandant (G-LMI) memorandum 16460 dated 26 January 1981.

PERSONNEL QUALIFICATIONS

MSL/COIL laboratory technicians performing sample preparation and testing are graduates of the Coast Guard Marine Science Technician School. Each MSL/COIL technician has successfully completed a comprehensive training program at the MSL/COIL facility. Additionally, many have received supplemental training at leading civilian institutions in their specialty area.

The Supervisor of Analysis monitors all aspects of the analysis, certifies and interprets the test results, and prepares the final MSL/COIL report. This individual is a professionally trained chemist experienced in oil spill source identification. Individuals currently qualified to perform this function are:

Lieutenant Commander Kristy L. Plourde, U.S. Coast Guard
Commanding Officer
B.S. Physical Sciences, 1983, US Coast Guard Academy
M.S. Chemistry, 1989, University of Connecticut

Dr. Martha Hendrick
Chemist
B.A. Chemistry, 1969, Rhodes College
M.A. Education, 1974, Stanford University
Ph.D. Analytical Chemistry, 1985, University of Connecticut
Chair, ASTM Subcommittee D19.31, Waterborne Oils

REFERENCES

A more technical description of the OIS is contained in Report CG-D-52-77 "Oil Spill Identification System", Final Report, June 1977, USCG R&D Center. This document is available through the National Technical Information Service, Springfield, VA 22161.

For information concerning the ASTM standards used in Oil Spill Identification, consult "Oil in the Environment", Martha S. Hendrick, Ph.D., ASTM Standardization News, April 1991.

For additional information regarding the applicability of the Coast Guard's OIS, see "Chemical Identification of Oil Spill Sources", Allen P. Bentz, Ph.D., The Forum, Volume XIII, Number 2, Winter 1978. Dr. Bentz is a research scientist at the Coast Guard Research and Development Center and a recognized expert in the field of oil spill source identification. He has been closely involved with most of the development work leading to the present state-of-the-art.

APPENDIX C

Boring Logs, Monitoring Well Logs, and Test Pit Logs

Appendix B

Lithologic Logs

| Elevation reference: Ground surface elevation: | | Well completed: Casing elevation: | | | | | | AS-BUILT DESIGN | | TESTING |
|---|---|--------------------------------------|------------------|----------------|----------------|-----------------|-----------------|-----------------|--|---------|
| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | AS-BUILT DESIGN | | | |
| 0 | <i>Inferred medium dense, moist, brown SILT with gravel and some sand. Slight odor noted.</i> | | | | | | | | | |
| 5 | <i>Inferred meium dense, moist, grey, SILT with some sand and gravel. Strong odor noted.</i> | | | | | ▼ ATD | | | | |
| 10 | <i>Inferred, medium dense, wet, grey, SILT with sand and organics. Strong odor noted.</i> | | | | | | | | | |
| 15 | <i>Inferred, dense, wet, dark grey, organics (wood and peat) with some sand and silt.</i> | | | | | | | | | |
| <i>Boring terminated at 18 feet.</i> | | | | | | | | | | |
| 20 | | | | | | | | | | |
| 25 | | | | | | | | | | |
| 30 | | | | | | | | | | |

LEGEND

▼
ATD Observed groundwater level
(ATD = at time of drilling)






RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
Environmental Consultants
1400 140th Ave NE
Bellevue, Washington 98005



| SOIL DESCRIPTION | DEPTH (FEET) | LAB TESTS | SAMPLING | GROUND WATER | STANDARD PENETRATION RESISTANCE | | | | | |
|---|--------------|-----------|----------|--------------|--|----|----|----|----|----|
| | | | | | ▲ BLOWS PER FOOT (140 lb. hammer, 30 inch drop) | | | | | |
| Ground Surface Elevation Approximately Feet | 0 | | | | 0 | 10 | 20 | 30 | 40 | 50 |
| Loose to medium dense, wet to saturated, gray and brown-gray, silty fine to coarse SAND with a trace of gravel and wood debris (Fill) | 0 - 10 | | I | ▽ | | 10 | | | | |
| Soft, saturated, brown, silty PEAT | 10 - 11 | | I | | | | | | | |
| Total depth 11 feet Boring completed 9 March 1988 | 11 - 40 | | | | | | | | | |

- SAMPLING**
- I 2' OD SPLIT SPOON SAMPLE
 - II 3' OD SHELBY SAMPLE
 - III 2.5' ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED



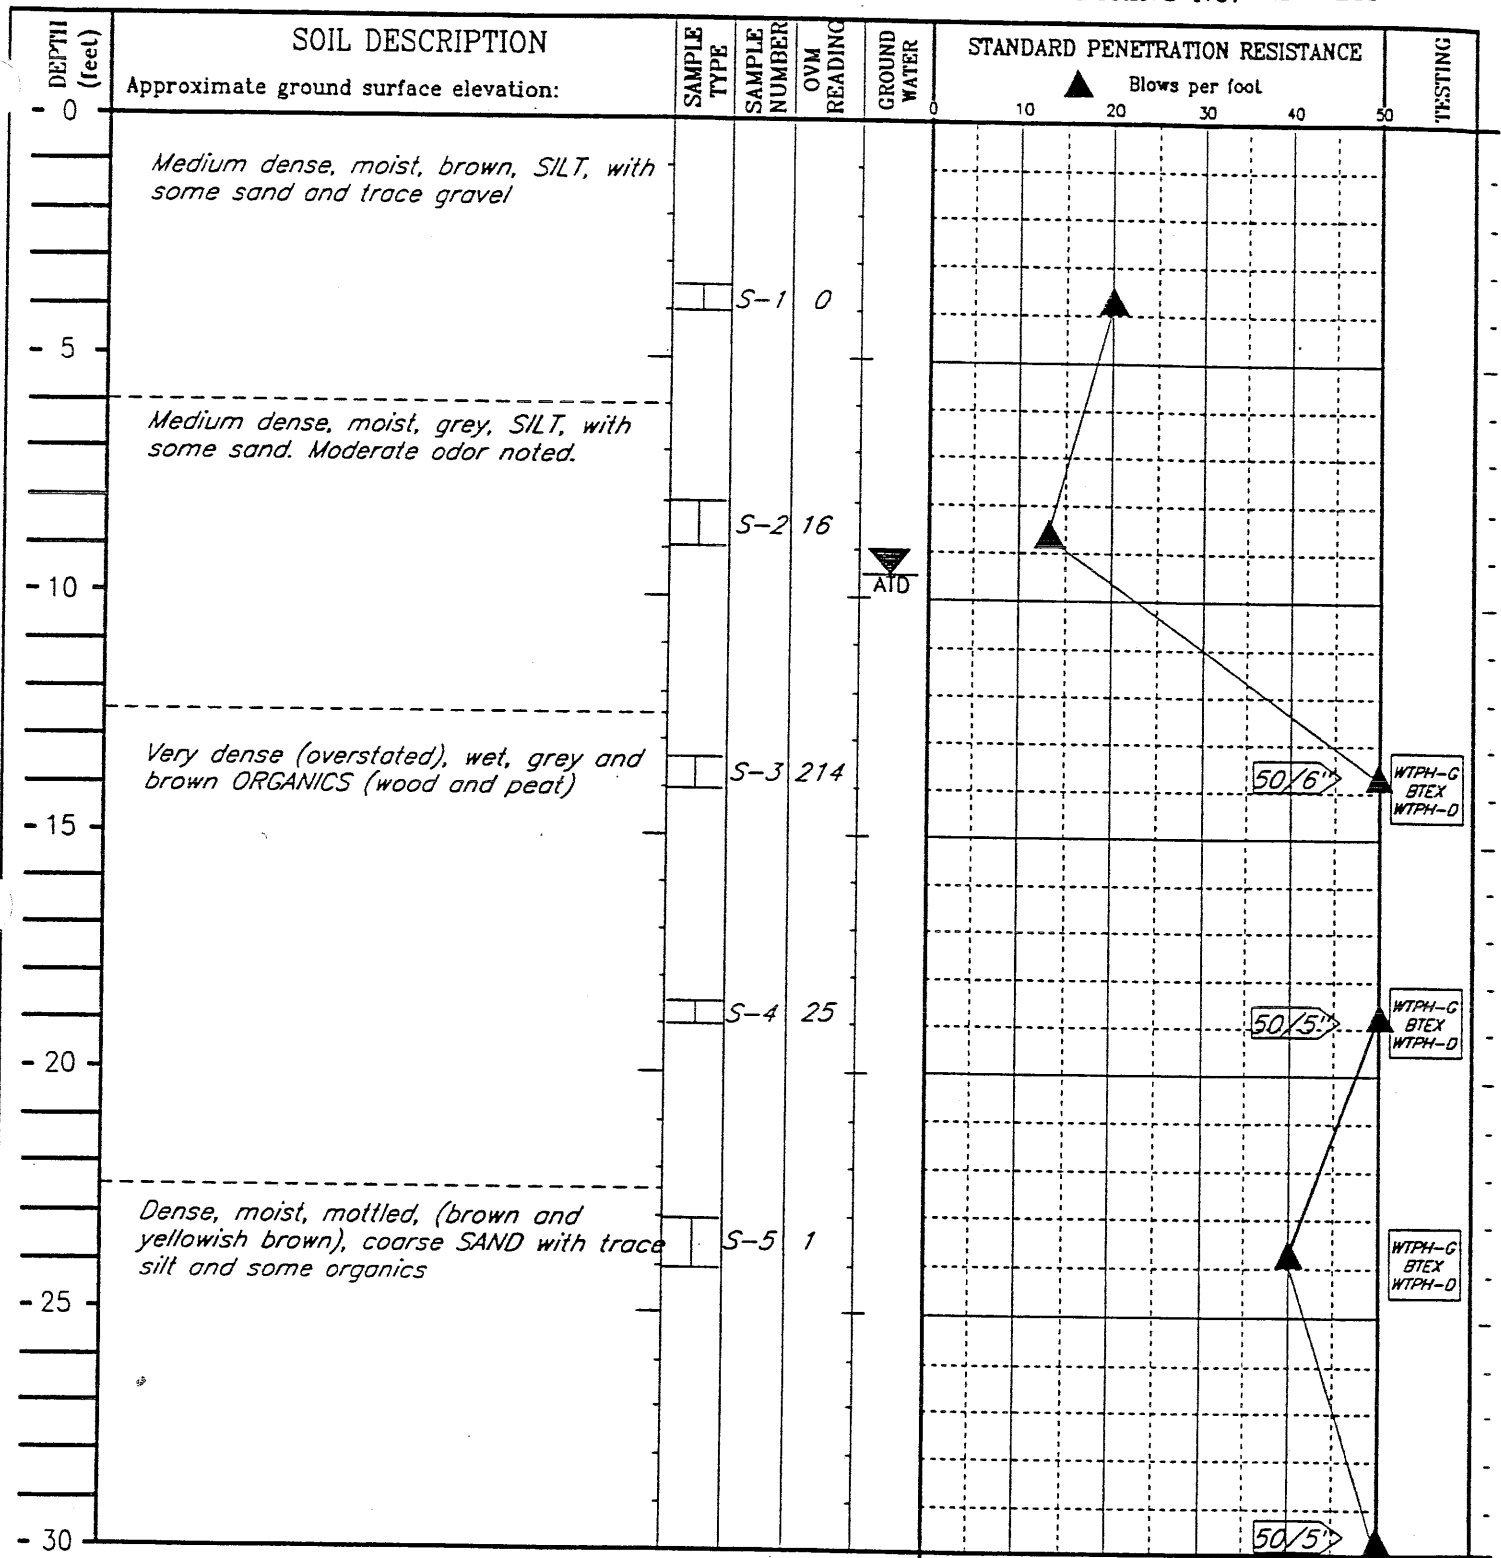


LEGEND

I 2-inch OD split-spoon sample

▽ Groundwater level at time of drilling


WTPH-G
BTEX
WTPH-D Soil analyses method




RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005


| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | OVM READING | GROUND WATER | STANDARD PENETRATION RESISTANCE | | | | | TESTING | |
|-----------------|---|----------------|------------------|----------------|-----------------|---------------------------------|----|----|----|----|---------|--|
| | | | | | | Blows per foot | | | | | | |
| 0 | Approximate ground surface elevation: | | | | | 0 | 10 | 20 | 30 | 40 | 50 | |
| | | | S-6 | 0 | | | | | | | | |
| | <i>Boring terminated at approximately 31 feet</i> | | | | | | | | | | | |
| -5 | | | | | | | | | | | | |
| -10 | | | | | | | | | | | | |
| -15 | | | | | | | | | | | | |
| -20 | | | | | | | | | | | | |
| -25 | | | | 1 | | | | | | | | |
| -30 | | | | | | | | | | | | |

LEGEND


 2-inch OD split-spoon sample



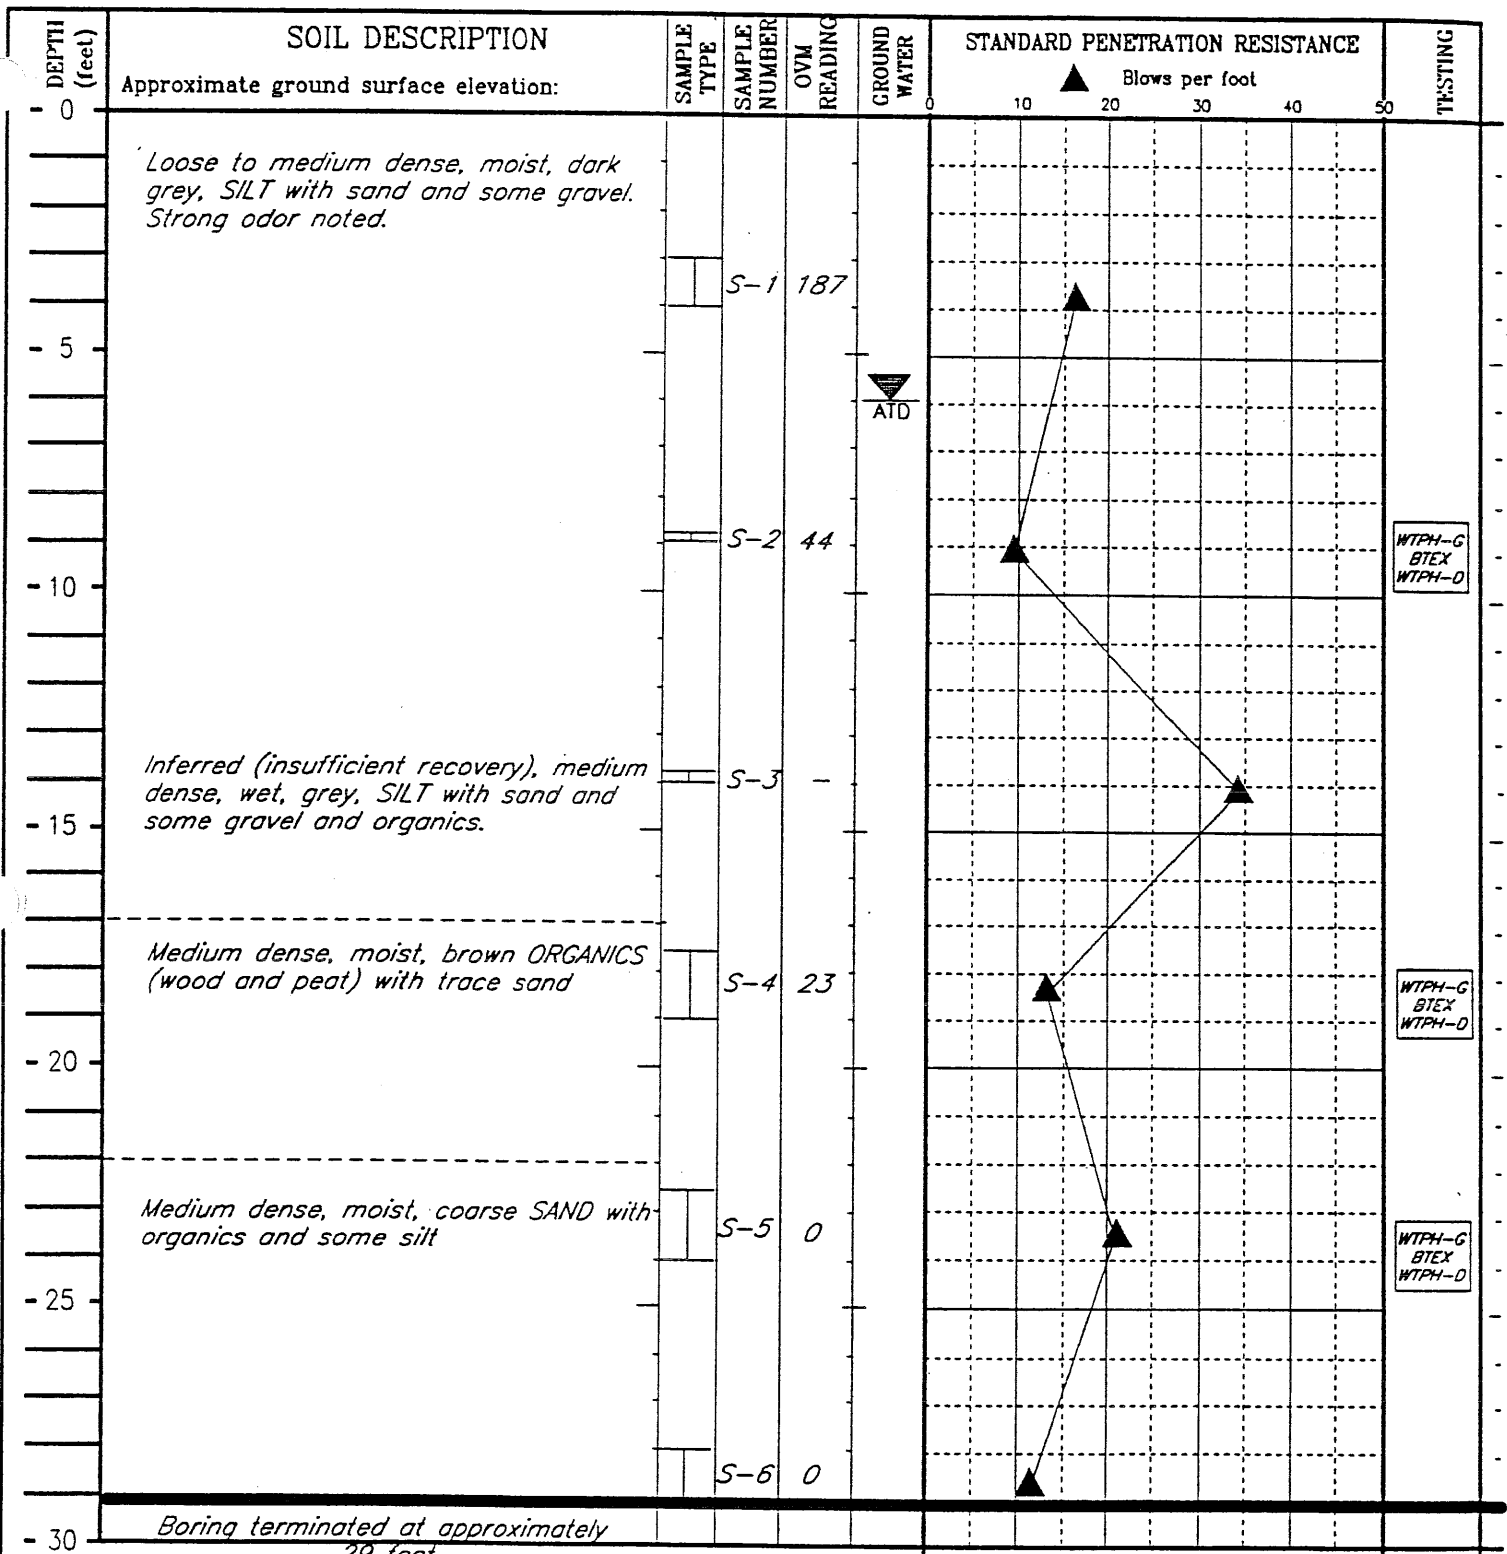

RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005




LEGEND


 2-inch OD split-spoon sample

 Groundwater level at time of drilling

 Soil analyses method



RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
Geotechnical & Environmental Consultants
 1400 140Lb Ave NE
 Bellevue, Washington 98005

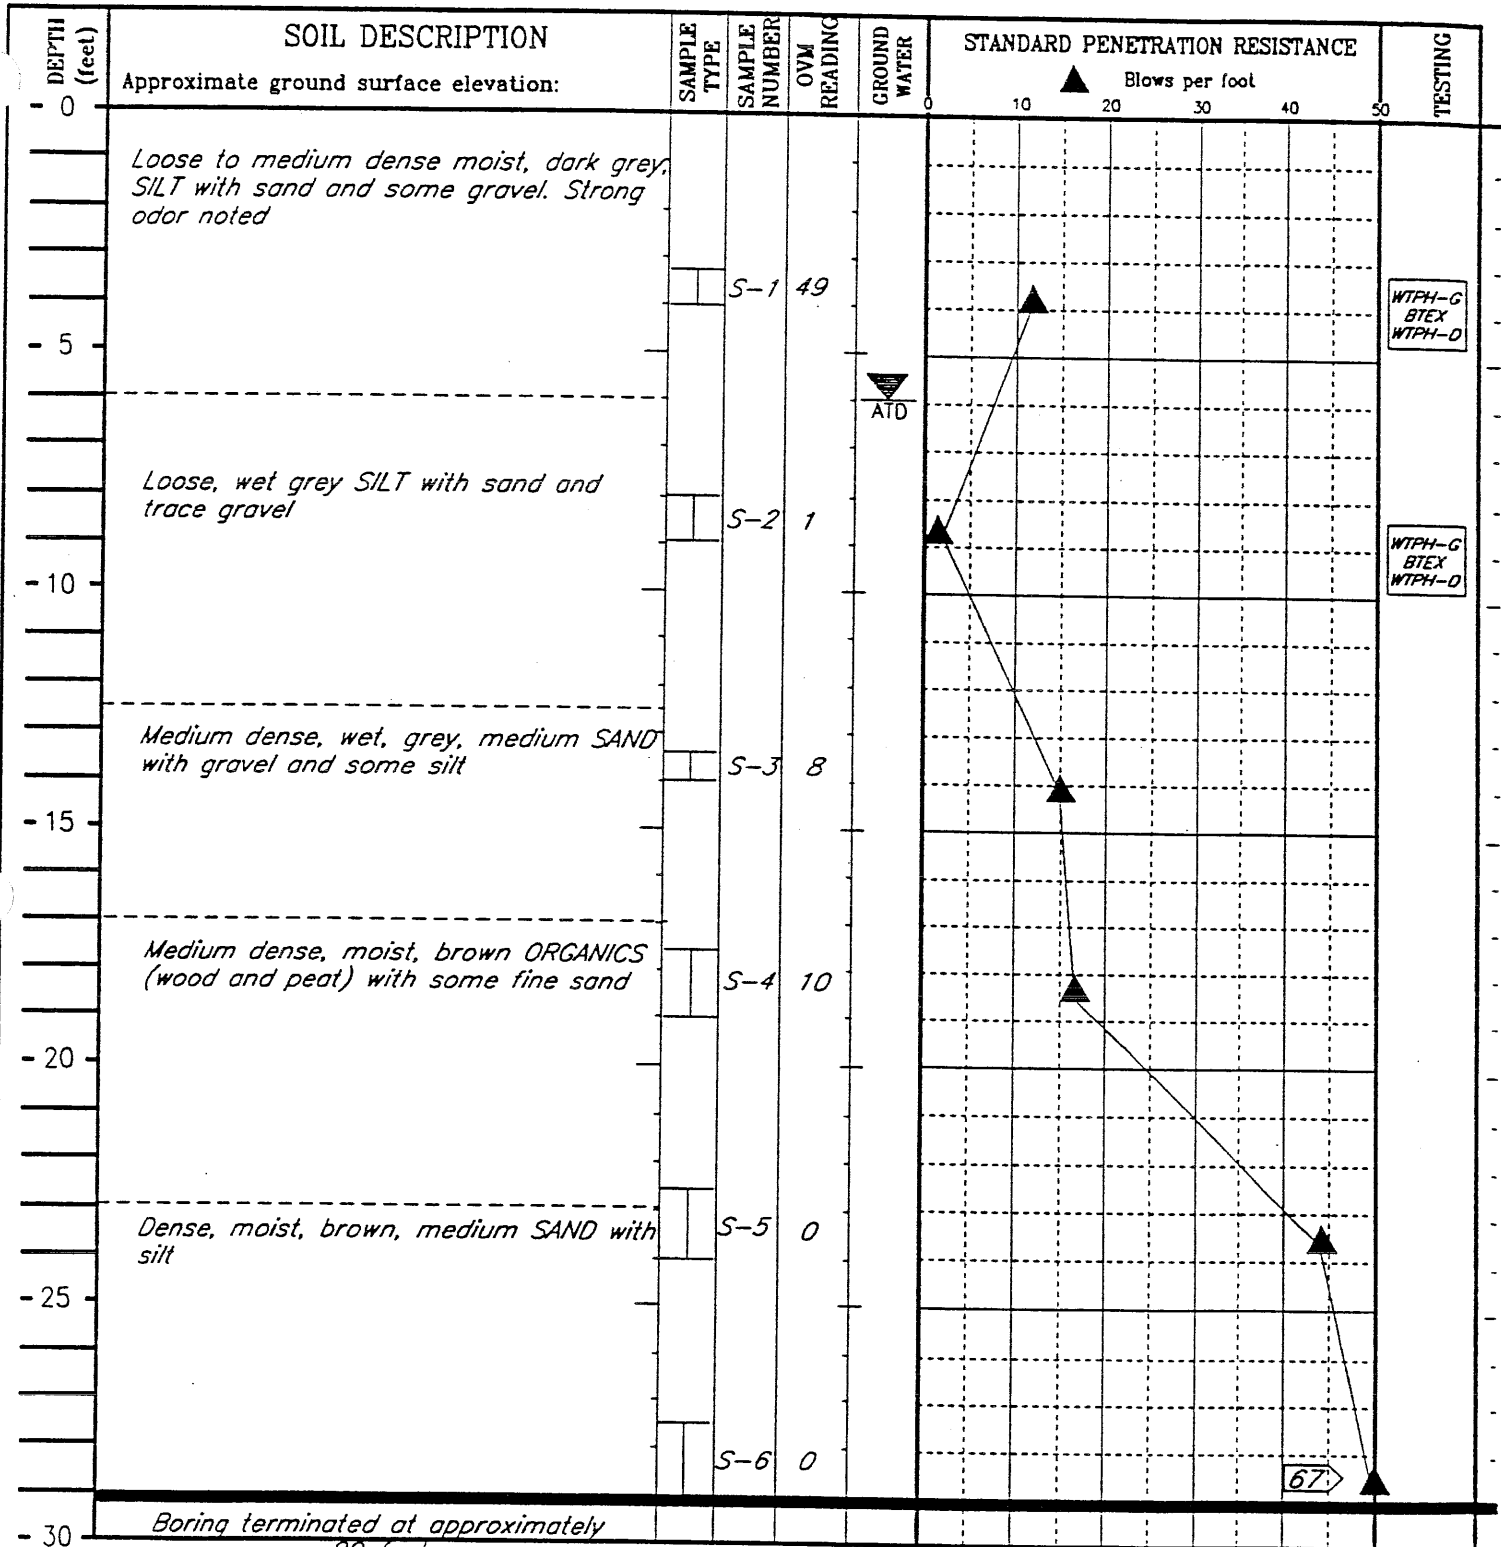


LEGEND


I 2-inch OD split- spoon sample

▼ Groundwater level at time of drilling

WTPH-G
BTEX
WTPH-D
Soil analyses method



RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005

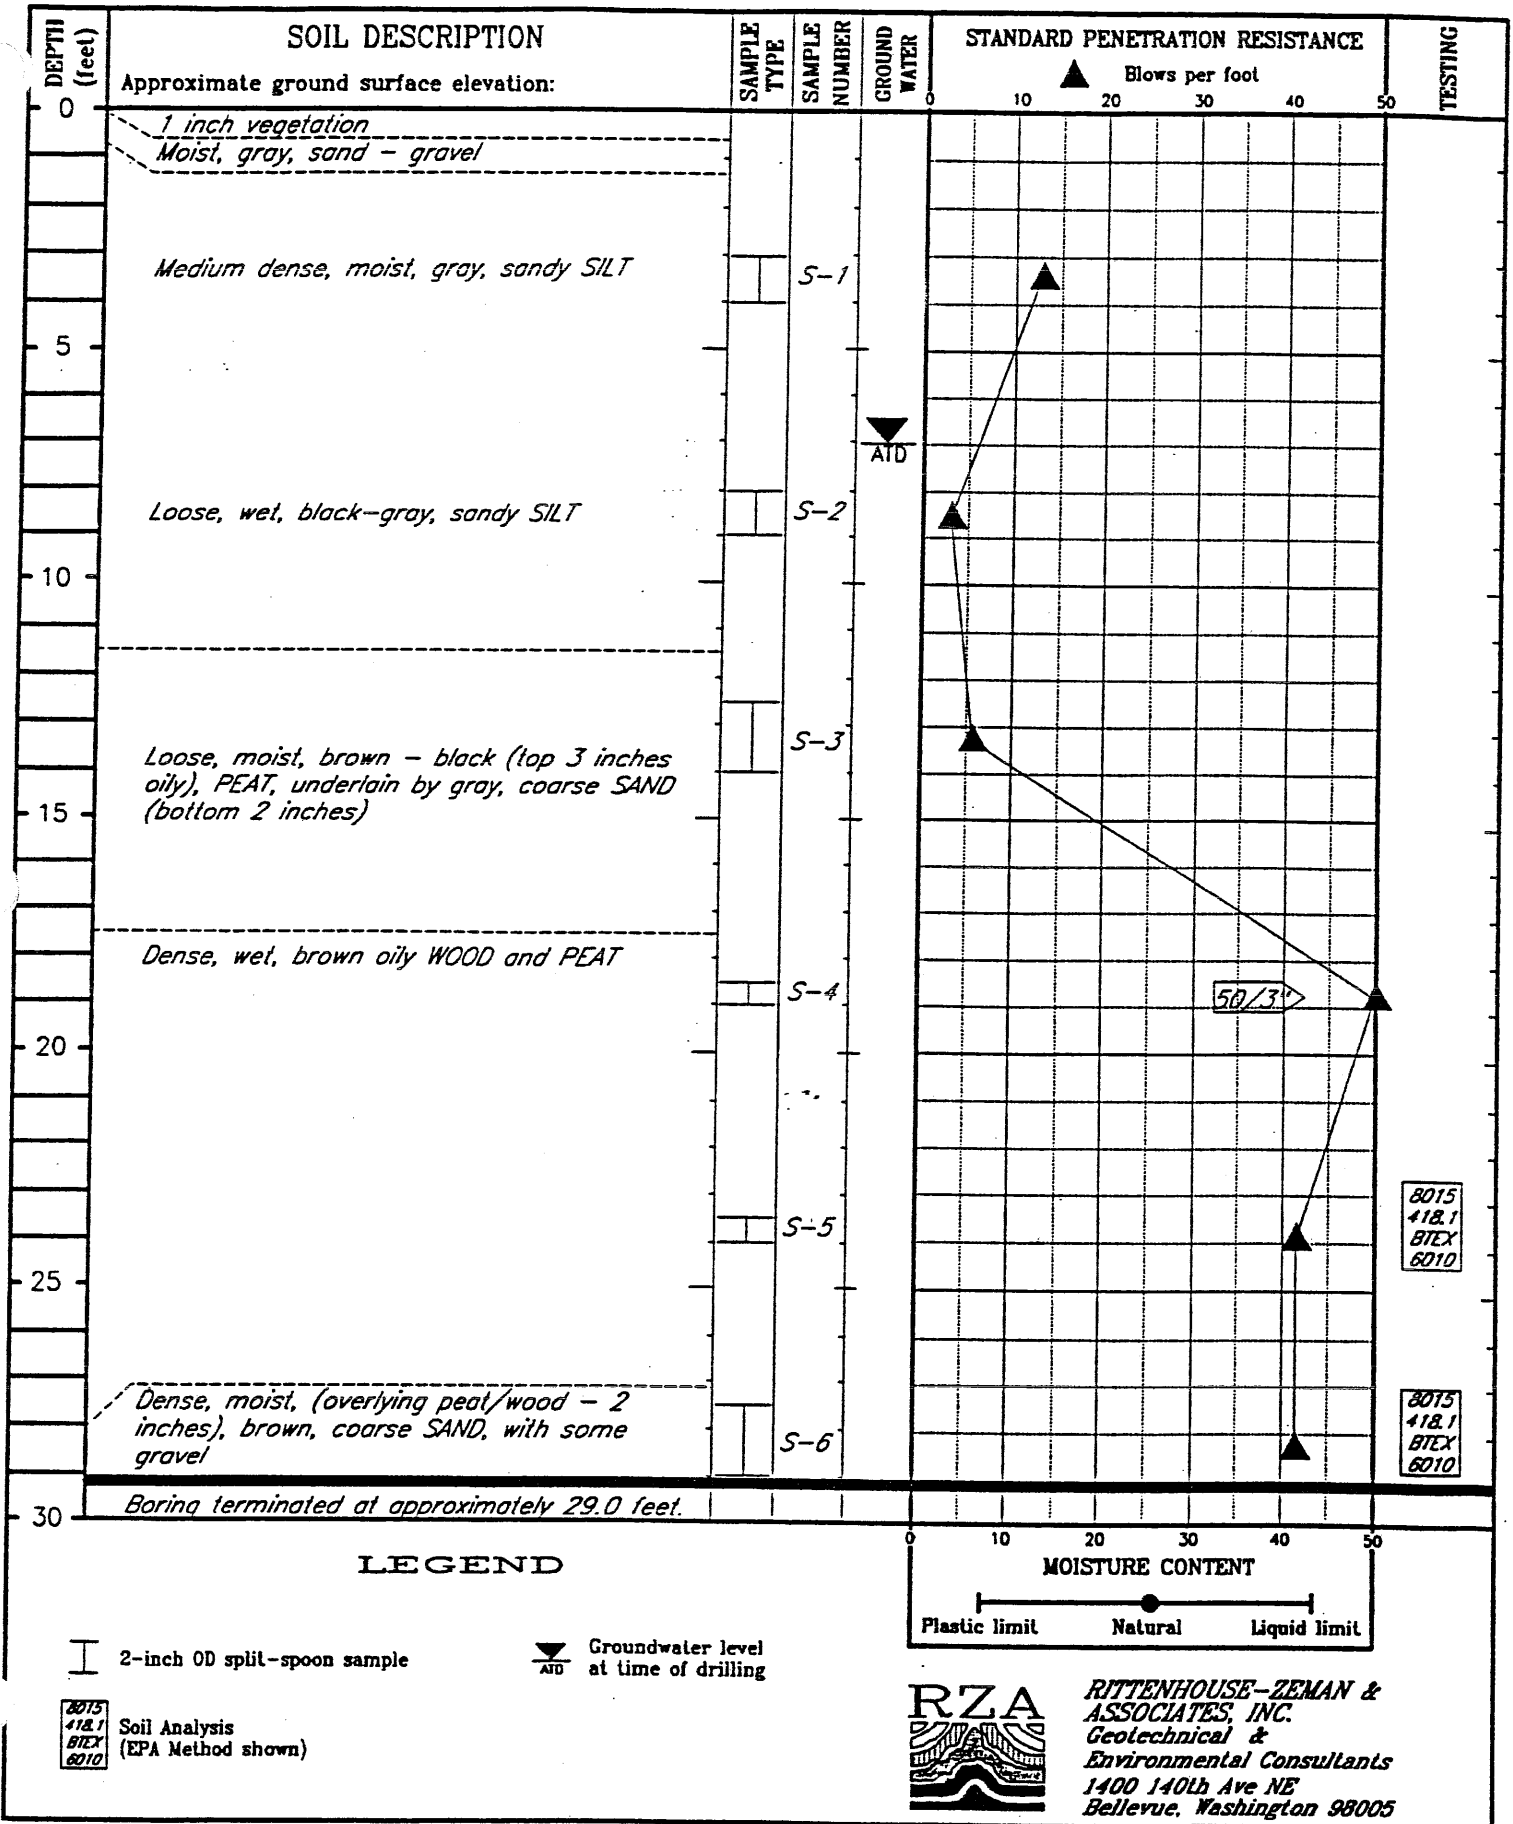

PROJECT: *Everett Mobil Bulk Plant* W.O. 11-04558-04 WELL NO. B-34


Elevation reference: N/A Well completed: N/A
 Ground surface elevation: N/A Casing elevation: N/A


AS-BUILT DESIGN


Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|--------------|---|-------------|---------------|-------------|-------------|--------------|--|
| 0 | | | | | | | |
| | <i>Loose, moist, brown, silty, fine to medium SAND interbedded with gray, sandy SILT with trace gravel</i> | | S-1 | 5 | 17 | | <i>Boring abandoned by backfilling with bentonite.</i> |
| | | | S-2 | | 69 | | |
| 5 | | | S-3 | | | ▼ ATD | |
| | <i>Medium dense to dense, saturated, gray, silty, fine to medium SAND with some wood debris</i> | | S-4 | 41 | 80 | | |
| | | | | | | | |
| 10 | <i>Grades to grayish-black, silty, medium to coarse SAND</i> | | S-5 | 12 | | | |
| | | | | | | | |
| 15 | <i>Bottom of boring at 14 feet. Petroleum-like staining and odor observed in all samples. Field FT-IR analysis of sample S-5 indicated > 10,000 ppm TPH.</i> | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

LEGEND

 2-inch O.D. split-spoon sample

 Observed groundwater level
ATD = at time of drilling

 3-inch OD Shelby sampler

RZA AGRA, Inc.
 Geotechnical & Environmental Group

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Bobcat Boring Logs

BB-1

Gray, moist to wet, silty, gravelly SAND with some cobbles. Slow seepage at approximately 1.0 foot; no other seepage encountered; soil exhibits a petroleum hydrocarbon-like odor. No LPH observed. Met with refusal at approximately 3.0 feet.

BB-2

Gray, moist to wet, gravelly SAND. Slow seepage at approximately 1.5 feet; no other seepage encountered; soil exhibits a petroleum hydrocarbon-like odor. Seepage from 1.5 foot depth pooled at bottom of boring and exhibits an iridescent sheen. No LPH observed. Boring terminated at a depth of approximately 4.0 feet.

BB-3

Gray, moist to wet, gravelly SAND with some gravel. Slow seepage below approximately 2.5 feet; soil exhibits a petroleum hydrocarbon-like odor. Discontinuous blebs of LPH observed on water pooled at the bottom of the boring. Boring terminated at a depth of approximately 4.0 feet. Boring allowed to remain open approximately two hours; discontinuous blebs of LPH still present on the water pooled in the bottom of the boring.

BB-4

Gray, moist to wet, silty, gravelly SAND with some wood debris. Slow seepage at approximately 1.0 foot; soil exhibits a petroleum hydrocarbon-like odor. Moderate seepage observed below approximately 3.5 feet. Approximately 0.01 to 0.02 feet of LPH accumulated on groundwater in the boring. Boring terminated at a depth of approximately 4.0 feet.

BB-5

Dark gray, wet, SAND with some silt, gravel, and wood debris. Moderate seepage observed below approximately 3.0 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet; caved to approximately 3.5 feet. Gauged fluid at bottom of boring using Colorcut paste; it appeared to be 100% LPH. Collected two bottles of LPH for potential future laboratory analysis; collected one bag sample of soil for possible sieve analysis.

BB-6

Gray, moist to wet, gravelly, SAND with some silt. LPH seepage observed at approximately 3.8 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Gauged fluid at bottom of boring using Colorcut paste; it appeared to be 100% LPH.

BB-7

Gray, moist to wet, gravelly, SAND with some silt and wood debris. Slow water and LPH seepage observed at approximately 1.0 feet; rapid LPH seepage observed below approximately 3.5 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Gauged fluid at bottom of boring using Colorcut paste; it appeared to be 100% LPH.

BB-8

Gray, moist to wet, gravelly SAND with some silt; scattered glass shards. LPH observed on tip of auger at approximately 2.5 feet. Slow seepage observed below approximately 3.8 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Gauged fluid at bottom of boring using Colorcut paste approximately one hour after drilling boring; LPH thickness approximately 0.05 feet.

BB-9

Gray, moist to wet, gravelly SAND with some silt. Slow seepage observed at approximately 1.5 feet. Slow seepage observed again below approximately 3.8 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Gauged fluid at bottom of boring using Colorcut paste; fluid appears to be a mixture of LPH and water (stains tape black like LPH but changes Colorcut from yellow to red like water).

BB-10

Gray, moist to wet, gravelly SAND with some silt and cobbles. No seepage observed; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet.

BB-11

Gray, moist to wet, gravelly SAND with some silt. No seepage observed in boring but soil and auger tip appears to be saturated with water; no LPH observed. Soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Boring left open overnight. Fluid level in boring in 5/23/96 was at approximately 3.0 feet. Gauged fluid with Colorcut paste; LPH thickness measured in boring using this method was approximately four inches. Collected two bottles of LPH for potential future laboratory analysis; collected one bag sample of soil for possible sieve analysis.

BB-12

Gray, wet, gravelly SAND with some silt. Rapid seepage observed below approximately 3.0 feet; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet. Seepage accumulated in the boring to a depth of approximately 2.0 feet. Gauged fluid at bottom of boring using Colorcut paste; LPH thickness approximately 0.01 feet. Collected two bottles of LPH for potential future laboratory analysis.

BB-13

Gray, moist, gravelly SAND overlying saturated $\frac{3}{4}$ -inch minus round rock at approximately 2.0 feet. LPH on tip of auger when removed from the boring. However, boring caved as fast as the auger was removed; consequently, LPH thickness was indeterminate; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet.

BB-14

Gray, moist, gravelly SAND with some silt and scattered metal debris. No seepage observed; soil exhibits a petroleum hydrocarbon-like odor. Boring terminated at a depth of approximately 4.0 feet.

LOG OF
EXPLORATORY BORING

Project No: 05-487-002 Boring No: W-1
 Date: 2-23-90
 Client: American Distributing Co Driller: Geotech
 Location: Bulk Terminal-Everett, Drilling Method: CMEC-55
 Hollow Stem Auger
 Logged by: G. Stuesse Hole Diameter: 7"
 Installation Data: (See Below) Page No: 1 of 1

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time: | Date: | Comments: |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|--|-------|-------|---|
| | | | | | | | | | |
| 0 - | | 4.00 | | Ring @ 3.0' | Pt | 0-3.0" Asphalt | | | 3.0' Organic debris, silty, brown, loose, moist, primarily wood shavings, slight organic odor |
| 2 - | | | | | | 10.0' Silt, brown, soft, wet, wood shavings, slight odor. | | | |
| 4 - | | | | | | 15.0' Silt, brown, soft, wet, wood shavings, slight petroleum sheen on cuttings. | | | |
| 6 - | | | | | | Installation Data: | | | |
| 8 - | | | | | | Screen: 23.0' - 3.0' | | | |
| 10 - | | | | | | Blank: 3.0' - 0 | | | |
| 12 - | | | | | | Sand: 23.0' - 2.0' | | | |
| 14 - | | | | | | Bentonite: 2.0' - 1.0' | | | |
| 16 - | | | | | | Concrete: 1.0' - 0 | | | |
| 18 - | | | | | | TD=23.0' | | | |

**LOG OF
EXPLORATORY BORING**

Project No: 05-487-002 Boring No: W-2
 Date: 2-22-90
 Client: American Distributing Co Driller: Geotech
 Location: Bulk Terminal-Everett, Drilling Method: CMEC-55
 Hollow Stem Auger
 Logged by: G. Stuesse Hole Diameter: 7"
 Installation Data: (See Below) Page No: 1 of 1

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time: | Date: | Comments: | |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|-------------|-------|-------|--|---|
| | | | | | | | | | | |
| 0 - | | 11 | 60 | Ring @ 3.0' | SW | | | | 0-3" Gravel; degraded asphalt. | |
| 2 - | | | | | | | | | 3-5" Sand, fine-coarse, grey, loose, very moist, occasional fine gravel, slight-moderate oily odor, dark brown, oily film on outside of sampler. | |
| 4 - | | | | | | | | | 5.0' Sand, fine-coarse, grey, loose, wet, occasional fine gravel, slight, moderate oily, odor, dark brown oily film on outside of sampler. | |
| 6 - | | | | | | | | | SW | 15.0' Sand, fine-coarse, grey, loose, wet, occasional coarse gravel, slight-medium oily odor, dark brown oily film on outside of sampler. |
| 8 - | | | | | | | | | SW | 20.0' Sand, fine coarse, grey, loose, wet, occasional coarse gravel, slight-medium oily odor, dark brown oily film on outside of sampler. |
| 10 - | | | | | | | | | OL | 23.0' Clay, brown, soft, wet, possible organic, very slight organic odor. |
| 12 - | | | | | | | | | | |
| 14 - | | | | | | | | | | |
| 16 - | | | | | | | | | | |
| 18 - | | | | | | | | | | |
| 20 - | | | | | | | | | | |
| 22 - | | | | | | | | | | |
| 24 - | | | | | | | | | | |
| 26 - | | | | | | | | | | |
| 28 - | | | | | | | | | | |
| 30 - | | | | | | | | | | |
| 32 - | | | | | | | | | | |
| 34 - | | | | | | | | | | |
| 36 - | | | | | | | | | | |
| 38 - | | | | | | | | | | |
| 40 - | | | | | | | | | | |
| 42 - | | | | | | | | | | |
| 44 - | | | | | | | | | | |
| 46 - | | | | | | | | | | |
| 48 - | | | | | | | | | | |
| 50 - | | | | | | | | | | |
| 52 - | | | | | | | | | | |
| 54 - | | | | | | | | | | |
| 56 - | | | | | | | | | | |
| 58 - | | | | | | | | | | |
| 60 - | | | | | | | | | | |
| 62 - | | | | | | | | | | |
| 64 - | | | | | | | | | | |
| 66 - | | | | | | | | | | |
| 68 - | | | | | | | | | | |
| 70 - | | | | | | | | | | |
| 72 - | | | | | | | | | | |
| 74 - | | | | | | | | | | |
| 76 - | | | | | | | | | | |
| 78 - | | | | | | | | | | |
| 80 - | | | | | | | | | | |
| 82 - | | | | | | | | | | |
| 84 - | | | | | | | | | | |
| 86 - | | | | | | | | | | |
| 88 - | | | | | | | | | | |
| 90 - | | | | | | | | | | |
| 92 - | | | | | | | | | | |
| 94 - | | | | | | | | | | |
| 96 - | | | | | | | | | | |
| 98 - | | | | | | | | | | |
| 100 - | | | | | | | | | | |

NOTE: The lower 3.0' of well could not be sand packed due to heaving sands.

Installation Data:
 Screen: 23.0' - 3.0'
 Blank: 3.0' - 0'
 Sand: 23.0' - 2.0'
 Bentonite: 2.0' - 1.0'
 Concrete: 1.0' - 0'

LOG OF
EXPLORATORY BORING

Project No: 05-487-002 Boring No: W-3
 Date: 2-22-90
 Client: American Distributing Co Driller: Geotech
 Location: Bulk Terminal-Everett, Drilling Method: CMEC-55
 Hollow Stem Auger
 Logged by: G. Stuesse Hole Diameter: 7"
 Installation Data: (See Below) Page No: 1 of 1

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time: | Date: | Comments: |
|--------------------|-------------|---------|---------------------------|-----------------------|---------------------------------------|---|-------|-------|-----------|
| 0 - | | 11 | | Ring @ 3.0' | SP | 0-3" Asphalt | | | |
| 2 - | | | | | | 3.0' Sand, slight silty, fine-medium, grey, loose, moist, occasional gravel, no odor. | | | |
| 4 - | | | | | | 7.0' Sand, slight silty, fine-medium, grey, loose, wet, occasional gravel, no odor. | | | |
| 6 - | | | | | | 15.0' Sand, slight silty, fine-medium, grey, loose, wet, occasional gravel, no odor. | | | |
| 8 - | | | | | | 20.0' Sand, slight silty, fine-medium, grey, loose, wet, occasional gravel, no odor. | | | |
| 10 - | | | | | | | | | |
| 12 - | | | | | | | | | |
| 14 - | | | | | | | | | |
| 16 - | | | | | | | | | |
| 18 - | | | | | | | | | |
| 20 - | | | | | | | | | |
| 22 - | | | | | | | | | |
| 24 - | TD=23.0' | | | | NOTE: Vapors from well have H2S odor. | | | | |
| Installation Data: | | | | | | Screen: 23.0' - 3.0' | | | |
| | | | | | | Blank: 3.0' - 0' | | | |
| | | | | | | Sand: 23.0' - 2.0' | | | |
| | | | | | | Bentonite: 2.0' - 1.0' | | | |
| | | | | | | Concrete: 1.0' - 0' | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-4

Date: 2/22/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal

Drilling Method:

Everett, WA

Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: | | | | |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|-------------|------|--|------------------|--|--|--|--|
| | | | | | | | | | | | | | |
| 0 - | | 16 | 0 | Ring @ 4' | SM | | | | 0 - 3" Concreta. | | | | |
| 2 - | | | | | | | | @ 4' Sand, silty, fine to medium grained, gray/brown, loose, wet, moderate odor, film of brown oil on sampler. | | | | | |
| 4 - | | | | | | | | @ 10' Sand, silty, fine to medium grained, gray/brown, loose, wet, moderate odor, pieces of glass, metal and wood. | | | | | |
| 6 - | | | | | | | | @ 15' Clay, organic, brown, soft, wet, pieces of wood, very slight odor. | | | | | |
| 8 - | | | | | | | | @ 20' Clay, organic, brown, soft, wet, pieces of wood, very slight odor. | | | | | |
| 10 - | | | | | | | | | | | | | |
| 12 - | | | | | | | | | | | | | |
| 14 - | | | | | | | | | | | | | |
| 16 - | | | | | | | | | | | | | |
| 18 - | | | | | | | | | | | | | |
| 20 - | | | | | | | | | | | | | |
| 22 - | | | | | | | | | | | | | |
| 24 - | | | | | | | | | | | | | |
| 26 - | | | | | | | | | | | | | |
| 28 - | | | | | | | | | | | | | |
| 30 - | | | | | | | | | | | | | |
| 32 - | | | | | | | | | | | | | |
| 34 - | | | | | | | | | | | | | |
| 36 - | | | | | | | | | | | | | |
| 38 - | | | | | | | | | | | | | |
| 40 - | | | | | | | | | | | | | |
| 42 - | | | | | | | | | | | | | |
| 44 - | | | | | | | | | | | | | |
| 46 - | | | | | | | | | | | | | |
| 48 - | | | | | | | | | | | | | |
| 50 - | | | | | | | | | | | | | |
| 52 - | | | | | | | | | | | | | |
| 54 - | | | | | | | | | | | | | |
| 56 - | | | | | | | | | | | | | |
| 58 - | | | | | | | | | | | | | |
| 60 - | | | | | | | | | | | | | |
| 62 - | | | | | | | | | | | | | |
| 64 - | | | | | | | | | | | | | |
| 66 - | | | | | | | | | | | | | |
| 68 - | | | | | | | | | | | | | |
| 70 - | | | | | | | | | | | | | |
| 72 - | | | | | | | | | | | | | |
| 74 - | | | | | | | | | | | | | |
| 76 - | | | | | | | | | | | | | |
| 78 - | | | | | | | | | | | | | |
| 80 - | | | | | | | | | | | | | |
| 82 - | | | | | | | | | | | | | |
| 84 - | | | | | | | | | | | | | |
| 86 - | | | | | | | | | | | | | |
| 88 - | | | | | | | | | | | | | |
| 90 - | | | | | | | | | | | | | |
| 92 - | | | | | | | | | | | | | |
| 94 - | | | | | | | | | | | | | |
| 96 - | | | | | | | | | | | | | |
| 98 - | | | | | | | | | | | | | |
| 100 - | | | | | | | | | | | | | |
| 102 - | | | | | | | | | | | | | |
| 104 - | | | | | | | | | | | | | |
| 106 - | | | | | | | | | | | | | |
| 108 - | | | | | | | | | | | | | |
| 110 - | | | | | | | | | | | | | |
| 112 - | | | | | | | | | | | | | |
| 114 - | | | | | | | | | | | | | |
| 116 - | | | | | | | | | | | | | |
| 118 - | | | | | | | | | | | | | |
| 120 - | | | | | | | | | | | | | |
| 122 - | | | | | | | | | | | | | |
| 124 - | | | | | | | | | | | | | |
| 126 - | | | | | | | | | | | | | |
| 128 - | | | | | | | | | | | | | |
| 130 - | | | | | | | | | | | | | |
| 132 - | | | | | | | | | | | | | |
| 134 - | | | | | | | | | | | | | |
| 136 - | | | | | | | | | | | | | |
| 138 - | | | | | | | | | | | | | |
| 140 - | | | | | | | | | | | | | |
| 142 - | | | | | | | | | | | | | |
| 144 - | | | | | | | | | | | | | |
| 146 - | | | | | | | | | | | | | |
| 148 - | | | | | | | | | | | | | |
| 150 - | | | | | | | | | | | | | |
| 152 - | | | | | | | | | | | | | |
| 154 - | | | | | | | | | | | | | |
| 156 - | | | | | | | | | | | | | |
| 158 - | | | | | | | | | | | | | |
| 160 - | | | | | | | | | | | | | |
| 162 - | | | | | | | | | | | | | |
| 164 - | | | | | | | | | | | | | |
| 166 - | | | | | | | | | | | | | |
| 168 - | | | | | | | | | | | | | |
| 170 - | | | | | | | | | | | | | |
| 172 - | | | | | | | | | | | | | |
| 174 - | | | | | | | | | | | | | |
| 176 - | | | | | | | | | | | | | |
| 178 - | | | | | | | | | | | | | |
| 180 - | | | | | | | | | | | | | |
| 182 - | | | | | | | | | | | | | |
| 184 - | | | | | | | | | | | | | |
| 186 - | | | | | | | | | | | | | |
| 188 - | | | | | | | | | | | | | |
| 190 - | | | | | | | | | | | | | |
| 192 - | | | | | | | | | | | | | |
| 194 - | | | | | | | | | | | | | |
| 196 - | | | | | | | | | | | | | |
| 198 - | | | | | | | | | | | | | |
| 200 - | | | | | | | | | | | | | |
| 202 - | | | | | | | | | | | | | |
| 204 - | | | | | | | | | | | | | |
| 206 - | | | | | | | | | | | | | |
| 208 - | | | | | | | | | | | | | |
| 210 - | | | | | | | | | | | | | |
| 212 - | | | | | | | | | | | | | |
| 214 - | | | | | | | | | | | | | |
| 216 - | | | | | | | | | | | | | |
| 218 - | | | | | | | | | | | | | |
| 220 - | | | | | | | | | | | | | |
| 222 - | | | | | | | | | | | | | |
| 224 - | | | | | | | | | | | | | |
| 226 - | | | | | | | | | | | | | |
| 228 - | | | | | | | | | | | | | |
| 230 - | | | | | | | | | | | | | |
| 232 - | | | | | | | | | | | | | |
| 234 - | | | | | | | | | | | | | |
| 236 - | | | | | | | | | | | | | |
| 238 - | | | | | | | | | | | | | |
| 240 - | | | | | | | | | | | | | |
| 242 - | | | | | | | | | | | | | |
| 244 - | | | | | | | | | | | | | |
| 246 - | | | | | | | | | | | | | |
| 248 - | | | | | | | | | | | | | |
| 250 - | | | | | | | | | | | | | |
| 252 - | | | | | | | | | | | | | |
| 254 - | | | | | | | | | | | | | |
| 256 - | | | | | | | | | | | | | |
| 258 - | | | | | | | | | | | | | |
| 260 - | | | | | | | | | | | | | |
| 262 - | | | | | | | | | | | | | |
| 264 - | | | | | | | | | | | | | |
| 266 - | | | | | | | | | | | | | |
| 268 - | | | | | | | | | | | | | |
| 270 - | | | | | | | | | | | | | |
| 272 - | | | | | | | | | | | | | |
| 274 - | | | | | | | | | | | | | |
| 276 - | | | | | | | | | | | | | |
| 278 - | | | | | | | | | | | | | |
| 280 - | | | | | | | | | | | | | |
| 282 - | | | | | | | | | | | | | |
| 284 - | | | | | | | | | | | | | |
| 286 - | | | | | | | | | | | | | |
| 288 - | | | | | | | | | | | | | |
| 290 - | | | | | | | | | | | | | |
| 292 - | | | | | | | | | | | | | |
| 294 - | | | | | | | | | | | | | |
| 296 - | | | | | | | | | | | | | |
| 298 - | | | | | | | | | | | | | |
| 300 - | | | | | | | | | | | | | |
| 302 - | | | | | | | | | | | | | |
| 304 - | | | | | | | | | | | | | |
| 306 - | | | | | | | | | | | | | |
| 308 - | | | | | | | | | | | | | |
| 310 - | | | | | | | | | | | | | |
| 312 - | | | | | | | | | | | | | |
| 314 - | | | | | | | | | | | | | |
| 316 - | | | | | | | | | | | | | |
| 318 - | | | | | | | | | | | | | |
| 320 - | | | | | | | | | | | | | |
| 322 - | | | | | | | | | | | | | |
| 324 - | | | | | | | | | | | | | |
| 326 - | | | | | | | | | | | | | |
| 328 - | | | | | | | | | | | | | |
| 330 - | | | | | | | | | | | | | |
| 332 - | | | | | | | | | | | | | |
| 334 - | | | | | | | | | | | | | |
| 336 - | | | | | | | | | | | | | |
| 338 - | | | | | | | | | | | | | |
| 340 - | | | | | | | | | | | | | |
| 342 - | | | | | | | | | | | | | |
| 344 - | | | | | | | | | | | | | |
| 346 - | | | | | | | | | | | | | |
| 348 - | | | | | | | | | | | | | |
| 350 - | | | | | | | | | | | | | |
| 352 - | | | | | | | | | | | | | |
| 354 - | | | | | | | | | | | | | |
| 356 - | | | | | | | | | | | | | |
| 358 - | | | | | | | | | | | | | |
| 360 - | | | | | | | | | | | | | |
| 362 - | | | | | | | | | | | | | |
| 364 - | | | | | | | | | | | | | |
| 366 - | | | | | | | | | | | | | |
| 368 - | | | | | | | | | | | | | |
| 370 - | | | | | | | | | | | | | |
| 372 - | | | | | | | | | | | | | |
| 374 - | | | | | | | | | | | | | |
| 376 - | | | | | | | | | | | | | |
| 378 - | | | | | | | | | | | | | |
| 380 - | | | | | | | | | | | | | |
| 382 - | | | | | | | | | | | | | |
| 384 - | | | | | | | | | | | | | |
| 386 - | | | | | | | | | | | | | |
| 388 - | | | | | | | | | | | | | |
| 390 - | | | | | | | | | | | | | |
| 392 - | | | | | | | | | | | | | |
| 394 - | | | | | | | | | | | | | |
| 396 - | | | | | | | | | | | | | |
| 398 - | | | | | | | | | | | | | |
| 400 - | | | | | | | | | | | | | |
| 402 - | | | | | | | | | | | | | |
| 404 - | | | | | | | | | | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003 Boring No: W-5
 Date: 2/22/90
 Client: American Distributing Co. Driller:
 Location: Bulk Terminal Drilling Method:
 Everett, WA Hole Diameter: 7"
 Logged By: Page No: 1 of 1
 Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|--|------|------|---|
| | | | | | | | | | |
| 0 - | | 28 | 50 | Ring @ 3' | SP | | | | 0 - 6" Gravel. |
| 2 - | | | | | | @ 3' Sand, fine to medium grained, slightly silty, gray, loose, moist, slight odor, pieces of wood and metal. | | | |
| 4 - | | | | | | @ 6' Sand, fine to medium grained, slightly silty, gray, loose, wet, slight odor, film of brown oil on cuttings. | | | |
| 6 - | | | | | | | | | |
| 8 - | | | | | | | | | |
| 10 - | | | | | | | | | |
| 12 - | | | | | | | | | |
| 14 - | | | | | | | | | |
| 16 - | | | | | | | | | |
| 18 - | | | | | | | | | |
| 20 - | | | | | | | | | |
| 22 - | | | | | | | | | |
| 24 - | | | | | | | | | |
| 26 - | | | | | | | | | |
| 28 - | | | | | | | | | |
| 30 - | | | | | | | | | |
| 32 - | | | | | | | | | |
| 34 - | | | | | | | | | |
| 36 - | | | | | | | | | |
| 38 - | | | | | | | | | |
| 40 - | | | | | | | | | |
| 42 - | | | | | | | | | |
| 44 - | | | | | | | | | |
| 46 - | | | | | | | | | |
| 48 - | | | | | | | | | |
| 50 - | | | | | | | | | |
| 52 - | | | | | | | | | |
| 54 - | | | | | | | | | |
| 56 - | | | | | | | | | |
| 58 - | | | | | | | | | |
| 60 - | | | | | | | | | |
| 62 - | | | | | | | | | |
| 64 - | | | | | | | | | |
| 66 - | | | | | | | | | |
| 68 - | | | | | | | | | |
| 70 - | | | | | | | | | |
| 72 - | | | | | | | | | |
| 74 - | | | | | | | | | |
| 76 - | | | | | | | | | |
| 78 - | | | | | | | | | |
| 80 - | | | | | | | | | |
| 82 - | | | | | | | | | |
| 84 - | | | | | | | | | |
| 86 - | | | | | | | | | |
| 88 - | | | | | | | | | |
| 90 - | | | | | | | | | |
| 92 - | | | | | | | | | |
| 94 - | | | | | | | | | |
| 96 - | | | | | | | | | |
| 98 - | | | | | | | | | |
| 100 - | | | | | | | | | |
| | TD=23' | | | | | | | | Installation Data: Screen 23' - 3' Blank 3' - 0' Sand 23' - 2' Bentonite 2' - 1' Concrete 1' - 0' |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-6

Date: 2/23/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method:

Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments | | | | |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|-------------|------|------|---|--|--|--|---|
| | | | | | | | | | | | | | |
| 0 - | | 19 | 30 | Ring @ 3' | SM | | | | @ 0 - 5' Sand, slightly silty, fine to medium grained, gray, loose moist, slight odor, some gravel. | | | | |
| 2 - | | | | | | | | | | | | | |
| 4 - | | | | | | | | | | | | | |
| 6 - | | | | | | | | | | | | | @ 6' Sand, slightly silty, fine to medium grained, gray, loose, wet, slight odor, some gravel, pieces of wood, brown oily film on water and cuttings. |
| 8 - | | | | | | | | | | | | | |
| 10 - | | | | | | | | | | | | | @ 10' Sand, very silty, fine to medium grained, gray, loose, wet, slight odor, some gravel, pieces of wood, brown oily film on water and cuttings. |
| 12 - | | | | | | | | | | | | | |
| 14 - | | | | | | | | | | | | | |
| 16 - | | | | | | | | | | | | | |
| 18 - | | | | | | | | | | | | | |
| 20 - | | | | | OL | | | | @ 20' Clay, organic, dark brown, soft, wet, hydrogen sulfide odor. | | | | |
| 22 - | | | | | | | | | | | | | |
| 24 - | | | | | | | | | | | | | |
| 26 - | | | | | | | | | | | | | |
| 28 - | | | | | | | | | | | | | |
| 30 - | | | | | | | | | | | | | |
| 32 - | | | | | | | | | | | | | |
| 34 - | | | | | | | | | | | | | |
| 36 - | | | | | | | | | | | | | |
| 38 - | | | | | | | | | | | | | |
| 40 - | | | | | | | | | | | | | |
| 42 - | | | | | | | | | | | | | |
| 44 - | | | | | | | | | | | | | |
| 46 - | | | | | | | | | | | | | |
| 48 - | | | | | | | | | | | | | |
| 50 - | | | | | | | | | | | | | |
| 52 - | | | | | | | | | | | | | |
| 54 - | | | | | | | | | | | | | |
| 56 - | | | | | | | | | | | | | |
| 58 - | | | | | | | | | | | | | |
| 60 - | | | | | | | | | | | | | |
| 62 - | | | | | | | | | | | | | |
| 64 - | | | | | | | | | | | | | |
| 66 - | | | | | | | | | | | | | |
| 68 - | | | | | | | | | | | | | |
| 70 - | | | | | | | | | | | | | |
| 72 - | | | | | | | | | | | | | |
| 74 - | | | | | | | | | | | | | |
| 76 - | | | | | | | | | | | | | |
| 78 - | | | | | | | | | | | | | |
| 80 - | | | | | | | | | | | | | |
| 82 - | | | | | | | | | | | | | |
| 84 - | | | | | | | | | | | | | |
| 86 - | | | | | | | | | | | | | |
| 88 - | | | | | | | | | | | | | |
| 90 - | | | | | | | | | | | | | |
| 92 - | | | | | | | | | | | | | |
| 94 - | | | | | | | | | | | | | |
| 96 - | | | | | | | | | | | | | |
| 98 - | | | | | | | | | | | | | |
| 100 - | | | | | | | | | | | | | |

TD=23'

Installation Data: Screen 23' - 3'
Blank 3' - 0'
Sand 23' - 2'
Bentonite 2' - 1'
Concrete 1' - 0'

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-8

Date: 6/28/90

Client: American Distributing Co.

Driller: ESE

Location: Bulk Terminal

Drilling Method: Hand Auger

Everett, WA

Hole Diameter: 4"

Logged By: G. Stuesse

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|------------|---------------|---------|---------------------------|-----------------------|------------------------------|---|------|------|--|
| | | | | | | | | | |
| 0 - | <p>TD=10'</p> | | | | SM | | | | 0 - 3' Sand, silty, brown, loose, moist to wet, no odor. |
| - | | | | | | | | | @ 3' - 10' Silt, gray, soft, wet, slight odor. |
| 2 - | | | | | | ML | | | |
| - | | | | | | | | | |
| 4 - | | | | | | | | | |
| - | | | | | | | | | |
| 6 - | | | | | | | | | |
| - | | | | | | | | | |
| 8 - | | | | | | | | | |
| 0 | | | | | | | | | |
| | | | | | | Installation Data: Screen 10' - 2' Blank 2' - 0' Sand 10' - 1' Bentonite 1' - .5' Concrete .5' - 0' | | | |

**LOG OF
EXPLORATORY BORING**

location of boring:

Project No: 05-487-003

Boring No: W-9

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal

Drilling Method: Hand Auger

Everett, WA

Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|------------|-------------|---------|---------------------------|-----------------------|------------------------------|-------------|------|------|---|
| 0 - | | | | | ML | | | | 0 - 3' Silt, sandy, brown, moist, no odor. |
| - | | | | | | | | | @ 3' - 7.5' Silt, gray, wet, moderate odor. |
| 2 - | | | | | | | | | |
| - | | | | | | | | | |
| 4 - | | | | | | | | | |
| - | | | | | | | | | |
| 6 - | | | | | | | | | |
| - | | | | | | | | | |
| 8 - | TD=7.5' | | | | | | | | Installation Data: Screen 7.5' - 1.5' |
| - | | | | | | | | | Blank 1.5' - 0 |
| - | | | | | | | | | Sand 7.5' - 1.0' |
| - | | | | | | | | | Bentonite 1.0' - 0.5' |
| - | | | | | | | | | Concrete 0.5' - 0 |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-11

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal

Drilling Method: Hand Auger

Everett, WA

Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: | |
|---------------|----------------|---------|--------------------------------------|--------------------------|------------------------------------|---------------------------------------|------|------|---|--|
| | | | | | | | | | | |
| 0 - | | | | | Pt | | | | 0 - 2' Peat, silty, brown, moist, no odor. @ 2' - 6.5' Peat, brown, wet, brown, oil sheen. | |
| - | | | | | | | | | | |
| 2 - | | | | | | | | | | |
| - | | | | | | | | | | |
| 4 - | | | | | | | | | | |
| 6 - | | | | | | | | | | |
| - | TD=6.5' | | | | | Installation Data: Screen 6.5' - 1.5' | | | | |
| - | | | | | | Blank 1.5' - 0 | | | | |
| - | | | | | | Sand 6.5' - 1.0' | | | | |
| - | | | | | | Bentonite 1.0' - 0.5' | | | | |
| - | | | | | | Concrete 0.5' - 0 | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-14

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|------------|--|---------|---------------------------|-----------------------|------------------------------|--------------------|------|--------|---|
| | | | | | | | | | |
| 0 - |  | | | | ML | | | | 0 - 6.5' Silt, sandy, moist to wet, very slight odor. |
| 2 - | | | | | | | | | |
| 4 - | | | | | | | | | |
| 5 - | | | | | | | | | |
| - | | TD=6.5' | | | | | | | |
| | | | | | | Installation Data: | | | |
| | | | | | | Screen | 6.5' | - 2.0' | |
| | | | | | | Blank | 2.0' | - 0' | |
| | | | | | | Sand | 6.5' | - 1.0' | |
| | | | | | | Bentonite | 1.0' | - 0.5' | |
| | | | | | | Concrete | 0.5' | - 0' | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-15

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

location of boring:
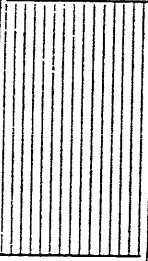
| epth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|--------------|--|---------|--------------------------------------|--------------------------|------------------------------------|-------------|------|------|---|
| | | | | | | | | | |
| 0 - |  | | | | | | | | 0 - 7' Silt, some sand and cobbles, moist to wet, slight odor. Installation Data: Screen 6.0' - 1.5' Blank 1.5' - 0' Sand 6.0' - 1.0' Bentonite 1.0' - 0.5' Concrete 0.5' - 0' |
| 2 - | | | | ML | | | | | |
| 4 - | | | | | | | | | |
| 6 - | | | | | | | | | |
| 8 - | | TD=7' | | | | | | | |
| - | | | | | | | | | |
| - | | | | | | | | | |
| - | | | | | | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-16

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method: Band Auger


Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: | |
|---------------|--|---------|--------------------------------------|--------------------------|------------------------------------|-----------------------------------|------|------|---|--|
| | | | | | | | | | | |
| 0 - |  | | | | ML | | | | 0 - 6' Silt, some sand and gravel, moist to wet, occasional cobbles, oil on ground water surface. | |
| - | | | | | | | | | | |
| 2 - | | | | | | | | | | |
| - | | | | | | | | | | |
| 4 - | | | | | | | | | | |
| 6 - | | | | | | | | | | |
| 8 - | TD=6' | | | | | Installation Data: Screen 6' - 2' | | | | |
| - | | | | | | Blank 2' - 0 | | | | |
| - | | | | | | Sand 6' - 1' | | | | |
| - | | | | | | Bentonite 1' - .5' | | | | |
| - | | | | | | Concrete .5' - 0 | | | | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-003

Boring No: W-17

Date: 6/28/90

Client: American Distributing Co.

Driller:

Location: Bulk Terminal
Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 7"

Logged By:

Page No: 1 of 1

Installation Data: See Below

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: | |
|------------|--|---------|---------------------------|-----------------------|------------------------------|-------------|------|------|---|-----------------------------------|
| 0 - |  | | | | ML | | | | 0 - 6' Silt, some sand and gravel, moist to wet, occasional cobbles, oil on ground water surface. | |
| 2 - | | | | | | | | | | |
| 4 - | | | | | | | | | | |
| 6 - | | | | | | | | | | |
| 8 - | | TD=6' | | | | | | | | Installation Data: Screen 6' - 2' |
| | | | | | | | | | | Blank 2' - 0' |
| | | | | | | | | | Sand 6' - 1' | |
| | | | | | | | | | Bentonite 1' - .5' | |
| | | | | | | | | | Concrete .5' - 0' | |

Mobil Oil/ADC Bulk

PROJECT: **Plant Properties**

W.O. 11-04558-09 WELL NO. GP-1


Elevation reference: *Unknown*
Ground surface elevation: *Unknown*

Well completed: **19 March 1996**
Casing elevation: *Unknown*

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|--------------|--|-------------|----------------|-------------|-------------|----------------|---------|
| 0 | Gravel Surfacing over moist, brown, silty, gravelly SAND, non-odorous | | | | | | |
| | Weathered, red clay brick | | | | | | |
| | Moist, brown, silty, fine SAND with some gravel and minor brick fragments | | GP-1/ 3.0' | | 0.0 | | |
| 5 | Moist to wet, gray, fine to medium SAND, petroleum odor at 7.0 feet | | GP-1/ 8.0' | | 27.0 | 3/22/96 ATD | |
| 10 | Grades to wet, gray, fine to coarse SAND (3-inch fine sandy silt layer at 10.0 feet) | | GP-1/ 10.0' | | 7.0 | | |

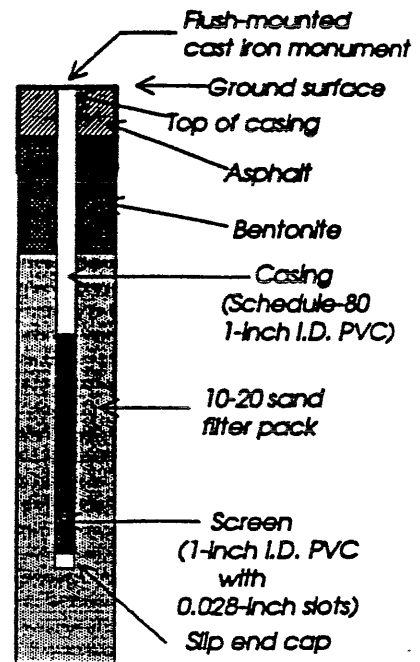

WPH-D

Bottom of boring at 12 feet.

15

20

25

30

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ Observed groundwater level
ATD = at time of drilling

WPH-G/ BEX WPH-D WPH-D Dr. Analytical testing

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: **19 March 1996**

Drilling completed: **19 March 1996**

Logged by: **CCC**

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-2

Elevation reference: Unknown
 round surface elevation: Unknown

Well completed: 19 March 1996
 Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | AS-BUILT DESIGN | TESTING |
|--------------|---|-------------|---------------|-------------|-------------|----------------|-----------------|---------|
| | | | | | | | | WTPH-D |
| 0 | Asphalt and base course over moist, gray/brown, silty, gravelly SAND | | | | | | | |
| | Moist, gray, fine to coarse SAND with some silt, non-odorous | | GP-2/ 3.5' | | 0.0 | | | |
| 5 | Grades to gray/brown, silty, fine to medium SAND, non-odorous | | | | | | | |
| | 2-inch fine sandy SILT layer at 7.3 feet | | GP-2/ 8.0' | | 11.0 | 3/22/96 ATD | | |
| 10 | Grades to saturated, stained black, fine to medium SAND, strong petroleum odor and LPH globules | | | | | | | |
| | Fine SAND interbedded with fine wood fragments | | GP-2/ 11.0' | | 11.0 | | | |
| | Bottom of boring at 12 feet. | | | | | | | |
| 15 | | | | | | | | |
| 20 | | | | | | | | |
| 25 | | | | | | | | |
| 30 | | | | | | | | |

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
 0/00/00 0/00/00 = date observed

▼ Observed groundwater level
 ATD = at time of drilling

WTPH-G/
 SEZ
 WTPH-D
 WTPH-D BY Analytical testing

AGRA
 Earth & Environmental

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started: 19 March 1996

Drilling completed: 19 March 1996

Logged by: CCC

AGRA Earth and Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-3

Elevation reference: *Unknown* Well completed: *Not Applicable*
 Ground surface elevation: *Unknown* Casing elevation: *Unknown*

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|--------------|--|-------------|---------------|-------------|-------------|--------------|---------|
| | | | | | | | |
| 0 | Asphalt and base course over moist, gray/brown fine SAND, non-odorous | | | | | | |
| 5 | Grades to moist to wet, gray, fine SAND, strong petroleum odor and LPH | | GP-3/ 3.0' | | 11.0 | ATD | |
| 6.5 | Bottom of boring at 6.5 feet, due to refusal. | | GP-3/ 6.5' | | 17.0 | | WPH-D |
| 10 | | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |



Bentonite adbondonment

WPH-D

LEGEND

- 2-inch O.D. Geoprobe sample
- Observed groundwater level
- ATD = at time of drilling
- Analytical testing
- 0/00/00 0/00/00 = date observed

AGRA
Earth & Environmental
 11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

AGRA Earth & Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-4

| Elevation reference: Unknown Ground surface elevation: Unknown | | Well completed: 19 March 1996 Casing elevation: Unknown | | AS-BUILT DESIGN | | | Page 1 of 1 |
|---|--|--|---------------|-----------------|-------------|--------------|---|
| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
| 0 | Asphalt over base course over gray/brown, gravelly, silty SAND, non-odorous | | | | | | |
| 5 | Moist, brown/black/gray, silty, fine to medium SAND with some gravel, wood and brick fragments, non-odorous Moist to wet, gray/brown, fine SAND, moderate petroleum odor Wood debris and LPH | | GP-4/ 4.0 | | 0.0 | 3/22/96 | |
| | | | GP-4/ 6.0 | | 7.0 | ATD | |
| | | | GP-4/ 8.0 | | 11.0 | | |
| 10 | Fine grained wood fragments, slight petroleum staining and odor | | | | | | <div style="border: 1px solid black; padding: 2px; width: fit-content;">WPH-D</div> |
| Bottom of boring at 12 feet. | | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ Observed groundwater level
ATD = at time of drilling

WPH-D
SEX
WPH-D
WPH-D Est. Analytical testing

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918


Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 19 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|--------------|---|-------------|---------------|-------------|-------------|--------------|---------|
| 0 | Asphalt and base course over moist, gray/black, fine SAND and broken gravel | | | | | | |
| | Moist to wet, brown, fine SAND with some silt, trace petroleum odor | | GP-5/ 3.0' | | | ATD | |
| | Moist to wet, gray, fine SAND, strong petroleum odor, LPH below 3.7 feet | | GP-5/ 4.0' | | | 3/22/96 | WPH-D |
| 5 | Grades to moist, fine sandy SILT | | GP-5/ 6.5' | | | | |
| | Fine grained wood debris with LPH | | | | | | |
| | Saturated, gray, fine SAND with LPH | | GP-5/ 8.0' | | | | WPH-D |
| 10 | Bottom of boring at 9.5 feet, due to refusal. | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

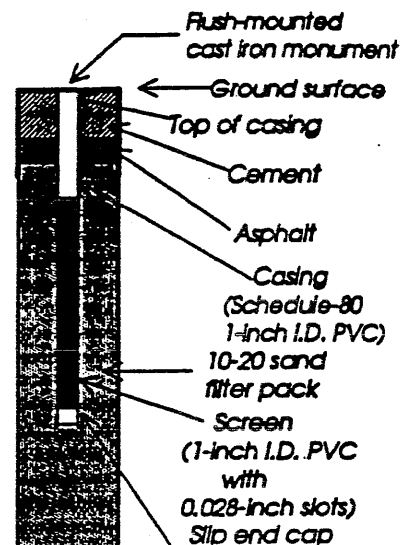

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ Observed groundwater level
ATD = at time of drilling

WPH-D
SEX
WPH-D Est. Analytical testing

AGRA
Earth & Environmental
11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Mobil Oil/ADC Bulk

PROJECT: *Plant Properties*

W.O. 11-04558-09 WELL NO. GP-6


Elevation reference: *Unknown*
Ground surface elevation: *Unknown*

Well completed: 19 March 1996
Casing elevation: *Unknown*

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|--------------|---|-------------|---------------|-------------|-------------|----------------|---------|
| | | | | | | | |
| 0 | Asphalt and base course over moist, gray, fine SAND with silt rich zones (2 to 3 feet - silty, gravelly SAND with wood debris, non-odorous) | | | | | | |
| 5 | Black, fine to medium sandy SILT and wood fragments, saturated with very viscous LPH | | GP-6/ 3.5 | | 15 | ATD 3/22/96 | |
| | Fine to medium grained wood debris, petroleum odor, no LPH | | GP-6/ 6.0 | | | | |
| 10 | Wood fragments saturated with very viscous LPH | | | | | | |

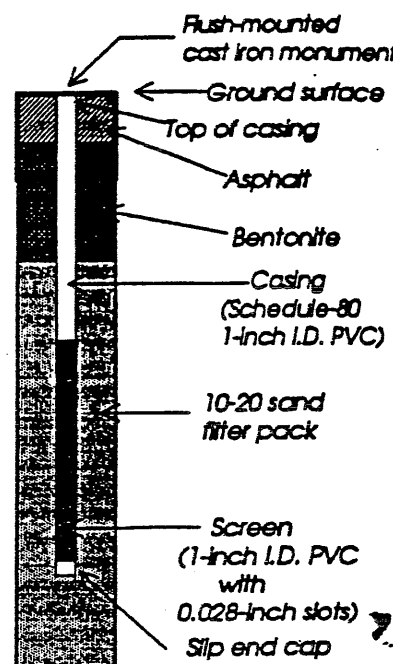

Bottom of boring at 12 feet.

| | | | | | | | |
|----|--|--|--|--|--|--|--|
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

LEGEND

- 2-inch O.D. Geoprobe sample
- Observed groundwater level
- Observed groundwater level ATD = at time of drilling
- Analytical testing
- Observed groundwater level 01/01/00 = date observed

AGRA
Earth & Environmental
11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 19 March 1996

Drilling completed: 19 March 1996

Logged by: CCC

AGRA Earth & Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-7

Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: Not Applicable
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|--------------|--|-------------|---------------|-------------|-------------|--------------|---------|
| 0 | Asphalt and base course over moist, brown, fine SAND with some silt (5-inch sandy SILT layer at 3.0 feet), non-odorous | | | | | | |
| | | | GP-7/4.0 | | | ▼ ATD | |
| 5 | Moist, brown, silty, gravelly SAND with wood debris and very viscous LPH grading to fine grained wood debris | | GP-7/5.5 | | | | |
| | Bottom of boring at 7.0 feet, due to refusal. | | | | | | |
| 10 | | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |



Bentonite abandonment

WTPH-G/
BTEX
WTPH-D Ed.

LEGEND

┆ 2-inch O.D.
Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼
ATD Observed groundwater level
ATD = at time of drilling

WTPH-G/
BTEX
WTPH-D Ed.
Analytical testing

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 20 March 1996

Drilling completed: 20 March 1996

Logged by: CCC

AGRA Earth and Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: **Plant Properties**

W.O. 11-04558-09 WELL NO. GP-8

| Elevation reference: Unknown | | Well completed: 20 March 1996 | | AS-BUILT DESIGN | | | Page 1 of 1 |
|-----------------------------------|--|-------------------------------|---------------|-----------------|-------------|--------------|---|
| Ground surface elevation: Unknown | | Casing elevation: Unknown | | | | | TESTING |
| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER | |
| 0 | Asphalt and base course | | | | | | |
| | Minor recovery, moist, dark gray SAND, slight petroleum odor | | GP-8/ 3.0' | | | | |
| 5 | Moist, black to gray/green, fine sandy SILT with wood debris, 1" thick zone of LPH | | | | | | |
| | Fine grained wood debris saturated with LPH over gray/green SILT | | GP-8/ 9.0' | | 11 | | |
| 10 | Minor recovery - silty, fine SAND over fine grained wood debris, petroleum odor | | | | | | <div style="border: 1px solid black; padding: 2px; width: fit-content;"> WTPH-G/ WTPH-D Dr. </div> |
| | Bottom of boring at 11 feet. | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

LEGEND

- 1-inch O.D. Geoprobe sample
- Observed groundwater level
- Observed groundwater level ATD = at time of drilling
- Analytical testing
- Observed groundwater level 0/00/00 = date observed

AGRA
Earth & Environmental
 11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started: 20 March 1996

Drilling completed: 20 March 1996

Logged by: CCC

AGRA Earth and Environmental, Inc.


Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | Asphalt and base course | | | | | |
| - | Trace recovery; minor gravel and wood fragments | | | | | |
| 5 | Minor recovery; moist, gray, fine SAND over minor wood debris and sandy SILT with gravel, strong petroleum odor | | | | | 3/22/96 |
| 10 | No recovery | | GP-9/ 8.0 | | 3.0 | |
| 12 | Bottom of boring at 12 feet. | | | | | |
| 15 | | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

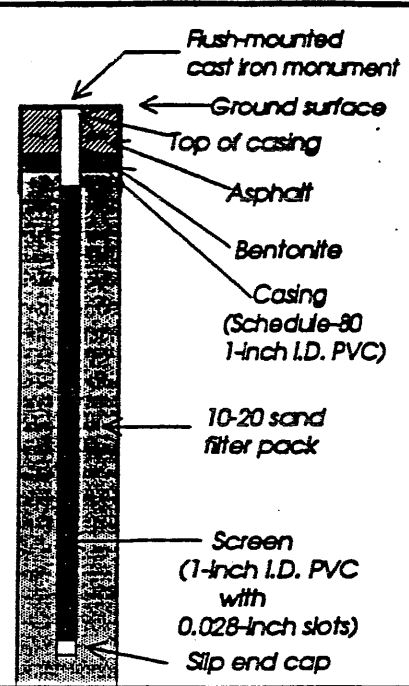

TESTING

WTPH-G/
BTEX
WTPH-D B2
WTPH-D

LEGEND

- 2-inch O.D. Geoprobe sample
- Observed groundwater level
- Observed groundwater level
ATD = at time of drilling
- Analytical testing
- 0/00/00 = date observed

AGRA
Earth & Environmental
11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

AGRA Earth & Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-10


Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|--|-------------|-----------------|-------------|-------------|--------------|
| 0 | Asphalt and base course over moist, brown/gray, silty, fine SAND, non-odorous | | GP-10/ 3.0' | | 1.0 | |
| 5 | Moist, gray, fine sandy SILT with some gravel, slight petroleum odor Woody debris saturated with LPH Moist to wet, gray/orange/brown, gravelly, medium to coarse SAND, petroleum odor Wet, brown stained gray, fine sandy SILT, strong petroleum odor, minor LPH Wet, brown, fine grained wood debris with LPH, minor saturated sand | | GP-10/ 7.0' | | | 3/22/96 |
| 10 | Saturated, gray, fine SAND with wood debris, strong sulfur odor, slight petroleum odor Wood fragments | | GP-10/ 11.0' | | 0.0 | |

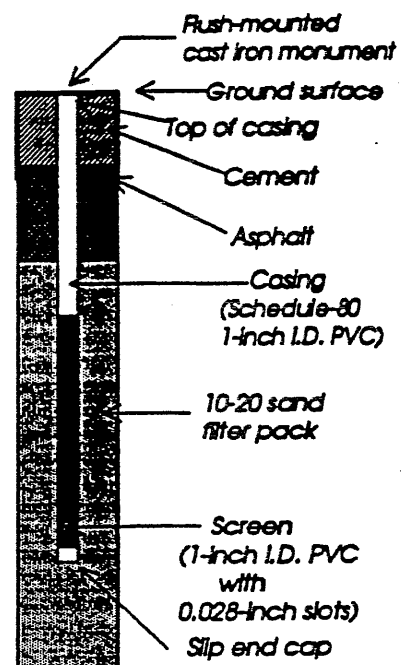

TESTING

WPH-D

Bottom of boring at 12 feet.

15
20
25
30

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ ATD Observed groundwater level
ATD = at time of drilling

WPH-G/
SEX
WPH-D
WPH-DL Analytical testing

AGRA
Earth & Environmental
11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 20 March 1996

Drilling completed: 20 March 1996

Logged by: CCC

AGRA Earth & Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-11


Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER |
|--------------|--|-------------|-----------------|-------------|-------------|--------------|
| 0 | Asphalt and base course over moist, brown, silty, fine SAND, non-odorous | | GP-11/ 3.0' | | 4.0 | |
| 5 | Moist, gray, silty, fine SAND with mottling and some shells and wood debris Moist, tan grading to gray, fine sandy SILT with interbedded wood debris, slight petroleum odor at 4.0 feet | | GP-11/ 6.5' | | | 3/22/96 |
| | Wet to saturated, brown, silty, gravelly SAND, strong petroleum odor, minor LPH | | GP-11/ 8.0' | | 0.0 | |
| 10 | Saturated, black, fine SAND, trace petroleum odor | | GP-11/ 12.0' | | | |

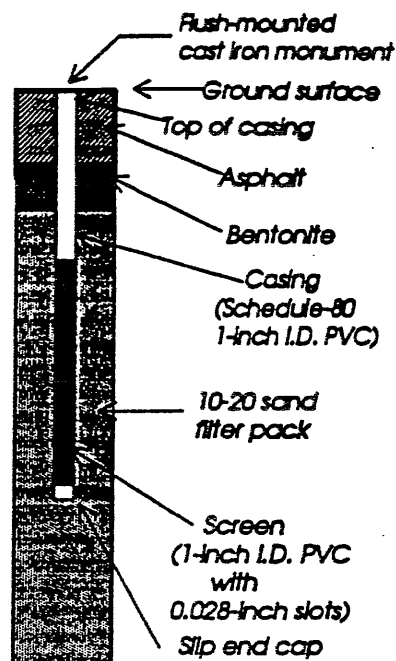

TESTING

WTPH-D
WTPH-G/
WTPH-D
WTPH-D Ed.

Bottom of boring at 12 feet.

15

20

25

30

LEGEND

2-inch O.D. Geoprobe sample

Observed groundwater level
0.00/00 0/00/00 = date observed

Observed groundwater level
ATD = at time of drilling

Analytical testing

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 20 March 1996

Drilling completed: 20 March 1996

Logged by: CCC

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-12


Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER | TESTING |
|--------------|---|-------------|-----------------|-------------|-------------|----------------|---------|
| 0 | Asphalt and base course over moist, black, gravelly SAND, slight petroleum odor | | | | | | |
| 5 | Moist, gray/brown, fine to coarse SAND grading to brown, fine SAND with some gravel, non-odorous | | GP-12/ 8.0' | | | | |
| 10 | Wet, gray stained globules black, fine SAND with gravel, strong petroleum odor and minor LPH globules | | GP-12/ 10.0' | | | 3/22/96 ATD | |
| | Saturated, gray, fine SAND with some gravel, strong petroleum odor, minor globules of LPH | | GP-12/ 11.0' | | | | WITH-D |
| | | | GP-12/ 12.5' | | 3.2 | | WITH-D |
| 15 | Bottom of boring at 14 feet. | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |

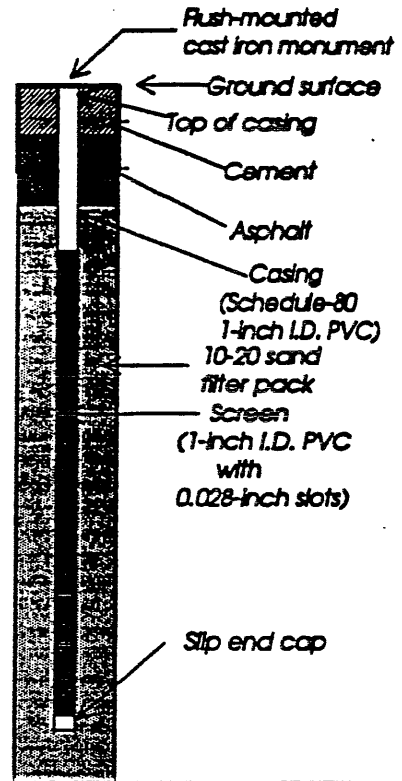

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ Observed groundwater level
ATD = at time of drilling

WITH-D/SDX/SDX/SDX/SDX Analytical testing

AGRA
Earth & Environmental

11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 19 March 1996

Drilling completed: 19 March 1996

Logged by: CCC

AGRA Earth and Environmental, Inc.

Mobil Oil/ADC Bulk

PROJECT: Plant Properties

W.O. 11-04558-09 WELL NO. GP-13

Elevation reference: Unknown
Ground surface elevation: Unknown

Well completed: 20 March 1996
Casing elevation: Unknown

AS-BUILT DESIGN

Page 1
of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | TESTING |
|------------------------------|---|-------------|-----------------|-------------|-------------|--------------|--|
| 0 | Asphalt over dense, moist, gray, gravelly, fine to coarse SAND, non-odorous | | GP-13/ 3.5' | | | | |
| 5 | Grades to moist, gray/black, gravelly, fine to medium SAND, non-odorous | | GP-13/ 7.0' | | | | WPH-D |
| 10 | Wet/saturated, gray/black, silty, fine SAND with some gravel and some wood debris, organic odor | | GP-13/ 10.0' | | | ATD | WPH-G/ WPH-D WPH-D Ext. WPH-D |
| Bottom of boring at 12 feet. | | | | | | | |
| 15 | | | | | | | |
| 20 | | | | | | | |
| 25 | | | | | | | |
| 30 | | | | | | | |



Bentonite abandonment

AGRA Earth & Environmental, Inc.

LEGEND

I 2-inch O.D. Geoprobe sample

▼ Observed groundwater level
0/00/00 0/00/00 = date observed

▼ ATD Observed groundwater level
ATD = at time of drilling

WPH-G/
WPH-D
WPH-D Ext.
WPH-D Analytical testing

AGRA
Earth & Environmental
11335 NE 122nd Way, Suite 100
Kirkland, Washington 98034-6918

Drilling started: 20 March 1996



Drilling completed: 20 March 1996


Logged by: CCC





| SOIL DESCRIPTION | DEPTH (FEET) | LAB TESTS | SAMPLING | GROUND WATER | STANDARD PENETRATION RESISTANCE | | | | | |
|--|--------------|-----------|----------|--------------|--|----|----|----|----|----|
| | | | | | ▲ BLOWS PER FOOT (140 lb. hammer, 30 inch drop) | | | | | |
| Ground Surface Elevation Approximately | Feet | | | | 0 | 10 | 20 | 30 | 40 | 50 |
| Loose, wet to saturated, brown-gray, silty fine SAND and fine sandy SILT with a trace of gravel (Fill) | 0 | | I | ▽ | | 10 | | | | |
| Very loose to loose, saturated, gray, silty fine to medium SAND with a trace of gravel (Fill) | 5 | | I | | | 10 | | | | |
| Soft, saturated, brown, silty PEAT | 10 | | | | | | | | | |
| Total depth 11½ feet Boring completed 9 March 1988 | 11.5 | | | | | | | | | |
| | 15 | | | | | | | | | |
| | 20 | | | | | | | | | |
| | 25 | | | | | | | | | |
| | 30 | | | | | | | | | |
| | 35 | | | | | | | | | |
| | 40 | | | | | | | | | |


- SAMPLING**
- I 2' OD SPLIT SPOON SAMPLE
 - II 3' OD SHELBY SAMPLE
 - 1.5' ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED




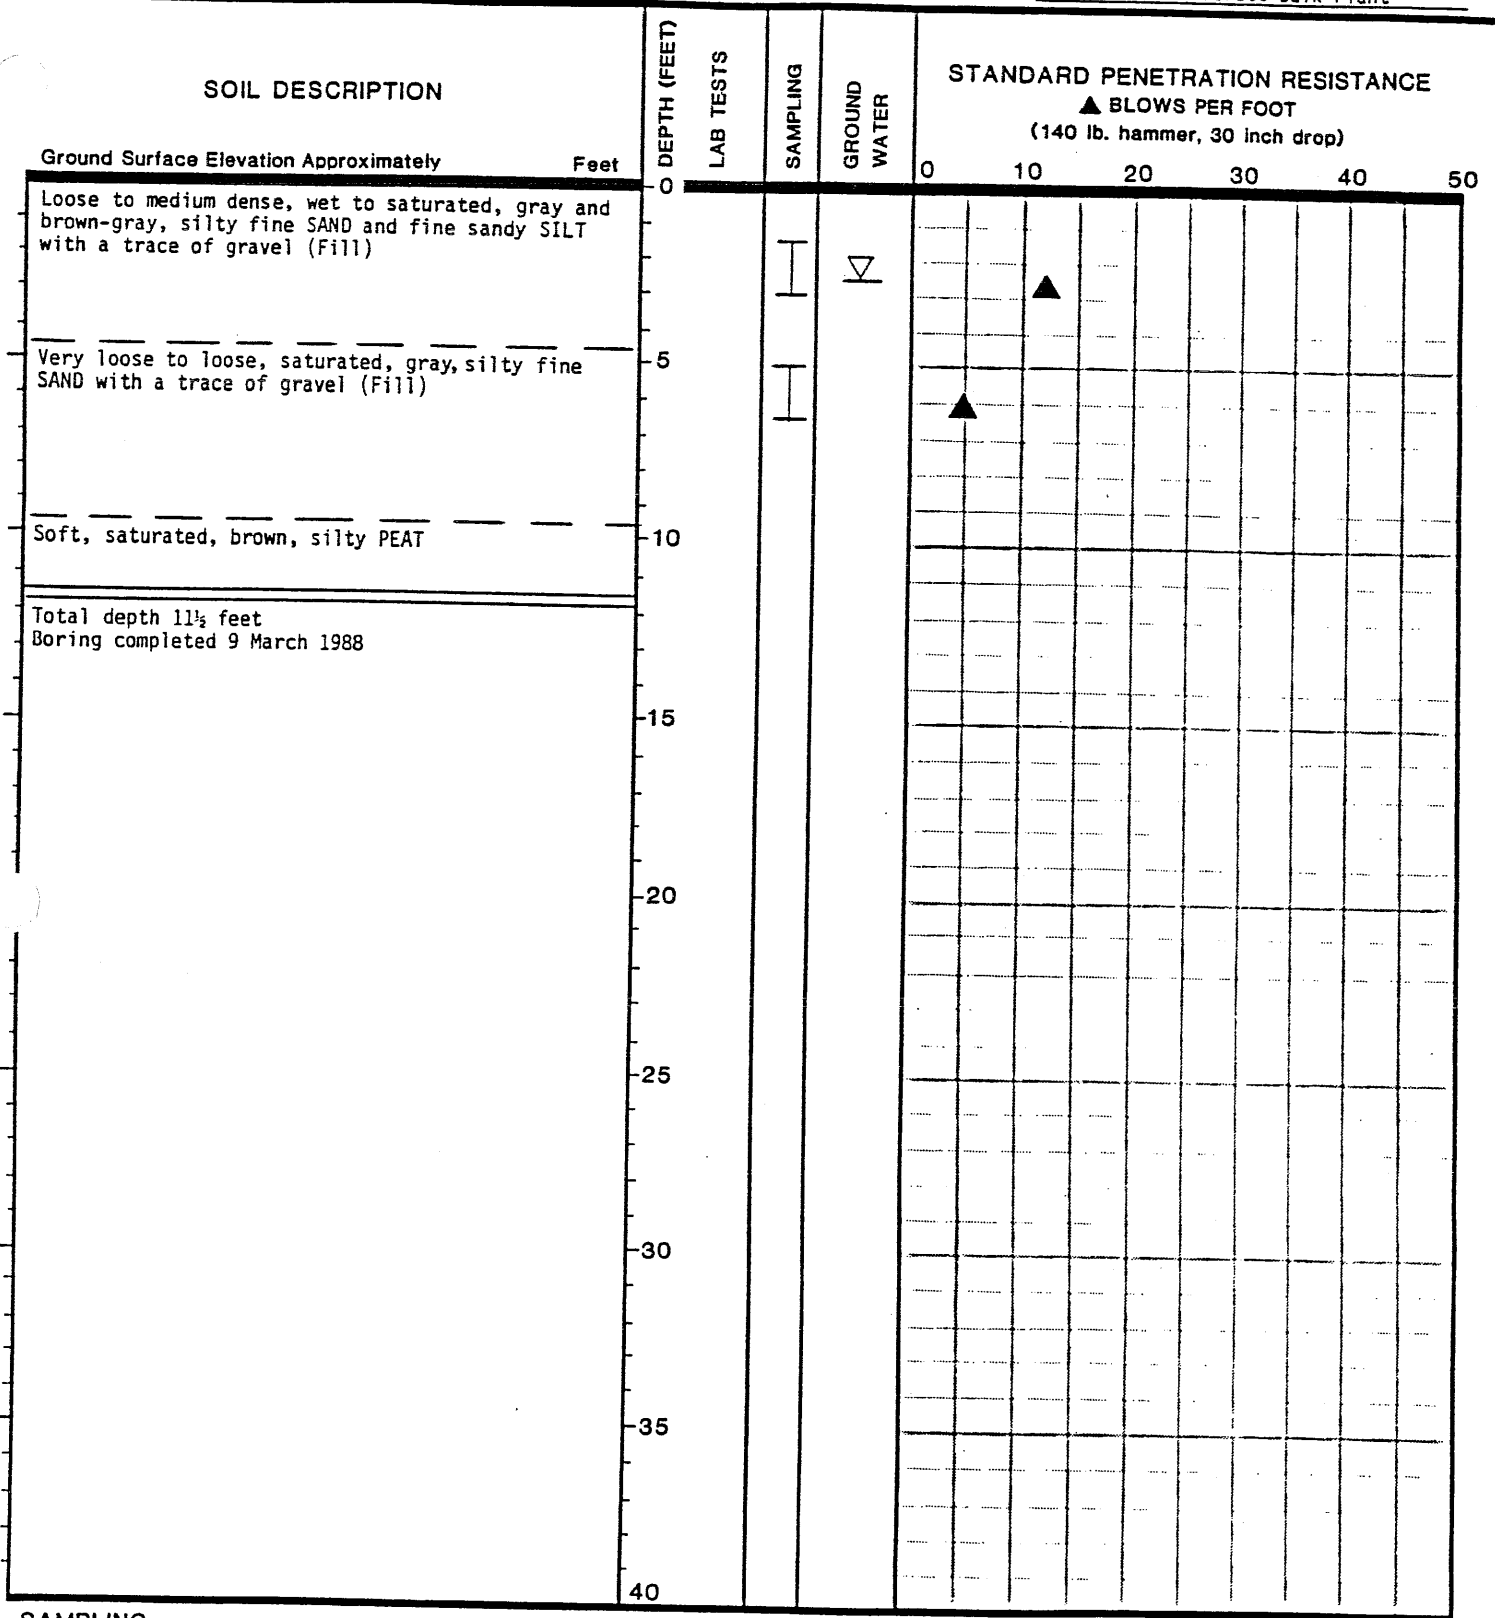



- SAMPLING**
- I 2" OD SPLIT SPOON SAMPLE
 - II 3" OD SHELBY SAMPLE
 - 2.5" ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED




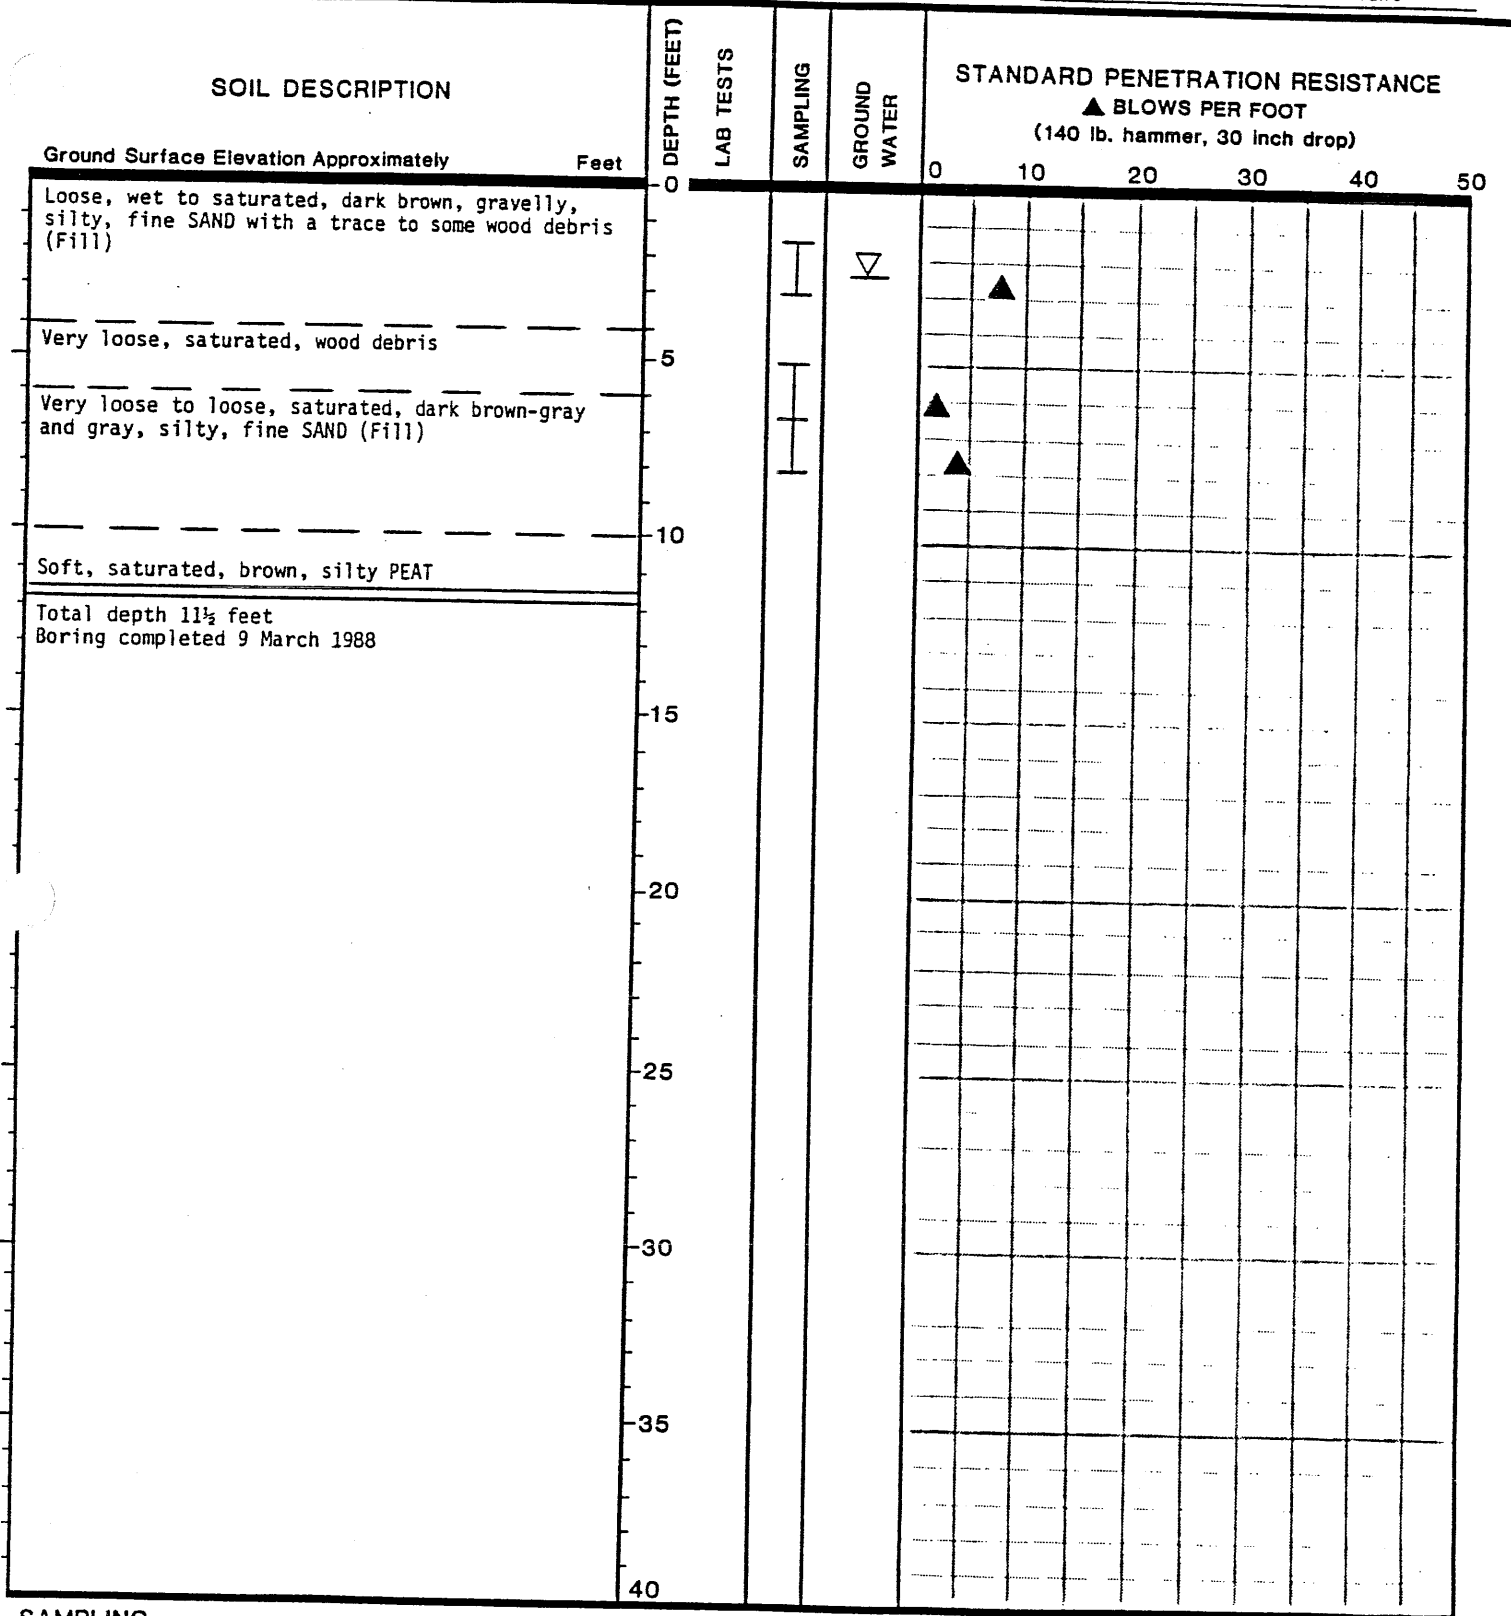


- SAMPLING**
- I 2" OD SPLIT SPOON SAMPLE
 - II 3" OD SHELBY SAMPLE
 - 2.5" ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED



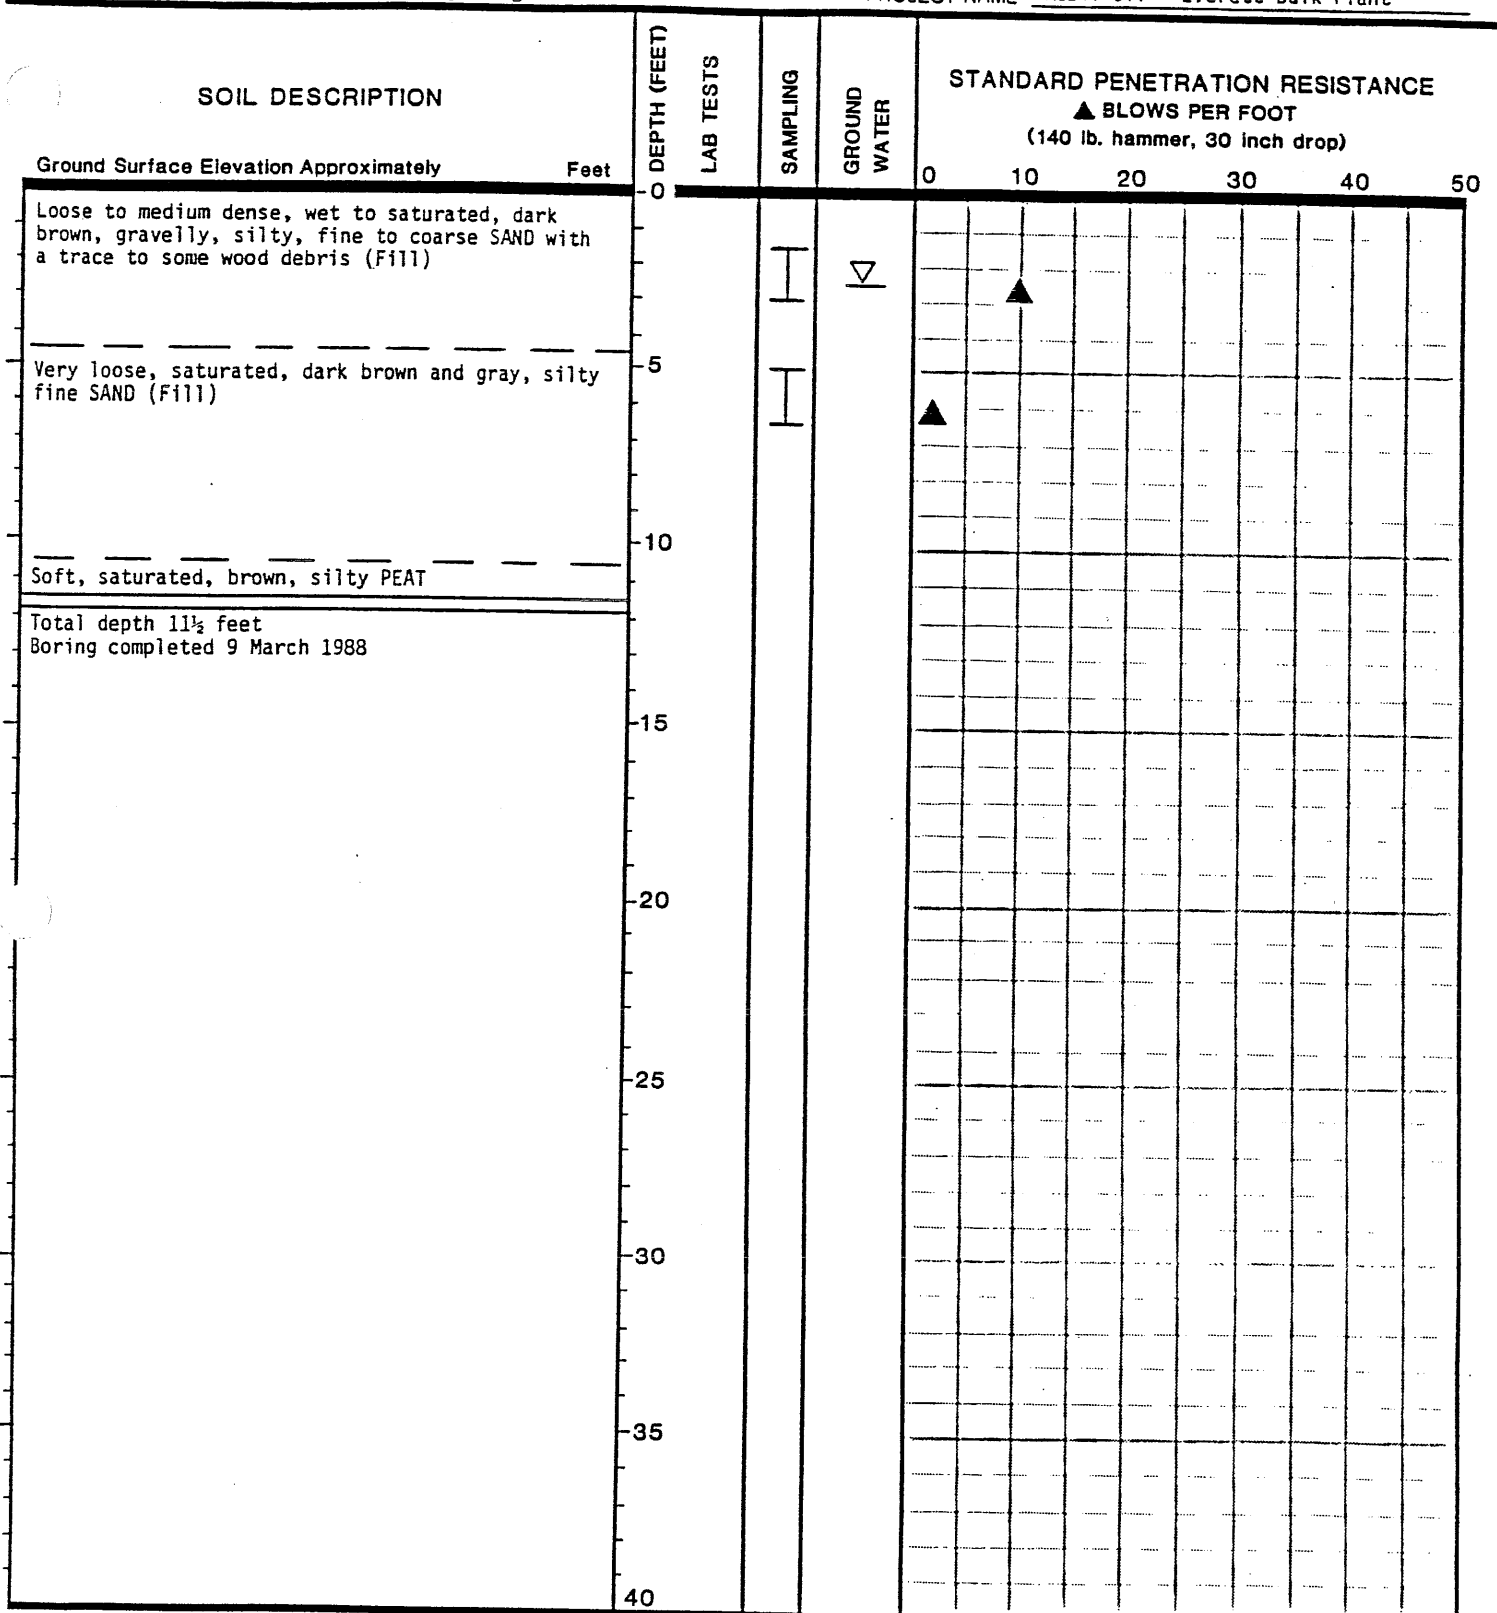

- SAMPLING**
 I 2' OD SPLIT SPOON SAMPLE
 II 3' OD SHELBY SAMPLE
 2.5' ID RING SAMPLE
 BULK SAMPLE
 * SAMPLE NOT RECOVERED





SOIL DESCRIPTION

Ground Surface Elevation Approximately Feet

Very loose, wet to saturated, gray and brown-gray, silty, fine SAND with a trace of gravel and wood debris (Fill)

Loose to medium dense, saturated, gray, silty fine SAND with some fine sandy SILT and a trace of gravel (Fill)

Soft, saturated, brown, silty PEAT

Total depth 11½ feet
 Boring completed 9 March 1988

DEPTH (FEET)

LAB TESTS

SAMPLING


GROUND WATER

STANDARD PENETRATION RESISTANCE

▲ BLOWS PER FOOT

(140 lb. hammer, 30 inch drop)


0 10 20 30 40 50

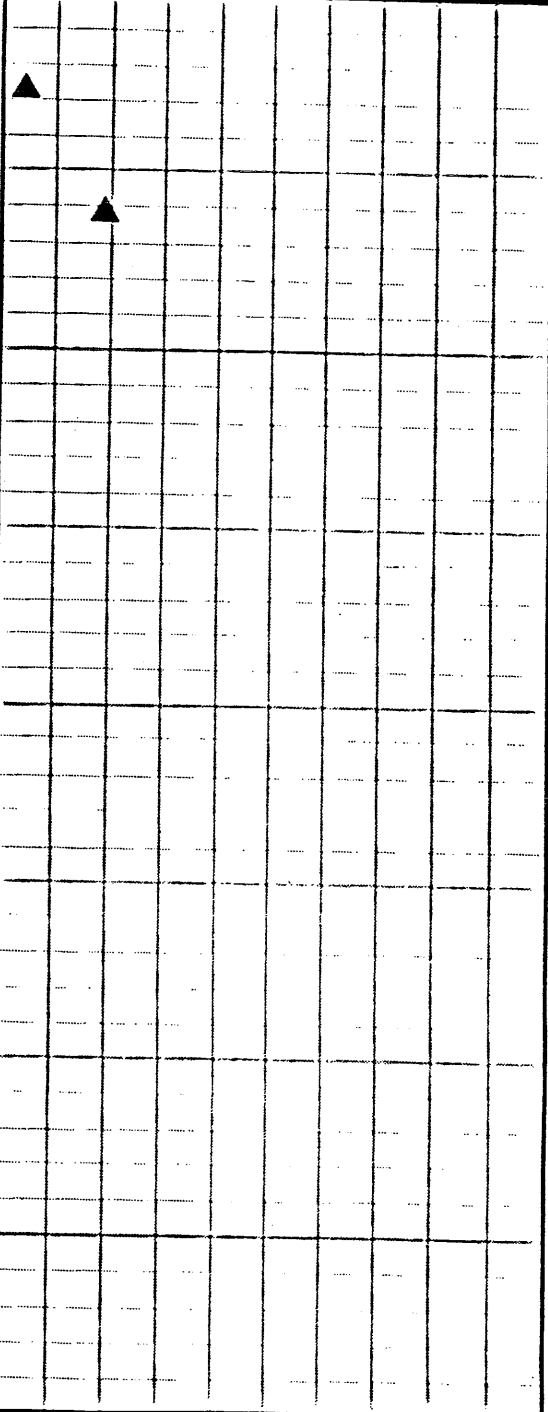


SAMPLING


- I 2' OD SPLIT SPOON SAMPLE
- II 3' OD SHELBY SAMPLE
- III 5' ID RING SAMPLE
- LK SAMPLE
- * SAMPLE NOT RECOVERED

GROUND WATER





LABORATORY TESTS



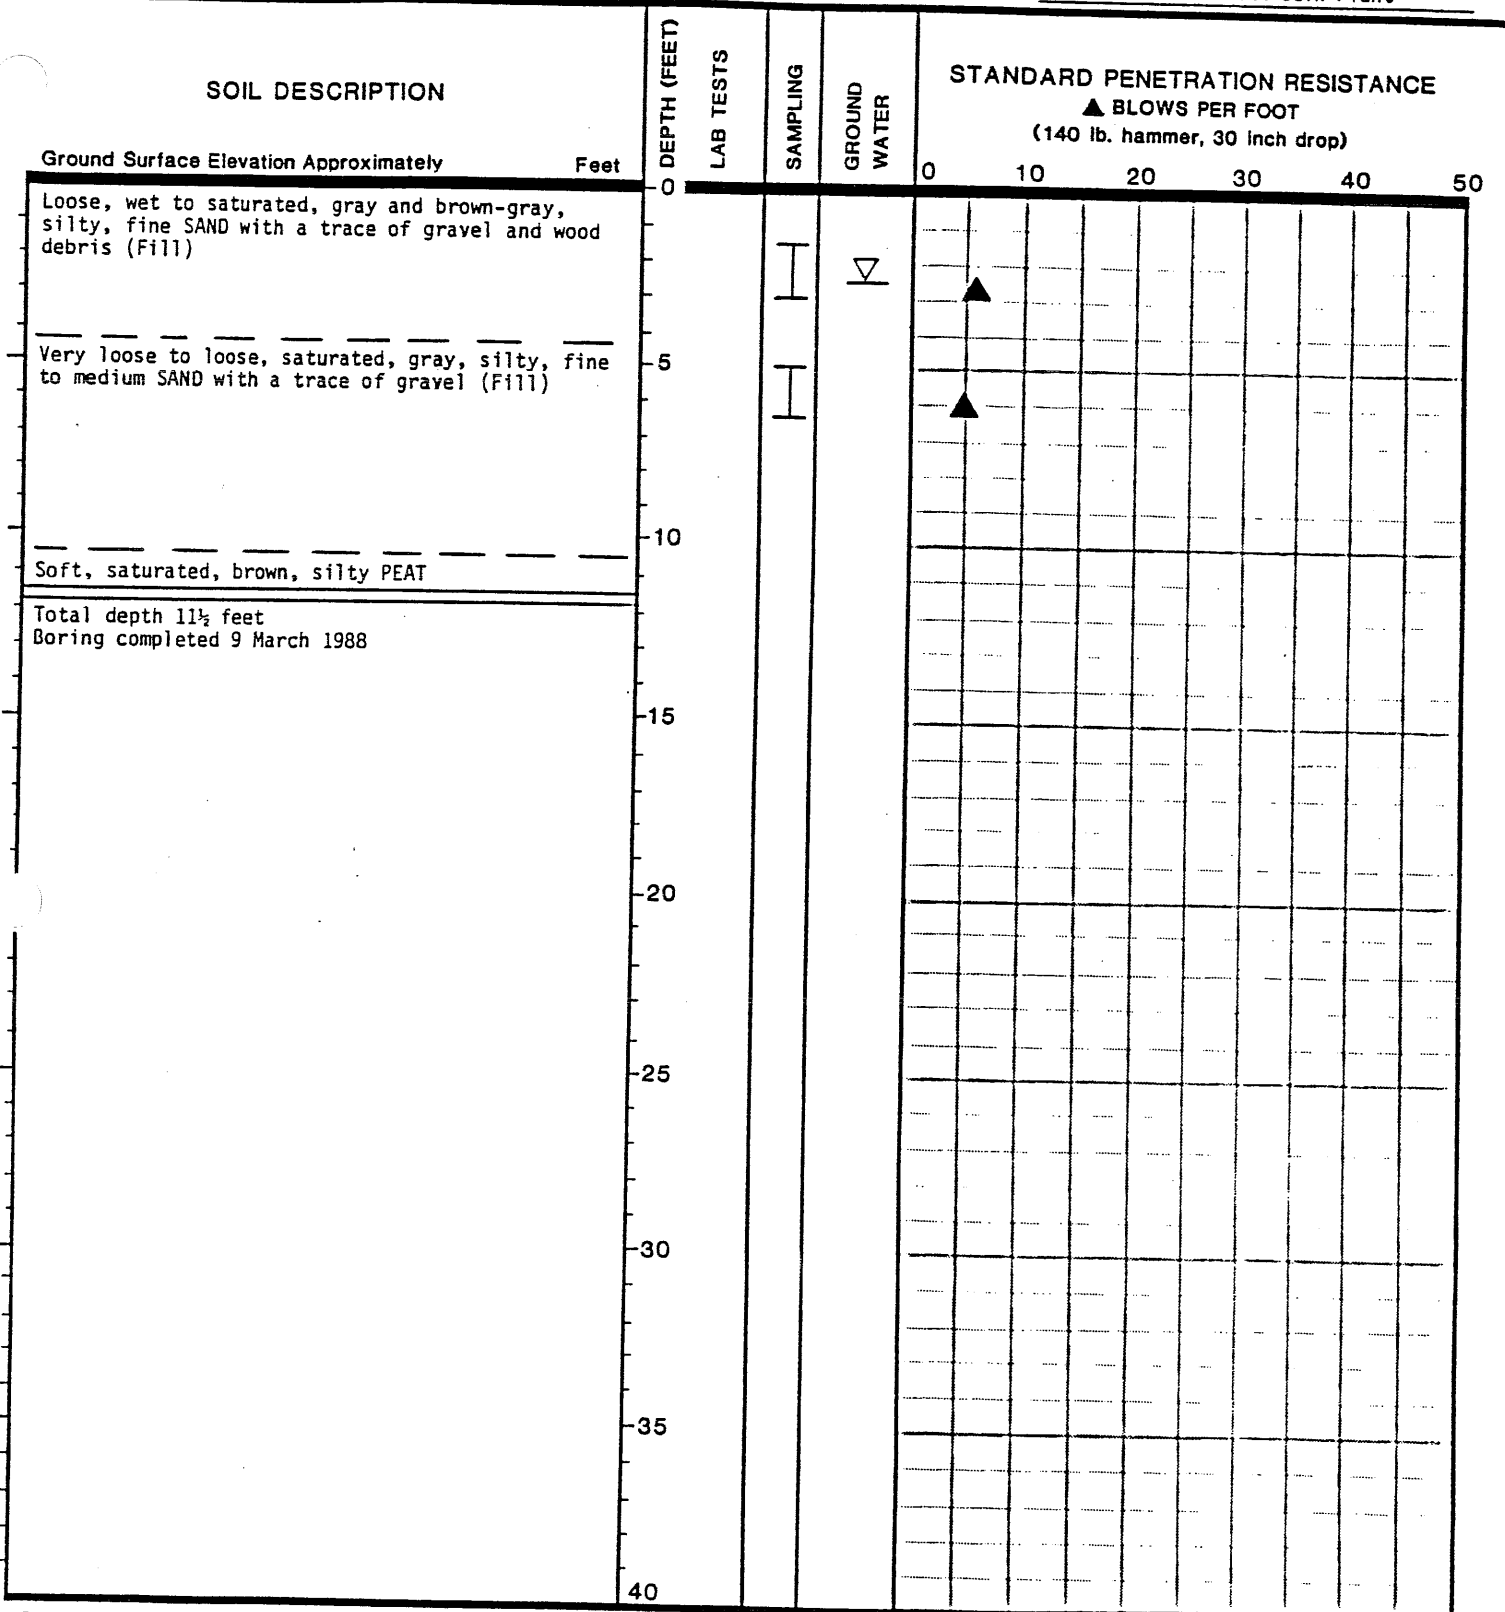

- SAMPLING**
- I 2" OD SPLIT SPOON SAMPLE
 - II 3" OD SHELBY SAMPLE
 - 2.5" ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED






| SOIL DESCRIPTION | DEPTH (FEET) | LAB TESTS | SAMPLING | GROUND WATER | STANDARD PENETRATION RESISTANCE ▲ BLOWS PER FOOT (140 lb. hammer, 30 inch drop) | | | | | | | | | | |
|---|--------------|-----------|----------|--------------|---|----|----|----|----|----|--|--|--|--|--|
| | | | | | 0 | 10 | 20 | 30 | 40 | 50 | | | | | |
| Ground Surface Elevation Approximately _____ Feet | 0 | | | | | | | | | | | | | | |
| Loose, wet to saturated, brown-gray, silty fine SAND with a trace to some gravel and wood debris (Fill) | 0 - 4.5 | | I* | ▽ | ▲ | | | | | | | | | | |
| Loose, saturated, gray, silty SAND with some gravel (Fill) | 4.5 - 10.5 | | B | | | | | | | | | | | | |
| Soft, saturated, brown, silty PEAT | 10.5 - 11.5 | | | | | | | | | | | | | | |
| Total depth 11½ feet Boring completed 9 March 1988 | 11.5 | | | | | | | | | | | | | | |
| | 15 | | | | | | | | | | | | | | |
| | 20 | | | | | | | | | | | | | | |
| | 25 | | | | | | | | | | | | | | |
| | 30 | | | | | | | | | | | | | | |
| | 35 | | | | | | | | | | | | | | |
| | 40 | | | | | | | | | | | | | | |


SAMPLING

- I 2" OD SPLIT SPOON SAMPLE
- II 3" OD SHELBY SAMPLE
- III 2.5" ID RING SAMPLE
- BULK SAMPLE
- * SAMPLE NOT RECOVERED

GROUND WATER





LABORATORY TESTS





| SOIL DESCRIPTION | DEPTH (FEET) | LAB TESTS | SAMPLING | GROUND WATER | STANDARD PENETRATION RESISTANCE ▲ BLOWS PER FOOT (140 lb. hammer, 30 inch drop) | | | | | | | | | | | | | | | |
|---|--------------|-----------|----------|--------------|---|----|----|----|----|----|--|--|--|--|--|--|--|--|--|--|
| | | | | | 0 | 10 | 20 | 30 | 40 | 50 | | | | | | | | | | |
| Ground Surface Elevation Approximately _____ Feet | 0 | | | | | | | | | | | | | | | | | | | |
| Very loose to medium dense (variable), wet to saturated, dark brown to black, silty fine SAND with some zones of wood, brick, etc. (Fill) | 0 - 4.5 | | I * | ▽ | ▲ | ▲ | | | | | | | | | | | | | | |
| Loose, saturated, gray, silty SAND with a trace to some gravel (Fill) | 4.5 - 9.5 | | | | | | | | | | | | | | | | | | | |
| Soft, saturated, brown, silty PEAT | 9.5 - 11.5 | | | | | | | | | | | | | | | | | | | |
| Total depth 11½ feet Boring completed 9 March 1988 | 11.5 | | | | | | | | | | | | | | | | | | | |
| | 15 | | | | | | | | | | | | | | | | | | | |
| | 20 | | | | | | | | | | | | | | | | | | | |
| | 25 | | | | | | | | | | | | | | | | | | | |
| | 30 | | | | | | | | | | | | | | | | | | | |
| | 35 | | | | | | | | | | | | | | | | | | | |
| | 40 | | | | | | | | | | | | | | | | | | | |



- SAMPLING**
- I 2" OD SPLIT SPOON SAMPLE
 - II 3" OD SHELBY SAMPLE
 - III 2.5" ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED








| SOIL DESCRIPTION | DEPTH (FEET) | LAB TESTS | SAMPLING | GROUND WATER | STANDARD PENETRATION RESISTANCE | | | | | |
|---|--------------|-----------|----------|--------------|--|----|----|----|----|----|
| | | | | | ▲ BLOWS PER FOOT (140 lb. hammer, 30 inch drop) | | | | | |
| Ground Surface Elevation Approximately Feet | 0 | | | | 0 | 10 | 20 | 30 | 40 | 50 |
| Very loose to loose, wet to saturated, dark brown and gray, silty fine SAND with a trace of gravel and wood debris (Fill) | 0 - 5 | | I | ▽ | ▲ | | | | | |
| Very loose, saturated, gray, silty, fine SAND with a trace of gravel (Fill) | 5 - 10 | | II | | ▲ | | | | | |
| Soft, saturated, brown, silty PEAT | 10 - 11.5 | | | | | | | | | |
| Total depth 11½ feet Boring completed 9 March 1988 | 11.5 | | | | | | | | | |
| | 15 | | | | | | | | | |
| | 20 | | | | | | | | | |
| | 25 | | | | | | | | | |
| | 30 | | | | | | | | | |
| | 35 | | | | | | | | | |
| | 40 | | | | | | | | | |

- SAMPLING**
- I 2' OD SPLIT SPOON SAMPLE
 - II 3' OD SHELBY SAMPLE
 - 2.5' ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED



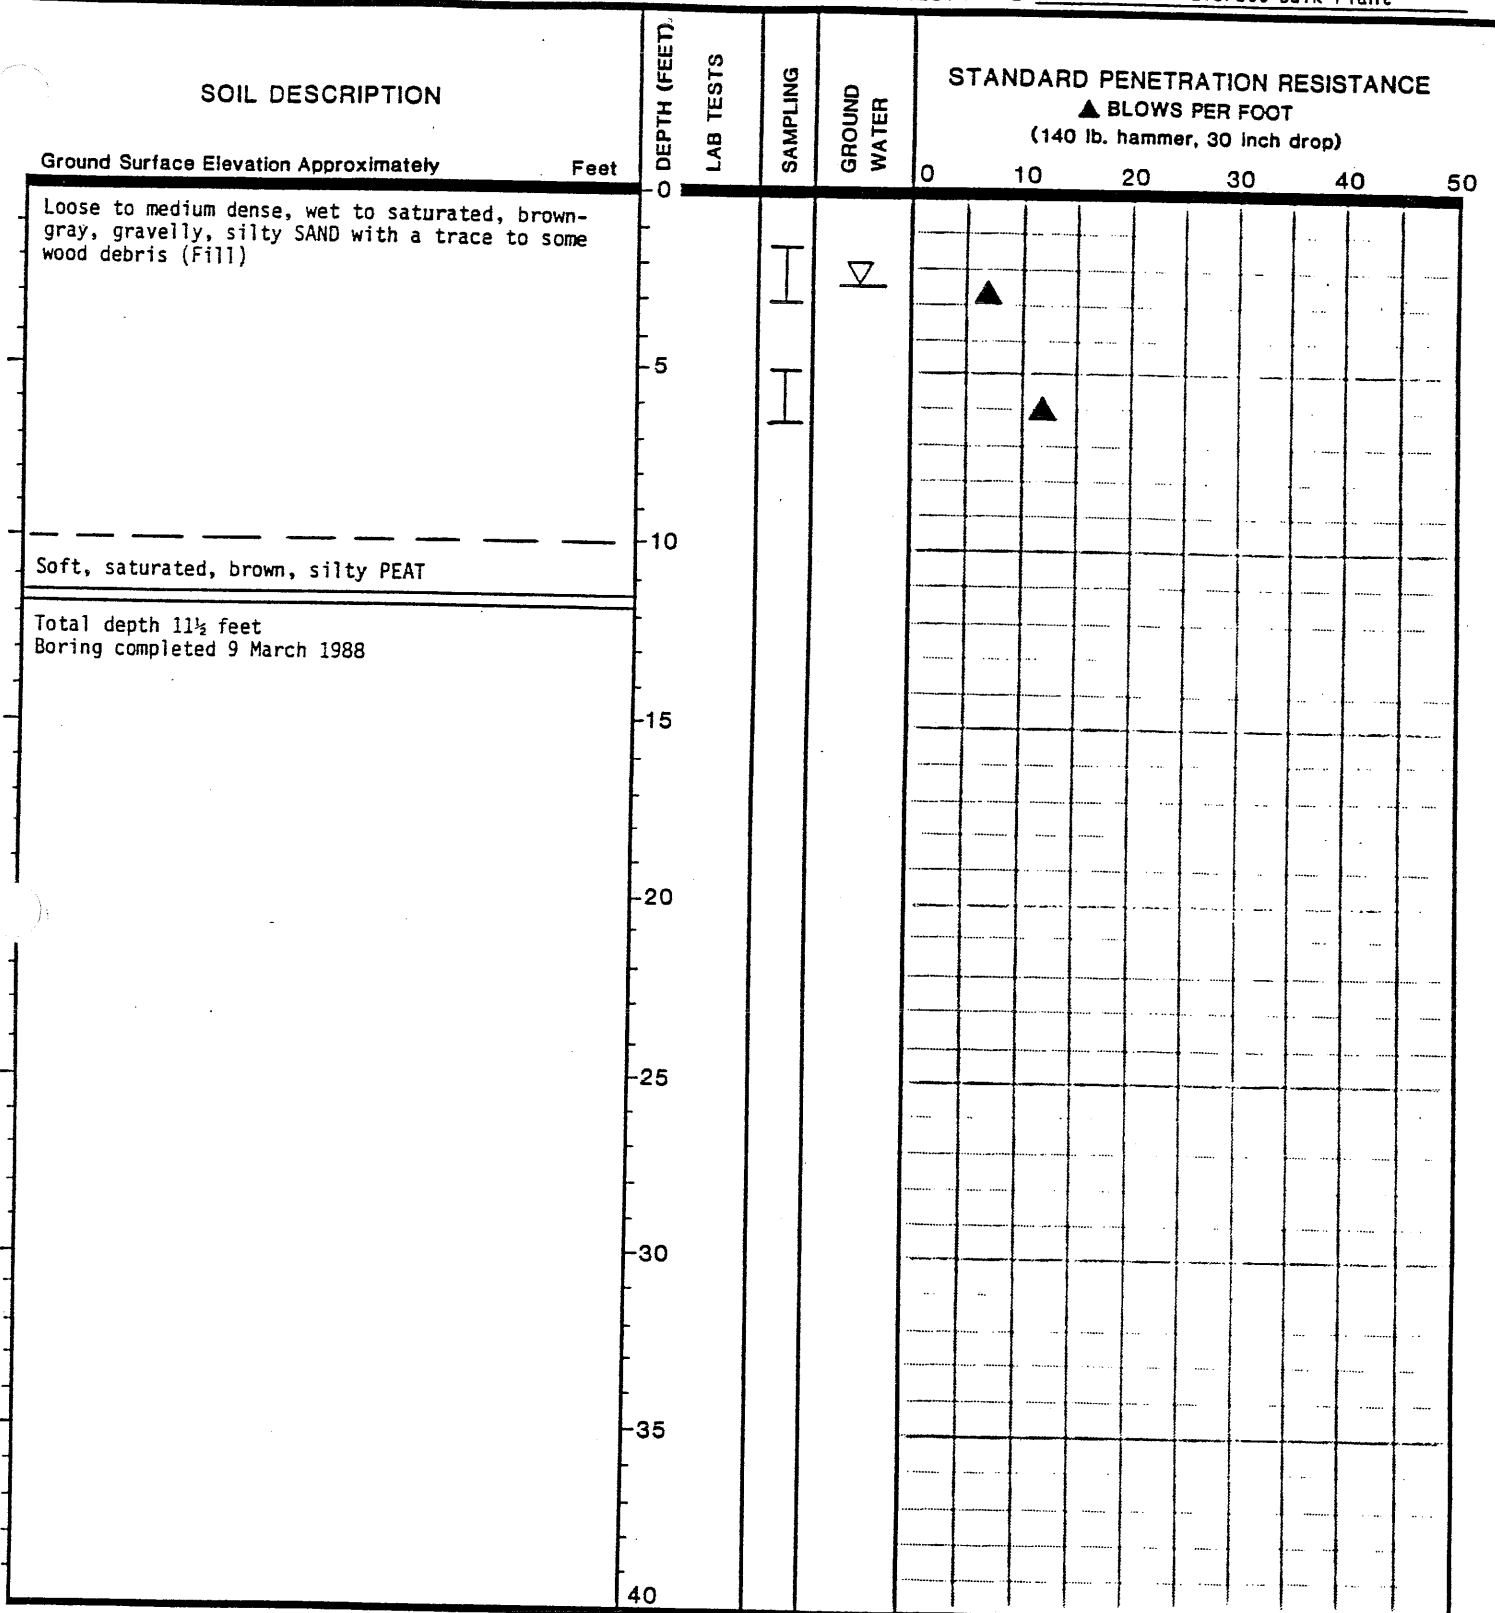

- SAMPLING**
- I 2' OD SPLIT SPOON SAMPLE
 - II 3' OD SHELBY SAMPLE
 - III 2.5' ID RING SAMPLE
 - IV BULK SAMPLE
 - * SAMPLE NOT RECOVERED





SOIL DESCRIPTION

Ground Surface Elevation Approximately Feet

Loose to medium dense, wet to saturated, brown-gray to gray, silty, fine to medium SAND with a trace of gravel (Fill)

Very loose, saturated, gray, silty, fine to medium SAND with trace of gravel, wood debris and black organics (Fill)

Soft, saturated, brown, silty PEAT

Total depth 11½ feet
Boring completed 10 March 1988

DEPTH (FEET)

LAB TESTS

SAMPLING

GROUND WATER

STANDARD PENETRATION RESISTANCE

▲ BLOWS PER FOOT
(140 lb. hammer, 30 inch drop)

0 10 20 30 40 50

40

SAMPLING

- I 2' OD SPLIT SPOON SAMPLE
- II 3' OD SHELBY SAMPLE
- III 2.5' ID RING SAMPLE
- IV JULK SAMPLE
- * SAMPLE NOT RECOVERED

GROUND WATER SEAL


DATE


WATER LEVEL
AT TIME OF DRILLING

OBSERVATION
WELL TIP



LABORATORY TESTS

- % WATER CONTENT
- NP NON PLASTIC




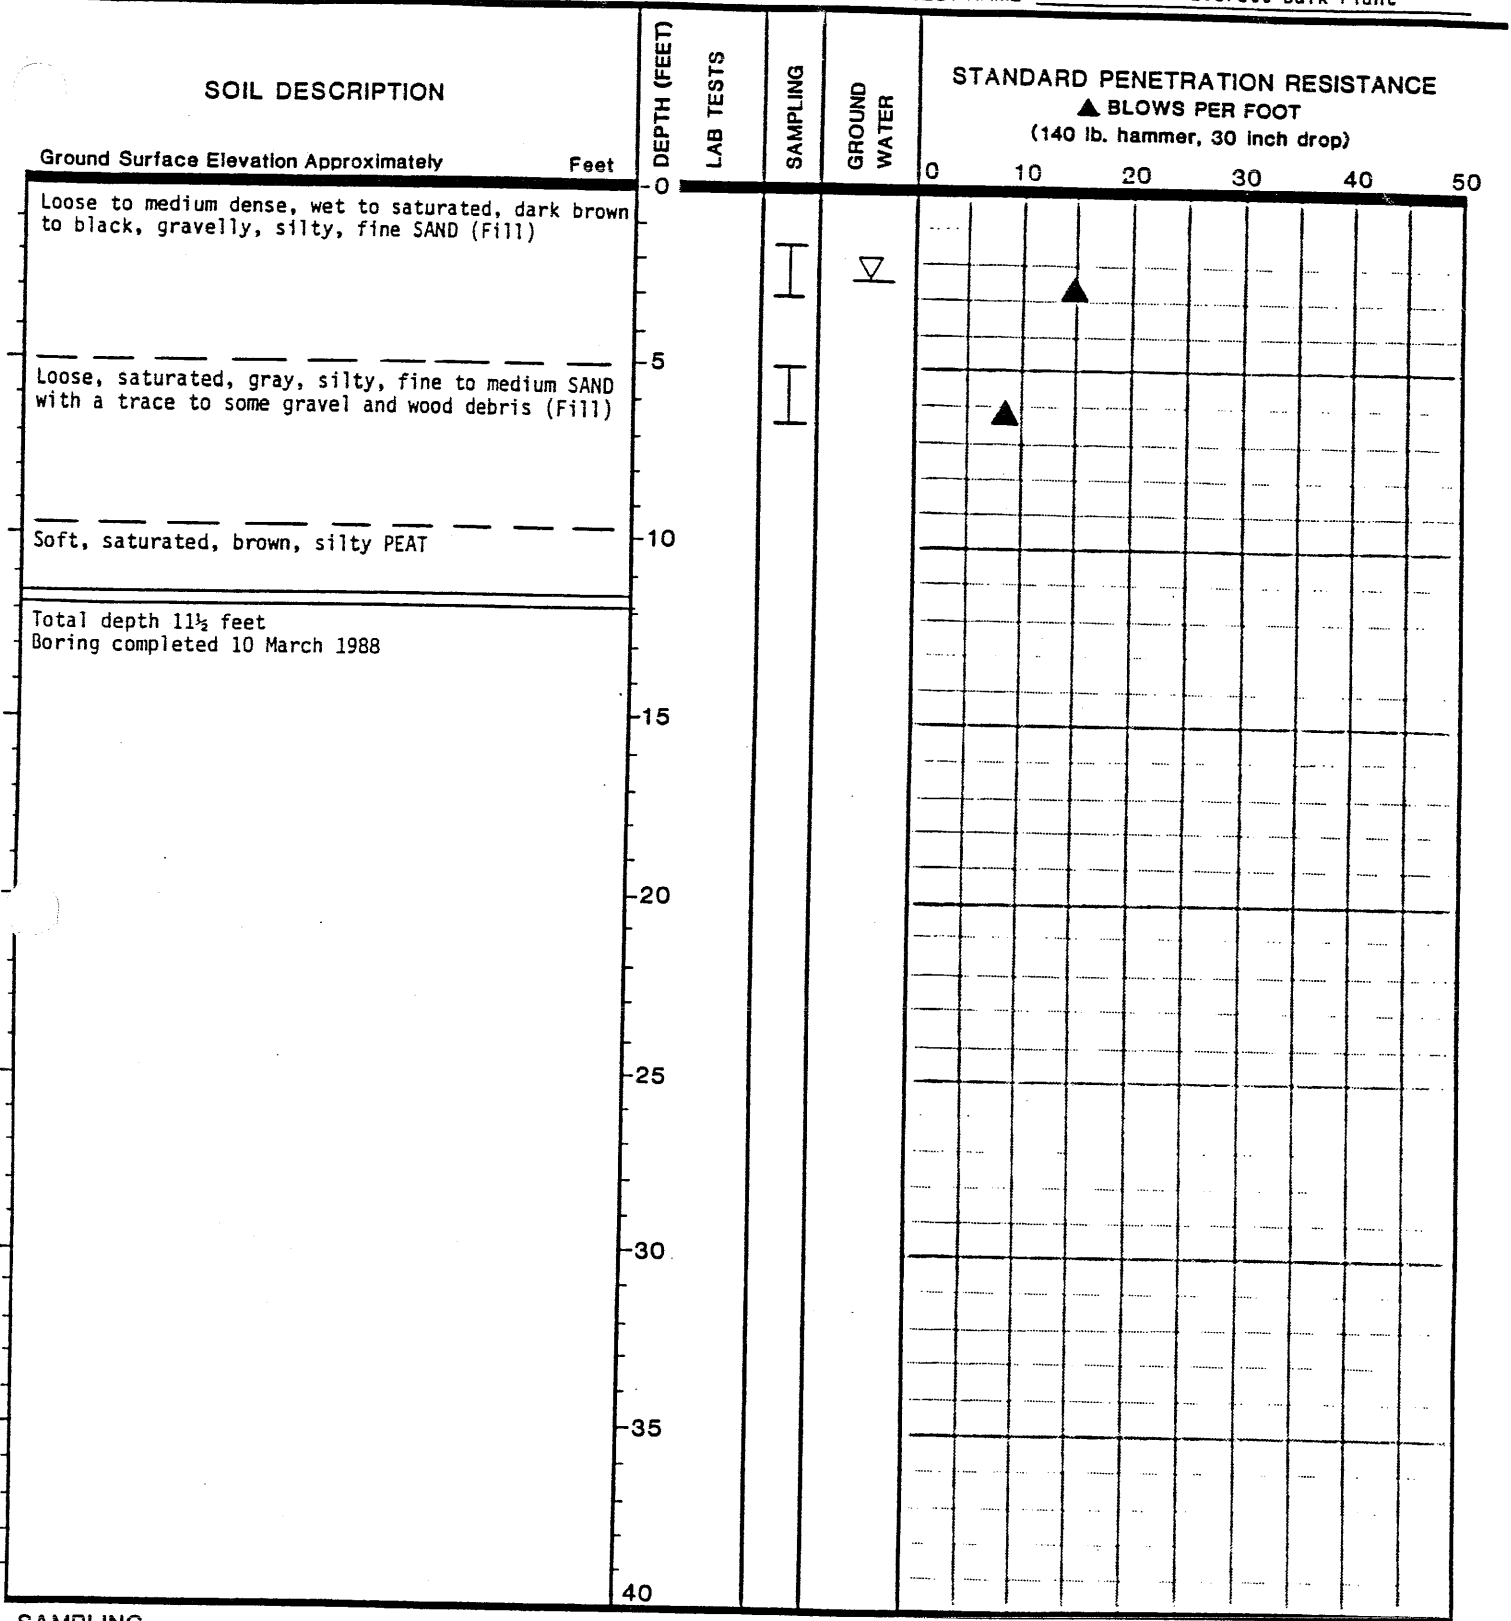


- SAMPLING**
- I 2' OD SPLIT SPOON SAMPLE
 - II 3' OD SHELBY SAMPLE
 - III 2.5' ID RING SAMPLE
 - BULK SAMPLE
 - * SAMPLE NOT RECOVERED



PORTABLE PERCUSSION BORING LOG MW-19

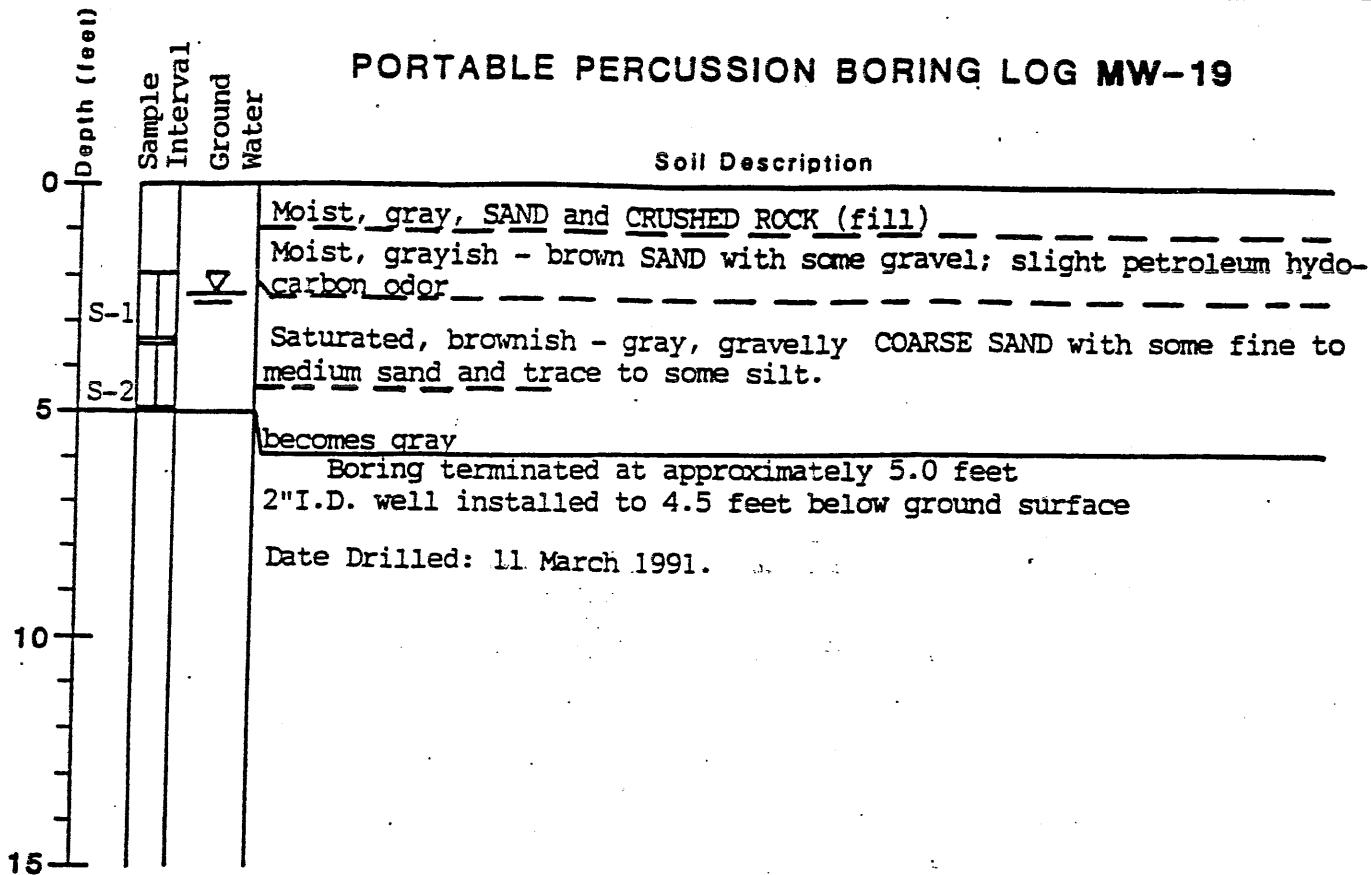

PORTABLE PERCUSSION BORING LOG MW-20

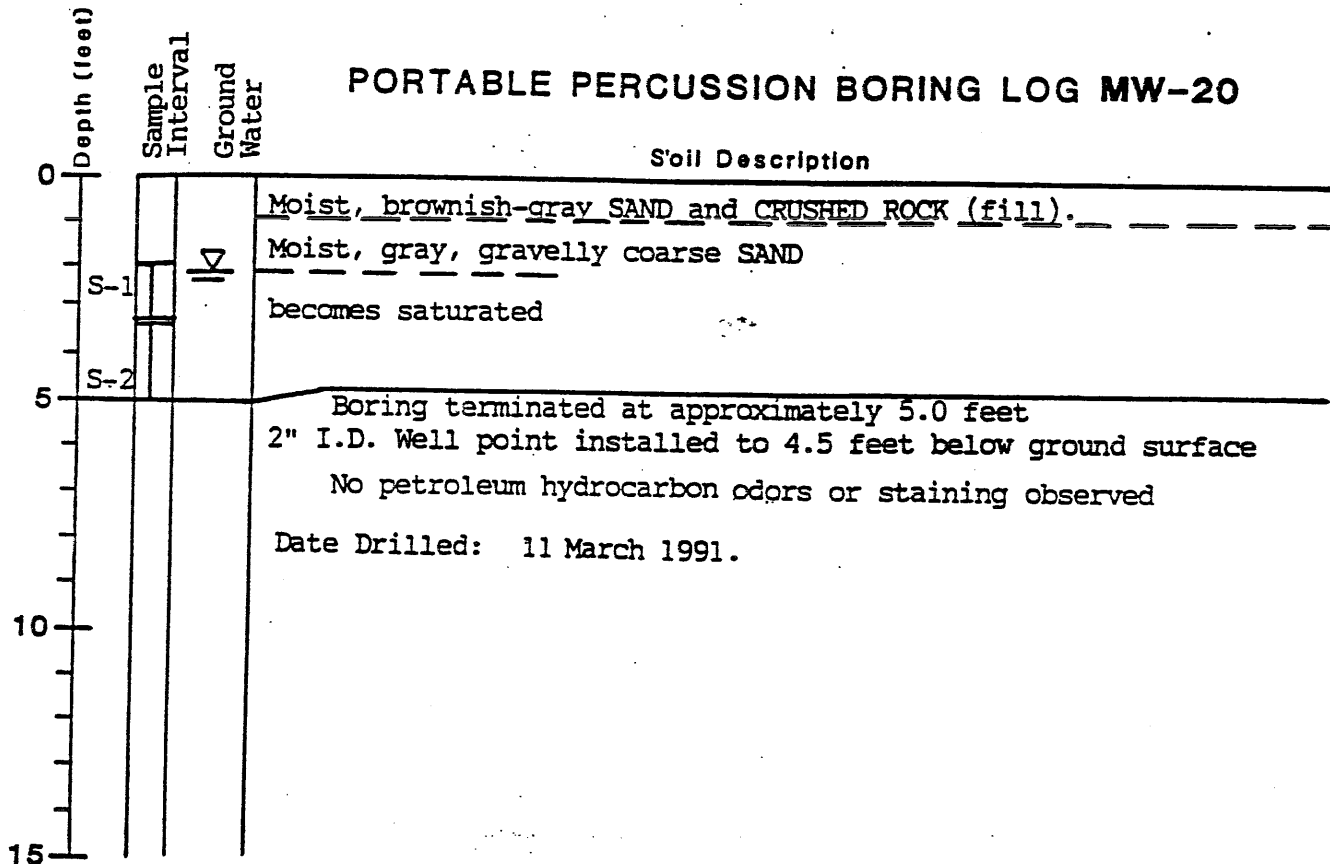

△ ATD groundwater level at time of drilling


RITTENHOUSE-ZEMAN & ASSOCIATES, INC.

Geotechnical Consultants


1400 140th N.E.
Bellevue, Washington 98007
(206) 716-8020



PORTABLE PERCUSSION BORING LOG MW-21

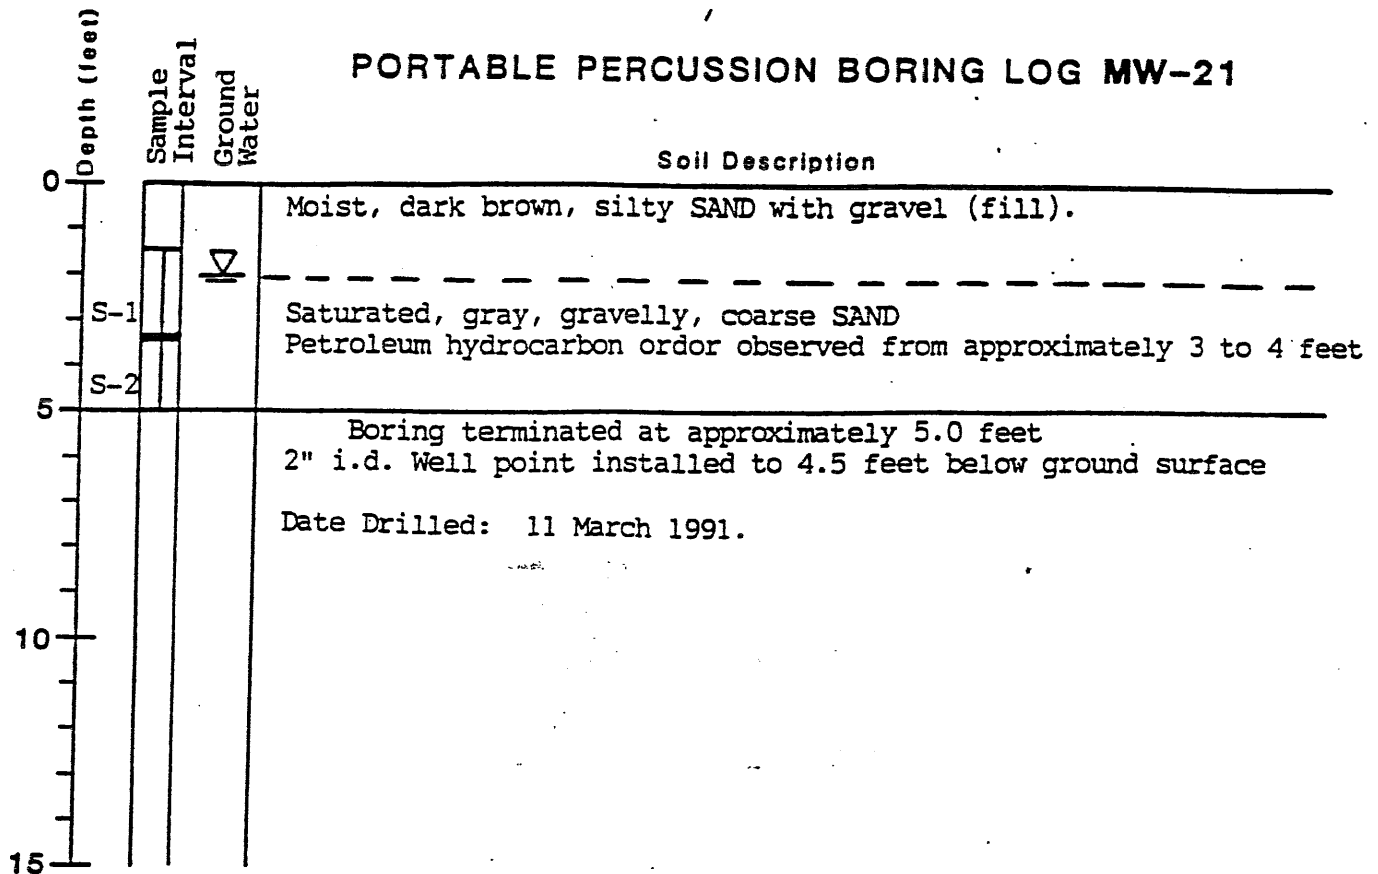

PORTABLE PERCUSSION BORING LOG MW-22

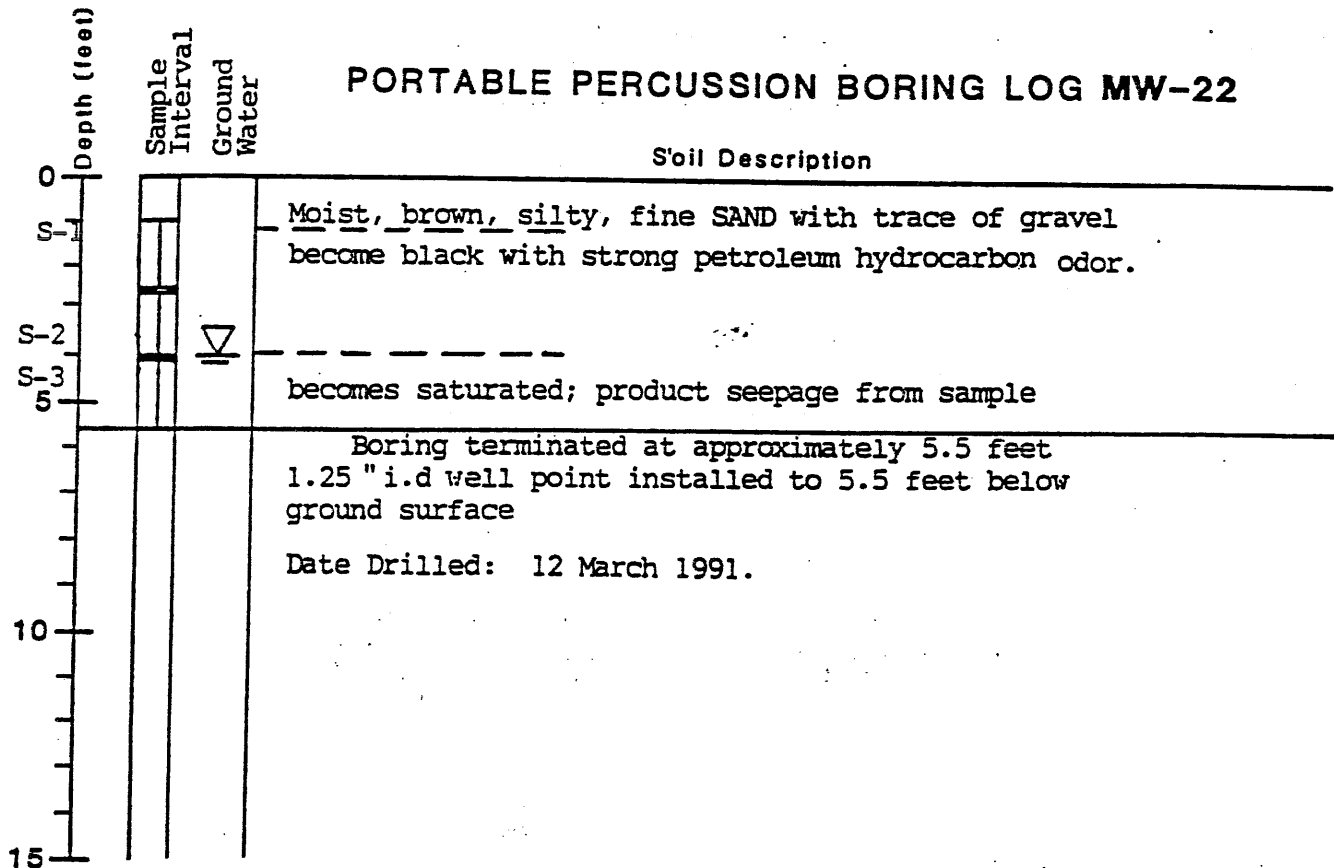

▽
ATD groundwater at time of drilling


**RITTENHOUSE-ZEMAN &
ASSOCIATES, INC.**

Geotechnical Consultants


1400 140th N.E.
Bellevue, Washington 98007
(206) 736-8020



PORTABLE PERCUSSION BORING LOG MW-23

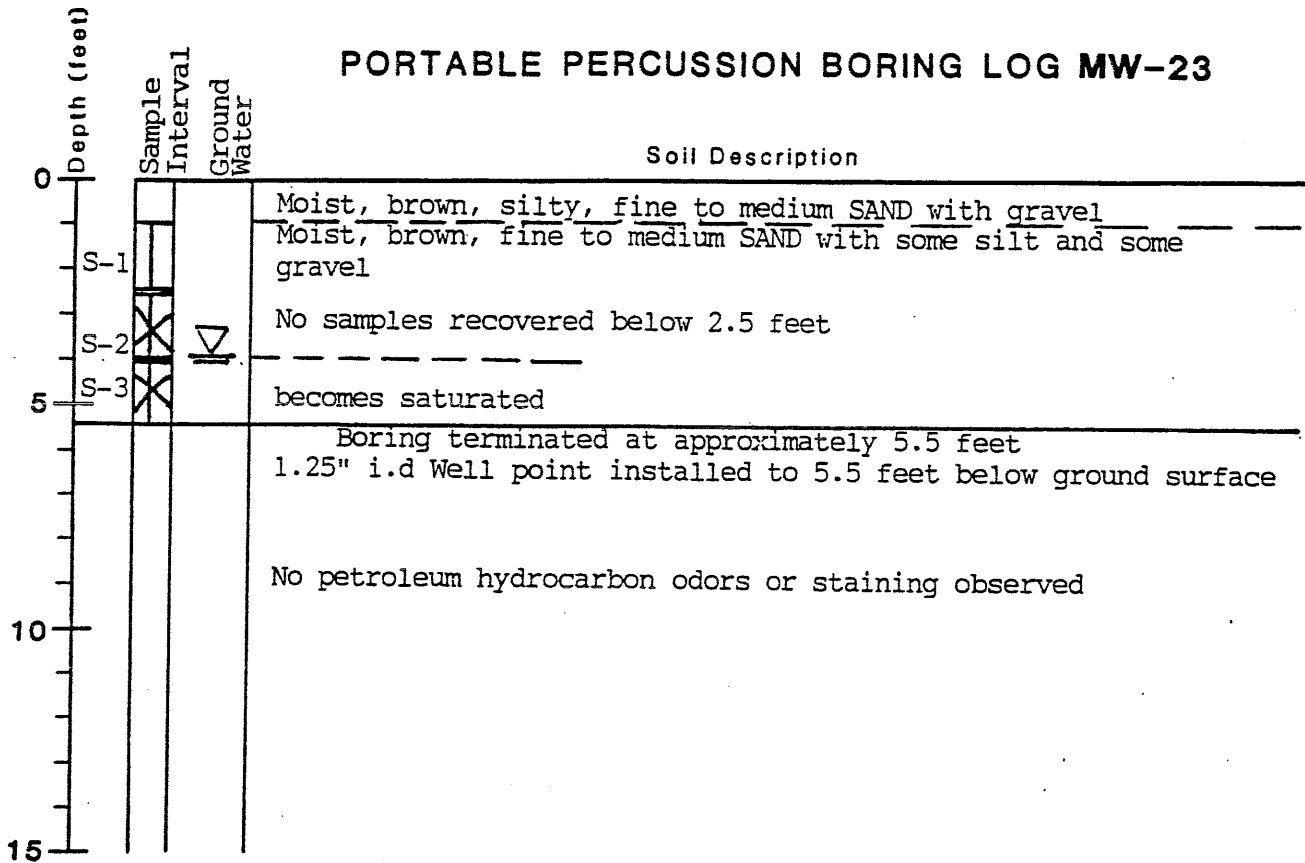

PORTABLE PERCUSSION BORING LOG MW-24

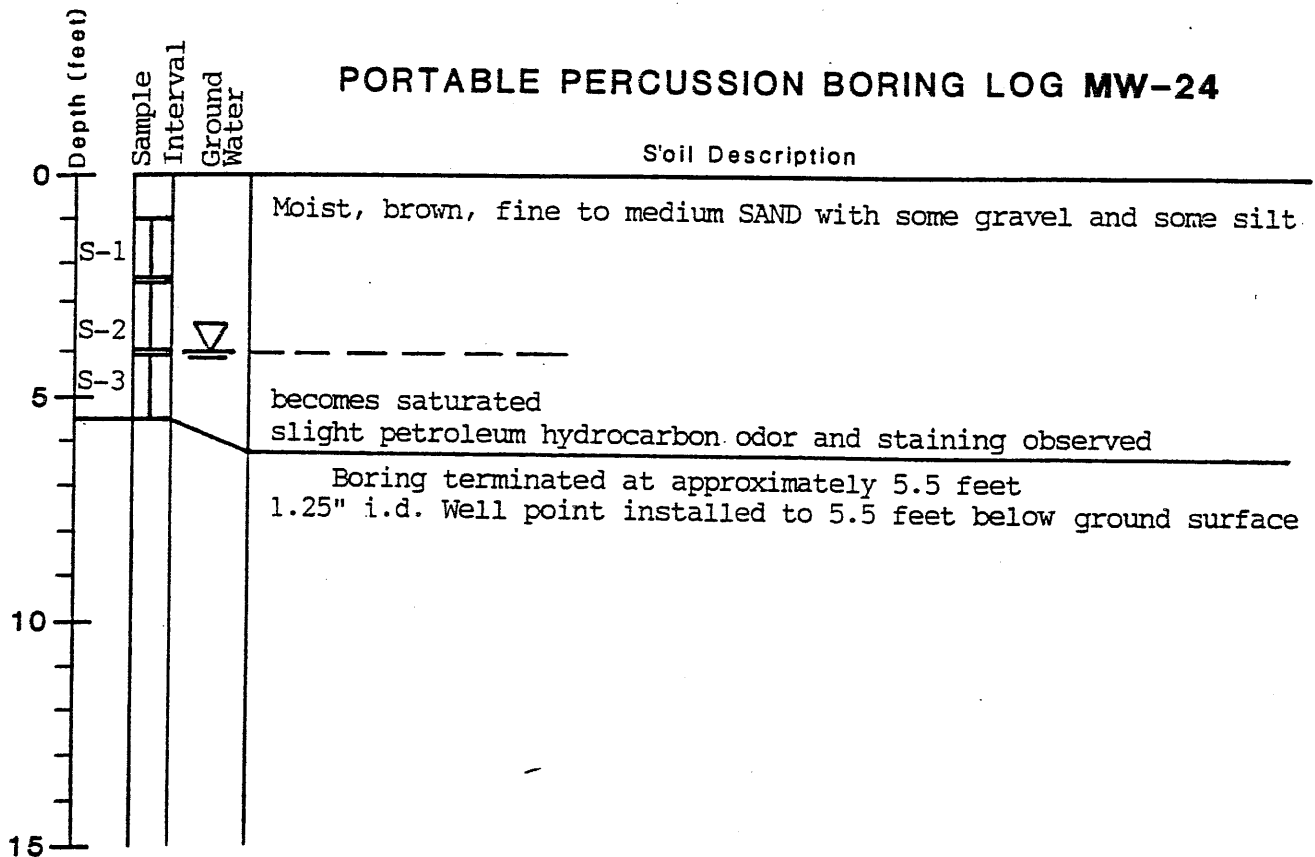


**RITTENHOUSE-ZEMAN &
ASSOCIATES, INC.**

Geotechnical Consultants


1400 140th N.E.
Belleve, Washington 98007
(206) 746-8020



PORTABLE PERCUSSION BORING LOG MW-25

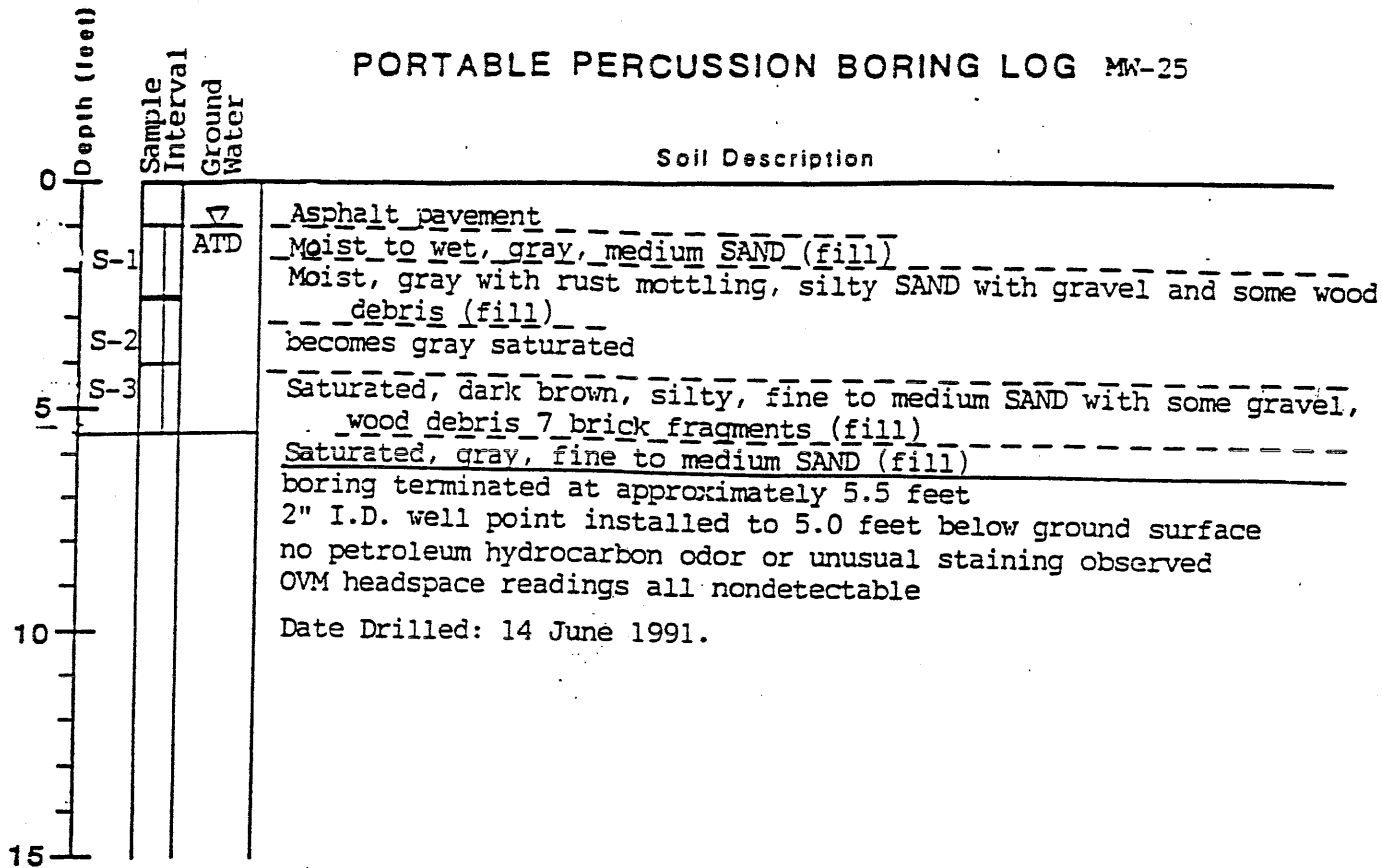

PORTABLE PERCUSSION BORING LOG MW-26

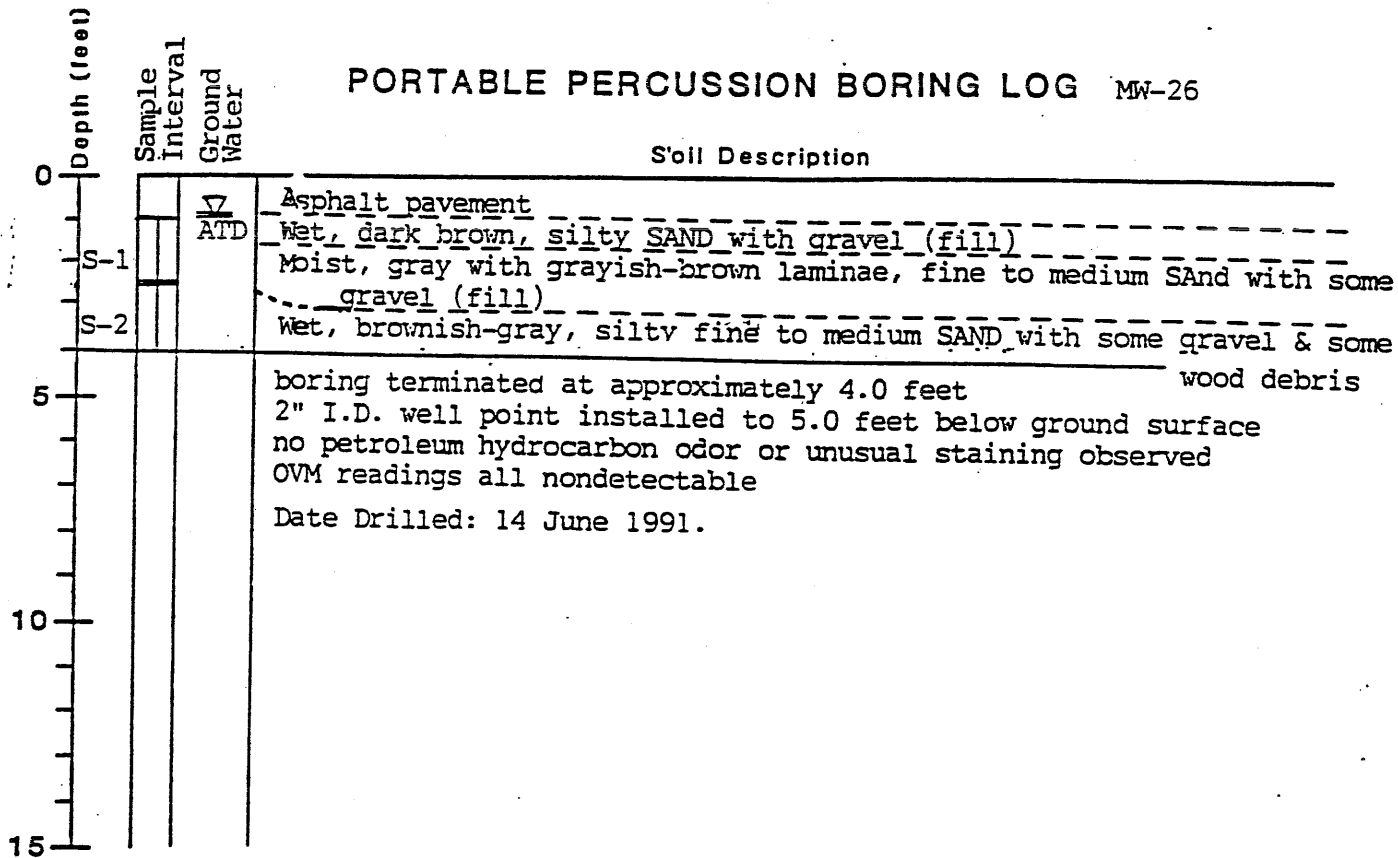

∇ ATD groundwater level at time of drilling

RITTENHOUSE-ZEMAN & ASSOCIATES, INC.

Geotechnical Consultants

1400 140th N.E.
 Bellerue, Washington 98007
 (206) 746-8020




Elevation reference: Well completed: *20 June 1991*
 Ground surface elevation: Casing elevation:

AS-BUILT DESIGN

TESTING

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER |
|--------------|--|-------------|---------------|-------------|-------------|--------------|
| 0 | 2" Asphalt. | | | | | |
| 0 - 5 | Medium dense, moist, gray, silty fine SAND with hydrocarbon odor | | S-1 | 15 | | ATD |
| 5 - 10 | Loose, wet, brown, PEAT with oily sheen and hydrocarbon odor | | S-2 | 2 | | |
| 10 - 13.5 | Loose, moist, gray, medium SAND hydrocarbon odor and sheen | | S-3 | 4 | | |
| 13.5 - 15 | Boring terminated at 13.5 feet. | | | | | |
| 15 - 20 | | | | | | |
| 20 - 25 | | | | | | |
| 25 - 30 | | | | | | |

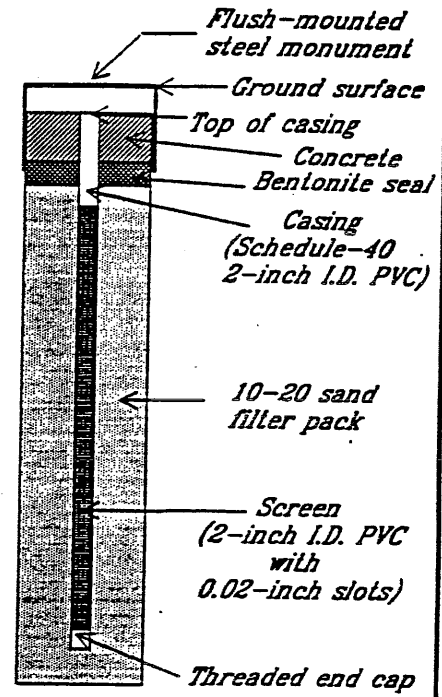

8015
418.1
BTEX
6010

8015
418.1
BTEX
6010

LEGEND

I 2-inch O.D. split-spoon sample

▽ Observed groundwater level (ATD = at time of drilling)

8015
418.1
BTEX
6010
Soil Analysis (EPA Method shown)


RZA RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005

Elevation reference: Well completed: *20 June 1991*
 Ground surface elevation: Casing elevation:

AS-BUILT DESIGN

TESTING

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | 2" Asphalt. | | | | | |
| | 3 inches brown/gray sandy GRAVEL | | | | | |
| 5 | Loose, moist, gray silty fine SAND | | S-1 | 2 | | ATD |
| 10 | Loose, moist, brown, PEAT layer, strong hydrocarbon odor | | S-2 | 2 | | |
| | Loose, moist to wet, brown, silty medium SAND with organics (peat); moderate hydrocarbon odor | | S-3 | 2 | | |
| 15 | Boring terminated at 13.5 feet. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

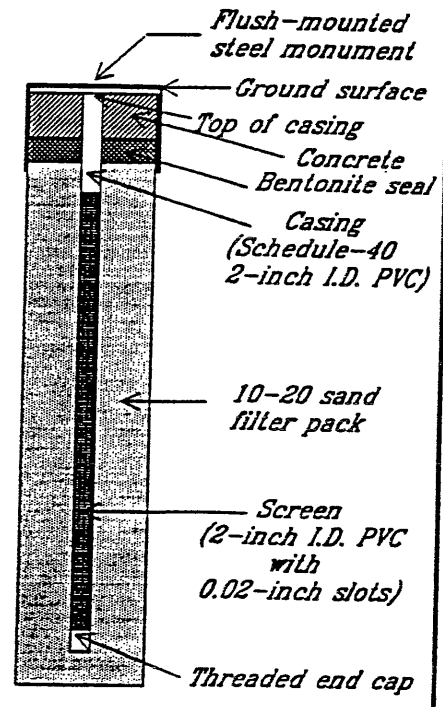

8015
418.1
BTEX
6010

8015
418.1
BTEX
6010

LEGEND

I 2-inch O.D. split-spoon sample
 Soil Analysis (EPA Method shown)

▼
ATD Observed groundwater level (ATD = at time of drilling)

RZA RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005

Drilling started: *20 June 1991*

Drilling completed: *20 June 1991*


Logged by: *JK*

Elevation reference:
 Well completed: *20 June 1991*
 Ground surface elevation:
 Casing elevation:

AS-BUILT DESIGN

TESTING

| DEPT (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER |
|-------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | 2" to 3" Asphalt. Loose, moist, gray, sandy, gravel | | | | | |
| 5 | Loose, moist, gray fine sandy SILT grading into silty fine sand | | S-1 | 3 | | ATD |
| 10 | Loose, wet, black oil-saturated PEAT with wood | | S-2 | 5 | | |
| | | | S-3 | 50/3" | | |

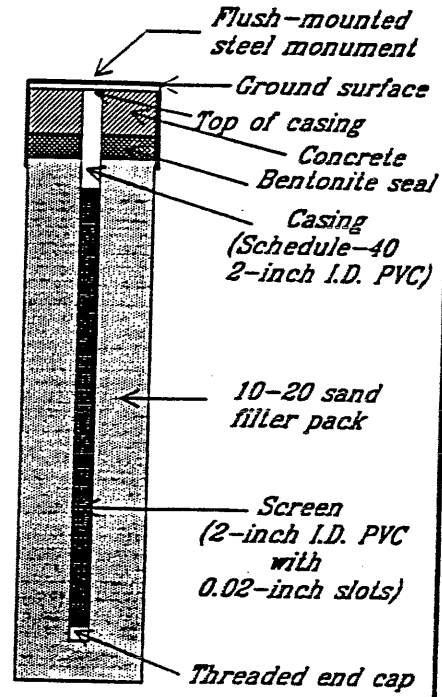

8015
418.1
BTEX
6010

8015
418.1
BTEX
6010

Boring terminated at 13.5 feet.

LEGEND

I 2-inch O.D. split-spoon sample

▽
ATD Observed groundwater level (ATD = at time of drilling)

8015
418.1
BTEX
6010 Soil Analysis (EPA Method shown)

× Sample not recovered

RZA RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005

Drilling started: *20 June 1991*

Drilling completed: *20 June 1991*


Logged by: *JK*

Elevation reference: Well completed: *20 June 1991*
 Ground surface elevation: Casing elevation:

AS-BUILT DESIGN

TESTING

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | QVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | 2" Asphalt. | | | | | |
| | Loose, moist, gray, silty SAND | | | | | |
| | Loose, moist, gray, silty fine SAND | ⊗ | S-1 | 5 | | ATD |
| 5 | Loose, black, oily wood and PEAT | | | | | |
| | Very loose, wet, oily, gray medium SAND with organics (wood and peat) | | S-2 | 2 | | |
| 10 | Loose, wet (oily), black/brown PEAT and wood | | S-3 | 8 | | |
| 15 | Boring terminated at 13.5 feet. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

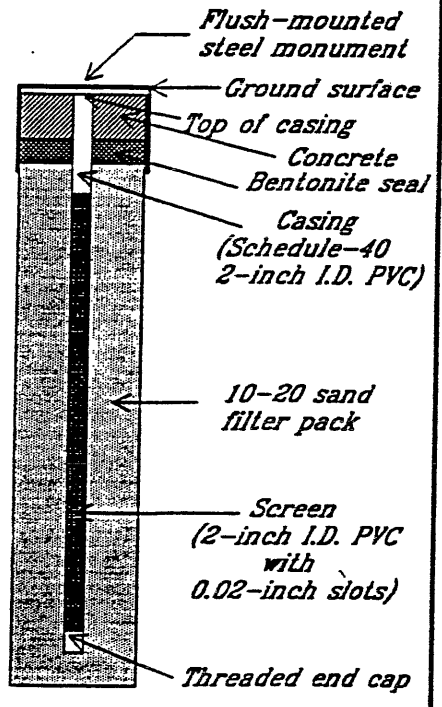

8015
418.1
BTEX
6010

8015
418.1
BTEX
6010

LEGEND

I 2-inch O.D. split-spoon sample

▼ ATD Observed groundwater level (ATD = at time of drilling)

8015
418.1
BTEX
6010
Soil Analysis (EPA Method shown)

⊗ Sample not recovered

RZA RITTENHOUSE-ZEMAN & ASSOCIATES, INC.
 Geotechnical & Environmental Consultants
 1400 140th Ave NE
 Bellevue, Washington 98005

Drilling started: *20 June 1991*

Drilling completed: *20 June 1991*

Logged by: *JK*

PROJECT: *Everett Mobil Bulk Plant* W.O. 11-04558-04 WELL NO. MW-3


Elevation reference: 100.00 feet
 Ground surface elevation: Unknown

Well completed: 07 December 1993
 Casing elevation: 98.58 feet

AS-BUILT DESIGN

TESTING

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | Asphaltic Concrete | | | | | |
| 0 - 5 | Medium dense, wet, brownish-gray, fine SAND with gravel (Fill). Slight petroleum-like odor observed | | S-1 | 25 | 5 | |
| 5 - 10 | Loose, wet to saturated, dark greenish-gray, SAND with some gravel and wood debris (Fill) | | S-2 | 6 | 5 | 12/8/93 |
| 10 - 15 | Medium dense, saturated, dark gray, medium SAND with wood debris | | S-3 | 22 | 5 | |
| 15 | Bottom of boring at 15 feet. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

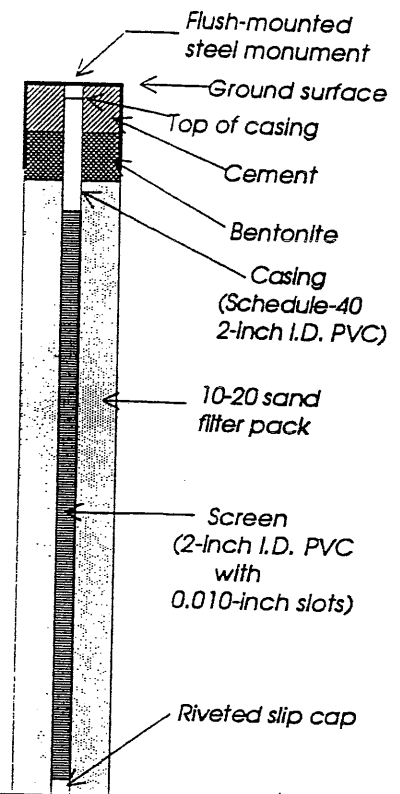

LEGEND

I 2-inch O.D. split-spoon sample

▼ Observed groundwater level
 0/00/00 0/00/00 = date observed

RZA AGRA, Inc.
 Geotechnical & Environmental Group

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started: 07 December 1993 Drilling completed:

07 December 1993 Logged by: TJP


PROJECT: *Everett Mobil Bulk Plant W.O. 11-04558-04* WELL NO. MW-32

Elevation reference: 100.00 feet Well completed: 07 December 1993
 Ground surface elevation: Unknown Casing elevation: 99.17 feet

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | Gravel surface | | | | | |
| 5 | Medium dense, wet to saturated, greenish-gray, gravelly, medium SAND (Fill) | | S-1 | 13 | 5 | 12/8/93 |
| 10 | Medium dense, saturated, grayish-dark brown, medium SAND with gravel, some silt and wood fragments | | S-2 | 17 | 5 | |
| 15 | Medium dense, saturated, grayish-dark brown, silty, fine to medium SAND with some gravel and wood fragments | | S-3 | 17 | 5 | |
| 15 | Bottom of boring at 15 feet. No unusual staining or petroleum-like odors observed. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

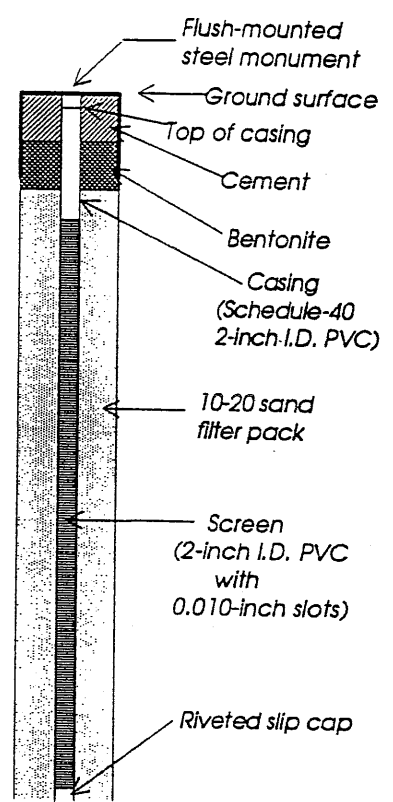

TESTING

LEGEND

- 2-inch O.D. split-spoon sample
- Observed groundwater level
- 0/00/00 = date observed

RZA AGRA, Inc.
 Geotechnical & Environmental Group


11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

PROJECT: *Everett Mobil Bulk Plant* W.O. 11-04558-04 WELL NO. MW-33

Elevation reference: 100.00 feet
 Ground surface elevation: Unknown
 Well completed: 07 December 1993
 Casing elevation: 97.64 feet

AS-BUILT DESIGN

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OMV READING | GROUND WATER |
|--------------|--|-------------|---------------|-------------|-------------|--------------|
| 0 | Asphaltic Concrete | | | | | |
| 0 - 5 | Medium dense, wet to saturated, gray, medium to coarse SAND with some gravel (Fill) | | S-1 | 21 | 5 | ▼ 12/8/93 |
| 5 - 7 | Medium dense, saturated, greenish-gray, silty, fine to medium SAND (Fill) | | S-2 | 11 | 5 | |
| 7 - 10 | Loose, saturated, brown, silty PEAT | | S-3 | 5 | 5 | |
| 10 - 13 | Loose to medium dense, saturated, gray to brownish-gray, SAND with trace to some silt, gravel and wood fragments | | S-4 | 8 | 5 | |
| 13 - 15 | (Chunk of wood stuck in sample tube; S-5 blow count probably not representative) | | S-5 | 50/ 5 | 5 | |
| 15 - 17 | | | S-6 | 11 | 5 | |
| 17 - 18 | | | S-7 | 6 | 5 | |
| 18 - 20 | | | S-8 | 10 | 5 | |
| 20 - 22 | | | S-9 | 17 | 5 | |
| 22 - 25 | | | S-10 | 14 | 5 | |
| 25 - 29 | Very stiff, saturated, brown, clayey SILT with organics (PEAT-Like) | | S-11 | 17 | 5 | |
| 30 | Bottom of boring at 29 feet. | | | | | |

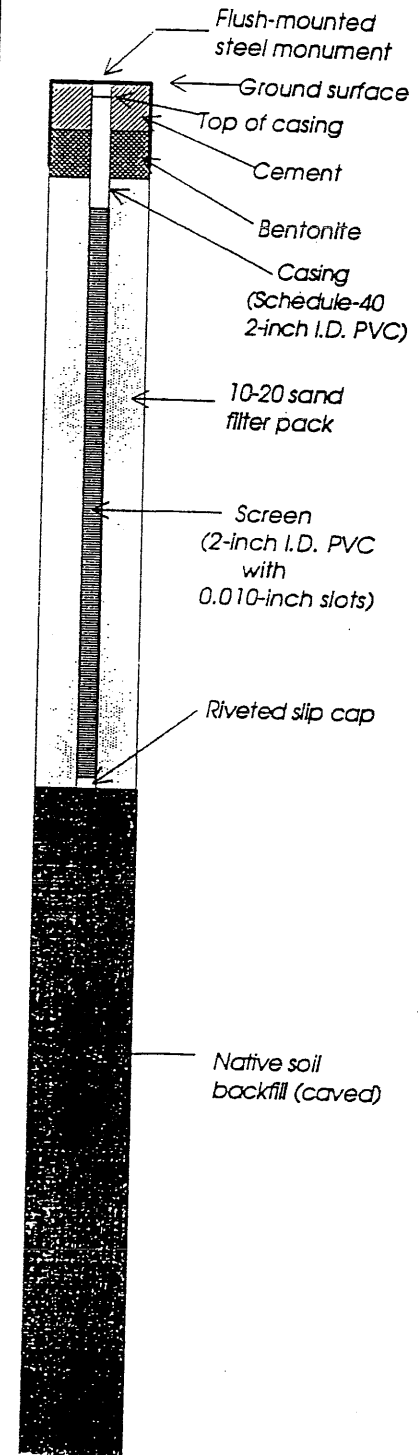

TESTING

No unusual staining or petroleum-like odors observed.

LEGEND

- 2-inch O.D. split-spoon sample
- ▼ Observed groundwater level 0/00/00 = date observed

RZA AGRA, Inc.
 Geotechnical & Environmental Group

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started: 07 December 1993 Drilling completed: 07 December 1993 Logged by: TJP


PROJECT: *Everett Mobil Bulk Plant* W.O. 11-04558-04 WELL NO. MW-35

Elevation reference: 100.00 feet
 Well completed: 06 December 1993
 Ground surface elevation: Unknown
 Casing elevation: 103.96 feet

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|---|-------------|---------------|-------------|-------------|--------------|
| 0 | | | | | | |
| 0 - 5 | Dense, moist, gray, silty, fine to medium SAND with some gravel | I | S-1 | 38 | 0 | |
| 5 - 15 | Loose, moist to saturated, gray, fine sandy SILT with some gravel | I | S-2 | 6 | 0 | ▼ 12/8/93 |
| 15 | | I | S-3 | 4 | 0 | |
| 15 | Bottom of boring at 15 feet. Field FT-IR analysis of samples S-1 and S-2 indicated TPH concentrations of <50 ppm. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |

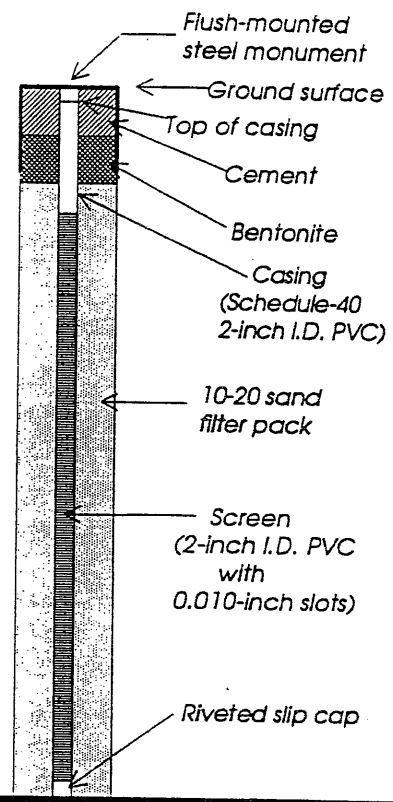

TESTING

LEGEND

I 2-inch O.D. split-spoon sample

▼ Observed groundwater level
 0/00/00 0/00/00 = date observed

RZA AGRA, Inc.
 Geotechnical & Environmental Group

11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Drilling started: 06 December 1993 Drilling completed: 06 December 1993 Logged by: GKS

PROJECT: *Everett Mobil Bulk Plant W.O. 11-04558-04* WELL NO. *MW-36*

Elevation reference: *100.00 feet* Well completed: *06 December 1993*
 Ground surface elevation: *Unknown* Casing elevation: *99.91 feet*

AS-BUILT DESIGN

Page 1 of 1

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | AS-BUILT DESIGN | TESTING |
|--------------|---|-------------|---------------|-------------|-------------|--------------|-----------------|---------|
| | | | | | | | | |
| 0 | | | | | | | | |
| | Medium dense, moist, blackish-gray, silty, fine to medium SAND with some gravel | | S-1 | 19 | 0 | 12/8/93 | | |
| 5 | Becomes very loose, with increasing silt content | | | | | | | |
| | | | S-2 | 2 | 0 | | | |
| 10 | Wood debris | | | | | | | |
| | | | S-3 | 4 | 0 | | | |
| 15 | Bottom of boring at 15 feet. | | | | | | | |
| 20 | | | | | | | | |
| 25 | | | | | | | | |
| 30 | | | | | | | | |

LEGEND

2-inch O.D. split-spoon sample

Observed groundwater level
 0/00/00 0/00/00 = date observed

RZA AGRA, Inc.
 Geotechnical & Environmental Group




11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

PROJECT: *Everett Mobil Bulk Plant W.O. 11-04558-04 WELL NO. MW-37*

Elevation reference: 100.00 feet Well completed: 06 December 1993
 Ground surface elevation: Unknown Casing elevation: 103.87 feet

| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER | AS-BUILT DESIGN | |
|--------------|---|-------------|---------------|-------------|-------------|--------------|--|--|
| | | | | | | | TESTING | |
| 0 | | | | | | | Flush-mounted steel monument | |
| | | | | | | | Ground surface | |
| | | | | | | | Top of casing | |
| | | | | | | | Cement | |
| | | | | | | | Bentonite | |
| | | | | | | | Casing (Schedule-40 2-inch I.D. PVC) | |
| 5 | Medium dense, moist, gray, silty, fine to medium SAND with trace gravel | | S-1 | 17 | 51 | | 10-20 sand filter pack | |
| | | | | | | | Screen (2-inch I.D. PVC with 0.010-inch slots) | |
| | | | | | | | Riveted slip cap | |
| | Becomes very loose, saturated; strong petroleum-like odor | | S-2 | 3 | 57 | 12/8/93 | | |
| 10 | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| 15 | Very loose, saturated, reddish-brown, medium to coarse SAND with some silt, trace gravel and organics; petroleum seepage observed | | S-3 | 3 | 34 | | | |
| | Bottom of boring at 15 feet. | | | | | | | |
| 20 | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| 25 | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| 30 | | | | | | | | |

LEGEND

-  2-inch O.D. split-spoon sample
-  Observed groundwater level
-  0/00/00 = date observed


RZA AGRA, Inc.
 Geotechnical & Environmental Group


11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918

Location reference: Unknown
 Ground surface elevation: Unknown

Well completed: 05 June 1996
 Casing elevation: Unknown



AS-BUILT DESIGN

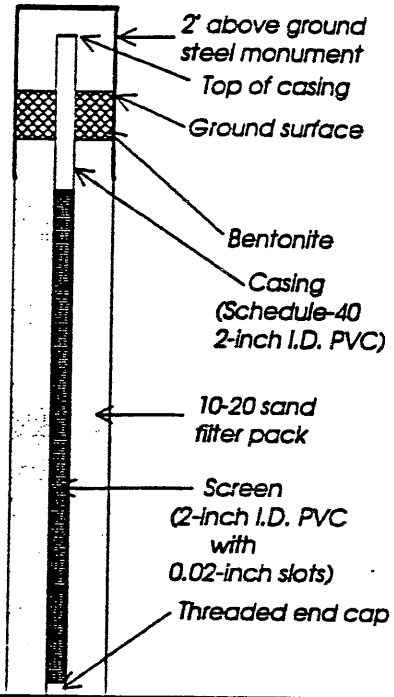
| DEPTH (feet) | SOIL DESCRIPTION | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS | OVM READING | GROUND WATER |
|--------------|--|---|----------------|-------------|-------------|--------------|
| 0 | Grass and Roots Loose, moist, dark brown, silty SAND with gravel (strong petroleum hydrocarbon-like odor) |  | MW-38/ 2.5 | | | |
| 5 | | | MW-38/ 5.0 | 10 | 0.0 | ATD |
| | | | MW-38/ 7.5 | 50/ 1" | 0.0 | |
| 10 | Medium dense, saturated, brown WOOD CHIPS with trace silt (Fill) (strong petroleum hydrocarbon-like odor) | | MW-38/ 10.0 | 11 | 0.0 | |
| 15 | Bottom of boring at 12.5 feet. | | | | | |
| 20 | | | | | | |
| 25 | | | | | | |
| 30 | | | | | | |



TESTING

LEGEND

-  2-inch O.D. split spoon sample
-  Grab sample

-  Observed groundwater level
- ATD = at time of drilling

AGRA
 Earth & Environmental
 11335 NE 122nd Way, Suite 100
 Kirkland, Washington 98034-6918


AGRA Earth & Environmental, Inc.

LOCATION

OBSERVED BY PATL
DRILLER/INSTALLER CASCADE

PROJECT No. 11-04558-09
PROJECT NAME MOBILE/AD
BORING/WELL I.D. URW-1
DATE 6/5/96

SOIL TYPE DEPTH



ABOVE GROUND RISER HEIGHT (IF APPLICABLE) 9
MONUMENT TYPE (IF APPLICABLE)
WELL CAP TYPE locking

0 SURFACE




~~GROUT TYPE/=SACKS~~
BENTONITE SEAL /=SACKS

1

WELL CASING I.D. 4"
TYPE OF CASING Schedule 40 PVC
TYPE OF CONNECTION Thread-d

2

FILTER PACK/SIZE/=SACKS 6x12



WELL SCREEN I.D. 4"
TYPE OF SCREEN "V" screen
SLOT SIZE 0.030


DIAMETER OF BOREHOLE 12"

140
145
145

ENDCAP TYPE threaded (0.5' pointed)

REMARKS





AGRA
Earth & Environmental

HOLE NO. RW-1
SHEET 1 OF 1
TOTAL DEPTH 15.0
DATE BEGUN 6/5/96
DATE COMPLETED 6/5/96

WTR. partly cloudy, 50's

TEST BORING LOG

| SAMPLING | | GROUNDWATER TABLE | | PROJECT NAME | |
|---------------|--------|--|------|--------------------|---------------------------|
| DATE | 6/5/96 | AT/DAT TIME OF DRILLING | 0930 | PROJECT NUMBER | MOBIL/ADC 11-04558-09 T17 |
| DEPTH IN FEET | 6.7 | AS=AFTER BORING | | GEOLOGIST/ENGINEER | RAL |
| TIME | 0930 | DRILLING CONTACTOR/CRE. | | METHOD USED | CASCADE HSA |
| DATE | 6/5/96 | SAMPLING METHOD: SPT=STANDARD PENETRATION TEST T=TUBE R=RING D&M | | | |

SOIL DESCRIPTION

GRASS AND ROOTS OVER
BACKFILL BENTONITE TO APPROX. 5.0 Feet

| | | | | | |
|------|----|----|---|----|--|
| RW-1 | 15 | 7 | 6 | 5m | m. dense, saturated, dark brown silty SAND with GRAVEL (5m) - wood debris, free product (oil), strong oil. NO SAMPLE FOR HEADSPACE |
| RW-1 | 8 | 6 | 6 | pt | stiff, moist saturated, brown PEAT - trace silt, strong odor HNU = 14 ppm |
| RW-1 | 12 | 11 | 8 | sp | m. dense, saturated, grey brown SAND with silt (SP) - trace peat, wood debris from 10-10.5 feet, strong odor. HNU = 40 ppm |
| RW-1 | 6 | 6 | 5 | pt | stiff, saturated, brown PEAT - trace silt, strong odor HNU = 5 ppm |

DRILL OUT TO 15'. HEAVY SAND
0.5 THREADED CAP.

140 lb - 30" Drop

BORING
LOG
SUMMARY




MONITORING WELL AS-BUILT REPORT

LOCATION _____
OBSERVED BY PTL
DRILLER/INSTALLER CASCADE

PROJECT No. 11-04558-09
PROJECT NAME MOBILE/ADK
BORING/WELL I.D. URW-1
DATE 6/5/96

SOIL TYPE DEPTH

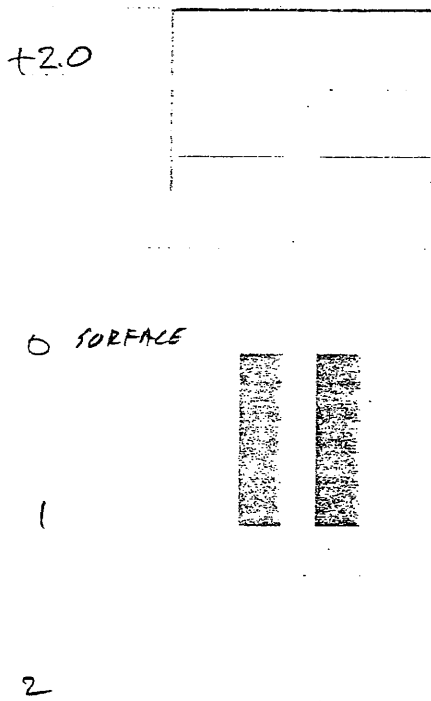

ABOVE GROUND RISER HEIGHT (IF APPLICABLE) _____
MONUMENT TYPE (IF APPLICABLE) _____
WELL CAP TYPE locking

~~GROUT TYPE~~ = SACKS _____
BENTONITE SEAL = SACKS _____

WELL CASING I.D. 4"
TYPE OF CASING Schedule 40 PVC
TYPE OF CONNECTION Threaded

FILTER PACK/SIZE = SACKS 6x12

WELL SCREEN I.D. 4"
TYPE OF SCREEN "V" screen
SLOT SIZE 0.030

DIAMETER OF BOREHOLE 12"

14.0
14.5
14.5

ENDCAP TYPE threaded (0.5' points)

REMARKS _____



LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-02

Date: 1-15-90

Client: American Distributing Co.

Driller: D. Alford

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger

Hole Diameter: 2"

Logged by: D. Alford

Page No: 1 of 1

Installation Data: Backfill with enviroplug

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|---------------|----------------|---------|--------------------------------------|--------------------------|------------------------------------|-----------------|------|------|--|
| | | | | | | approx. 2.0' | | | |
| 0 - | | | | Sample @ | sp | | | | Grass |
| - | | | | 0.5-1.0' | ----- | | | | 0.5-1.0' Sand, coarse grained with occasional gravel, saturated, slight petroleum odor. |
| 1 - | | | | Sample @ | sm | | | | 2.5-3.0' Sand, coarse grained with grey/green clayey silt, organic debris, strong petroleum odor, iridescent sheen on water. |
| 2 - | | | | Sample @ | | | | | |
| 3 - | TD = 3.0' | | | 2.5-3.0' | | | | | |
| 4 - | | | | | | | | | |
| 5 - | | | | | | | | | |
| | | | | | | | | | Groundwater at approximately 2' |

LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-08

Date: 1-16-90

Client: American Distributing Co.

Driller: D. Alford

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger

Hole Diameter: 2"

Logged by: D. Alford

Page No: 1 of 1

Installation Data: Backfill with enviroplug

location of boring:

| epth (ft) | Graphic Log | Blow/ft | Vapor Concen- tration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|--------------|----------------|---------|--------------------------------------|--------------------------|------------------------------------|-----------------|------|------|--|
| | | | | | | Approx. 5.0' | | | |
| 0 - | | | | | | | | | Grass |
| - | | | | Sample @ 0.5-1.0' | sm | 0.5-1.0' | | | Sand, silty with occasional gravel, medium grained, light brown, dry, no odor. |
| 1 - | | | | | sm | 1.5-2.0' | | | Sand, coarse grained, gravelly, some silt/clay, light to dark brown, loose, moist, no odor. |
| 2 - | | | | Sample @ 2.5-3.0' | sc | 2.5-3.0' | | | Sand, clayey, with occasional gravel, light grey, moist strong petroleum odor. |
| 3 - | | | | Sample @ 4.5-5.0' | sc | 4.5-5.0' | | | Sand, clayey, with occasional gravel, light grey, moist strong petroleum odor. Saturated at 5.0' |
| 4 - | | | | | | | | | |
| 5 - | | | | | | | | | |
| - | | | | | | | | | Groundwater at approximately 5.0' |

LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-12

Date: 1-16-90

Client: American Distributing Co.

Driller: D. Alford

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 2"

Logged by: D. Blaes

Page No: 1 of 1

Installation Data: Backfill with Enviroplug

Location of boring:
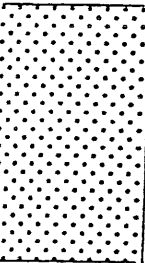
| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: | |
|------------|--|---------|---------------------------|-----------------------|------------------------------|--------------|----------|------|--|---|
| | | | | | | Approx. 3.5' | | | | |
| 0 - |  | | | Sample @ 0.5-1.0' | sp | 0.5-1.0' | | | Sand, with gravel, medium grained, brown, loose, moist, no petroleum odor. | |
| 1 - | | | | Sample @ 2.5-3.0' | sp | 2.5-3.0' | | | Sand, medium grained, gravelly, grey brown, loose, visible oil staining, strong diesel odor. | |
| 2 - | | | | Sample @ 3.0-3.5' | | | 3.0-3.5' | | | Sand, medium grained, gravelly, grey, wet, strong petroleum odor. |
| 3 - | | | | | | | | | | |
| 4 - | TD = 3.5' | | | | | | | | | |
| 5 - | | | | | | | | | | |
| | | | | | | | | | Groundwater at approximately 3.5' | |

LOG OF
EXPLORATORY BORING

Project No: 05-487-001

Boring No: AD-18

Date: 1-17-90

Client: American Distributing Co.

Driller: D. Alford

Location: Bulk Terminal-Everett, WA

Drilling Method: Hand Auger


Hole Diameter: 2"

Logged by: D. Blaes

Page No: 1 of 1

Installation Data: Backfill with Enviroplug

Location of boring:

| Depth (ft) | Graphic Log | Blow/ft | Vapor Concentration (ppm) | Sample type and Depth | Soil Group Symbol (U.S.C.S.) | Water Level | Time | Date | Comments: |
|------------|--|---------|---------------------------|-----------------------|------------------------------|-----------------|------|------|---|
| | | | | | | Approx. 4.5' | | | |
| 0 - |  | | | Sample @ | sc | | | | 0.5-1.0' Sand, clayey, brown, slightly cohesive, moist, no odor |
| 1 - | | | | 0.5-1.0' | sc | | | | 1.0-4.0' Sand, medium grained, clayey, brown to grey, organic debris, medium dense, moist, moderate diesel odor at 2.0-3.0' |
| 2 - | | | | | | | | | |
| 3 - | | | | | | | | | |
| 4 - | | | | | Sample @ | sc | | | |
| 5 - | TD = 4.5' | | | | | | | | Groundwater at approximately 4.5' |

TEST PIT LOGS

Depth (feet)

Soil Classification

11-04558-04

Test Pit TP-1

0.0 - 0.5 Gravel surface
0.5 - 1.5 Loose, wet, dark grayish-brown, silty SAND with gravel (Fill)
1.5 - 3.5 Loose, wet to saturated, gray, coarse SAND with gravel
Strong petroleum-like odor and black oily staining observed;
Test pit terminated at approximately 3.5 feet
Moderate groundwater and liquid petroleum hydrocarbon seepage below 3 feet

Field FT-IR analysis indicated > 4,600 ppm TPH at 3 foot depth

Test Pit TP-2

0.0 - 0.5 Gravel surface; old A/C at 0.5 feet
0.5 - 4.0 Loose, wet to saturated, gray, coarse SAND with gravel
No unusual odors or staining observed;
Test pit terminated at approximately 4.0 feet
Moderate groundwater seepage observed below 3.5 feet
A large block of concrete encountered at a depth of approximately 1 foot

Field FT-IR analysis indicated 30 ppm TPH at 3.5 foot depth

Test Pit TP-3

0.0 - 0.5 Gravel surface old A/C at 0.5 feet
0.5 - 4.0 Loose, wet to saturated, gray, coarse SAND with gravel
Test pit terminated at approximately 4.0 feet
Moderate groundwater seepage observed below 3.5 feet
Slight surface sheen observed on groundwater emanating from the east side of the test pit

Field FT-IR analysis indicated 80 ppm TPH at 3.5 foot depth

Depth (feet) Soil Classification

Test Pit TP-4

0.0 - 0.5 Gravel surface
0.5 - 4.0 Loose, wet to saturated, gray, coarse SAND with gravel
Test pit terminated at approximately 4.0 feet
Moderate groundwater seepage observed below 3.5 feet
No unusual odors or staining observed

Field FT-IR analysis indicated 30 ppm TPH at 3.5 feet

Test Pit TP-5

0.0 - 0.5 Gravel surface
0.5 - 4.0 Loose, wet to saturated, gray, coarse SAND with gravel
Test pit terminated at approximately 4.0 feet
Moderate groundwater seepage observed below 3.5 feet
No unusual odors or staining observed

Field FT-IR analysis indicated 50 ppm TPH at 3.5 feet

Date excavated: 8 December 1993

Logged by: TJP

Backhoe Test Pit Logs

TP-1-96

Gray, moist to wet, silty SAND with gravel and some cobbles. Met with refusal at a depth of approximately 3.0 feet due to buried concrete. Slow seepage observed at approximately 1.5 feet. Soil exhibits a petroleum hydrocarbon-like odor. After approximately 1.5 hours, discontinuous blebs of LPH were observed on the water accumulated in the test pit.

TP-2-96

Brown, moist to wet, silty SAND with gravel and some wood and metal debris; becomes gray below approximately 1.0 feet. Slow seepage observed at approximately 1.0 feet and again below approximately 4.0 feet. Soil exhibits a petroleum hydrocarbon-like odor. After approximately 1.5 hours, discontinuous blebs of LPH were observed on the water accumulated in the test pit. Test pit terminated at approximately 4.5 feet.

TP-3-96

Gray, moist, gravelly SAND with some silt with scattered wood and brick debris. Underlain at approximately 4.0 feet by gray, wet to saturated, cohesive, silty, fine to medium SAND. Slow seepage observed at approximately 1.5 feet. Moderate seepage observed below a depth of approximately 6.0 feet. Soil exhibits a petroleum hydrocarbon-like odor. No LPH observed; sheen present of water accumulated in the test pit. Test pit terminated at approximately 6.5 feet.

Backhoe Test Pit Logs

TP-4-96

Brown, moist to wet, silty SAND with some gravel; becomes gray with a petroleum hydrocarbon-like odor below 2.5 feet. Slow seepage observed below approximately 5.0 feet. Discontinuous blebs of LPH observed on the groundwater accumulated in the bottom of the test pit. Test pit terminated at approximately 6.0 feet.

TP-5-96

Brown, moist to wet, silty SAND with some gravel with some brick and glass debris; becomes gray with a petroleum hydrocarbon-like odor below 2.5 feet. Slow seepage observed below approximately 5.0 feet. Encountered a 4-inch diameter clay pipe at approximately 4.5 feet. LPH and water drained from the pipe for approximately 10 to 15 minutes after digging through the pipe. Discontinuous blebs of LPH observed on the groundwater accumulated in the bottom of the test pit. The LPH appeared to originate from both seepage from the soil and infiltration from the broken clay pipe. Test pit terminated at approximately 6.0 feet.

TP-6-96

Brownish-gray, moist to wet, silty SAND with gravel and wood debris; becomes gray with a petroleum hydrocarbon-like odor below approximately 2.0 feet. Moderate to rapid LPH and groundwater seepage observed below approximately 4.0 feet. Approximately 0.02 feet of LPH accumulated as a continuous layer on top of groundwater pooled inside of the test pit. Test Pit terminated at approximately 6.0 feet.

TP-7-96

Moist to wet, dark brown to black, SAND with some silt and gravel; strong petroleum hydrocarbon-like odor observed. Moderate LPH and groundwater seepage observed below 3.0 feet. LPH accumulated as a continuous layer on top of the groundwater pooled in the test pit. LPH thickness was approximately 0.10 feet. Test pit terminated at approximately 4.0 feet.

APPENDIX D


SELECTED GEOTECHNICAL BORING LOGS

LOG OF BORING NO. DM-7-99

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: December 8, 1999
DATE COMPLETED: December 8, 1999
DRILLING CONTRACTOR: Cascade Drilling
DRILLER: Scott Kruger
DRILLING METHOD: Hollow Stem Auger to Mud Rotary
SAMPLING METHOD: D&M U, 300lb hammer, 30" drop

WATER LEVEL: ∇ 7.00 ft

ELEVATION: 18 ft
TOTAL DEPTH: 45.00 ft
WEATHER: Light rain
FIELD ENGINEER: BBS
CHECKED BY:

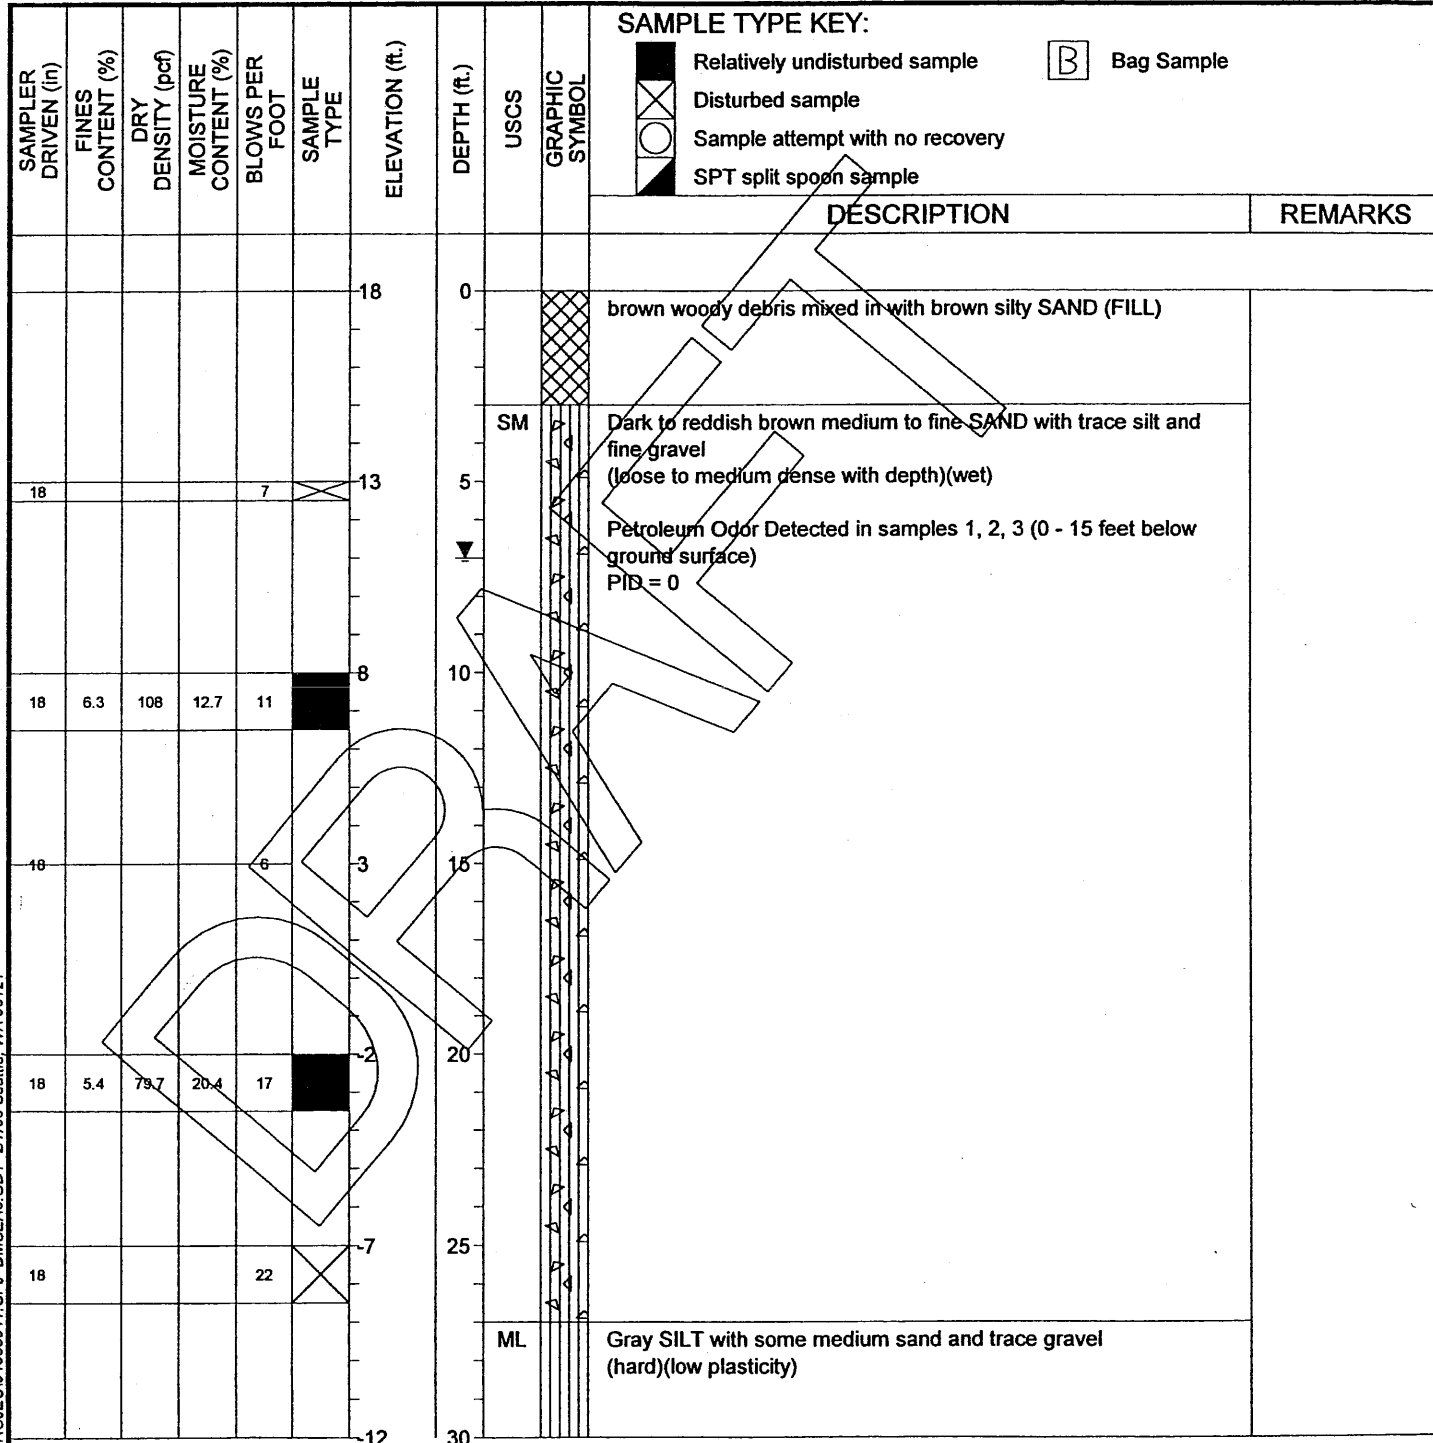

SAMPLE TYPE KEY:











- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

093 DRAFT K:11630-PROJECT\04333041.GPJ DM5E46.GDT 2/7/00 Seattle, WA 98121

PROJECT: California Street Overcrossing
 PROJECT NO: 04333-041-189
 PROJECT LOCATION: Everett, WA

FIELD ENGINEER: BBS
 CHECKED BY:

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION(ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | SAMPLE TYPE KEY: | |
|------------------------|----------------------|----------------------|-------------------------|-------------------|---|----------------|-------------|------|--|--|--|
| | | | | | | | | | |  Relatively undisturbed sample  Disturbed sample  Sample attempt with no recovery  SPT split spoon sample |  Bag sample |
| | | | | | | | | | | DESCRIPTION | REMARKS |
| 18 | | 119.2 | 25.8 | 81 |  | -12 | 30 | | | | |
| | | | | | | | | SM |  | Brown medium SAND with some silt and trace of fine gravel (very dense)(wet) | |
| 12 | | 107.2 | 15 | 50/6" |  | -17 | 35 | | | | |
| 18 | | 109.8 | 11.4 | 68 |  | -22 | 40 | | | | |
| 10 | | | | 100/10" |  | -27 | 45 | | | | |
| | | | | | | | | | | End of Boring at 46 feet below ground surface Ground water encountered at 7 feet below ground surface | |

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

0B3 DRAFT K116310-PROJ/EC/04333041.GPJ DIMSEA6.GDT 2/7/00 Seattle, WA 98121

LOG OF BORING NO. DM-8-99

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: December 1, 1999
DATE COMPLETED: December 1, 1999
DRILLING CONTRACTOR: Cascade Drilling
DRILLER: Scott Kruger
DRILLING METHOD: Hollow Stem Auger to Mud Rotary
SAMPLING METHOD: D&M U, 300lb hammer, 30" drop

WATER LEVEL: ∇ 5.00 ft

ELEVATION: 18 ft
TOTAL DEPTH: 50.00 ft
WEATHER: Overcast, light rain
FIELD ENGINEER: BBS
CHECKED BY:

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS GRAPHIC SYMBOL | SAMPLE TYPE KEY: | |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|---------------------------|---|---------|
| | | | | | | | | | DESCRIPTION | REMARKS |
| | | | | | | 18 | 0 | SM/ML | Asphalt | |
| | | | | | | | | | Black SAND with some silt and trace fine gravel (fill)(very loose)(wet) | |
| | | | | | | | | | Petroleum Odor Detected in samples 1, 2 (0 - 10 feet below ground surface) PID = 0 | |
| 18 | 19.6 | | | 2 | | 13 | | | | |
| | | | | | | | | | | |
| | | | | | | 8 | 10 | SM | Reddish brown medium SAND with some gravel and trace silt (very dense)(wet) | |
| 18 | 5.1 | | | 5 | | | | | | |
| | | | | | | | | | | |
| 18 | | 78 | 13.9 | 52 | | 3 | 15 | | | |
| | | | | | | | | | | |
| 18 | | 119.3 | 16.9 | 87 | | 2 | 20 | | | |
| | | | | | | | | | | |
| 18 | | 111.3 | 15.5 | 95 | | 7 | 25 | | | |
| | | | | | | | | | | |
| | | | | | | 12 | 30 | | | |

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

083 DRAFT K:\1630-PROJECT\04333041.GPJ DMSEA6.GDT 2/7/00 Seattle, WA 98121



DAMES & MOORE
A DAMES & MOORE GROUP COMPANY

LOG OF BORING DM-8-99

FIGURE A-10.1

PROJECT: **California Street Overcrossing**

PROJECT NO: **04333-041-189**

PROJECT LOCATION: **Everett, WA**

FIELD ENGINEER: **BBS**

CHECKED BY:

Sheet 2 of 2

| SAMPLER DRIVEN (ft) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION(ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | SAMPLE TYPE KEY: | |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|----------------|-------------|------|-------------------|--|------------|
| | | | | | | | | | | DESCRIPTION | REMARKS |
| 9 | 113.1 | 14.3 | 50/3" | | | 12 | 30 | | | Relatively undisturbed sample | Bag sample |
| 6 | | | 50/6" | | | 17 | 35 | | | Disturbed sample | |
| 18 | | | 29 | | | 22 | 40 | ML | | Gray SILT with trace fine to medium sand and fine gravel (very stiff) | |
| 18 | 90.2 | | 36 | | | 27 | 45 | SM | | Gray fine to medium SAND with some silt (very dense)(wet) | |
| 18 | | | 50/6" | | | 32 | 50 | | | End of Boring at 51.5 feet below ground surface Ground water encountered at 5 feet below ground surface | |

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

DB3 DRAFT K:\16310-PROJECT\04333041.GPJ_DMSEA6.GDT 27700 Seattle, WA 98121



LOG OF BORING DM-8-99


FIGURE A-10.2

MONITORING WELL NO. DM-6-99

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: December 6, 1999
DATE COMPLETED: December 6, 1999
DRILLING CONTRACTOR: Cascade Drilling
DRILLER: Scott Kruger
DRILLING METHOD: Hollow Stem Auger to Mud Rotary
SAMPLING METHOD: D&M U, 300lb hammer, 30" drop

WATER LEVEL: ∇ 0.00 ft

ELEVATION: +20.00
TOTAL DEPTH: 55.00 ft
WEATHER: Overcast, light rain
FIELD ENGINEER: BBS
CHECKED BY:

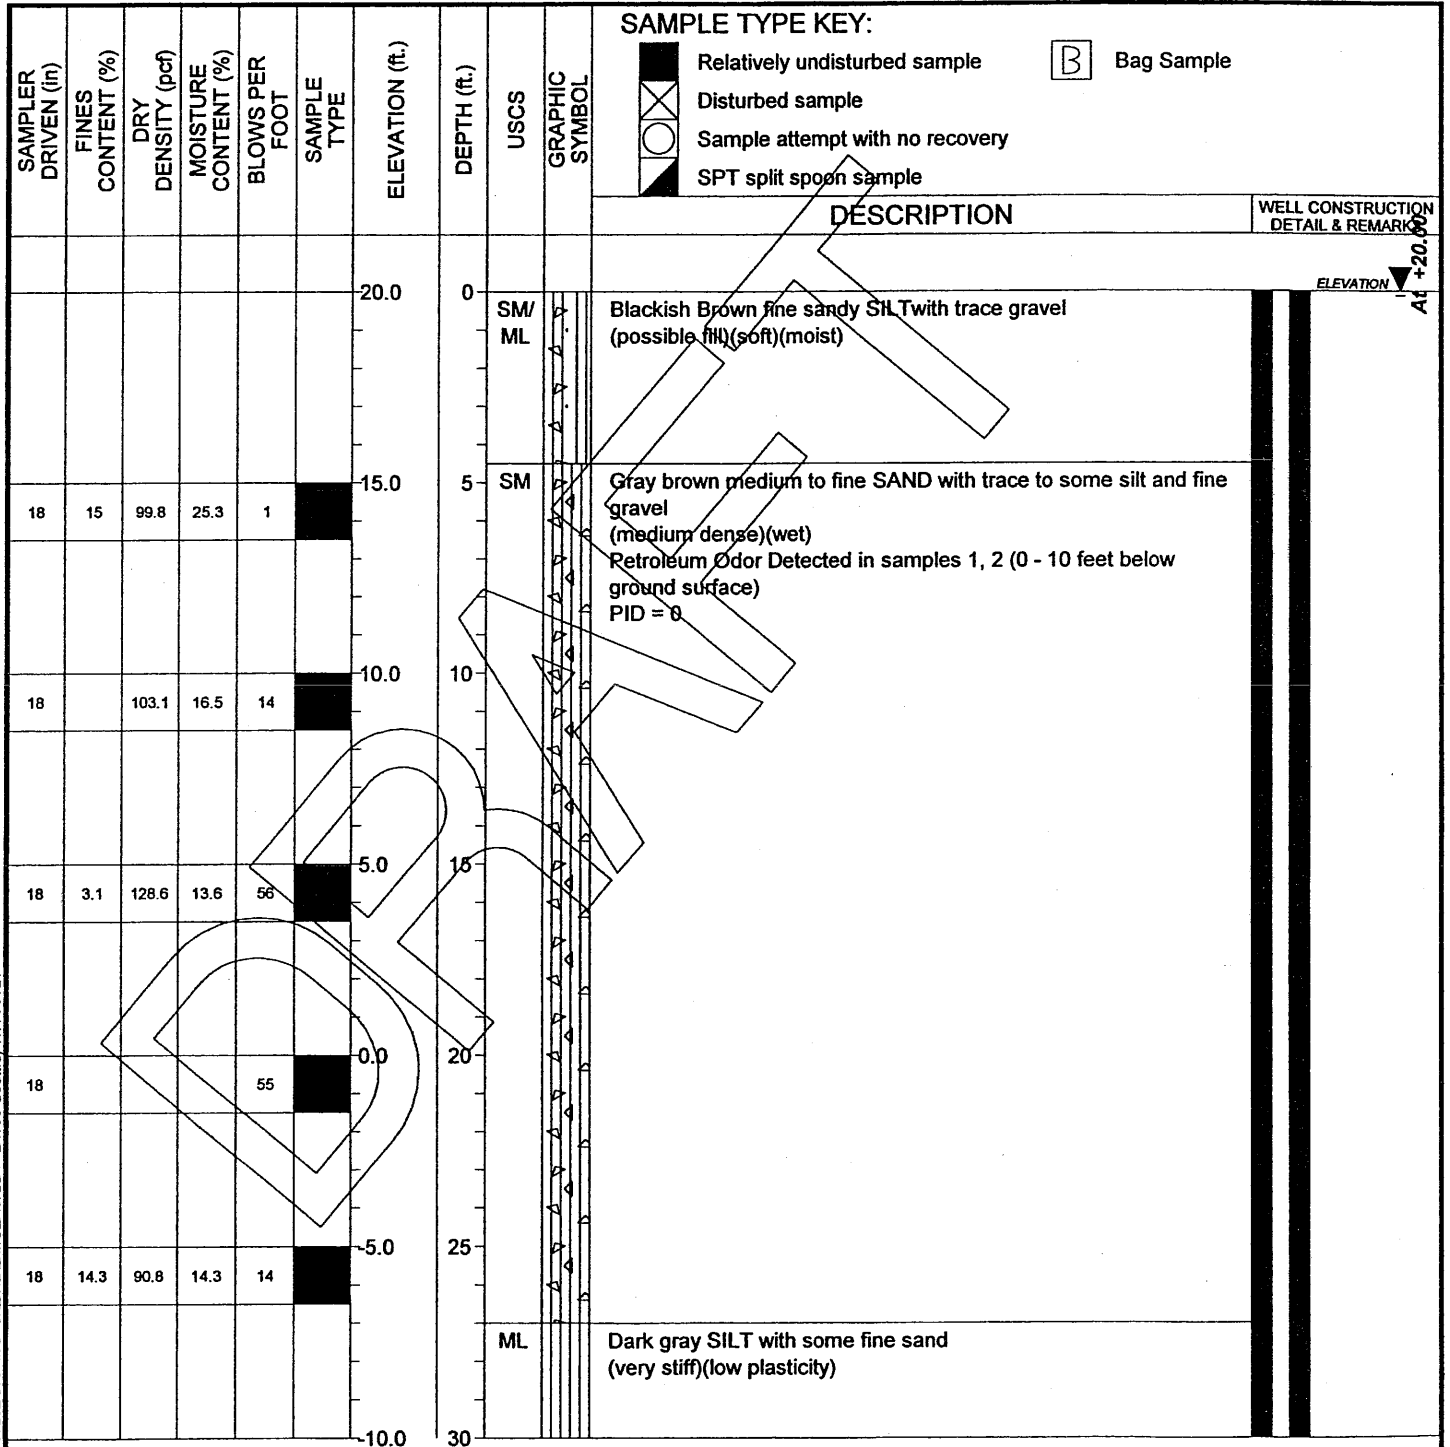

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample


NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons

5/11/03/PT/FR/W/EL/1/6/RA/FR/04/6/00/04/3/29/41/2/FR/00/01/5E/6/GDT 2/7/00 Seattle, WA 98121



- WELL SYMBOL KEY:**
- Bentonite grout
 - Bentonite plug
 - Filter Pack
 - Well screen
 - Concrete plug

MONITORING WELL DM-6-99
 FIGURE A-8.1

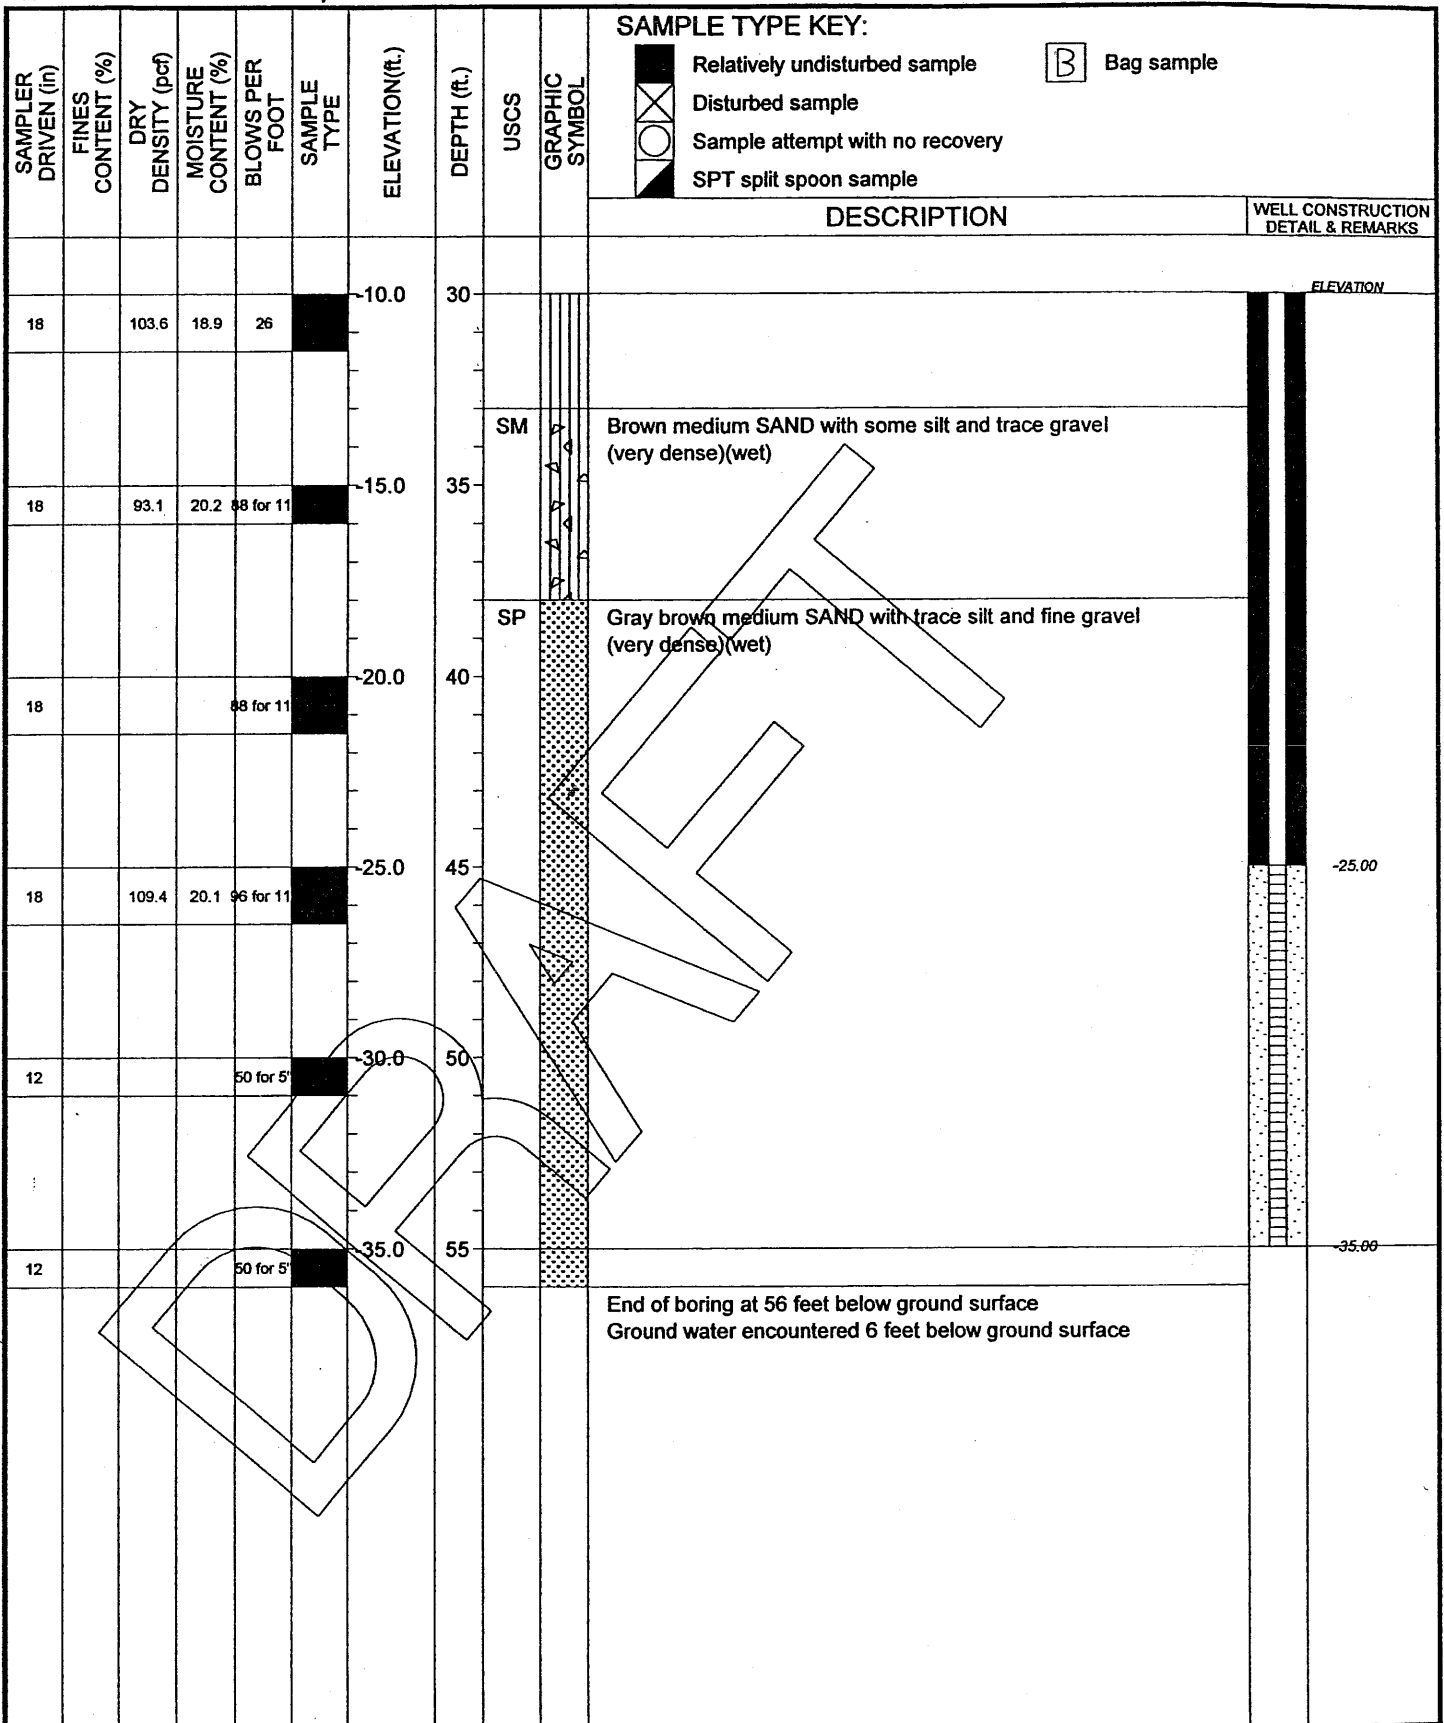


WELL DRAFT K:\16310-PROJ\04333041.GPJ DMSEA6.GDT 2/7/00 Seattle, WA 98121

NOTES: PID is a Photo Ionization Detector that detects the presence of volatile hydrocarbons



WELL
SYMBOL
KEY:



MONITORING WELL DM-6-99
 Well screen
 Concrete plug
FIGURE A-8.2

**APPENDIX B
BORING LOGS**

LOG OF BORING NO. UG-1

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 25, 2000**
 DATE COMPLETED: **September 25, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼ 4.00 ft**

ELEVATION: **18 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **T. Parkington**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|----------------|---------------------------------------|------------------------|
| | | | | | | 18 | 0 | | | Asphaltic Concrete. | |
| | | | | | | | | GP | | Gravel subgrade | |
| | | | | | | | | PT | | Dark brown silty peat | PID = 3 ppm |
| | | | | | | 13 | 5 | | | | PID = 24 ppm |
| | | | | | | | | SM | | Black silty sand with some woody peat | PID = 2 ppm |
| | | | | | | | | SM | | Brown sand with some silt. h.c. odor | |
| | | | | | | 8 | 10 | | | Brown gray sand, wet. | PID = 0 ppm No odor |
| Boring completed at 12 feet. Backfilled with Bentonite. Ground water at 4 feet bgs. | | | | | | | | | | | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

LOB3 K:\16304333--1\GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT_11/3/00_Seattle, WA 98121

NOTES:



LOG OF BORING NO. UG-2

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 25, 2000**
 DATE COMPLETED: **September 25, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼ 3.00 ft**

ELEVATION: **16 ft**
 TOTAL DEPTH: **17.00 ft**

WEATHER:
 FIELD ENGINEER: **T. Parkington**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|---------------------|--|--|
| | | | | | | 16 | 0 | ■ | Asphaltic Concrete. | |
| | | | | | | | | ■ | Black organic silt | |
| | | | | | X | | 3 | ▼ | Black silty sand. Strong odor. | PID = 200 ppm |
| | | | | | X | 11 | 5 | ■ | Black woody peat | Very oily. PID = 200 ppm GW sample taken PID = 300 ppm |
| | | | | | X | 6 | 10 | ■ | | PID = 12 ppm |
| | | | | | X | 1 | 15 | ■ | Brown silty sand. | PID = 0 ppm |
| | | | | | | | | | Boring completed at 17 feet. Backfilled with bentonite. Ground water at 3 feet | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample

- B Bag Sample
- ↓ Pocket Penetrometer
- V Vane Shear (psf)

LOB3 K:116304333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT 11/3/00 Seattle, WA 98121

NOTES:



LOG OF BORING UG-2

FIGURE G 2

LOG OF BORING NO. UG-3

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: September 25, 2000
DATE COMPLETED: September 25, 2000
DRILLING CONTRACTOR: Cascade Drilling
DRILLER:
DRILLING METHOD: Geoprobe
SAMPLING METHOD: Geoprobe

WATER LEVEL: ∇ 5.00 ft

ELEVATION: 18 ft
TOTAL DEPTH: 14.50 ft
WEATHER:
FIELD ENGINEER: T. Parkington
CHECKED BY: M. McCabe

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|-------|----------------|--|--|
| | | | | | | 18 | 0 | | ■ | Asphaltic Concrete. | |
| | | | | | | | | GP | □ | Gravel subgrade | |
| | | | | | ⊗ | | | SM | □ | Gray brown silty sand | PID = 0 ppm |
| | | | | | ⊗ | 13 | | SM | □ | Red-tan silty sand | PID = 0 ppm |
| | | | | | ⊗ | | | SM/ML | □ | Brown silty sand / sandy silt with lenses of woody peat. | PID = 1 ppm |
| | | | | | ○ | 8 | 10 | | □ | | No evidence of hydrocarbons in water on rods |
| | | | | | | | | | | Boring completed at 14.5 feet. Backfilled with bentonite. Groundwater at 5 feet bgs. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- B Bag Sample
- ↓ Pocket Penetrometer
- ▽ Vane Shear (psf)

LOB3 K1163104333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT 11/23/00 Seattle, WA 98121

NOTES:



LOG OF BORING UG-3

FIGURE G 3

LOG OF BORING NO. UG-5

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: September 25, 2000
DATE COMPLETED: September 25, 2000
DRILLING CONTRACTOR: Cascade Drilling
DRILLER:
DRILLING METHOD: Geoprobe
SAMPLING METHOD: Geoprobe

WATER LEVEL: ∇ 6.00 ft

ELEVATION: 19 ft
TOTAL DEPTH: 12.00 ft
WEATHER:
FIELD ENGINEER: B. Strickler
CHECKED BY: M. McCabe

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|----------------|--|-------------|
| | | | | | | 19 | 0 | GP | | Gravel | |
| | | | | | | | | SM | | Brown silty sand with trace gravel. No odor. | PID = 0 ppm |
| | | | | | | 14 | 5 | SM | | Gray silty sand | PID = 0 ppm |
| | | | | | | | | SM | | Dark brown silty sand with trace gravel and wood fragments. | PID = 0 ppm |
| | | | | | | 9 | 10 | | | End of boring at 12 feet. Backfilled with bentonite. Ground water at 6 feet bgs. | PID = 0 ppm |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

LOB3_K116304333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT_11/3/00 Seattle, WA 98121

NOTES:



LOG OF BORING UG-5

FIGURE G 5

LOG OF BORING NO. UG-6

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 26, 2000**
 DATE COMPLETED: **September 26, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼ 5.00 ft**
 ELEVATION: **18 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | SAMPLE TYPE KEY: | | |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|-----------|-------------------|--|---------|---------------------|
| | | | | | | | | | | DESCRIPTION | REMARKS | |
| | | | | | | 18 | 0 | SM/ GM | | Relatively undisturbed sample | | Bag Sample |
| | | | | | | | | | | Disturbed sample | | Pocket Penetrometer |
| | | | | | | | | | | Sample attempt with no recovery | | Vane Shear (psf) |
| | | | | | | | | | | SPT split spoon sample | | |
| | | | | | | | | | | | | |
| | | | | | | 13 | | SM | | Gray silty sand, some gravel. No odor. | | PID = 0 ppm |
| | | | | | | | | | | Traces of brown color | | PID = 0 ppm |
| | | | | | | | | | | Some wood fragments. | | PID = 0 ppm |
| | | | | | | 8 | 10 | SP | | Brown sand, silt and gravel. | | PID = 0 ppm |
| | | | | | | | | | | End of boring at 12 feet. Backfilled with bentonite. Ground water at 5 feet bgs. | | |

NOTES:

LOB3 K16304333--1GEOPROBE.GPJ URSSEA1.GLB URSSEA1.GDT 11/3/00 Seattle, WA 98121



LOG OF BORING UG-6

FIGURE G 6

LOG OF BORING NO. UG-7

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: September 26, 2000
DATE COMPLETED: September 26, 2000
DRILLING CONTRACTOR: Cascade Drilling
DRILLER:
DRILLING METHOD: Geoprobe
SAMPLING METHOD: Geoprobe

WATER LEVEL: ∇ 2.00 ft
ELEVATION: 16 ft
TOTAL DEPTH: 12.00 ft
WEATHER:
FIELD ENGINEER: B. Strickler
CHECKED BY: M. McCabe

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|------|-------------------|---|-------------|
| | | | | | | 16 | 0 | | ■ | Asphaltic Concrete. | |
| | | | | | ⊗ | | ▼ | SM | ⚡ | Dark brown to gray silty sand with some gravel | PID = 0 ppm |
| | | | | | ⊗ | 11 | 5 | | ⚡ | Some wood fragments | PID = 0 ppm |
| | | | | | ⊗ | 6 | 10 | | ⚡ | Dark brown sand with some silt and gravel. | PID = 0 ppm |
| | | | | | | | | | | End of boring at 12 feet. Backfilled with bentonite. Groundwater at 2 feet bgs. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- ⊗ Disturbed sample
- Sample attempt with no recovery
- ⚡ SPT split spoon sample
- ⓑ Bag Sample
- ⓓ Pocket Penetrometer
- Ⓥ Vane Shear (psf)

NOTES:



LOG OF BORING UG-7

FIGURE G 7

LOB3_K:16304333--1GEOPROBE.GPJ_URSSSE1.GLB_URSSSE1.GDT_11/3/00 Seattle, WA_98121

LOG OF BORING NO. UG-8

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: September 26, 2000
DATE COMPLETED: September 26, 2000
DRILLING CONTRACTOR: Cascade Drilling
DRILLER:
DRILLING METHOD: Geoprobe
SAMPLING METHOD: Geoprobe

WATER LEVEL: ∇ 4.00 ft

ELEVATION: 17 ft
TOTAL DEPTH: 19.50 ft
WEATHER:
FIELD ENGINEER: B. Strickler
CHECKED BY: M. McCabe

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS GRAPHIC SYMBOL | SAMPLE TYPE KEY: | | DESCRIPTION | REMARKS |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|---------------------------|--|---|---------------|---------|
| | | | | | | | | | Relatively undisturbed sample Disturbed sample Sample attempt with no recovery SPT split spoon sample | Bag Sample Pocket Penetrometer Vane Shear (psf) | | |
| | | | | | | 17 | 0 | GP | Gravel | | | |
| | | | | | | | | SM | Gray silty sand with some gravel | | | |
| | | | | | | | | SM | Dark brown to black silty sand with some gravel and wood fragmenst. Strong odor. Strong odor | | PID = 186 ppm | |
| | | | | | | 12 | 5 | SM | Gray silty sand with some gravel Black silty sand with some wood fragments. Strong odor | | PID = 180 ppm | |
| | | | | | | | | PT | Black woody peat, strong odor. Color grades to red with no odor. | | PID = 105 ppm | |
| | | | | | | 7 | 10 | | | | PID = 5 ppm | |
| | | | | | | | | | | | PID = 0 ppm | |
| | | | | | | | | | | | | |
| | | | | | | 2 | 15 | | Brown sand with some silt and gravel. Faint odor No odor. | | PID = 0 ppm | |
| | | | | | | | | | End of boring at 19.5 feet. Backfilled with bentonite. Gound water at 4 feet bgs. | | | |

LOB3 K:116304333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT_11/3/00 Seattle, WA 98121

NOTES:



LOG OF BORING NO. UG-9

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 26, 2000**
 DATE COMPLETED: **September 26, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼4.00 ft**
 ELEVATION: **18 ft**
 TOTAL DEPTH: **17.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|----------------|---|---------------|
| | | | | | X | 18 | 0 | GP | | Gravel | |
| | | | | | X | | 4 | SM | | Gray silty sand with some gravel. Strong odor. | PID = 430 ppm |
| | | | | | X | 13 | 5 | | | Strong odor. | PID = 175 ppm |
| | | | | | X | | 8 | PT | | Woody peat. Strong odor. | PID = 200 ppm |
| | | | | | X | 8 | 10 | | | Strong odor. | PID = 375 ppm |
| | | 827.4 | | | X | | 15 | SP | | Brown sand with trace silt and some gravel. Some odor. | PID = 0 ppm |
| | | | | | X | 3 | 15 | | | No odor | PID = 0 ppm |
| | | | | | | | | | | End of boring at 17 feet. Backfill with bentonite. Groundwater at 4 feet bgs. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

NOTES:

LOG OF BORING UG-9

FIGURE G 9



LOB3 K:16304333--1GEOPROBE.GPJ_URSSSE1.GLB_URSSSE1.GDT_11/3/00 Seattle, WA 98121

LOG OF BORING NO. UG-10

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 26, 2000**
 DATE COMPLETED: **September 26, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼ 3.00 ft**
 ELEVATION: **18 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|------------------------|----------------------|----------------------|-------------------------|-------------------|----------------|-----------------|-------------|------|-------------------|---|-------------|
| | | | | | | 18 | 0 | GP | ○ | Gravel | |
| | | | | | | 3 | 3 | SP | ▼ | Brown to dark brown sand with some to trace silt and gravel. No odor. | PID = 0 ppm |
| | | | | | | 5 | 5 | | | | PID = 0 ppm |
| | | | | | | 8 | 8 | | | | PID = 0 ppm |
| | | | | | | 10 | 10 | | | | PID = 0 ppm |
| | | | | | | | | | | End of boring at 12 feet. Backfilled with Bentonite. Groundwater at 3 feet bgs. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

LOB3 K1163104333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT 11/2/00 Seattle, WA 98121

NOTES:



LOG OF BORING UG-10

FIGURE G 10

LOG OF BORING NO. UG-11

PROJECT: California Street Overcrossing
PROJECT NO: 04333-041-189
PROJECT LOCATION: Everett, WA
CLIENT NAME: Port of Everett
DATE STARTED: September 26, 2000
DATE COMPLETED: September 26, 2000
DRILLING CONTRACTOR: Cascade Drilling
DRILLER:
DRILLING METHOD: Geoprobe
SAMPLING METHOD: Geoprobe

WATER LEVEL: ∇ 4.00 ft

ELEVATION: 18 ft
TOTAL DEPTH: 12.00 ft
WEATHER:
FIELD ENGINEER: B. Strickler
CHECKED BY: M. McCabe

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | SAMPLE TYPE KEY: | |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|--|--|---|
| | | | | | | | | | | Relatively undisturbed sample Disturbed sample Sample attempt with no recovery SPT split spoon sample | Bag Sample Pocket Penetrometer Vane Shear (psf) |
| | | | | | | | | | | DESCRIPTION | REMARKS |
| | | | | | | 18 | 0 | GP | Gravel. | | |
| | | | | | | | 4 | SP | Brown to gray sand with some to trace silt and gravel. Faint odor. | | PID = 0 ppm |
| | | | | | X | 5 | 4 | | No odor | | PID = 0 ppm |
| | | | | | X | 8 | 8 | | | | PID = 0 ppm |
| | | | | | X | 10 | 10 | | | | PID = 0 ppm |
| | | | | | | | | | | End of boring at 12 feet. Backfilled with bentonite. Groundwater at 4 feet bgs. | |

NOTES:

LOB3 K116304333--1GEOPROBE.GPJ_URSSEA1.GLB_URSSEA1.GDT 11/3/00 Seattle, WA 98121



LOG OF BORING UG-11

FIGURE G 11

LOG OF BORING NO. UG-12

PROJECT: **California Street Overcrossing**
 PROJECT NO: **04333-041-189**
 PROJECT LOCATION: **Everett, WA**
 CLIENT NAME: **Port of Everett**
 DATE STARTED: **September 26, 2000**
 DATE COMPLETED: **September 26, 2000**
 DRILLING CONTRACTOR: **Cascade Drilling**
 DRILLER:
 DRILLING METHOD: **Geoprobe**
 SAMPLING METHOD: **Geoprobe**

WATER LEVEL: **▼4.00 ft**
 ELEVATION: **18 ft**
 TOTAL DEPTH: **12.00 ft**
 WEATHER:
 FIELD ENGINEER: **B. Strickler**
 CHECKED BY: **M. McCabe**

| SAMPLER DRIVEN (in) | FINES CONTENT (%) | DRY DENSITY (pcf) | MOISTURE CONTENT (%) | BLOWS PER FOOT | SAMPLE TYPE | ELEVATION (ft.) | DEPTH (ft.) | USCS | GRAPHIC SYMBOL | DESCRIPTION | REMARKS |
|---------------------|-------------------|-------------------|----------------------|----------------|-------------|-----------------|-------------|------|----------------|---|-------------|
| | | | | | X | 18 | 0 | | | | |
| | | | | | X | 13 | 5 | | | Brown sand with trace silt and gravel. No odor. | PID = 0 ppm |
| | | | | | X | 8 | 10 | | | Some wood fragments. | PID = 0 ppm |
| | | | | | X | 8 | 10 | | | Woody peat | PID = 0 ppm |
| | | | | | X | 8 | 10 | | | Brown sand with trace silt and gravel. | |
| | | | | | | | 12 | | | End of boring at 12 feet. Groundwater at 4 feet bgs. Backfilled with bentonite. | |

SAMPLE TYPE KEY:

- Relatively undisturbed sample
- Disturbed sample
- Sample attempt with no recovery
- SPT split spoon sample
- Bag Sample
- Pocket Penetrometer
- Vane Shear (psf)

NOTES:



LOG OF BORING UG-12

FIGURE G 12

Project Information

| | | | |
|-------------------|--------------------------------|-----------|-------------------------------|
| Project Name: | California Street Overcrossing | Location: | California St and Federal Ave |
| Project/Task No.: | 53-04333041.00 00056 | Weather: | sunny, 60F |

Drilling Information

| | | | |
|------------------|---------------------------------|--------------------------------|--------------------------------|
| Date Started: | Thursday, June 21, 2001 | Annulus Diameter: | 2 inches |
| Date Completed: | Thursday, June 21, 2001 | Hammer Weight and Drop: | NA lbs and NA inches |
| Drilled By: | Kasey Goble of Cascade Drilling | Sampler Type: | 3' stainless steel split spoon |
| Logged By: | Kate Pineo of URS | Approximate Surface Elevation: | NA feet |
| Checked By: | Dave Raubvogel of URS | Groundwater Level: | 4 below ground surface |
| Drilling Method: | Direct Push | Total Depth: | 13 below ground surface |
| Drill Rig Type: | Truck-mounted GeoProbe | Backfill Material: | bentonite chips, asphalt patch |

Well Installation Data

| | | | |
|----------------------|----|--------------------------|----|
| Type of Well Casing: | NA | Top of PVC Elevation: | NA |
| Screen Perforation: | NA | Type/Thickness of Seals: | NA |
| Diameter of Well: | NA | Type of Sand Pack: | NA |
| Screened Interval: | NA | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|------|---------------------|--------------|---|-------------------------|--------------------|-------------|---|
| 0 | | | | | | Asphalt, gravel road base. | | | | |
| 1 | | 36/24 | | SM | | Gray to brown Silt and fine Sand, some very angular fine Gravel, dry. | | 16.1 | JP1/1.5-4.5 | Began sampling at 1.5'. |
| 2 | | | | SP | | Gray medium to coarse sand, mottled, moist. | | | | |
| 3 | | | | ML | | Gray Silt and Clay, wood debris, moist. | | | | |
| 4 | | 36/27 | 8:15 | SM | | Brown fine Sand and Silt, wet. | | 45 | JP1/4.5-7.5 | |
| 5 | | | | ML | | Brown Silt and Clay, wet. | | | | |
| 6 | | | | | | | | | | |
| 7 | | | | | | | | | | |
| 8 | | 36/36 | 8:30 | SM | | Brown Sand and Silt with silty clay interbeds, grading black. | | 15 | JP1/7.5-10 | |
| 9 | | | | | | | | | | |
| 10 | | 36/12 | 8:45 | SP | | Brown medium to coarse Sand, medium soft, mottled, wet. | | 5 | | Refusal at 10' bgs. Moved 6.5' west and sampled 10 - 13'. |
| 11 | | | | | | | | | | |
| 12 | | | | | | | | | | |
| 13 | | | | | | BORING COMPLETED AT 13' | | | | |
| 14 | | | | | | | | | | |
| 15 | | | | | | | | | | |
| 16 | | | | | | | | | | |
| 17 | | | | | | | | | | |
| 18 | | | | | | | | | | |
| 19 | | | | | | | | | | |
| 20 | | | | | | | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.
 PID screening on black soil at 10' bgs = 14 ppm.
 Sampled groundwater JP1/GW at 8:30. Slow recharge, very clear water.
 Slight organic odor in 10 - 13' sample. Not collected for analysis.

Project Information

| | | | |
|-------------------|---------------------------------------|-----------|--------------------------------------|
| Project Name: | <u>California Street Overcrossing</u> | Location: | <u>California St and Federal Ave</u> |
| Project/Task No.: | <u>53-04333041.00 00056</u> | Weather: | <u>sunny, 60F</u> |

Drilling Information

| | | | |
|------------------|---|--------------------------------|---------------------------------------|
| Date Started: | <u>Thursday, June 21, 2001</u> | Annulus Diameter: | <u>2</u> inches |
| Date Completed: | <u>Thursday, June 21, 2001</u> | Hammer Weight and Drop: | <u>NA</u> lbs and <u>NA</u> inches |
| Drilled By: | <u>Kasey Goble</u> of <u>Cascade Drilling</u> | Sampler Type: | <u>3' stainless steel split spoon</u> |
| Logged By: | <u>Kate Pineo</u> of <u>URS</u> | Approximate Surface Elevation: | <u>NA</u> feet |
| Checked By: | <u>Dave Raubvogel</u> of <u>URS</u> | Groundwater Level: | <u>2.3</u> below ground surface |
| Drilling Method: | <u>Direct Push</u> | Total Depth: | <u>6</u> below ground surface |
| Drill Rig Type: | <u>Truck-mounted GeoProbe</u> | Backfill Material: | <u>benonite chips</u> |

Well Installation Data

| | | | |
|----------------------|-----------|--------------------------|-----------|
| Type of Well Casing: | <u>NA</u> | Top of PVC Elevation: | <u>NA</u> |
| Screen Perforation: | <u>NA</u> | Type/Thickness of Seals: | <u>NA</u> |
| Diameter of Well: | <u>NA</u> | Type of Sand Pack: | <u>NA</u> |
| Screened Interval: | <u>NA</u> | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|------|---------------------|--------------|--|-------------------------|--------------------|---------|---------|
| 0 | | 36/24 | 9:15 | ML | | Brown Silt and Clay, some fine Gravel, dry. | | 0 | JP2/0-3 | |
| 1 | | | | SM | | Fine Sand and Silt, some fine Gravel, wet. | | 0 | JP2/3-6 | |
| 2 | | | | | | | | | | |
| 3 | | 36/24 | 9:15 | | | Grading brown fine to coarse Sand and fine Gravel, some Silt. | | | | |
| 4 | | | | | | Grading brown-gray fine Sand and Silt, some fine to coarse Gravel. | | | | |
| 5 | | | | | | Black fine Sand, saturated. | | | | |
| 6 | | | | | | BORING COMPLETED AT 6' | | | | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.

Project Information

| | | | |
|-------------------|---------------------------------------|-----------|--------------------------------------|
| Project Name: | <u>California Street Overcrossing</u> | Location: | <u>California St and Federal Ave</u> |
| Project/Task No.: | <u>53-04333041.00 00056</u> | Weather: | <u>sunny, 60F</u> |

Drilling Information

| | | | |
|------------------|---|--------------------------------|---------------------------------------|
| Date Started: | <u>Thursday, June 21, 2001</u> | Annulus Diameter: | <u>2</u> inches |
| Date Completed: | <u>Thursday, June 21, 2001</u> | Hammer Weight and Drop: | <u>NA</u> lbs and <u>NA</u> inches |
| Drilled By: | <u>Kasey Goble</u> of <u>Cascade Drilling</u> | Sampler Type: | <u>3' stainless steel split spoon</u> |
| Logged By: | <u>Kate Pineo</u> of <u>URS</u> | Approximate Surface Elevation: | <u>NA</u> feet |
| Checked By: | <u>Dave Raubvogel</u> of <u>URS</u> | Groundwater Level: | <u>2.5</u> below ground surface |
| Drilling Method: | <u>Direct Push</u> | Total Depth: | <u>6</u> below ground surface |
| Drill Rig Type: | <u>Truck-mounted GeoProbe</u> | Backfill Material: | <u>bentonite chips</u> |

Well Installation Data

| | | | |
|----------------------|-----------|--------------------------|-----------|
| Type of Well Casing: | <u>NA</u> | Top of PVC Elevation: | <u>NA</u> |
| Screen Perforation: | <u>NA</u> | Type/Thickness of Seals: | <u>NA</u> |
| Diameter of Well: | <u>NA</u> | Type of Sand Pack: | <u>NA</u> |
| Screened Interval: | <u>NA</u> | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|-------|---------------------|--------------|---|-------------------------|--------------------|---------|---------|
| 0 | | 36/30 | 10:00 | GP | | Brown fine to medium Sand and fine Gravel, dry. | | 8.5 | JP3/0-3 | |
| 1 | | | | ML | | Brown-gray Silt and Clay, some fine Gravel, damp. | | | | |
| 2 | | | | | | | | | | |
| 3 | | 36/36 | 10:00 | SM | | Brown fine Sand and Silt, wet. | | 6 | JP3/3-6 | |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | | | | | BORING COMPLETED AT 6'. | | | | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.

Project Information

| | | | |
|-------------------|--------------------------------|-----------|-------------------------------|
| Project Name: | California Street Overcrossing | Location: | California St and Federal Ave |
| Project/Task No.: | 53-04333041.00 00056 | Weather: | sunny, 60F |

Drilling Information

| | | | |
|------------------|---------------------------------|--------------------------------|--------------------------------|
| Date Started: | Thursday, June 21, 2001 | Annulus Diameter: | 2 inches |
| Date Completed: | Thursday, June 21, 2001 | Hammer Weight and Drop: | NA lbs and NA inches |
| Drilled By: | Kasey Goble of Cascade Drilling | Sampler Type: | 3' stainless steel split spoon |
| Logged By: | Kate Pineo of URS | Approximate Surface Elevation: | NA feet |
| Checked By: | Dave Raubvogel of URS | Groundwater Level: | 2 below ground surface |
| Drilling Method: | Direct Push | Total Depth: | 10 below ground surface |
| Drill Rig Type: | Truck-mounted GeoProbe | Backfill Material: | bentonite chips |

Well Installation Data

| | | | |
|----------------------|----|--------------------------|----|
| Type of Well Casing: | NA | Top of PVC Elevation: | NA |
| Screen Perforation: | NA | Type/Thickness of Seals: | NA |
| Diameter of Well: | NA | Type of Sand Pack: | NA |
| Screened Interval: | NA | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|-------|---------------------|--------------|---|-------------------------|--------------------|----------|---------|
| 0 | | 36/24 | 10:30 | GP | | Brown-gray fine Sand and Gravel, dry | | 280 - 300 | JP4/0-3 | Odor. |
| 1 | | | | SM | | Gray fine Sand and Silt, some fine Gravel, dark gray ash/sinder layer, dry. | | | | |
| 2 | | | | | | Grading brown fine Sand and Silt, little coarse Gravel. | | | | |
| 3 | | 36/12 | 10:45 | SP | | Brown fine to coarse SAND, little coarse Gravel, wet. | | 270 | JP4/3-6 | Odor. |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | | | | | No sample collected. | | | | |
| 7 | | | | | | | | | | |
| 8 | | 24/7 | 10:50 | SM | | Gray medium Sand and Silt, wet. Red-brown wood debris noted. | | 5.3 | JP4/8-10 | |
| 9 | | | | | | | | | | |

BORING COMPLETED AT 10'.

NOTES:

Groundwater level measured down-hole with water level indicator.
Groundwater sample JP4/GW collected at 10:50.

Project Information

| | | | |
|-------------------|---------------------------------------|-----------|--------------------------------------|
| Project Name: | <u>California Street Overcrossing</u> | Location: | <u>California St and Federal Ave</u> |
| Project/Task No.: | <u>53-04333041.00 00056</u> | Weather: | <u>sunny, 60F</u> |

Drilling Information

| | | | |
|------------------|---|--------------------------------|---------------------------------------|
| Date Started: | <u>Thursday, June 21, 2001</u> | Annulus Diameter: | <u>2</u> inches |
| Date Completed: | <u>Thursday, June 21, 2001</u> | Hammer Weight and Drop: | <u>NA</u> lbs and <u>NA</u> inches |
| Drilled By: | <u>Kasey Goble</u> of <u>Cascade Drilling</u> | Sampler Type: | <u>3' stainless steel split spoon</u> |
| Logged By: | <u>Kate Pineo</u> of <u>URS</u> | Approximate Surface Elevation: | <u>NA</u> feet |
| Checked By: | <u>Dave Raubvogel</u> of <u>URS</u> | Groundwater Level: | <u>2</u> below ground surface |
| Drilling Method: | <u>Direct Push</u> | Total Depth: | <u>6</u> below ground surface |
| Drill Rig Type: | <u>Truck-mounted GeoProbe</u> | Backfill Material: | <u>bentonite chips</u> |

Well Installation Data

| | | | |
|----------------------|-----------|--------------------------|-----------|
| Type of Well Casing: | <u>NA</u> | Top of PVC Elevation: | <u>NA</u> |
| Screen Perforation: | <u>NA</u> | Type/Thickness of Seals: | <u>NA</u> |
| Diameter of Well: | <u>NA</u> | Type of Sand Pack: | <u>NA</u> |
| Screened Interval: | <u>NA</u> | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PTD Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|-------|---------------------|--------------|---|-------------------------|--------------------|---------|---------|
| 0 | | 36/36 | 11:05 | SM | | Light gray fine Sand and Silt, some coarse Gravel, dry. | | 4.3 | JP5/0-3 | |
| 1 | | | | ML | | Dark gray SILT and coarse Gravel | | | | |
| | | 36/22 | 11:10 | SM | | Brown dense fine Sand and Silt, wet, grading gray. | | 1.5 | | |
| 2 | | | | | | | | | | |
| 3 | | | | | | Grading brown. | | 5.3 | JP5/3-6 | |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| | | | | SP | | Black fine to medium Sand and Gravel. | | | | |
| 6 | | | | | | BORING COMPLETED AT 6'. | | | | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.

Project Information

| | | | |
|-------------------|---------------------------------------|-----------|--------------------------------------|
| Project Name: | <u>California Street Overcrossing</u> | Location: | <u>California St and Federal Ave</u> |
| Project/Task No.: | <u>53-04333041.00 00056</u> | Weather: | <u>sunny, 60F</u> |

Drilling Information

| | | | |
|------------------|---|--------------------------------|---------------------------------------|
| Date Started: | <u>Thursday, June 21, 2001</u> | Annulus Diameter: | <u>2</u> inches |
| Date Completed: | <u>Thursday, June 21, 2001</u> | Hammer Weight and Drop: | <u>NA</u> lbs and <u>NA</u> inches |
| Drilled By: | <u>Kasey Goble</u> of <u>Cascade Drilling</u> | Sampler Type: | <u>3' stainless steel split spoon</u> |
| Logged By: | <u>Kate Pineo</u> of <u>URS</u> | Approximate Surface Elevation: | <u>NA</u> feet |
| Checked By: | <u>Dave Raubvogel</u> of <u>URS</u> | Groundwater Level: | <u>2</u> below ground surface |
| Drilling Method: | <u>Direct Push</u> | Total Depth: | <u>9</u> below ground surface |
| Drill Rig Type: | <u>Truck-mounted GeoProbe</u> | Backfill Material: | <u>bentonite chips</u> |

Well Installation Data

| | | | |
|----------------------|-----------|--------------------------|-----------|
| Type of Well Casing: | <u>NA</u> | Top of PVC Elevation: | <u>NA</u> |
| Screen Perforation: | <u>NA</u> | Type/Thickness of Seals: | <u>NA</u> |
| Diameter of Well: | <u>NA</u> | Type of Sand Pack: | <u>NA</u> |
| Screened Interval: | <u>NA</u> | | |

| Depth (feet) | Blows per 6 inches | Penetration/ Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|--------------------------------|-------|---------------------|--------------|--|-------------------------|--------------------|---------|----------------|
| 0 | | 36/24 | 11:50 | SM | | Gray-brown fine Sand and Silt, some coarse Gravel, mottled, dry. | | 4.3 | JP5/0-3 | |
| 1 | | | | | | | | | | |
| 2 | | | | | | | | | | |
| 3 | | 36/6 | 11:50 | | | Grading wet. | | 14 | | Poor recovery. |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | 36/18 | 11:50 | | | Grading peat noted. | | 1.5 | JP5/6-9 | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | BORING COMPLETED AT 9'. | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.

Project Information

| | | | |
|-------------------|---------------------------------------|-----------|--------------------------------------|
| Project Name: | <u>California Street Overcrossing</u> | Location: | <u>California St and Federal Ave</u> |
| Project/Task No.: | <u>53-04333041.00 00056</u> | Weather: | <u>sunny, 60F</u> |

Drilling Information

| | | | |
|------------------|---|--------------------------------|---------------------------------------|
| Date Started: | <u>Thursday, June 21, 2001</u> | Annulus Diameter: | <u>2</u> inches |
| Date Completed: | <u>Thursday, June 21, 2001</u> | Hammer Weight and Drop: | <u>NA</u> lbs and <u>NA</u> inches |
| Drilled By: | <u>Kasey Goble</u> of <u>Cascade Drilling</u> | Sampler Type: | <u>3' stainless steel split spoon</u> |
| Logged By: | <u>Kate Pineo</u> of <u>URS</u> | Approximate Surface Elevation: | <u>NA</u> feet |
| Checked By: | <u>Dave Raubvogel</u> of <u>URS</u> | Groundwater Level: | <u>2</u> below ground surface |
| Drilling Method: | <u>Direct Push</u> | Total Depth: | <u>9</u> below ground surface |
| Drill Rig Type: | <u>Truck-mounted GeoProbe</u> | Backfill Material: | <u>bentonite chips</u> |

Well Installation Data

| | | | |
|----------------------|-----------|--------------------------|-----------|
| Type of Well Casing: | <u>NA</u> | Top of PVC Elevation: | <u>NA</u> |
| Screen Perforation: | <u>NA</u> | Type/Thickness of Seals: | <u>NA</u> |
| Diameter of Well: | <u>NA</u> | Type of Sand Pack: | <u>NA</u> |
| Screened Interval: | <u>NA</u> | | |

| Depth (feet) | Blows per 6 inches | Penetration/Recovery (inches) | Time | USCS Classification | USCS Graphic | Material Description | Well Completion Diagram | PID Readings (ppm) | Samples | Remarks |
|--------------|--------------------|-------------------------------|-------|---------------------|--------------|--|-------------------------|--------------------|---------|--------------|
| 0 | | 36/30 | | SM | | Light brown fine Sand and Silt, some fine Gravel, dry. | | | | Odor. |
| 1 | | | | | | Grading dark gray. | | 75 | JP7/1-2 | |
| 2 | | | | SP | | Brown fine to medium Sand, little coarse Gravel, wet. | | 20 | JP7/2-3 | |
| 3 | | 36/0 | | | | | | | | No recovery. |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | 36/24 | 12:20 | | | Grading brown fine to medium Sand. | | 9 | JP7/6-9 | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | BORING COMPLETED AT 9' | | | | |

NOTES:

Groundwater level measured down-hole with water level indicator.
 Groundwater sample JP7/GW collected at 12:20.



Project No.: 31174 Boring: MW20 Plate: 1 OF 1
 Site: Former Mobil Oil Terminal 46-108 Date: 07/03/02
 Drill Contractor: Cascade Drilling, Inc. of Woodinville, WA

Sample Method: None Geologist: Antonio Luna
 Drill Rig: CME-55 Bore Hole Diameter: 8" Signature: _____
 Location: Southwest corner of property Registration: _____
in gravel next to Federal Avenue. Logged by: Antonio Luna

| DEPTH (ft) | BLOW COUNTS | PID/OVM (ppm) | SAMPLE | COLUMN | USCS | GEOLOGIC DESCRIPTION | WELL DESIGN |
|------------|-------------|---------------|--------|--------|------|---|-------------|
| 5 | | | | | | Removed steel well and point, backfilled with bentonite, capped with 1 foot of cement | |
| | | | | | | Total depth, 5 feet below ground surface | |

Casing Diameter: N/A, Slot Size: N/A, Sand Size: N/A, Grout: N/A



Project No.: 31174 Boring: MW21 Plate: 1 OF 1
 Site: Former Mobil Oil Terminal 46-108 Date: 07/03/02
 Drill Contractor: Cascade Drilling, Inc. of Woodinville, WA

Sample Method: None Geologist: Antonio Luna
 Drill Rig: CME-55 Bore Hole Diameter: 10" Signature: _____
 Location: Southwest corner of property Registration: _____
in gravel next to Federal Avenue. Logged by: Antonio Luna

| DEPTH (ft) | BLOW COUNTS | PTD/OVM (ppm) | SAMPLE | COLUMN | USCS | GEOLOGIC DESCRIPTION | WELL DESIGN |
|------------|-------------|---------------|--------|--------|------|--|-------------|
| 5 | | | | | | Removed schedule 40 PVC well casing, overdrilled to remove seal and sand pack, backfilled with bentonite, capped with 1 foot of cement | |
| | | | | | | Total depth, 6 feet below ground surface | |

Casing Diameter: N/A, Slot Size: N/A, Sand Size: N/A, Grout: N/A



Project No.: 31174 Boring: Unknown Plate: 1 OF 1

Site: Former Mobil Oil Terminal 46-108 Date: 07/03/02

Drill Contractor: Cascade Drilling, Inc. of Woodinville, WA

Sample Method: None Geologist: Antonio Luna

Drill Rig: CME-55 Bore Hole Diameter: 10" Signature: _____

Location: Southwest corner of property Registration: _____

in gravel next to Federal Avenue. Logged by: Antonio Luna

| DEPTH (ft) | BLOW COUNTS | PD/OVM (ppm) | SAMPLE | COLUMN | USCS | GEOLOGIC DESCRIPTION | WELL DESIGN |
|------------|-------------|--------------|--------|--------|------|--|-------------|
| 5 | | | | | | Well overdrilled to remove well casing, seal, and sand pack, backfilled with bentonite, capped with 1 foot of cement | |
| | | | | | | Total depth, 6 feet below ground surface | |

Casing Diameter: N/A, Slot Size: N/A, Sand Size: N/A, Grout: N/A

| 0 DEPTH (ft bgs) | GRAPHIC LOG | USCS SYMBOL | SOIL DESCRIPTION | SAMPLE | BLOW COUNT SPT N VALUE | VOLATILE READING (ppm) | GROUNDWATER | FIELD AND LABORATORY TESTING | WELL SCHEMATIC |
|---------------------|-------------|-------------|---|--------|---------------------------|---------------------------|-------------|--|--|
| 0 | | | Surface: 0.2 feet of asphalt over 1.6 feet of gray fine to medium angular gravel (crushed rock base course) A vac-truck was utilized from 0 to 5 feet below the ground surface to ensure utilities were cleared. | | | | | | Flush mount in cement seal Hydrated bentonite chip seal |
| 5 | | SP | Medium dense, moist, brown, fine to coarse SAND with some silt and trace fine gravel Moist to wet, wood; possibly a large block | | 22 | 0.0 | | | 2-inch PVC casing in 2/12 silica sand filter pack 2-inch PVC 10 slot screen in 2/12 silica sand filter pack |
| | | SP | Loose, wet, brown, fine to medium SAND with trace silt and petroleum odor Becomes saturated and gray at 8.3 feet Water appeared viscous and sediments appeared to have a metallic luster from 8.3 to 9 feet Becomes medium dense at 9.5 feet | | 6 | 0.0 | | A1_S-1_020408 Sheen Test None Observed A1_S-2_020408 | |
| 10 | | | Becomes gray and brown, with some fine gravel and trace silt and no odor observed at 10.4 feet Cobbles in sampler shoe | | 21 | 0.0 | | | |
| | | GP-GM | Medium dense, saturated, dark gray, fine GRAVEL with some fine to medium sand and silt, light to medium sheen | | | 0.0 | | | |
| | | SP | Medium dense, saturated, gray fine to medium SAND with trace silt and fine gravel and occasional organics (wood splinters) Approximatley 0.01 foot thick layers of wood splinters at 13, 14, and 15 feet | | 16 | 0.0 | | Sheen Test Light Observed | |
| 15 | | | Becomes loose, with petroleum odor and no visible gravel at 14.5 feet | | 14 | 0.0 | | | 2/12 silica sand Bentonite chips |
| | | | Approximatley 0.1 foot thick layer of stiff, moist, brown, SILT with numerous organics / organic SILT (plant fragments, wood fibers, roots) at 18 feet | | 14 | 0.0 | | Sheen Test Light Observed | |
| 20 | | | | | 24 | 0.0 | | Sheen Test None Observed | |
| | | ML | Very stiff, moist, brown, SILT with trace fine to coarse sand and numerous organics / organic SILT with trace fine to coarse sand | | 20 | 0.0 | | | |
| 25 | | SP | Becomes with occasional organics (roots) at 25 feet Medium dense, saturated, gray, fine to medium SAND with trace silt | | 17 | 0.0 | | | |
| 30 | | | Exploration terminated at 26.5 feet below the existing ground surface. | | | | | | |

| | |
|--|---|
| BORING METHOD: HSA | ELEVATION REFERENCE: NA |
| BOREHOLE DIAMETER: 8 (in) | GROUND SURFACE ELEVATION: NA |
| DRILL RIG: CME | CASING ELEVATION: NA |
| CONTRACTOR: Cascade Drilling, Inc./Scott | START CARD/TAG ID: /BAB238 |
| LOGGED BY: LME | DRILLING DATES: 02/04/2008 - 02/04/2008 |

REMARKS:

ENVR+WELL-BORING FEDERALAVENUE.GPJ AMEC PORTLAND.GDT 3/17/08

ExxonMobil / American Distributing Company
7-915-15716-B

AMEC Earth and Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, Washington
USA 98034
Tel (425) 820-4669
Fax (425) 821-3914



LOG OF BORING MWA1
PAGE 1 OF 1

| 0 DEPTH (ft bgs) | GRAPHIC LOG | USCS SYMBOL | SOIL DESCRIPTION | SAMPLE | BLOW COUNT SPT N VALUE | VOLATILE READING (ppm) | GROUNDWATER | FIELD AND LABORATORY TESTING | WELL SCHEMATIC |
|---------------------|-------------|-------------|--|--------|---------------------------|---------------------------|-------------|--------------------------------------|--|
| 0 | | | Surface: moist, dark gray, angular fine to medium gravel (crushed rock) A vac-truck was utilized from 0 to 5 feet below the ground surface to ensure utilities were cleared. Approximatley 2 feet of wood with creosote odor (appeared to be blocks of wood treated with creosote) | | | | | | Flush mount in cement seal Hydrated bentonite chip seal |
| 5 | | SP | Very loose, moist, black, fine to medium SAND with some silt and numerous organics (wood splinters) | | 5 | 0.0 | ▼ | A2_S-1_020408 Sheen Test Light | 2-inch PVC casing in 2/12 silica sand filter pack 2-inch PVC 10 slot screen in 2/12 silica sand filter pack |
| | | SP | Very loose, moist, brown, fine to medium SAND with trace silt | | | | | Observed A2_S-2_020408 | |
| | | ML | Stiff, wet to saturated, blue-gray, sandy SILT with slight petroleum odor and light sheen | | | | | | |
| | | OL/ML | Stiff, moist, dark brown to black, organic SILT / SILT with numerous organics (roots, plant fragments) and petroleum odor | | 11 | 0.0 | ▼ | | |
| | | SM | Loose, wet to saturated, silty, fine to medium SAND with trace fine gravel and petroleum odor and light sheen | | | | | | |
| | | ML | Stiff, moist, brown, SILT with some clay and numerous organics (roots) | | 25 | 0.0 | | Sheen Test None Observed | |
| 10 | | SP | Loose, moist to wet, gray, fine to medium SAND with trace silt and scattered organics (roots) | | | | | | |
| | | SP | Medium dense, saturated, gray, fine to medium SAND with trace silt | | | | | | |
| | | | Becomes with occasional organics (roots, plant fragments) at 15 feet | | | | | | |
| | | | Tip of sampler shoe contained wet, brown, organic SILT / SILT with numerous organics (roots, plant fragments) | | 11 | 0.0 | | Sheen Test None Observed | 2/12 silica sand Bentonite chips |
| | | | | | 14 | 0.0 | | | |
| | | | | | 16 | 0.0 | | Sheen Test None Observed | |
| | | OL/ML | Stiff, moist, brown, organic stratified SILT with some clay and trace fine to medium sand / stratified SILT with some clay and trace fine to medium sand and numerous organics (roots, plant fragments) | | | | | | |
| | | SP | Medium dense, saturated, gray, fine to medium SAND with trace silt and occasional organics (roots, plant fragments) Becomes no visible organics at 22 feet | | 25 | 0.0 | | | |
| | | | | | 25 | 0.0 | | Sheen Test None Observed | |
| 25 | | | Exploration terminated at 26.5 feet below the existing ground surface. | | 25 | 0.0 | | | |

| | | |
|--|---|----------|
| BORING METHOD: HSA | ELEVATION REFERENCE: NA | REMARKS: |
| BOREHOLE DIAMETER: 8 (in) | GROUND SURFACE ELEVATION: NA | |
| DRILL RIG: CME | CASING ELEVATION: NA | |
| CONTRACTOR: Cascade Drilling, Inc./Scott | START CARD/TAG ID: /BAB237 | |
| LOGGED BY: LME | DRILLING DATES: 02/04/2008 - 02/04/2008 | |

ENVR+WELL-BORING FEDERAL AVENUE GPJ AMEC PORTLAND.GDT 3/17/08

ExxonMobil / American Distributing Company
7-915-15716-B

AMEC Earth and Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, Washington
USA 98034
Tel (425) 820-4669
Fax (425) 821-3914



LOG OF BORING MWA2
PAGE 1 OF 1



Texaco Refining
and Marketing Inc

3400 188th Street SW
Suite 630
Lynnwood WA 98037

RECEIVED

JUN 02 1998

DEPT. OF ECOLOGY

April 20, 1998

Subsurface Investigation Results
Port of Everett - Former Bulk Facilities
2600 Federal Avenue, Everett, Washington

*Received by
Mobil
6-11-98*

Mr. Norm Peck
Washington Department of Ecology Northwest Region
Toxic Cleanup Program
Mail Stop NB-81
3190 - 160th Avenue SE
Bellevue, Washington 98008-5452

Dear Mr. Peck:

Enclosed is a copy of a Environmental Investigation Report for the above-referenced location. The report was prepared by Pacific Environmental Group (PEG) on behalf of Chevron Products Company, Texaco Refining and Marketing, Kimberly-Clark, and Burlington Northern Railroad. The work was conducted in response to Ecology's concern that petroleum bulk distribution facilities formerly located at the site had contributed to the free phase hydrocarbons (free product) identified in a City of Everett Combined Sewer Outfall (CSO Line) located between the subject site and the Mobil/American Distributing facilities to the south.

During June and July 1996, approximately 23,000 gallons of free product (identified as fuel oil) were recovered by others during excavation of the CSO Line. Extensive free product contamination had previously been identified at the Mobil/American Distributing facility. Mobil subsequently conducted a historical investigation of potential off-site sources of petroleum hydrocarbons, and former Standard Oil and Tidewater Oil bulk distribution facilities, located north of the CSO line were identified. Ecology identified Potentially Liable Parties (PLPs) associated with the former facilities and proposed an Agreed Order requiring an investigation to determine whether impacts from the former bulk facilities were contributing to the CSO Line problem.


Four of the PLPs, Chevron, Texaco, Kimberly-Clark, and Burlington Northern/Santa Fe Railroad, decided to conduct an investigation of the former terminals as an independent action in order to expedite the process. The investigation consisted of advancing 15 soil probes and collecting grab samples of groundwater, and installing and sampling two permanent groundwater monitoring wells. The results of the investigation are presented in the enclosed report.

No free product was observed during this investigation. In fact, the only significant dissolved hydrocarbon concentrations identified were in the two probes located adjacent to the CSO Line. Based on the results of this investigation, we believe that it is impossible to conclude that the free product found in the CSO Line is the result of operations at the former Chevron and Tidewater properties, now owned by Kimberley Clark.


Mr. Norm Peck
April 20, 1998
Page 2

Additionally, fuel fingerprinting analysis, conducted during the CSO Line repairs, showed a strong correlation between the fuel oil from the CSO Line and the free product recovered from wells at the Mobil/American Distributing site. Based on these results, we believe that there is no reason to maintain any link between the former bulk plants and the Mobil/American Distributing/CSO problem. Further, we see no reason to conduct additional investigation. Please feel free to contact me at (206) 774-6090 extension 227 if you have any questions regarding this report.


Sincerely,




Tony Palagyi
Project Manager
Texaco EH&S



Ann Marie Johnson
Project Manager
Chevron Products Company



Richard C. Abrams
Environmental Manager
Kimberly Clark



Bruce Sheppard
Manager Env. Remediation
Burlington Northern/Santa Fe

RECEIVED
JUN 02 1998
DEPT. OF ECOLOGY

— Soil Borings were very shallow perhaps too shallow
Considering fill history
— Well screening size may have been too tight to allow viscous fluids to collect.
— may not be acceptable to WDE, Norm Peck.

Environmental Investigation Report

Former Bulk Fuel Facilities
2600 Federal Avenue
Everett, Washington

Prepared for


Chevron Products Company, Texaco Refining and Marketing,
Kimberly-Clark, and BNSF

April 14, 1998

Prepared by

Pacific Environmental Group, Inc.
4020 - 148th Avenue NE, Suite B
Redmond, Washington 98052

Project 520-165.1A



PACIFIC
ENVIRONMENTAL
GROUP, INC.

CONTENTS

| | |
|--|-----------|
| EXECUTIVE SUMMARY | i |
| 1.0 INTRODUCTION | 1 |
| 1.1 Scope of Work | 1 |
| 1.2 Site Description | 2 |
| 1.3 Previous Investigations | 2 |
| 2.0 INVESTIGATIVE PROCEDURES | 3 |
| 2.1 Soil Probe Installation | 3 |
| 2.1.1 Soil and Groundwater Sampling | 3 |
| 2.2 Soil Borings and Monitoring Well Installation | 4 |
| 2.2.1 Soil Sampling | 4 |
| 2.2.2 Well Casing Installation | 4 |
| 2.2.3 Well Development and Groundwater Sampling | 5 |
| 2.3 Analytical Program | 6 |
| 3.0 FINDINGS | 7 |
| 3.1 Subsurface Conditions | 7 |
| 3.2 Sample Analytical Results | 7 |
| 3.2.1 Soil | 7 |
| 3.2.2 Groundwater | 7 |
| 4.0 CONCLUSIONS | 9 |
| 5.0 SIGNATURES OF ENVIRONMENTAL PROFESSIONALS | 10 |

TABLES, FIGURES, AND APPENDICES

Tables

| | |
|---------|--------------------------------|
| Table 1 | Soil Analytical Results |
| Table 2 | Groundwater Analytical Results |

Figures

| | |
|----------|--|
| Figure 1 | Site Location Map |
| Figure 2 | Site Map - Exploration Locations |
| Figure 3 | Site Map - Groundwater Sample Concentrations |

Appendix A - Investigative Procedures/Field Data Sheets

Appendix B - Boring Logs

**Appendix C - Laboratory Analytical Methods and Results
Chain of Custody Documentation**

EXECUTIVE SUMMARY

An environmental assessment of soil and groundwater conditions was performed at 2600 Federal Avenue in Everett, Washington. Pacific Environmental Group, Inc. (PEG) conducted this assessment on behalf of Chevron, Texaco, Kimberly-Clark, and BNSF. The scope of work for this environmental assessment was presented in a sampling and analysis workplan dated August 20, 1997, and was performed between November 17, 1997 and January 19, 1998. This workplan was developed in response to the Washington Department of Ecology's decision to name Chevron, Texaco, Kimberly-Clark, and BNSF as Potentially Liable Persons (PLPs), in regard to petroleum contamination found adjacent to the City of Everett Combined Sewer Outfall (CSO) line, which resulted in an oil release into Port Gardner Bay in 1995.

The project consisted of the following tasks:

- Install fifteen exploratory soil probes (Probe 1 through Probe 15).
- Install two soil borings and convert them to groundwater monitoring wells (KC-1 and KC-2).
- Collect soil and groundwater samples from the borings and probes.

Measurable thicknesses of separate-phase hydrocarbons were not identified in any of the soil probes or monitoring wells installed during this investigation. The analytical results from the soil probes and groundwater monitoring wells indicate that the highest concentrations of hydrocarbons in soil and groundwater are limited to the area immediately adjacent to the CSO line. There is no evidence from this investigation that the former facilities on the 2600 Federal Avenue property contributed to the separate-phase hydrocarbons encountered during repair of the CSO line in 1996.

1.0 INTRODUCTION

1.1 Scope of Work

This investigation was performed between November 17, 1997 and January 19, 1998. The purpose of this investigation was to evaluate soil and groundwater quality in the vicinity of several former petroleum bulk plants adjacent to Port Gardner Bay in Everett, Washington (Figure 1). The goal of this investigation was to show whether evidence exists that would suggest the former facilities contributed to the separate-phase hydrocarbons documented at the CSO line. The scope of work consisted of the following tasks:

- Prepare a site safety plan for the project in accordance with WISHA and OSHA regulations.
- Install fifteen exploratory soil probes (Probe-1 through Probe-15) using a direct push probe sampling rig, and a hand auger.
- Install two soil borings using a hollow-stem auger drilling rig. Convert the borings to groundwater monitoring wells (KC-1 and KC-2) using 2-inch diameter Schedule 40 PVC well casing with 0.020-inch slotted screen.
- Collect soil samples from the borings and probes for soil characterization and possible laboratory analysis.
- Conduct field screening of soil samples using a photoionization detector and an oil sheen test.
- Develop and sample the two newly installed monitoring wells.
- Submit soil and groundwater samples and appropriate documentation to a Washington State accredited laboratory for analyses.
- Prepare this report.

Each of these tasks is described in detail in Section 2.0, and the findings and conclusions are presented in Sections 3.0 and 4.0.

1.2 Site Description

The project site is located on the Port Gardner Bay waterfront near Federal Avenue and the foot of Everett Avenue in Everett, Snohomish County, Washington. The property being investigated is currently the site of a pulp and paper mill owned by Kimberly-Clark, a railroad right-of-way owned by BNSF, and part of the Port of Everett that includes a log yard and a towing business (Dunlap Towing), hereafter referred to as "the Site". The Site was the former location of petroleum bulk plants operated by Standard Oil of California (Chevron) and Associated Oil Company (Texaco). Aboveground petroleum storage tanks were also operated on the Site until recently by Kimberly-Clark. Figure 2 shows the locations of former facilities in relation to the current property use.

The subject property is located in the NE ¼ of the SW ¼, and the NW ¼ of the SE ¼, Section 19 of Township 29 North, Range 5 East, Willamette Meridian. According to the United States Geological Survey topographic map of Everett, Washington, the property is located approximately 10 feet above mean sea level.

1.3 Previous Investigations

PEG is not aware of any previous environmental investigations performed at the former Bulk Plant facilities with respect to petroleum hydrocarbons.

Based on information provided by PTI Environmental Services Inc., assessment and remediation activities have occurred on and directly adjacent to the Mobil/American Distributing Co. site, that is located directly south of the Kimberly-Clark mill. In August and October of 1995, the U.S. Coast Guard responded to an oil discharge in Port Gardner Bay that was traced to the City of Everett combined sewer outfall (CSO). The CSO line runs east-west directly south of the Kimberly-Clark warehouse (Figure 2). The oil from the discharge was matched to a sample from the Mobil/American Distributing Co. site.

In April 1996, an Agreed Order was issued by Ecology to Mobil and American Distributing Co., which focused on elimination of oil discharge from the CSO line, followed by definition of the nature and extent of contamination. In June and July 1996, the CSO line was excavated and repaired. Approximately 23,000 gallons of #3 or #4 fuel oil were recovered during dewatering activities for the CSO line repair by Mobil/American Distributing Co. Approximately 800 cubic yards of petroleum contaminated soil were hauled off-site for disposal by Mobil/American Distributing Co.

2.0 INVESTIGATIVE PROCEDURES

2.1 Soil Probe Installation

Transglobal Environmental Geosciences Northwest Inc. (TEG) of Olympia, Washington installed fourteen exploratory soil probes (Probe 2 through Probe 15) to depths ranging from 4 to 13 feet below grade on November 17 and 18, 1997. Soil probe locations were positioned in proximity to former facilities on the Site that could be potential sources of petroleum hydrocarbons, and adjacent to the CSO line. A direct-push hydraulic drive point system was used and a PEG geologist using the Unified Soil Classification System logged the borings. Following the collection of soil samples, the borings were abandoned by grouting with a bentonite sealant to the surface. Investigative procedures are presented in Appendix A. Soil probe locations are presented on Figure 2. Soil probe logs are presented in Appendix B.

2.1.1 Soil and Groundwater Sampling

Soil Probe 1 could not be accessed with the Strataprobe rig, therefore a soil sample was collected from this location utilizing a stainless steel hand auger. Soil samples were collected continuously from a depth of one foot below grade to the bottom of the soil borings in soil Probe 2 through Probe 4, and Probe 7 through Probe 15, utilizing a direct-push hydraulic drive point system. Soil samples were collected continuously from a depth of three feet and two feet below grade in soil Probe 5 and Probe 6, respectively. Soil samples retained for chemical analyses were placed in laboratory supplied sample jars with Teflon[®] lined lids. The samples were placed on ice during transport and submitted to North Creek Analytical, Inc. in Bothell, Washington for chemical analysis. Groundwater samples were also collected from each probe location utilizing a screened probe section which was sampled using a peristaltic pump with disposable tubing.

Soil samples were field screened for the presence of organic vapors using a Thermo Environmental Instruments Inc. Model 580B PID with a 10.0 electron volt (eV) lamp. Soil screening procedures are described in Appendix A. It should be noted that the PID measurements are considered semi-quantitative data since the instrument detects all organic compounds with ionization potentials less than 10 eV. PID results for the soil samples ranged from non-detectable levels to 86 parts per million (ppm). In addition, the soil samples were

field screened for oil sheens. Oil sheen screening procedures are presented in Appendix A. The results of this field screening are also recorded on the exploratory boring logs in Appendix B.

2.2 Soil Borings and Monitoring Well Installation

Two exploratory soil borings (KC-1 and KC-2) were drilled by Cascade Drilling of Bothell, Washington on January 16, 1998. The boring locations were chosen to determine if the former facilities might have contributed to the petroleum hydrocarbons observed in the CSO line excavation. The borings were installed to depths of approximately 16.5 feet below the floor within the existing Kimberly-Clark warehouse. The borings were moved slightly from the original locations in the sampling and analysis workplan to avoid high-traffic areas. Holes were cut through the concrete floor to allow drilling equipment to access the soil.

There was an open space between the warehouse floor and the ground surface. The ground surface was approximately five feet below the concrete warehouse floor at Well KC-1, and approximately 4.5 feet below the floor at Well KC-2. The casings for these two wells protrude above the ground surface and are completed just below the warehouse floor to allow access from within the warehouse. The exploratory boring logs show detail of this well completion arrangement.

2.2.1 Soil Sampling

Eight-inch outside diameter hollow-stem auger drilling equipment was used and a PEG geologist using the Unified Soil Classification System logged the borings. Initial soil samples were collected at approximately seven and nine feet below the warehouse floor, and sampling continued thereafter at approximately five-foot intervals to the total depth explored. Soil samples for chemical analyses were retained in laboratory-supplied glass jars with Teflon™ lined lids. The samples were placed on ice for transport to North Creek Analytical, Inc. accompanied by chain-of-custody documentation. Investigative procedures and sample preservation techniques are presented in Appendix A. Boring locations are shown on Figure 2. Soil samples were field screened for oil sheens and for the presence of organic vapors using a PID. PID test procedures and oil sheen field screening procedures are described in Appendix A. The results of the field screening are recorded on the exploratory boring logs in Appendix B.

2.2.2 Well Casing Installation

The two borings were converted to groundwater monitoring wells (KC-1 and KC-2) with the installation of 2-inch diameter, Schedule 40 PVC casing with 0.020-inch factory slotted screen. The well screen was placed across the saturated zone and extended from approximately 2 feet to 10 feet below ground surface in Well KC-1, and from approximately 1.5 feet to 11.5 feet

below ground surface in Well KC-2. Ground surface refers to the soil surface below the warehouse floor. Refer to the boring logs in Appendix B for specific information on well construction. The annular space of each well was packed with a graded 10x20 Colorado silica sand. The sand pack was placed across the entire screened interval, extending approximately six inches above the top of the screens. The annular space of each well was then sealed with hydrated bentonite chips to the ground surface beneath the warehouse floor. A plug-type locking device was installed at the top of each monitoring well. A metal plate able to withstand forklift traffic was placed in the opening of the concrete floor. Soil cuttings generated during drilling remained beneath the warehouse floor.

2.2.3 Well Development and Groundwater Sampling

Monitoring Wells KC-1 and KC-2 were developed on January 16, 1998 by surging and bailing. Well development procedures and records are presented in Appendix A.

Groundwater samples were collected from Wells KC-1 and KC-2 on January 19, 1998. Depths to groundwater in Wells KC-1 and KC-2 on this date were 6.53 feet and 5.78 feet below top of casing, respectively. Well locations are shown on Figure 2.

Prior to sampling, each well was visually checked for the presence of sheens using a clear single-use disposable polyethylene bailer. No sheens were observed in the wells. The wells were then purged of a minimum of three casing volumes of water by bailing. Groundwater samples were collected after the wells recovered to at least 60 percent of the pre-purge static water level. Samples were collected with a single-use disposable bailer. Groundwater sampling procedures are described in detail in Appendix A. Field sampling data sheets are also presented in Appendix A.

One blind duplicate sample (KC-X) was collected from Monitoring Well KC-2. One trip blank sample (Trip Blank) was also prepared utilizing laboratory provided deionized water, and was carried throughout the sampling event.

Development and purge water was placed directly into the mill's wastewater disposal system.

2.3 Analytical Program

Soil and groundwater samples that were selected for laboratory testing were analyzed for one or more of the following parameters:

| <u>PARAMETER</u> | <u>METHOD</u> |
|--|---|
| Total Petroleum Hydrocarbons as gasoline (TPH-gasoline) | Washington Method WTPH-G |
| TPH-diesel and TPH-oil | Washington Method WTPH-D plus Extended |
| Benzene, toluene, ethyl benzene and xylenes (BTEX compounds) | EPA Method 8020 |

The samples were analyzed by North Creek Analytical of Bothell, Washington.

3.0 FINDINGS

3.1 Subsurface Conditions

In general, soil encountered during soil probe and monitoring well installations consisted of silty sand, and sand. Occurrences of clay, wood, and organic material were also noted in some locations. Boring logs that show detailed lithologic descriptions are included in Appendix B. Groundwater was generally encountered during soil probe installation at depths less than five feet below grade. Measurable thicknesses of separate-phase hydrocarbons were not observed in any of the soil probe or boring locations. Hydrocarbon sheens were noted in soil samples from Probe 6, Probe 7, and Probe 11. On January 19, 1998, depth to groundwater in Monitoring Wells KC-1 and KC-2 was 6.53 feet and 5.78 feet below top of casing, respectively, which is approximately 1.5 feet below the ground surface under the warehouse floor.

3.2 Sample Analytical Results

3.2.1 Soil

A total of three soil samples were submitted for analysis from soil Probe 7, soil Probe 11, and Boring KC-1. The soil samples collected from the soil probes were submitted for analysis based on the observation of sheens during field screening. The soil sample submitted from Boring KC-1 was collected from just above the groundwater interface. Concentrations of TPH-gasoline, TPH-diesel, and TPH-oil were detected in the three soil samples, however all concentrations were below the respective MTCA Method A cleanup levels.

*only
3 samples*

The soil analytical results are summarized in Table 1. Laboratory analytical reports and chain-of-custody documentation are included in Appendix C. Figure 2 should be referenced for sample locations.

3.2.2 Groundwater

Groundwater samples from Probe 3, Probe 4, Probe 5, Probe 7, and Probes 10 through 15 contained detectable concentrations of TPH-gasoline, TPH-diesel, TPH-oil, or BTEX compounds. However, only the samples from Probe 7, Probe 11, Probe 13, and Probe 14

contained TPH-diesel and/or TPH-oil concentrations exceeding MTCA Method A cleanup levels. The samples from Probe 7 and Probe 11 (closest to the CSO line) contained the highest TPH concentrations. Concentrations of TPH-diesel in Probe 7 and Probe 11 were 52,400 parts per billion (ppb) and 56,000 ppb, respectively. Concentrations of TPH-oil in Probe 7 and Probe 11 were 38,400 ppb and 43,900 ppb, respectively. Groundwater analytical results are summarized in Table 2.

The groundwater sample from Well KC-1 contained a detectable concentration of TPH-diesel, below the MTCA Method A cleanup level. The sample from Well KC-2 contained no detectable concentrations of TPH or BTEX compounds. Groundwater analytical results are summarized in Table 2.

A blind duplicate water sample (KC-X) was submitted for analysis, along with a trip blank. The blind duplicate was a duplicate sample from Well KC-2. The blind duplicate contained detectable concentrations of TPH-gasoline and TPH-diesel. Blind duplicate sample KC-X does not correlate with the non-detectable concentrations observed in the sample from Well KC-2, and may indicate a field or laboratory error. However, the concentrations reported in Sample KC-X were not significantly higher than the method reporting limits, and may represent a statistical variation in the laboratory analysis. Concentrations of TPH or BTEX were not detected in the trip blank sample.

Laboratory analytical reports and chain-of-custody documentation are included in Appendix C. Figure 3 should be referenced for sample locations and TPH concentrations.

4.0 CONCLUSIONS

Based on laboratory analytical data, the following conclusions can be made:

- No measurable thicknesses of separate-phase hydrocarbons were identified in any of the soil probes or monitoring wells installed during this investigation.
- Detected concentrations of TPH-gasoline, TPH-diesel, TPH-oil, and toluene in the soil samples analyzed from the exploratory soil probes and borings did not exceed the respective Washington State Model Toxics Control Act (MTCA) Method A cleanup levels.
- Groundwater samples collected from soil Probe 7 and soil Probe 11 (nearest the CSO line) exceeded the MTCA Method A cleanup level for TPH-diesel at levels of 52,400 ppb and 56,000 ppb, respectively.
- Groundwater samples collected from soil Probe 7 and soil Probe 11 (nearest the CSO line) exceeded the MTCA Method A cleanup level for TPH-oil at levels of 38,400 ppb and 43,900 ppb, respectively.
- Groundwater samples collected from soil Probe 13, and soil Probe 14 exceeded the MTCA Method A cleanup level for TPH-oil at levels of 1,420 ppb and 2,930 ppb, respectively.
- All other detected concentrations of BTEX compounds, TPH-gasoline, TPH-diesel, and TPH-oil in groundwater samples were below the MTCA Method A cleanup levels.

The analytical results from the soil probes and groundwater monitoring wells demonstrate that the highest concentrations of hydrocarbons in soil and groundwater are found immediately adjacent to the CSO line. There is no evidence from this investigation that the former facilities located north of the CSO line contributed to the separate phase hydrocarbons encountered during repair of the CSO line.

5.0 SIGNATURES OF ENVIRONMENTAL PROFESSIONALS

ENVIRONMENTAL INVESTIGATION

2600 Federal Avenue

Everett, Washington


February 12, 1998.

PEG Project Number 520-165.1A

This report prepared for:

Chevron Products Company, Texaco Refining and Marketing Inc., Kimberly-Clark, and BNSF


by:



Matthew Miller

Project Geologist

and reviewed by:



Eric Larsen

Senior Geologist

Pacific Environmental Group, Inc.

4020 - 148th Avenue NE,

Suite B

Redmond, Washington 98052

(425) 869-5099

(425) 869-5639 (FAX)

TABLE 2
GROUNDWATER ANALYTICAL RESULTS


Former Bulk Fuel Facilities
2600 Federal Avenue
Everett, Washington

| Sample I.D. | Date | Benzene (ppb) | Toluene (ppb) | Ethyl-benzene (ppb) | Xylenes (ppb) | TPH-Gasoline (ppb) | TPH-Diesel (ppb) | TPH-Oil (ppb) |
|--|----------|-----------------|-----------------|---------------------|---------------|--------------------|------------------|---------------|
| Probe 2 | 11/17/97 | ND | ND | ND | ND | ND | ND | ND |
| Probe 3 | 11/17/97 | ND | ND | ND | ND | ND | ND | 766 |
| Probe 4 | 11/17/97 | 0.877 | 0.569 | 0.602 | 2.52 | 137 | 276 | ND |
| Probe 5 | 11/17/97 | ND | ND | ND | ND | 64.6 | ND | ND |
| Probe 6 | 11/17/97 | ND | ND | ND | ND | ND | ND | ND |
| Probe 7 | 11/17/97 | ND | ND | ND | ND | 327 | 52,400 | 38,400 |
| Probe 8 | 11/17/97 | ND | ND | ND | ND | ND | ND | ND |
| Probe 9 | 11/17/97 | ND | ND | ND | ND | ND | ND | ND |
| Probe 10 | 11/17/97 | ND | 0.672 | ND | ND | ND | ND | ND |
| Probe 11 | 11/17/97 | ND | ND | ND | 4.86 | 736 | 56,000 | 43,900 |
| Probe 12 | 11/17/97 | ND | 0.715 | ND | ND | ND | ND | ND |
| Probe 13 | 11/18/97 | ND | ND | ND | ND | ND | ND | 1,420 |
| Probe 14 | 11/18/97 | ND | ND | ND | ND | ND | 311 | 2,930 |
| Probe 15 | 11/18/97 | ND | 1.26 | 1.23 | 2.37 | 172 | ND | ND |
| KC-1 | 01/19/98 | ND | ND | ND | ND | ND | 430 | ND |
| KC-2 | 01/19/98 | ND | ND | ND | ND | ND | ND | ND |
| KC-X* | 01/19/98 | ND | ND | ND | ND | 57.9 | 355 | ND |
| Trip Blank | 01/19/98 | ND | ND | ND | ND | ND | NA | NA |
| MTCA Method A Cleanup Levels: | | 5.0 | 40 | 30 | 20 | 1000 | 1000 | 1000 |
| Laboratory Reporting Limits: | | 0.50-1.0 | 0.50-1.0 | 0.50-1.0 | 1.00 | 50.0 | 250 | 750 |
| <p>Concentrations reported as parts per billion (ug/l) Certified analytical results are included in Attachment B ND - Not Detected at or above the laboratory reporting limit NA - Not Analyzed * - KC-X is a duplicate sample from Well KC-2 TPH as Diesel and Oil - Analysis by Washington Method WTPH-D plus extended TPH as Gasoline - Analysis by Washington Method WTPH-G BTEX Compounds - Analysis by EPA Method 8020A</p> | | | | | | | | |

TABLE 1
SOIL ANALYTICAL RESULTS

Former Bulk Fuel Facilities
2600 Federal Avenue
Everett, Washington


| Sample I.D. | Date | Depth (feet) | Benzene (ppm) | Toluene (ppm) | Ethyl-benzene (ppm) | Xylenes (ppm) | TPH-Gasoline (ppm) | TPH-Diesel (ppm) | TPH-Oil (ppm) |
|---|----------|--------------|---------------|---------------|---------------------|---------------|--------------------|------------------|---------------|
| Probe 7-3 | 11/17/97 | 3.0 | ND | 0.0545 | ND | ND | ND | 17.6 | 71.1 |
| Probe 11-4 | 11/17/97 | 4.0 | ND | ND | ND | ND | 20.7 | 19.6 | 52.5 |
| KC1-8.5 | 01/16/98 | 8.5 | ND | ND | ND | ND | 6.50 | 52.7 | 81.8 |
| MTCA Method A Cleanup Levels: | | | 0.5 | 40 | 20 | 20 | 100 | 200 | 200 |
| Laboratory Reporting Limits: | | | 0.050 | 0.050 | 0.050 | 0.10 | 5.0 | 10.0 | 25.0 |
| Concentrations reported as parts per million (mg/kg) Certified analytical results are included in Attachment B ND - Not detected at or above the laboratory reporting limits TPH as Diesel and Oil - Analysis by Washington Method WTPH-D plus extended TPH as Gasoline - Analysis by Washington Method WTPH-G BTEX Compounds - Analysis by EPA Method 8020A | | | | | | | | | |

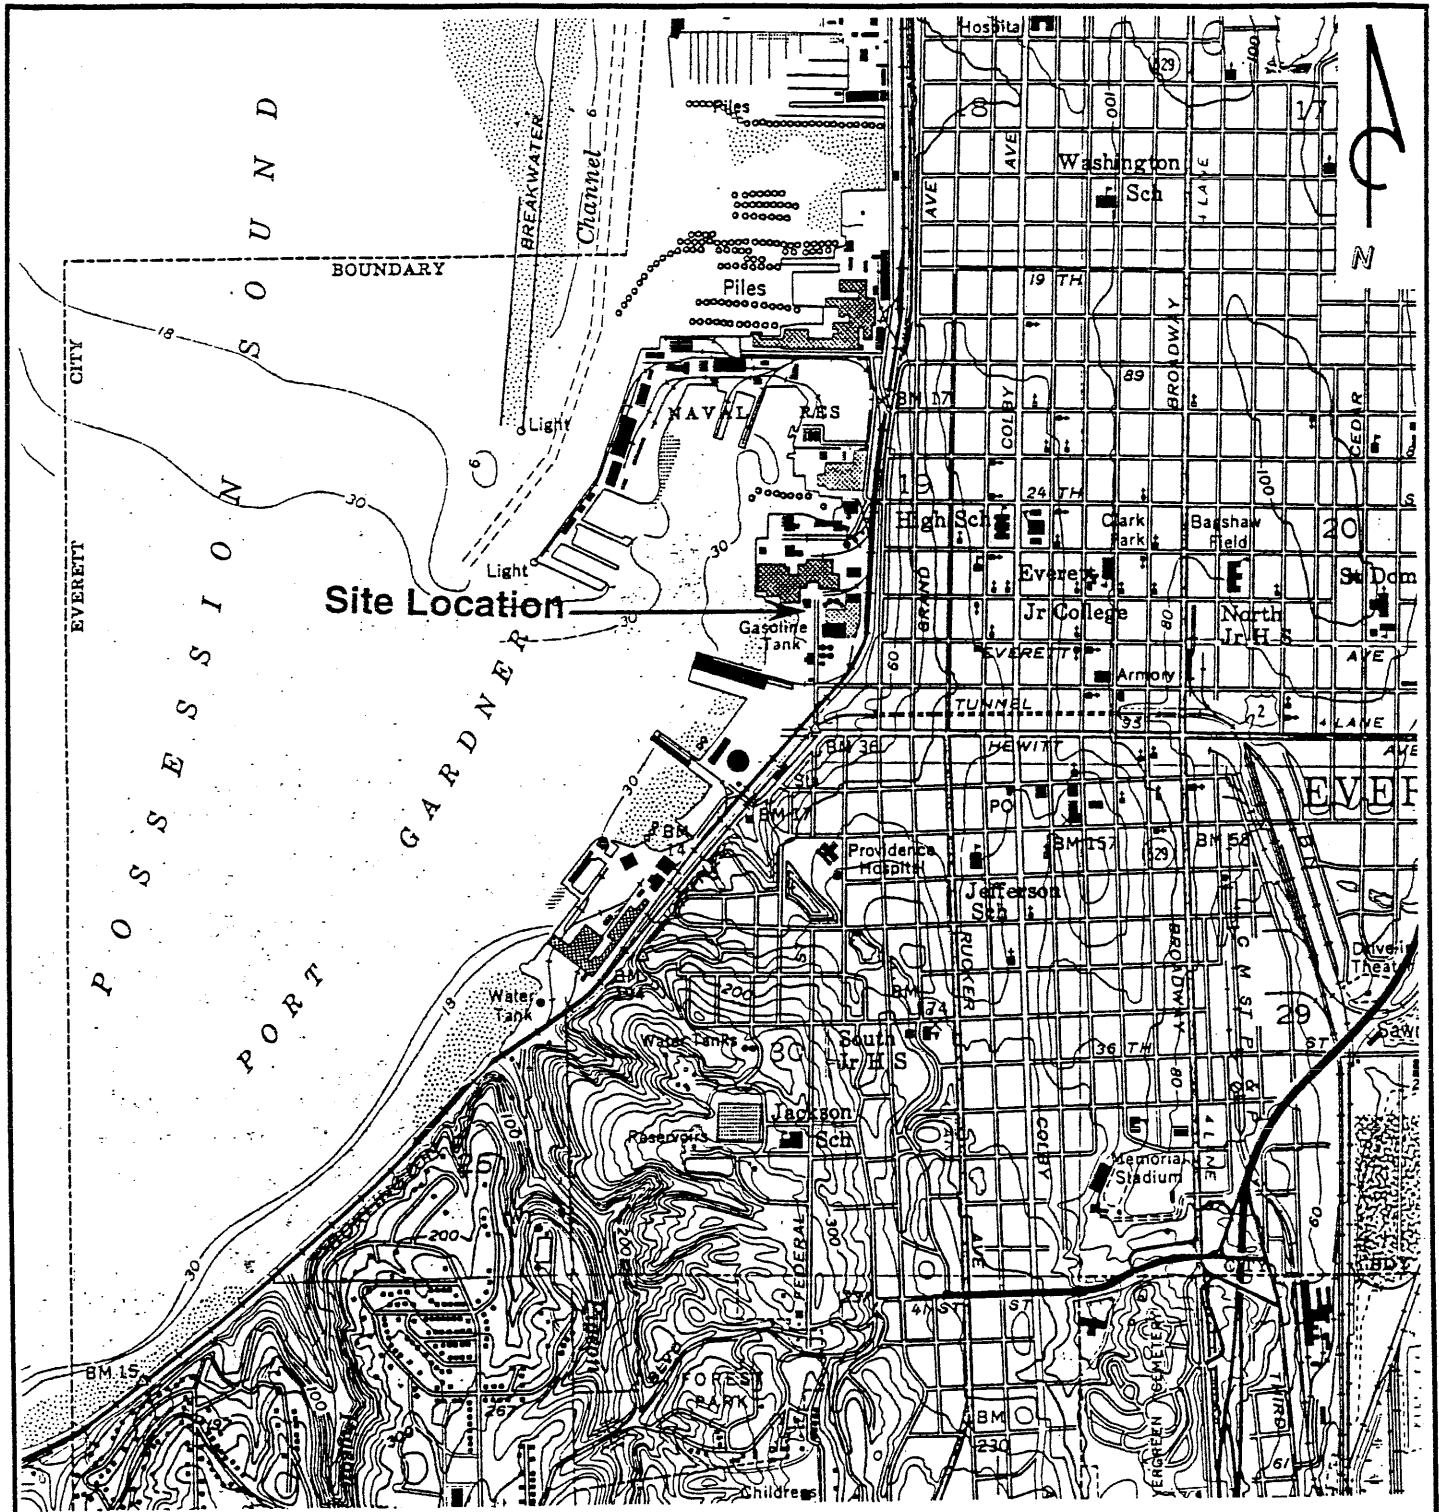

REFERENCE:

USGS 7.5 MIN. TOPOGRAPHIC MAP
 TITLED: Everett, Washington
 DATED: 1953 REVISED: 1968 and 1973
 COUNTY: Snohomish

SCALE: 1 to 24,000 (1 Inch = Approximately 2000 Feet)



MAP LOCATION




PACIFIC
 ENVIRONMENTAL
 GROUP, INC.


FORMER BULK FUEL FACILITIES
 2600 Federal Avenue
 Everett, Washington

SITE LOCATION MAP


FIGURE:
1
 PROJECT:
 520-165.1A

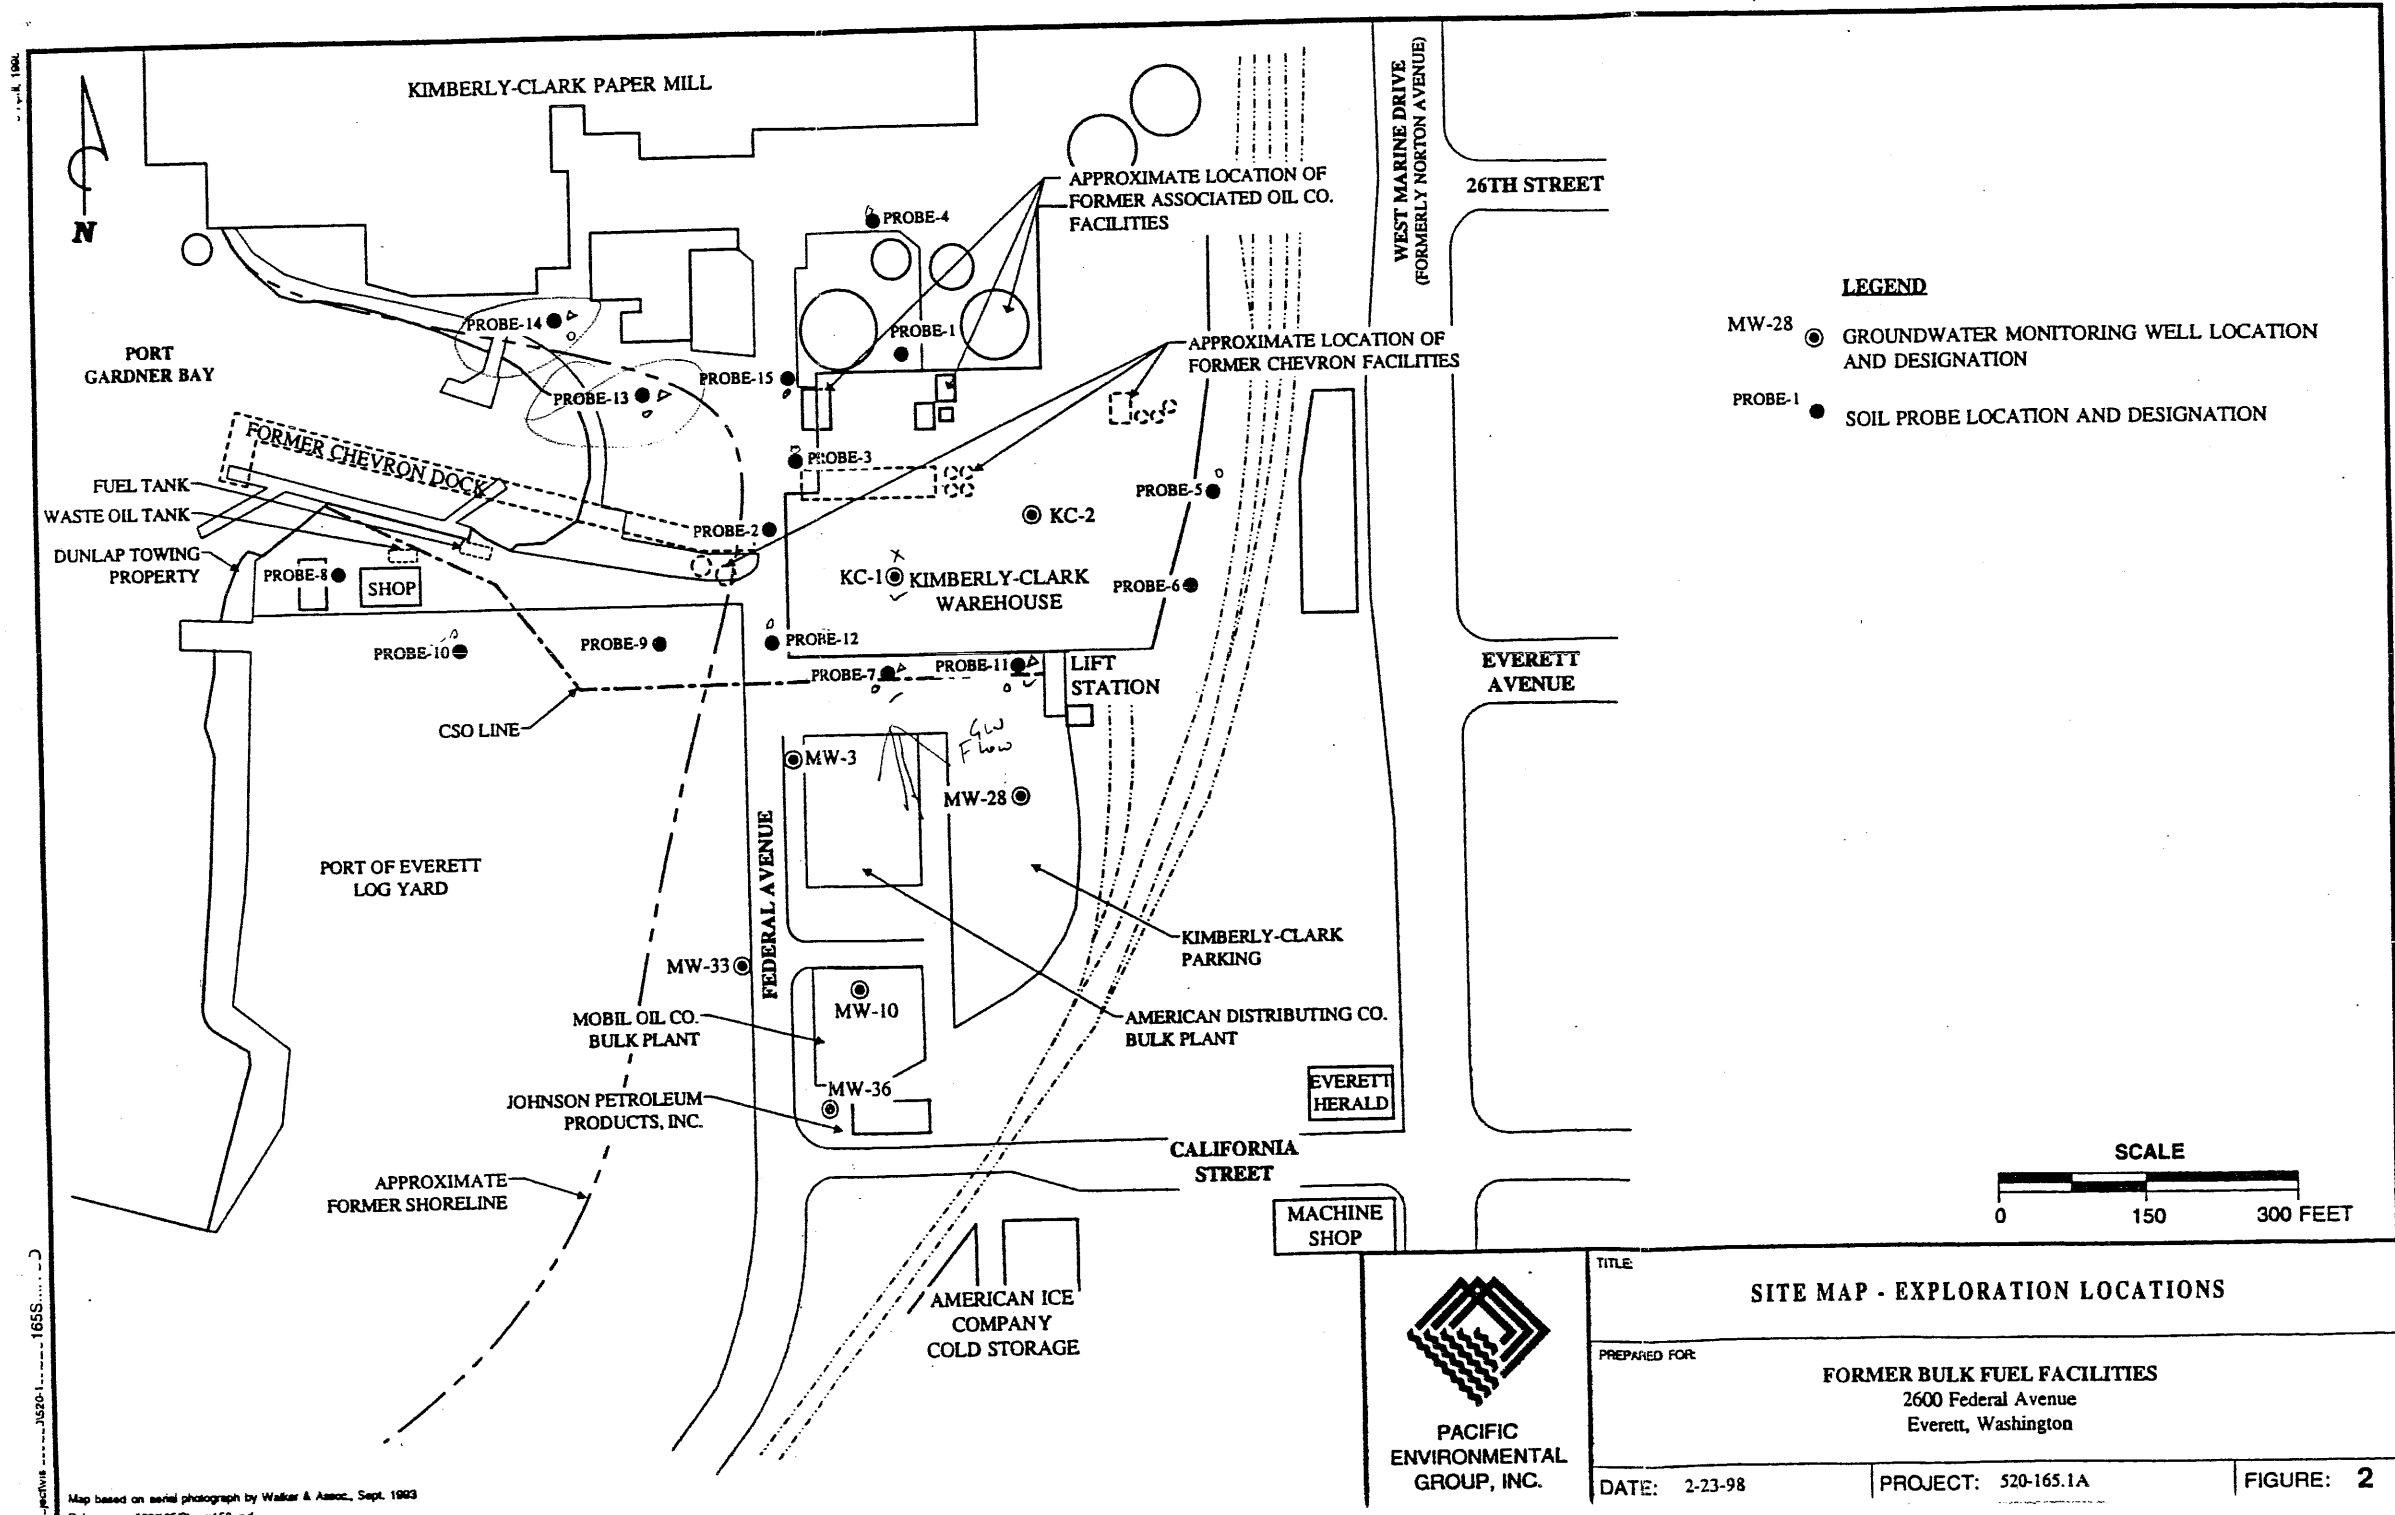

9 April 1998

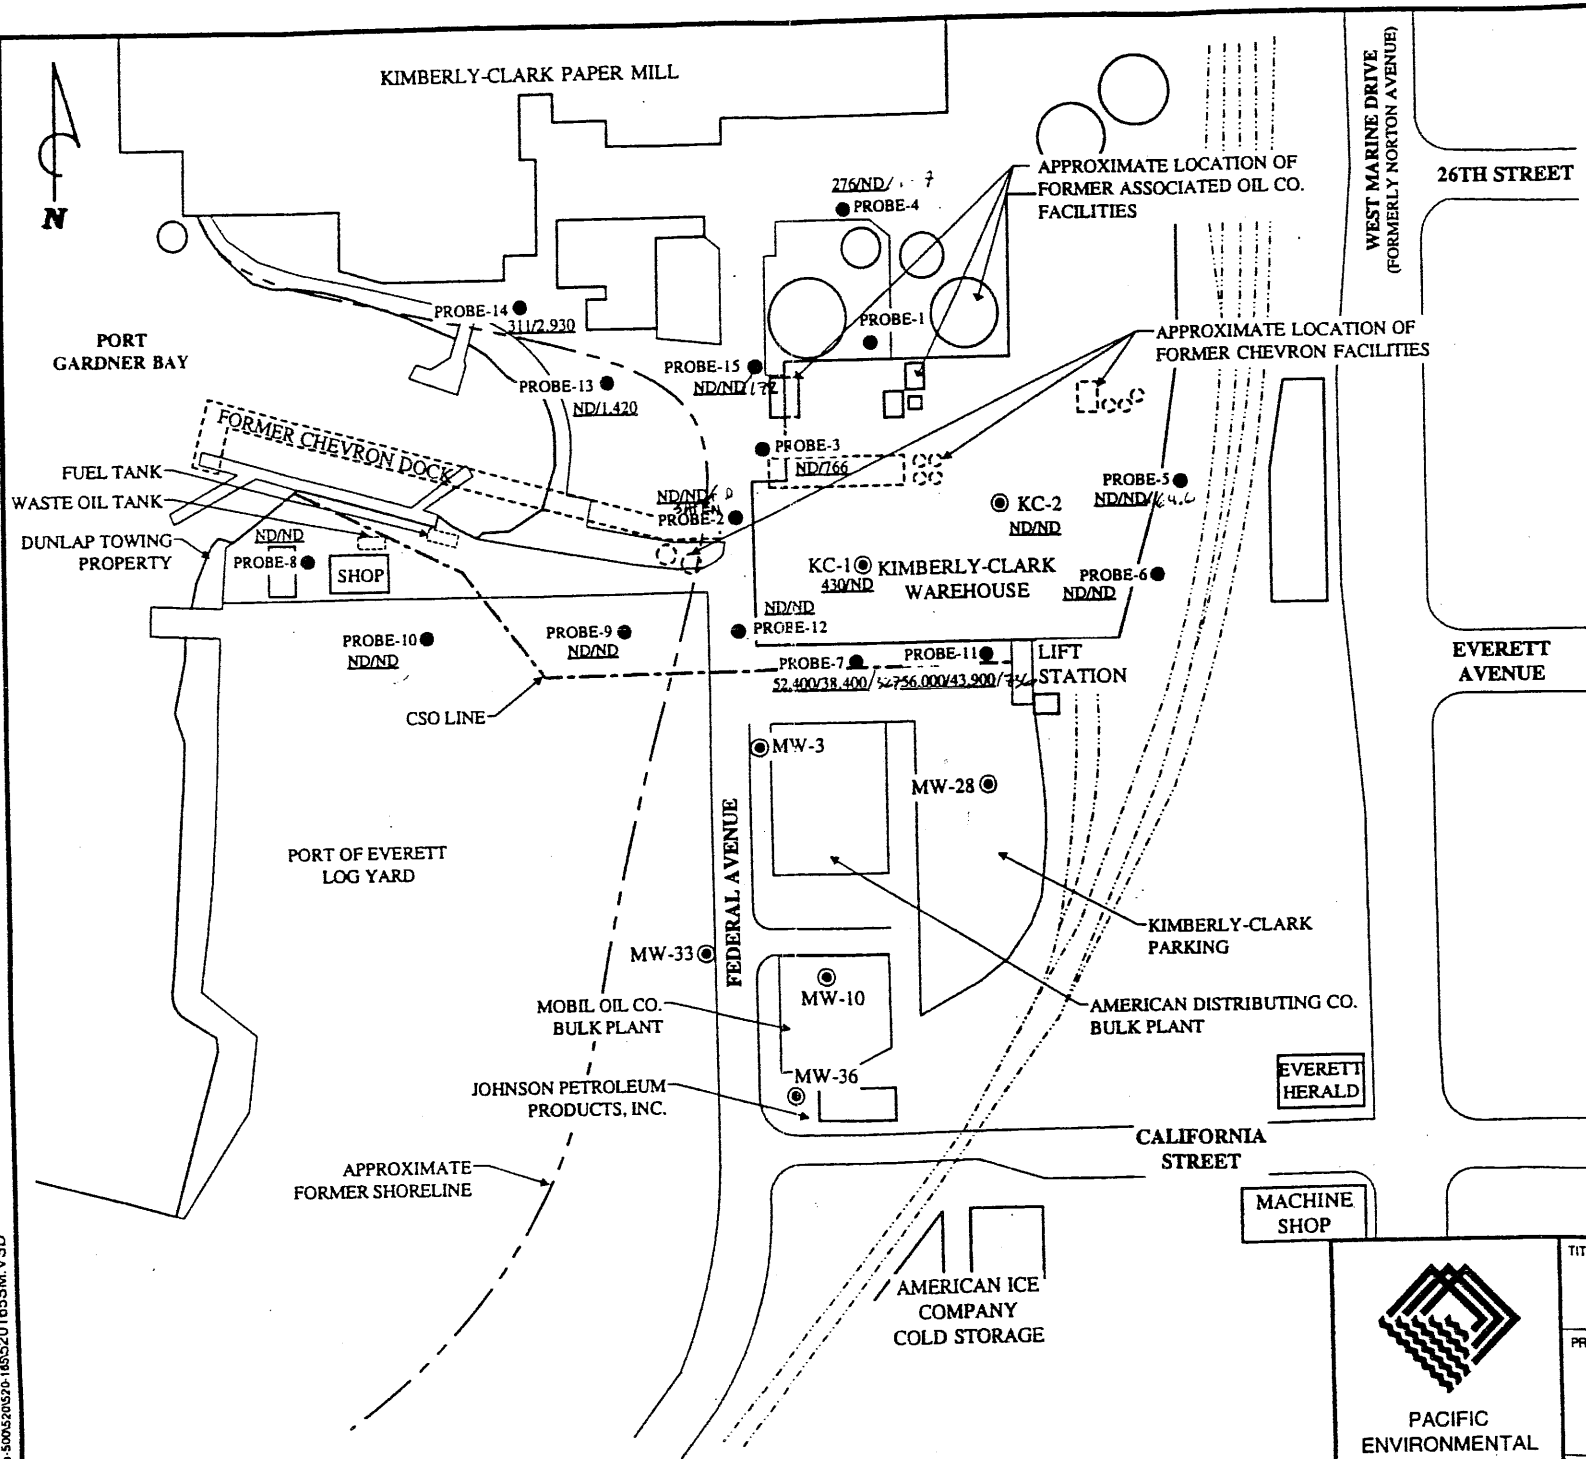

- LEGEND**
- MW-28 ● GROUNDWATER MONITORING WELL LOCATION AND DESIGNATION
 - PROBE-1 ● SOIL PROBE LOCATION AND DESIGNATION
 - ND/766 TPH-DIESEL/TPH-OIL CONCENTRATIONS IN GROUNDWATER, IN PARTS PER BILLION
 - ND NOT DETECTED



I:\projects\500520165\520165SM.VSD

Map based on aerial photograph by Walker & Assoc., Sept. 1993
Reference: 520165Stamp150.vsd



PACIFIC ENVIRONMENTAL GROUP, INC.

| | | |
|---|---------------------|------------------|
| TITLE SITE MAP - GROUNDWATER SAMPLE CONCENTRATIONS | | |
| PREPARED FOR: FORMER BULK FUEL FACILITIES 2600 Federal Avenue Everett, Washington | | |
| DATE: 2-23-98 | PROJECT: 520-165.1A | FIGURE: 3 |



**ADDENDUM TO DRAFT FOCUSED FEASIBILITY
STUDY SAMPLING AND ANALYSIS WORK PLAN
ExxonMobil / ADC Property, Ecology Site ID 2728
2717/2731 Federal Avenue
Everett, Washington**

Submitted to:

ExxonMobil Environmental Services
East Providence Terminal
1001 Wampanoag Trail
Riverside, Rhode Island 02915

and

American Distributing Company
13618 45th Avenue NE
Marysville, Washington 98271

Submitted by:

AMEC Earth & Environmental, Inc.
11810 North Creek Parkway North
Bothell, Washington 98011

February 10, 2010

AMEC Project No. 0-915-15716-D

TABLE OF CONTENTS

| | | <u>Page</u> |
|------|--|-------------|
| 1.0 | INTRODUCTION..... | 1 |
| 1.1 | Property History..... | 1 |
| 2.0 | OBJECTIVES..... | 1 |
| 3.0 | PROJECT ORGANIZATION AND RESPONSIBILITIES..... | 2 |
| 4.0 | DATA QUALITY OBJECTIVES..... | 2 |
| 5.0 | PRE-FIELD ACTIVITIES..... | 5 |
| 6.0 | FIELD PROCEDURES..... | 5 |
| 6.1 | Field Health and Safety Procedures..... | 5 |
| 6.2 | Field Preparation..... | 6 |
| 6.3 | Utility Survey..... | 6 |
| 6.4 | Calibration of Field Equipment..... | 6 |
| 6.5 | Soil Borings..... | 6 |
| 6.6 | Soil Sample Collection..... | 7 |
| 6.7 | Soil Sample Analyses..... | 8 |
| 6.8 | Groundwater Sample Collection..... | 9 |
| 6.9 | Groundwater Sample Analyses..... | 9 |
| 6.10 | Sample Containers, Preservation and Storage..... | 9 |
| 6.11 | Equipment Decontamination..... | 9 |
| 6.12 | Investigation Derived Waste Management..... | 10 |
| 7.0 | DOCUMENTATION..... | 11 |
| 7.1 | Field Logbook..... | 11 |
| 7.2 | Labeling..... | 11 |
| 7.3 | Sample Chain of Custody..... | 12 |
| 8.0 | DATA VALIDATION..... | 12 |
| 9.0 | QUALITY CONTROL..... | 13 |
| 9.1 | Field Quality Control Samples..... | 13 |
| 9.2 | Laboratory Quality Control Samples..... | 13 |
| 9.3 | Field Variances..... | 13 |
| 9.4 | Data Management..... | 13 |
| 10.0 | REFERENCES..... | 14 |

LIST OF TABLES

| | |
|---------|--|
| Table 1 | Method Detection and Reporting Limits in Soil Samples |
| Table 2 | Method Detection and Reporting Limits in Groundwater Samples |
| Table 3 | Proposed Total Boring Depth and Soil and Groundwater Samples |
| Table 4 | Sample Containers, Preservation and Storage |

LIST OF FIGURES

| | |
|----------|--|
| Figure 1 | Site Location Map |
| Figure 2 | Proposed Storm Water Upgrade Soil Boring Locations |
| Figure 3 | Clearance Distance in Vicinity of Proposed Borings |

LIST OF ATTACHMENTS

| | |
|---------------|---|
| Attachment A1 | Boring Logs for MW-A1 and MW-A2 |
| Attachment A2 | Site-Specific Health and Safety Plan |
| Attachment A3 | City of Everett Street Use Permit Documentation |
| Attachment A4 | Field Documentation Forms |

ACRONYMS AND ABBREVIATIONS

| | |
|------------|---|
| ADC | American Distributing Company |
| AMEC | AMEC Earth & Environmental, Inc. |
| bgs | below ground surface |
| BTEX | benzene, toluene, ethylbenzene, and xylenes |
| COC | chain-of-custodies |
| CSS | Colorado silica sand |
| DQIs | data quality indicators |
| DQOs | data quality objectives |
| Ecology | Washington State Department of Ecology |
| EDB | ethylene dibromide |
| EDC | 1,2-dichloroethane |
| EPA | U.S. Environmental Protection Agency |
| ExxonMobil | ExxonMobil Oil Corporation |
| FFS | Focused Feasibility Study |
| HASP | Health and Safety Plan |
| HSA | hollow stem auger |
| IDW | investigation derived waste |
| mg/kg | milligram per kilograms |
| mg/L | milligram/liter |
| MDLs | method detection limits |
| MS/MSD | matrix spike/matrix spike duplicate |
| mV | millivolt |
| PAHs | polycyclic aromatic hydrocarbons |
| PID | photoionization detector |
| PPE | personal protective equipment |
| ppm | parts per million |
| PVC | polyvinyl chloride |
| Property | ExxonMobil/ADC Property |
| QA | quality assurance |
| QC | quality control |
| RPD | relative percent difference |
| SAP | Sampling and Analysis Plan |
| SD | standard deviation |
| TPH-D | total petroleum hydrocarbons–diesel |
| TPH-O | total petroleum hydrocarbons–oil |
| TPH-G | total petroleum hydrocarbons–gasoline |
| VOCs | volatile organic compounds |
| WAC | Washington Administrative Code |
| WP | Work Plan |

1.0 INTRODUCTION

AMEC Earth & Environmental, Inc., (AMEC) has prepared this Addendum to the October 2009 Draft Final Focused Feasibility Study (FFS) Sampling and Analysis (SAP) Work Plan (WP) on behalf of ExxonMobil Oil Corporation (ExxonMobil) and the American Distributing Company (ADC). This Addendum outlines additional soil and groundwater characterization activities that will be conducted to the north and west of the ExxonMobil/ADC Property (the Property) located at 2717 and 2731 Federal Avenue in Everett, Washington (Figure 1). The City of Everett (the City) is planning to upgrade the storm sewer line that will result in trenching within Everett Avenue and Federal Avenue. In advance of trenching, samples of the soil and groundwater will be collected from borings to determine soil and groundwater disposal options. This Addendum addresses the specific field sampling activities related to the borings, chemical analyses, and quality assurance (QA) procedures associated with borings along the utility alignment.

1.1 Property History

Historically, total petroleum hydrocarbons as diesel (TPH-D), oil (TPH-O), and gasoline (TPH-G), benzene, toluene, ethylbenzene, xylenes, polycyclic aromatic hydrocarbons (PAHs), and lead were found in soil and groundwater beneath the Property and beneath properties to the west, north, and east. Petroleum contamination has resulted from past releases from former operations at the ExxonMobil and ADC Parcels and other similar businesses in the area.

2.0 OBJECTIVES

The objective of the soil and groundwater characterization beneath Everett Avenue and Federal Avenue is to collect sufficient analytical data for disposal classification. Elements of this addendum are based on the Washington Administrative Code (WAC) Ecology Model Toxics Control Act (MTCA) Cleanup Regulations WAC 173-340-820 and City of Everett Waste Water discharge regulations. The proposed location for the disposal of soil from the utility excavation is the CEMEX facility in Everett. The soil and groundwater sampling will include the following activities:

1. Advance five borings (three along Everett Avenue and two along Federal Avenue [Figure 2]) to evaluate the concentration of chemicals in soil and groundwater. The borings will be advanced at each location using a hollow stem auger (HSA) drill rig to the total depth of the proposed trench at the location of each boring. Two of the borings will be terminated at a minimum depth of 20 feet below ground surface (bgs) to provide soil lithology information for the City's geotechnical engineer.
2. Collect continuous samples from the borings using a standard penetration test (SPT) and a split spoon (SS).

3. Collect two to three composite soil samples from each boring for laboratory analyses. The first composite will be from the top four feet and the second from the lower four feet. Discreet samples for volatile organic compounds (VOC) analysis will be collected from the upper four feet and from the SPT.
4. Collect “grab” water samples from each boring. If sheen or product is encountered, an additional water sample will be collected from just below the water table (a foot or two below).
5. Soil samples will be analyzed for CEMEX acceptance criteria and “grab” groundwater samples will be analyzed for the City of Everett sanitary sewer discharge criteria. The soil and groundwater samples will be performed on a one-week turn-around schedule.

3.0 PROJECT ORGANIZATION AND RESPONSIBILITIES

The project is organized as follows:

ExxonMobil and ADC are the owners of the Property.

AMEC Earth & Environmental, Inc. (AMEC) is the environmental consultant for this project.

- Gary Dupuy (phone number 206-342-1777) and Meg Strong (phone number 425-368-0966) are the client managers for the project.
- Leah Vigoren (phone number 206-838-8470) is the project manager and is responsible for project management. Technical and administrative elements are included in her project management responsibilities.
- Anastasia Speransky (phone number 206-838-1776) is the task manager for the project and quality assurance manager for this project, which includes data quality objectives, and quality assurance/quality control (QA/QC) objectives as well as health and safety.

Cascade Drilling, Inc. in Woodinville, Washington, is the drilling contractor for the project.

Test America, Inc., in Nashville, Tennessee, is responsible for managing analyses of the samples collected. The laboratory is also responsible for sample preparation and ensuring that the QA/QC results from the laboratory are valid.

The geotechnical engineer will be provided by the City of Everett.

4.0 DATA QUALITY OBJECTIVES

Data Quality Objectives (DQOs) is a quality management tool developed by the U.S. Environmental Protection Agency (EPA) that is used to facilitate the planning of data collection activities. The DQO process provides a systematic procedure for defining criteria in the data collection design. The primary reference for the formal DQO process is EPA’s guidance document (EPA 1994). The DQO process consists of the following seven key steps.

1. State the problem.
2. Identify the decision.
3. Identify the inputs to the decision.
4. Define the boundaries of the study.
5. Develop a decision rule.
6. Specify tolerable limits on decision errors.
7. Optimize the design for obtaining data.

DQOs are qualitative and quantitative statements, developed using the DQO process, that are intended to clarify study objectives, define an appropriate type of data, and specify tolerable levels of potential decision errors that will be used as the basis for establishing the quality and quantity of data needed to support decisions.

Data Quality Indicators (DQI) (accuracy, precision, completeness, representativeness, comparability, and method detection limits) refer to quality control criteria established for various aspects of data gathering, sampling, or analysis activity. In defining DQIs specifically for the project, the level of uncertainty associated with each measurement is determined.

Accuracy is the degree of agreement of a measurement with a known or true value. To determine accuracy, a laboratory or field value is compared to a known or true concentration. Accuracy is determined by such quality control (QC) indicators as: matrix spikes (MS), surrogate spikes, laboratory control samples (blind spikes) and performance samples.

Precision is the degree of mutual agreement between or among independent measurements of a similar property (usually reported as a standard deviation [SD] or relative percent difference [RPD]). This indicator relates to the analysis of duplicate laboratory or field samples. An RPD of $\leq 50\%$ for water and $\leq 50\%$ for soil, depending upon the chemical being analyzed, is generally acceptable. Typically field precision is assessed by field duplicates and laboratory precision is assessed using laboratory duplicates, matrix spike duplicates, or laboratory control sample duplicates).

Completeness is expressed as percent of valid usable data actually obtained compared to the amount that was expected. Due to a variety of circumstances, sometimes either not all samples scheduled to be collected can be collected or else the data from samples cannot be used (for example, samples lost, bottles broken, instrument failures, laboratory errors, etc.). The minimum percent of completed analyses defined in this section depends on how much information is needed for decision making. Generally, completeness percent goals increase when the fewer the number of samples are collected per event or the more critical the data are for decision making. Goals in the 90 to 95% range are typical.

Representativeness is the expression of the degree to which data accurately and precisely represent a characteristic of an environmental condition or a population. It relates both to the

area of interest and to the method of taking the individual sample. The idea of representativeness should be incorporated into discussions of sampling design. Representativeness is best assured by a comprehensive statistical sampling design, but it is recognized that this is usually outside the scope of most one-time events. Most one-time event SAPs focus on issues related to judgmental sampling and why certain areas are included or not included and the steps being taken to avoid either false positives or false negatives.

Comparability expresses the confidence with which one data set can be compared to another. The use of methods from EPA or “Standard Methods” or from some other recognized sources allows the data to be compared facilitating evaluation of trends or changes in a site, a river, groundwater, etc. Comparability also refers to the reporting of data in comparable units so direct comparisons are simplified (e.g., this avoids comparison of milligram/liter (mg/L) for nitrate reported as nitrogen to mg/L of nitrate reported as nitrate, or parts per million (ppm) vs. mg/L discussions).

Detection Limit(s) (usually expressed as method detection limits [MDLs] or Quantitation Limit[s]) for all analytes or compounds of interest for all analyses requested is presented in Tables 1 and 2. These limits should be related to any decisions that will be made as a result of the data collection effort. A critical element to be addressed is how these limits relate to any regulatory or action levels that may apply.

Data Review and Management

Data management will commence during the field investigation. Each soil and groundwater sample collected will be recorded in a bound field book which will include a description of the location, depth, matrix, sample ID, and date and time of collection. Once data has returned from the laboratory, the electronic deliverables will be reviewed to ensure the receipt of all requested analytes and again cross-checked with chain-of-custodies (COCs). Data will be tabulated in electronic spreadsheets and again checked to ensure proper entry before use in reporting.

Assessment Oversight

The project manager will ensure that sample methods and accurate documentation are being practiced. Quality assurance (QA) systems will be emplaced at regular intervals during the data management process as described above. Finally, a peer review process by a senior technical staff will be conducted on the final reporting.

Corrective Actions

Corrective actions, if necessary, shall be completed. If acceptance criteria were not met and a corrective action was not successful or corrective action was not performed, data will be flagged appropriately. Requirements and procedures for documenting the need for corrective actions are described in this section.

Items requiring corrective action in the laboratory shall be documented by the use of a corrective action report. The QA coordinator or any other laboratory member can initiate the corrective action report request in the event QC results exceed acceptability limits, or upon identification of some other laboratory problem. Corrective actions can include reanalysis of the sample or samples affected, re-sampling and analysis, or a change in procedures, depending upon the severity of the problem.

5.0 PRE-FIELD ACTIVITIES

AMEC will coordinate the field activities and contract a private utility locating service in addition to contacting the underground utilities location center (Call Before You Dig). In addition, AMEC will update an existing site-specific Health and Safety Plan (HASP) (Attachment A2).

Site access for the borings on Everett Avenue which is owned by Kimberly Clark will be obtained by the City of Everett. AMEC will prepare and submit to the City the traffic control plan and right of way access applications for the work (Attachment A3).

6.0 FIELD PROCEDURES

This section presents the field investigation procedures for the soil and groundwater sampling effort. The field investigation will consist of drilling soil borings and collecting soil and groundwater samples. The proposed soil boring locations are illustrated on Figure 2. The proposed soil boring depths and specifications are listed in Table 3.

6.1 Field Health and Safety Procedures

AMEC field personnel will adhere to the health and safety procedures detailed in the *Site-Specific Health and Safety Plan*. City staff must follow their own Health and Safety Plan.

The hospital closest to the Site is Providence Hospital. An emergency contact list and a map illustrating the emergency route to Providence Hospital are located in the *Health and Safety Plan*.

It is anticipated that all fieldwork will be performed using Level D modified personal protective equipment (PPE). At a minimum, each on-site worker will be required to wear safety footwear (steel-toed boots), hard hat, hearing protection, eye protection, and a high visibility safety vest. In addition, AMEC and AMEC's contractors will be required to wear hand protection (e. g. leather and/or nitrile gloves). PPE will be upgraded whenever there is a potential for direct contact with contaminated soil or groundwater. Changes in the required PPE will be based on changed work conditions and field observations. PPE upgrades may consist of the following:

- Tyvek Coveralls – if a splash transfer is considered likely;
- Additional PPE upgrades that may be required, depending on breathing zone levels of petroleum hydrocarbons detected.

Eating, drinking, chewing gum or tobacco, smoking, or any practice that involves hand-to mouth contact increases the probability of contaminant ingestion and is prohibited in any area where the possibility of contamination exists.

Potential physical hazards that may be encountered include heat stress, slips, trips, and falls.

The AMEC field team will have current certifications for first aid, and a cell phone will be available at all times while personnel are in the field. All emergency response services will be reached by calling 911, from a land line if available.

6.2 Field Preparation

A Right of Way permit will be prepared and submitted to the City of Everett. The Traffic Control Plan is included in Attachment A3.

6.3 Utility Survey

AMEC will arrange a meeting with the City of Everett to mark the boring locations prior to initiation of field activities. During the markings of the borings, AMEC will identify all aboveground and overhead power lines. Proposed boring locations that are within 25 feet of an overhead power line will be moved until clearance is achieved. AMEC will also oversee a geophysical survey conducted by a private utility locator to identify subsurface utilities within 25 feet of the proposed soil boring locations. The presence of below-grade utilities will be identified, and their inferred locations will be marked on the ground surface at the site. In addition, subsurface activity locations may be reviewed with the City, if available at the time. During the utility location by the private contractor, the area noted as the former underground fuels lines will be specifically investigated in an attempt to identify the position of the pipes.

6.4 Calibration of Field Equipment

Calibration of a photo-ionization detector (PID) will occur daily at the beginning of field activities. Calibration results and times will be recorded in the field notes.

Calibration instructions for the PID are included with the equipment manuals enclosed in the equipment cases. In general, the PID will be used to screen soil for the presence of lighter end petroleum hydrocarbons, such as gasoline and benzene.

6.5 Soil Borings

Three soil borings (CE-1 through CE-3) will be advanced along Everett Avenue and two soil borings (CE-4 and CE-5) will be advanced along Federal Avenue (Figure 2). The borings will be advanced at each location using a HSA drill rig. Soil borings CE-1, CE-3, and CE-4 will be terminated at the total depth of the proposed trench at the location of each boring (approximately 8 feet bgs at each location). Soil borings CE-2 and CE-5 will be terminated at a minimum depth of 20 feet bgs to provide soil lithology information for the City. Proposed soil boring depths and specifications are listed in Table 3.

Per ExxonMobil Standard Operation Procedures (SOPs), 4-foot subsurface clearance will be performed by hand augering and vactor truck. The auger with round edges will be turned slowly and not forced through the soil. All soil boring locations are subject to change based on observed conditions in the field (aboveground and belowground utilities, existing equipment, etc.).

6.6 Soil Sample Collection

The purpose of the soil sampling is to characterize soil for proper disposal so that the City can direct load onto a truck during trenching. The first four feet generated during the hand augering for utility clearance will be composited to form the first sample. The second composite sample will be generated by blending continuous discreet soil samples collected by SPT from four to eight feet. Discrete samples for VOC and gasoline analysis will be taken from the composited upper sample and from the SPT.

The City of Everett's geotechnical engineer will log the lithology and obtain samples for grain size distribution analysis. AMEC's field representative will examine relevant chemical sample information (e.g., visual and olfactory observation and PID measurement) and will collect soil samples for laboratory analyses.

The guideline for the soil samples to be collected is as follows: In each boring, AMEC will collect two composite soil samples from two sampling intervals (1) the interval from the ground surface to 4 feet bgs using a hand auger and (2) from 4 feet bgs to the bottom of the boring (trench depth – approximately 8 feet). For composite soil samples, soil from each interval will be placed into a heavy 1-quart freezer Ziploc bag and mixed. Gravel and vegetation will be removed from the composite sample. If a discrete layer of asphaltic pavement is encountered, it will be excluded from the sample and its presence noted on the boring log. Composite samples will be collected in three 4-ounce soil jars. Samples will be labeled and chilled on ice in a cooler for delivery under proper chain-of-custody protocol to a Washington-certified analytical laboratory. It is assumed that AMEC will collect two to three discrete soil samples and two to three composite soil sample per boring for laboratory analyses.

Two discrete soil samples will be either collected from the composite sample between zero and four feet bgs and one the SPT. Selection of the sampling location will be based on (1) the interval that exhibited the highest VOC vapor concentration, as measured with a PID and/or (2) intervals of petroleum hydrocarbon staining or odors and/or (3) heavy contamination such as free product is encountered. If VOCs are not detected and no staining or odor is observed, the discreet samples will be collected from a the composite material and the other from below the water table. Discreet soil samples will be collected using a soil core syringe and inserted into a pre-tared 40 milliliter volatile organic analyses (VOA) vial in accordance with EPA Method 5035 sampling methodologies. In addition, a discrete soil sample will be collected in one 4-ounce soil jars for moisture analysis.

Samples for laboratory analyses below the proposed trench depth will not be collected except to assess lithology. To prevent cross contamination, any equipment repeatedly in contact with the soil will be decontaminated before and after each individual sampling attempt.

6.7 Soil Sample Analyses

The soil sample analytical program presented below is based on requirements of the disposal facilities (e. g. CEMEX).

A total of 11 discrete soil samples will be submitted to analytical laboratory for the following analyses:

- Gasoline range TPH, using Ecology method NWTPH as gasoline (NWTPH-Gx),
- All 11 samples will be analyzed for benzene, toluene, ethylbenzene, and total xylenes (BTEX) and up to 3 of the 11 samples will be selected and submitted for volatile organic compounds (VOCs) by EPA Method 8260B. The three samples will be selected based on visual or olfactory indications of hydrocarbons.

A total of 11 composite soil samples will be submitted to analytical laboratory for the following analyses:

- RCRA eight metals (Ag, As, Ba, Cd, Cr, Hg, Pb, Se) by U. S. Environmental Protection Agency (EPA) Method 200/6000/7000 Series.
- In addition, it is likely that a significant number of the soils may exceed the lower MTCA Method A soil cleanup limit of 19 milligrams per kilogram (mg/kg) for total chromium. A note will be placed on each chain-of-custody directing the laboratory to automatically perform a follow-up hexavalent chromium analysis using EPA Method 7196A for any sample whose total chromium result exceeds 19 mg/kg. We estimate that two samples will be requested to be analyzed for hexavalent chromium.
- If any soil analytical result (in mg/kg) is equal to or greater than 20 times the maximum concentration for the hazardous waste toxicity characteristics listed in 40 CFR 261.24 (in milligrams per liter [mg/L]), then the sample may be analyzed using Toxicity Characteristic Leaching Procedure (TCLP) using U. S. EPA Methods 1311 and 6010 series. (Sample volume will be held for TCLP analysis at the laboratory. We will direct the laboratory to provide notification prior to issuance of the laboratory report so that hold times would be met).
- Diesel and heavy oil range Total Petroleum Hydrocarbons (TPH), using Ecology Method Northwest Total Petroleum Hydrocarbon as diesel and lube oil (NWTPH-Dx). All NWTPH–Dx samples will be prepared in the analytical laboratory using silica gel acid wash to eliminate non-petroleum hydrocarbon interferences.
- Low-level polycyclic aromatic hydrocarbons (PAHs) by EPA method 8270D SIM.

Soil sample methods, required sample containers, preservation requirements, and holding times are provided in Table 4.

Soil samples will be submitted to Ecology-certified Test America, Inc. analytical laboratory located in Nashville, Tennessee for one-week turn around analytical time.

6.8 Groundwater Sample Collection

To collect a “grab” groundwater sample, a temporary 2-inch-diameter, flush-threaded Schedule 40 polyvinyl chloride (PVC) with a 5-foot-long slotted screen will be installed in each boring. The well screens will be installed to straddle the water table. Sand (10/20 CSS) will be placed in the annular space surrounding the screens to minimize turbidity. The sand pack will extend to a height of at least 1 foot above the top of the screen.

Following placing of a screen, water from the temporary well will be pumped using a submersible pump to minimize the amount of suspended solids, and a “grab” water sample will be collected either with a disposable bailer or peristaltic pump. AMEC will record the volume of water removed. The purged groundwater will be contained in 55-gallon drums and stored at the Property pending the analytical results and the City’s construction schedule.

6.9 Groundwater Sample Analyses

The groundwater sample analytical program presented below is based on the chemicals likely to be in groundwater from past uses of the Property that may be required to be tested for the holder to discharge water into Port Gardner Bay. For the City of Everett, this includes stormwater that runs through the City’s storm drain system as well as treated water discharged from Everett’s Water Pollution Control Facility. To comply with the City’s discharge regulations, five “grab” groundwater samples from the borings will be analyzed for:

- RCRA 8 metals (Ag, As, Ba, Cd, Cr, Hg, Pb, Se) by EPA Method 6010B/7470A (reporting limit less than 1 microgram per liter),
- Corrosives (pH) by field testing, and
- TPH and BTEX.

Groundwater samples will be submitted to Ecology-certified Test America, Inc. analytical laboratory located in Nashville, Tennessee for one-week turn around analytical time.

In addition, Gene Bennett, a City of Everett discharge expert, will be available at 425-257-8249 for the water discharge questions.

6.10 Sample Containers, Preservation and Storage

Soil and groundwater samples will be collected and placed into precleaned sample containers provided by the analytical laboratory in accordance with Table 4. Upon collection, sample containers will be sealed, labeled, chilled to 4°C in a cooler with ice, and maintained with AMEC’s custody until delivery to the project analytical laboratory, Test America, Inc., in Nashville, Tennessee.

6.11 Equipment Decontamination

Decontamination of sampling equipment will be performed to maintain data quality, to prevent cross contamination, and to prevent the potential introduction of contaminants into previously

unimpacted areas. Reusable sampling equipment, including the drill rig, down-hole drilling equipment, and stainless-steel materials, will be decontaminated prior to each sampling event. General decontamination procedures for nondedicated soil and groundwater sampling equipment and accessories are as follows.

- Physically remove soils using a nonphosphate detergent solution.
- Rinse with noncontaminated tap water.
- Rinse with deionized water.
- Rinse with Isopropyl alcohol.
- Air dry.

6.12 Investigation Derived Waste Management

Investigation Derived Waste (IDW) generated during the course of the field investigation will be labeled and securely stored on the Property in 55-gallon drums approved by the U.S. Department of Transportation. Drums will be stored at a designated location. The various waste streams will include the following:

- Potentially contaminated liquids, including fluids derived from purging and equipment decontamination water;
- Potentially contaminated solids, principally soil cuttings; and
- Personal protective equipment (PPE).

Each drum will be labeled with standardized IDW drum labels to indicate its contents, date of collection, location from which the IDW originated, and other pertinent information. In addition, all drums will also be labeled with indelible paint sticks or pens. AMEC will maintain an inventory of the drums. The purged groundwater and soil cuttings will be stored at the Property pending the analytical results and the City's construction schedule. PPE will be placed in a separate 55-gallon drum and disposed off-site at an appropriate facility.

7.0 DOCUMENTATION

The integrity of data obtained from samples collected during the field investigation depends on proper sample management and handling. Proper sample management includes sample labeling, which includes assignment of a specific identification number and affixing proper identification and markings to the collected samples. Proper handling includes proper packing and transport of the sample containers.

7.1 Field Logbook

The field logbook serves as the primary record of field activities. Entries shall be made chronologically and in sufficient detail to allow the writer or a knowledgeable reviewer to reconstruct the applicable events. The field logbook shall be bound with consecutively numbered and water repellent pages.

At a minimum, the following information will be recorded in either the field logbook or a separate sample log sheet during the collection of each sample:

- Sample location and description;
- Sampler's name(s);
- Date and time of sample collection;
- Type of sample (soil or groundwater);
- Type of sampling equipment used;
- Field instrument readings and calibration; and
- Field observations and details related to analysis or integrity of samples (e.g., weather conditions, noticeable odors, colors, etc.).

7.2 Labeling

Each sample container sent to the lab will have a unique sample identification label. The following information will be included on the sample label:

- Project name and location;
- Project number;
- Sample identification number;
- Date and time of collection; and
- Initials of the sampler.

Each soil sample will be named by the boring number and depth (or depth interval) of sample collection in feet. For example, a discrete soil sample collected from soil boring CE-1 at a depth of 6 feet will have a sample designation as "CE-1-6." A composite soil sample from soil boring CE-2 at a depth interval from the surface to the soil/water interface that was encountered at 3.5

feet bgs will have a sample designation as “CE-2-0-3.5.” “Grab” groundwater samples will be named by the boring location, and identified as a grab sample with the date of sample collection. For example, a “grab” groundwater sample collected from boring CE-1 on February 22, 2010, would be named “CE1-G022210.”

Duplicate samples will be sent to the laboratory blindly. However, the location of the sample will not be revealed to the laboratory. Instead, duplicate samples will be named sequentially as Dup-1 and Dup-2. The location of the duplicate sample collection will be recorded in the field notebook.

7.3 Sample Chain of Custody

COC forms will be completed at the end of each sampling day. The completed COC form(s) and samples will be kept in the possession of the field team until relinquishing the samples to the laboratory or courier service. One copy of the completed COC form will be kept by the field team, and the original COC form will be stored in a resealable plastic bag and transported in the sample container with the laboratory samples. Custody seals will be placed along the seal of each sample container in order to prevent tampering with the samples. A copy of the COC form is included in Attachment A4.

8.0 DATA VALIDATION

Data validation is the procedure of reviewing data against a known set of criteria to verify data validity prior to its use. Data validation procedures have been developed by the US EPA to standardize the validation process for analytical results for both water-quality and soil-quality investigations and are documented as the *US EPA Contract Laboratory Program National Functional Guidelines for Superfund Organic Methods Data Review*, US EPA, Office of Solid Waste and Emergency Response, Washington, D.C., Publication 9240.1-48, US EPA-540/R-08-01 (US EPA 2008). The Functional Guidelines are intended to be used as a guide for evaluation of data generated under statements of work for organic and inorganic analyses associated with the US EPA Contract Laboratory Program (CLP). The Functional Guidelines also provide general data validation guidelines that can be applied to data generated by non-CLP analytical methods.

One hundred percent (100%) of the analytical data for soil and groundwater samples will be validated using EPA Stage 4 data validation level. Stage 4 validation includes an examination of sample and QC raw data and instrument printouts to check for technical, calculation, analyte identification, analyte quantitation, and transcription or reduction errors. At a minimum 10% of reported results on summary forms should be confirmed by recalculation. The data validation staff will review field documents and laboratory data report packages, and if needed, apply data qualifiers to the data. The data reviewer will determine if the project data quality objectives have been met, and will calculate the data completeness for the project.

9.0 QUALITY CONTROL

This Addendum has been prepared to provide instructions and guidance to ensure the sample chemical data collected in support of the site soil and groundwater sampling results are scientifically valid. The sections below outline methods and processes to meet these objectives.

9.1 Field Quality Control Samples

To evaluate quality control (QC), a blind field duplicate sample will be collected at a frequency of 5 percent of the samples for each matrix (soil and groundwater).

Two trip blank vials provided by the laboratory will be placed into the cooler designated to store samples to be analyzed for VOCs to evaluate the potential for cross-contamination. Field duplicates are replicate samples collected at the same location during the same sampling session (roughly at the same time). The field duplicate samples will be collected in the same container types and handled and analyzed in the same manner, as all other soil and groundwater samples. The field duplicates will be analyzed for the same analytes as the primary sample.

9.2 Laboratory Quality Control Samples

Laboratory QC samples are analyzed as part of standard laboratory practice. The laboratory monitors the precision and accuracy of the results of its analytical procedures through analysis of QC samples. In part, laboratory QC samples consist of Matrix Spike/Matrix Spike Duplicate (MS/MSD) samples for organic analyses, and MS/MSD for inorganic analyses. The term "matrix" refers to use of the actual media collected in the field (e.g., routine soil and water samples). Laboratory QC samples are an aliquot (subset) of the field sample. They are not separate samples, but a special designation of an existing sample. The laboratory QC samples will be analyzed for the same analytes as the standard samples.

9.3 Field Variances

As conditions in the field may vary, it may become necessary to implement minor modifications to the sampling as presented in this Addendum. When appropriate, ExxonMobil, ADC, and the City of Everett will be notified and a verbal (followed by a written verification) approval will be obtained before implementing the changes. Modifications to the approved plan will be documented in the sampling project report.

9.4 Data Management

Data management will commence during the field investigation. Each soil and groundwater sample collected will be recorded on field logs, which will include a description of the location, depth, matrix, sample ID, and date and time of collection. All data submittals will be consistent with Ecology Policy 840 (dated March 31, 2008) Environmental Information Management (EIM) submittal requirement format. Once data have been provided by the laboratory, the electronic

deliverables will be reviewed to ensure the receipt of all requested analytes and again cross-checked with COCs.

10.0 REFERENCES

AMEC Earth & Environmental, Inc. (AMEC), 2009. *Draft Final Focused Feasibility Study Work Plan for ExxonMobil / ADC Property, Ecology ID 2728, 2717/2731 Federal Avenue, Everett, Washington, Bothell, Washington, October 2.*

U.S. Environmental Protection Agency (EPA), 1994. *Guidance of the Data Quality Objectives Process*, EPA QA/G-4. EPA/600/R-96/055, EPA Office of Research and Development, Washington, D.C. September.

Puls, R.W. and Barcelona, M.J., 1996. *Low-Flow (Minimal Drawdown) Groundwater Sampling Procedures*, U.S. EPA /540/S-95/504

Washington State Department of Ecology (Ecology), 2001. *Model Toxics Control Act Cleanup Regulation*, Chapter 173-340 WAC. Publication No. 94-06

TABLES

Table 1. Method Detection and Reporting Limits for Soil Samples

| Specific Method | Analyte | MDL | MRL | Units |
|-----------------|-----------------------------|----------|---------|-------|
| SW846 8260B | Acetone | 0.0250 | 0.0500 | mg/kg |
| SW846 8260B | Benzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Bromobenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Bromochloromethane | 0.00102 | 0.00200 | mg/kg |
| SW846 8260B | Bromodichloromethane | 0.000400 | 0.00200 | mg/kg |
| SW846 8260B | Bromoform | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Bromomethane | 0.000640 | 0.00200 | mg/kg |
| SW846 8260B | 2-Butanone | 0.0170 | 0.0500 | mg/kg |
| SW846 8260B | sec-Butylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | n-Butylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | tert-Butylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Carbon disulfide | 0.000670 | 0.00500 | mg/kg |
| SW846 8260B | Carbon Tetrachloride | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Chlorobenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Chlorodibromomethane | 0.000380 | 0.00200 | mg/kg |
| SW846 8260B | Chloroethane | 0.000420 | 0.00500 | mg/kg |
| SW846 8260B | Chloroform | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Chloromethane | 0.00100 | 0.00200 | mg/kg |
| SW846 8260B | 2-Chlorotoluene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 4-Chlorotoluene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dibromo-3-chloropropane | 0.00340 | 0.00500 | mg/kg |
| SW846 8260B | 1,2-Dibromoethane (EDB) | 0.000520 | 0.00200 | mg/kg |
| SW846 8260B | Dibromomethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,4-Dichlorobenzene | 0.000720 | 0.00200 | mg/kg |
| SW846 8260B | 1,3-Dichlorobenzene | 0.000430 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dichlorobenzene | 0.000430 | 0.00200 | mg/kg |
| SW846 8260B | Dichlorodifluoromethane | 0.00160 | 0.00200 | mg/kg |
| SW846 8260B | 1,1-Dichloroethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dichloroethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | cis-1,2-Dichloroethene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,1-Dichloroethene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | trans-1,2-Dichloroethene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,3-Dichloropropane | 0.000450 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dichloropropane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 2,2-Dichloropropane | 0.000780 | 0.00200 | mg/kg |
| SW846 8260B | cis-1,3-Dichloropropene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | trans-1,3-Dichloropropene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,1-Dichloropropene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Ethylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Hexachlorobutadiene | 0.000630 | 0.00500 | mg/kg |
| SW846 8260B | 2-Hexanone | 0.0170 | 0.0500 | mg/kg |
| SW846 8260B | Isopropylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | p-Isopropyltoluene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Methyl tert-Butyl Ether | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Methylene Chloride | 0.00200 | 0.0100 | mg/kg |
| SW846 8260B | 4-Methyl-2-pentanone | 0.00290 | 0.0500 | mg/kg |
| SW846 8260B | Naphthalene | 0.00170 | 0.00500 | mg/kg |
| SW846 8260B | n-Propylbenzene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Styrene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,1,1,2-Tetrachloroethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,1,2,2-Tetrachloroethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | Tetrachloroethene | 0.000400 | 0.00200 | mg/kg |
| SW846 8260B | Toluene | 0.000400 | 0.00200 | mg/kg |

Table 1. Method Detection and Reporting Limits for Soil Samples

| | | | | |
|------------------|--------------------------------------|----------|---------|-------|
| SW846 8260B | 1,2,3-Trichlorobenzene | 0.000920 | 0.00200 | mg/kg |
| SW846 8260B | 1,2,4-Trichlorobenzene | 0.00102 | 0.00200 | mg/kg |
| SW846 8260B | 1,1,2-Trichloroethane | 0.00111 | 0.00500 | mg/kg |
| SW846 8260B | 1,1,1-Trichloroethane | 0.000400 | 0.00200 | mg/kg |
| SW846 8260B | Trichloroethene | 0.000830 | 0.00200 | mg/kg |
| SW846 8260B | Trichlorofluoromethane | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,2,3-Trichloropropane | 0.00103 | 0.00200 | mg/kg |
| SW846 8260B | 1,3,5-Trimethylbenzene | 0.000400 | 0.00200 | mg/kg |
| SW846 8260B | 1,2,4-Trimethylbenzene | 0.000420 | 0.00200 | mg/kg |
| SW846 8260B | Vinyl chloride | 0.000820 | 0.00200 | mg/kg |
| SW846 8260B | o-Xylene | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | m,p-Xylene | 0.000670 | 0.00300 | mg/kg |
| SW846 8260B | Xylenes, total | 0.00130 | 0.00500 | mg/kg |
| SW846 8260B | Diisopropyl Ether | 0.000670 | 0.00200 | mg/kg |
| SW846 8260B | 1,2-Dichloroethene (total) | 0.00144 | 0.00200 | mg/kg |
| SW846 8260B | 1,1,2-Trifluorotrchloroethane | 0.000590 | 0.00200 | mg/kg |
| | | | | |
| SW846 8270D SIM | Acenaphthene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | Acenaphthylene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Anthracene | 0.000700 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (a) anthracene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (a) pyrene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (b) fluoranthene | 0.00160 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (g,h,i) perylene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | Benzo (k) fluoranthene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | Chrysene | 0.000600 | 0.00333 | mg/kg |
| SW846 8270D SIM | Dibenz (a,h) anthracene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Fluoranthene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Fluorene | 0.000500 | 0.00333 | mg/kg |
| SW846 8270D SIM | Indeno (1,2,3-cd) pyrene | 0.000300 | 0.00333 | mg/kg |
| SW846 8270D SIM | 1-Methylnaphthalene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | 2-Methylnaphthalene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Naphthalene | 0.000700 | 0.00333 | mg/kg |
| SW846 8270D SIM | Phenanthrene | 0.000400 | 0.00333 | mg/kg |
| SW846 8270D SIM | Pyrene | 0.000300 | 0.00333 | mg/kg |
| | | | | |
| NWTPH-Dx | TPH - Diesel Range by NWTPH-Dx (SGT) | 2.00 | 4.00 | mg/kg |
| NWTPH-Dx | TPH - Oil Range by NWTPH-Dx (SGT) | 2.00 | 4.00 | mg/kg |
| | | | | |
| NWTPH-Gx | TPH - NWTPH-Gx | 0.500 | 5.00 | mg/kg |
| | | | | |
| SW846 1311/6010B | Arsenic TCLP SW 6010B | 0.0400 | 0.100 | mg/L |
| SW846 1311/6010B | Barium TCLP SW 6010B | 0.0100 | 0.100 | mg/L |
| SW846 1311/6010B | Cadmium TCLP SW 6010B | 0.00600 | 0.0100 | mg/L |
| SW846 1311/6010B | Chromium TCLP SW 6010B | 0.0260 | 0.0500 | mg/L |
| SW846 1311/6010B | Lead TCLP SW 6010B | 0.0210 | 0.0500 | mg/L |
| SW846 1311/6010B | Selenium TCLP SW 6010B | 0.0390 | 0.100 | mg/L |
| SW846 1311/6010B | Silver TCLP SW 6010B | 0.0280 | 0.0500 | mg/L |
| SW846 1311/7470A | Mercury TCLP 7470A | 0.00100 | 0.0100 | mg/L |
| | | | | |
| SW846 6010B | Arsenic Total EPA 6010B | 0.700 | 1.00 | mg/kg |
| SW846 6010B | Barium Total EPA 6010B | 0.100 | 2.00 | mg/kg |
| SW846 6010B | Cadmium Total EPA 6010B | 0.200 | 1.00 | mg/kg |
| SW846 6010B | Chromium Total EPA 6010B | 0.500 | 1.00 | mg/kg |

Table 1. Method Detection and Reporting Limits for Soil Samples

| | | | | |
|-------------|-----------------------------------|--------|-------|-------|
| SW846 6010B | Lead Total EPA 6010B | 0.400 | 1.00 | mg/kg |
| SW846 6010B | Selenium Total EPA 6010B | 0.700 | 2.00 | mg/kg |
| SW846 6010B | Silver Total EPA 6010B | 0.500 | 1.00 | mg/kg |
| SW846 7471A | Mercury 7471A | 0.0400 | 0.100 | mg/kg |
| | | | | |
| SW846 7196A | Chromium, Hexavalent by EPA 7196A | 1.70 | 2.00 | mg/kg |

Notes:

TPH = Total Petroleum Hydrocarbon
EPA = U. S. Environmental Protection Agency
mg/kg = milligram per kilogram
mg/L = milligram per liter
MDL = method detection limit
MRL = method reporting limit

Table 2. Method Detection and Reporting Limits for Groundwater Samples

| Specific Method | Analyte | MDL | MRL | Units |
|------------------------|--------------------------|------------|------------|--------------|
| SW846 8260B | Benzene | 0.410 | 1.00 | ug/L |
| SW846 8260B | Ethylbenzene | 0.350 | 1.00 | ug/L |
| SW846 8260B | Toluene | 0.350 | 1.00 | ug/L |
| SW846 8260B | o-Xylene | 0.330 | 1.00 | ug/L |
| SW846 8260B | m,p-Xylene | 0.400 | 2.00 | ug/L |
| | | | | |
| NWTPH-Dx | Diesel | 28.0 | 100 | ug/L |
| NWTPH-Dx | Motor Oil | 28.0 | 100 | ug/L |
| | | | | |
| NWTPH-Gx | GRO (C4-C12) NW | 40.0 | 100 | ug/L |
| | | | | |
| SW846 6010B | Arsenic Total EPA 6010B | 0.00360 | 0.0100 | mg/L |
| SW846 6010B | Barium Total EPA 6010B | 0.00100 | 0.0100 | mg/L |
| SW846 6010B | Cadmium Total EPA 6010B | 0.000600 | 0.00100 | mg/L |
| SW846 6010B | Chromium Total EPA 6010B | 0.00260 | 0.00500 | mg/L |
| SW846 6010B | Lead Total EPA 6010B | 0.00210 | 0.00500 | mg/L |
| SW846 6010B | Selenium Total EPA 6010B | 0.00390 | 0.0100 | mg/L |
| SW846 6010B | Zinc Total EPA 6010B | 0.00500 | 0.0500 | mg/L |
| | | | | |
| SW846 7470A | Mercury Total 7470A | 0.000100 | 0.000200 | mg/L |
| | | | | |

Notes:

TPH = Total Petroleum Hydrocarbon

EPA = U. S. Environmental Protection Agency

mg/L = milligram per liter

µ/L = microgram per liter

MDL = method detection limit

MRL = method reporting limit

Table 3 Soil and Groundwater Samples

| Boring Number | City of Everett Trench Station Number | Trench Depth (ft bgs) | Drilling Method | Boring Depth (ft bgs) | Depth of Sampling (ft bgs) | Number of Soil Samples | Number of Groundwater Samples |
|----------------------|--|------------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|--------------------------------------|
| CE-1 | 20+02 | 7.9 | HSA | 8 | 8 | 2 | 1 |
| CE-2 | 18+00 | 7.5 | HSA | 20 | 8 | 3 | 1 |
| CE-3 | 17+00 | 7.6 | HSA | 8 | 8 | 2 | 1 |
| CE-4 | 15+50 | 6.75 | HSA | 7 | 7 | 2 | 1 |
| CE-5 | 14+00 | 8 | HSA | 20 | 8 | 2 | 1 |
| Duplicate samples | | | | | | 2 | 1 |
| Total Samples | | | | | | 13 | 6 |

Notes:

Duplicate samples will be collected from intervals exhibiting evidence of potential contamination, such as staining or odor.

ft bgs = feet below ground surface

HSA = hollow-stem auger


Table 4 Sample Containers, Preservation and Storage

| Analysis | Method | Sample Container | Number of Containers | Preservation and Storage | Holding Times |
|---|-----------------|--|----------------------|-----------------------------|---------------|
| Soil | | | | | |
| Gasoline Range Organics | NWTPH-Gx | 40-mL vial (VOA) w/MeOH | 1 | 4° C | 14 days |
| Diesel Range Organics ¹ | NWTPH-Dx | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 14 days |
| Volatile Organic Compounds | EPA 8260B | 40-mL vial (VOA) w/stir bar ² | 2 | 4° C | 14 days |
| Polycyclic Aromatic Hydrocarbons | EPA 8270D | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 14 days |
| Metals | EPA 6010/6020 | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 6 months |
| Mercury (Hg)/Hexavalent Chromium (CrVI) | EPA 7471/7196 | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 28 days |
| Water | | | | | |
| Gasoline Range Organics | NWTPH-Gx | 40-mL vial (VOA) w/HCl | 1 | HCl pH<2, 4° C | 14 days |
| Diesel Range Organics ¹ | NWTPH-Dx | 4 oz. CWM jar with PTFE lid | 1 | 4° C | 14 days |
| BTEX | EPA 8260B | 40-mL vial (VOA) w/HCl | 2 | 4° C | 14 days |
| Metals (total) | EPA 200.7/200.8 | 500-mL HDPE | 1 | HNO ₃ pH<2, 4° C | 6 months |
| Mercury (Hg) | EPA 7470 | 500-mL HDPE | 1 | 4° C | 28 days |
| pH | EPA 150.1/9040 | 60-mL HDPE | 1 | 4° C | ASAP |

Notes:

1. Silica gel cleanup will be performed on samples
 2. Sample volume = 5 ounces
- NW TPH = Northwest Total Petroleum Hydrocarbon
 EPA = U. S. Environmental Protection Agency
 CWM jar = Clear, wide-mouth glass jar
 HCl = Hydrochloric acid
 MeOH = Methanol
 BTEX = benzene, toluene, ethylbenzene, total xylene
 NaOH = sodium hydroxide
 HNO₃ = Nitric Acid
 HDPE - High Density Polyethylene
 PTFE = teflon
 VOA = volatile organic analysis
 mL = milliliter

FIGURES

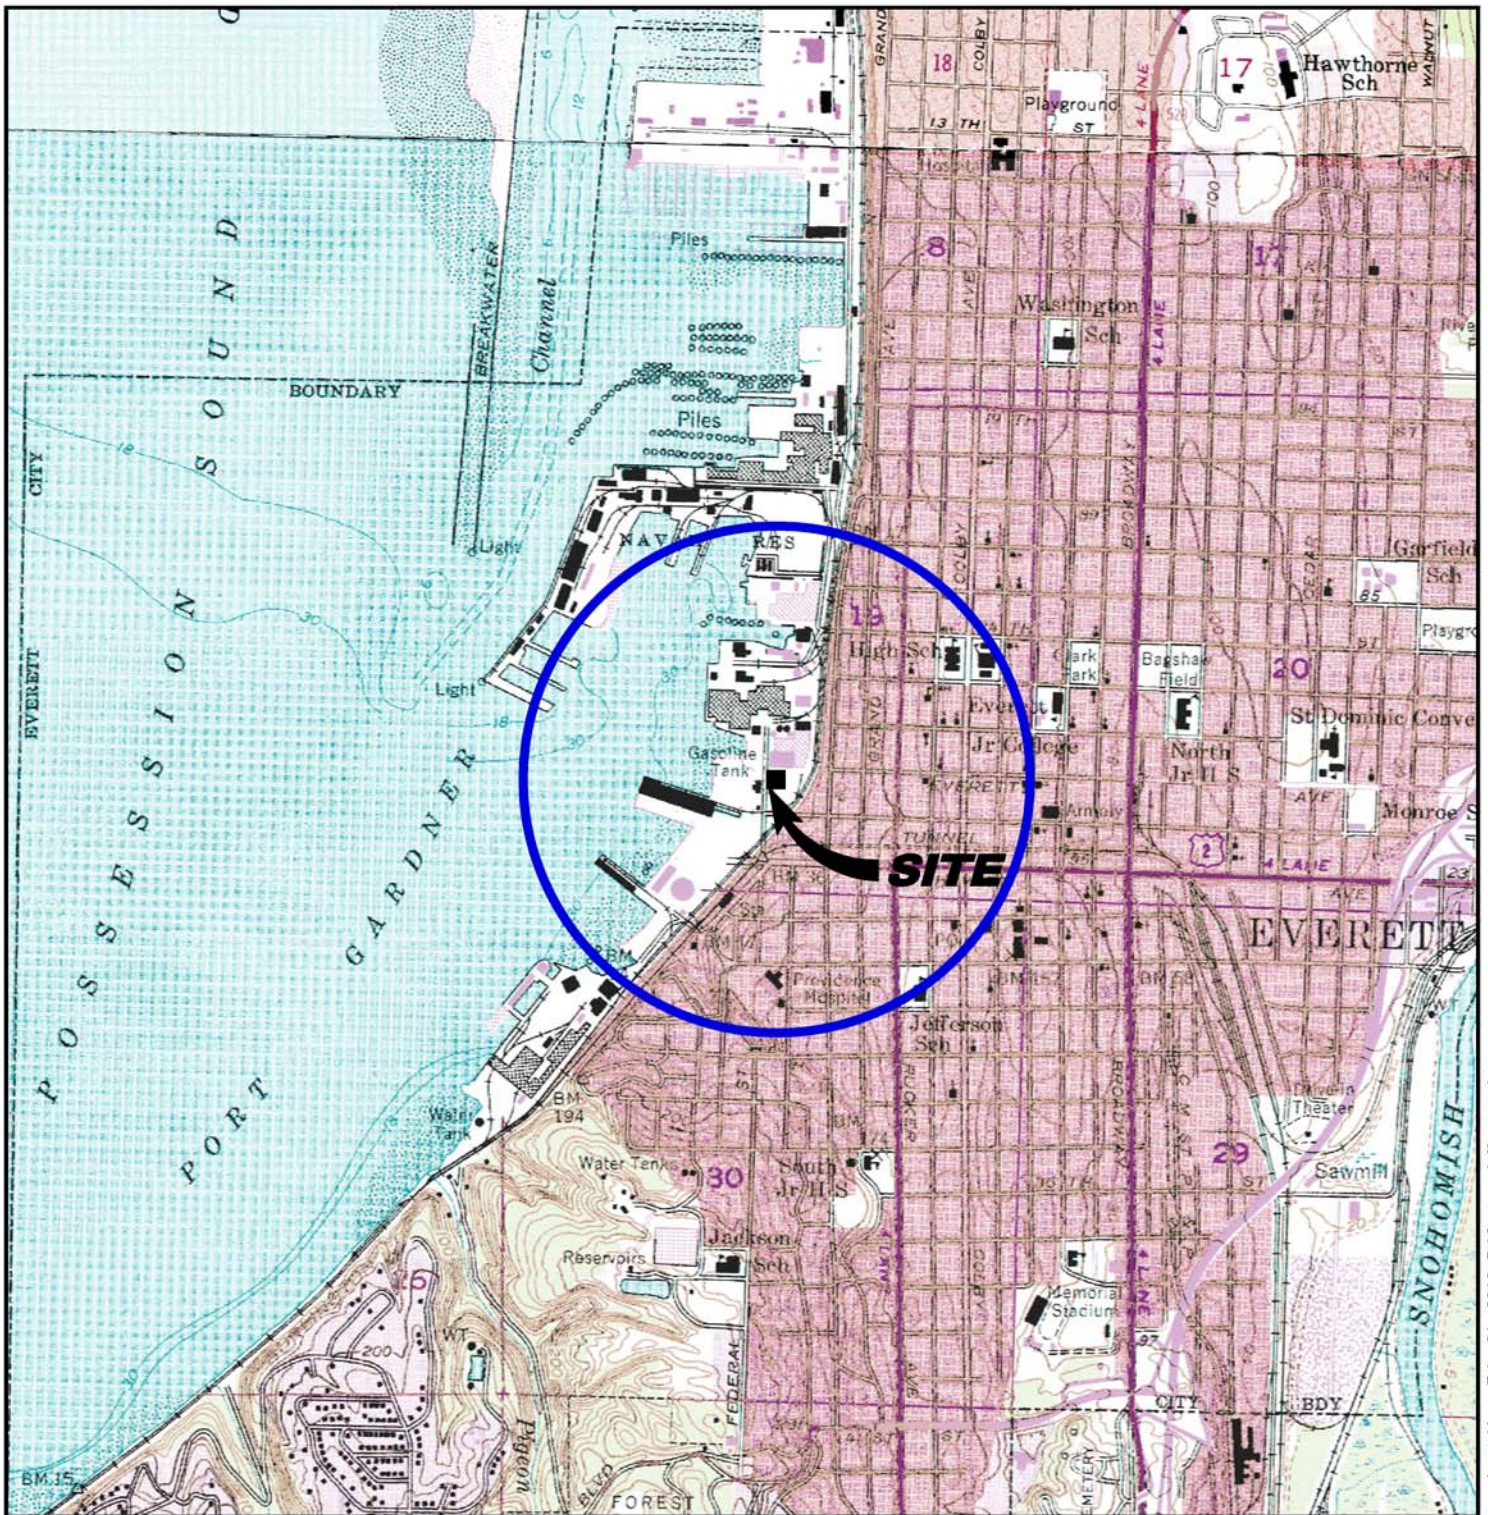

EXPLANATION



1/2-MILE RADIUS CIRCLE

SOURCE: USGS Quad Topo of Everett and Marysville, Photorevised 1973.



0 2000 4000 Feet

SCALE: 1:24,000

AMEC Earth & Environmental

11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201



CLIENT LOGO

CLIENT

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**

PROJECT **EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728**

DWN BY: JRS

DATUM: NONE

DATE: FEBRUARY 2010

TITLE **SITE LOCATION MAP**

CHK'D BY: AS


REV. NO.:

PROJECT NO:
0-915-15716-D

PROJECTION: NONE

SCALE: AS SHOWN

FIGURE No. **1**

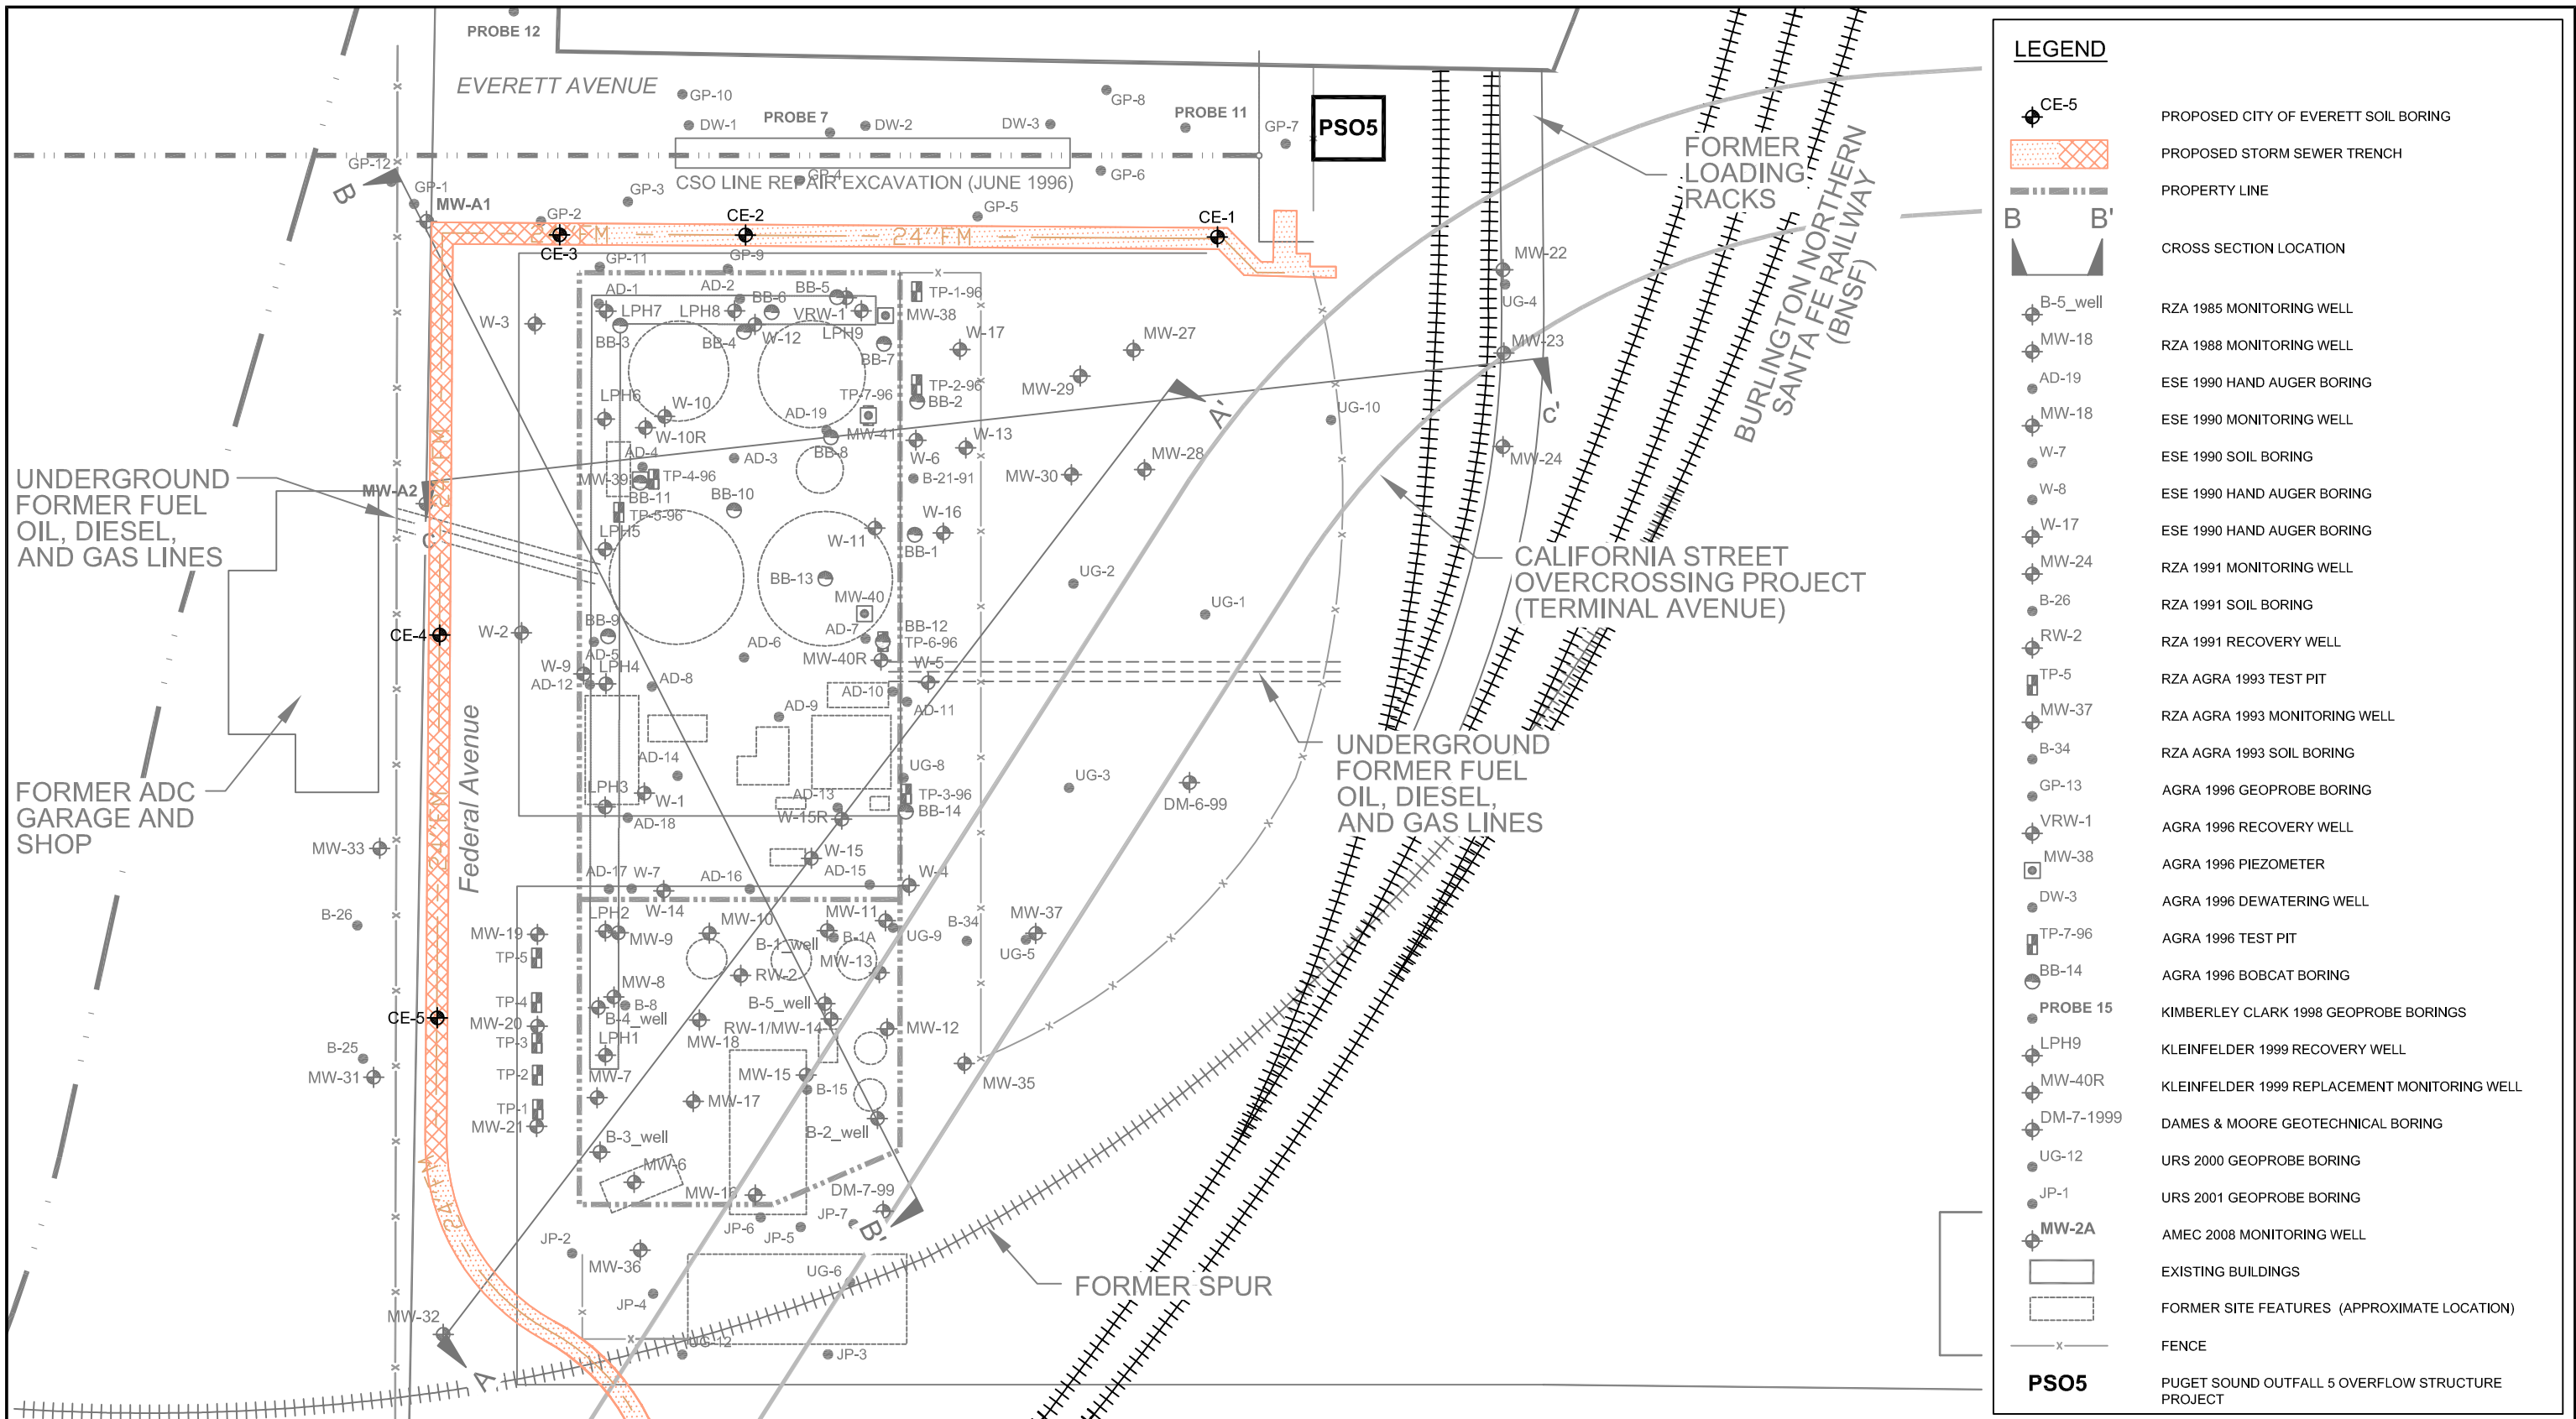

| LEGEND | |
|--------|--|
| | PROPOSED CITY OF EVERETT SOIL BORING |
| | PROPOSED STORM SEWER TRENCH |
| | PROPERTY LINE |
| | CROSS SECTION LOCATION |
| | RZA 1985 MONITORING WELL |
| | RZA 1988 MONITORING WELL |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 MONITORING WELL |
| | ESE 1990 SOIL BORING |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 HAND AUGER BORING |
| | RZA 1991 MONITORING WELL |
| | RZA 1991 SOIL BORING |
| | RZA 1991 RECOVERY WELL |
| | RZA AGRA 1993 TEST PIT |
| | RZA AGRA 1993 MONITORING WELL |
| | RZA AGRA 1993 SOIL BORING |
| | AGRA 1996 GEOPROBE BORING |
| | AGRA 1996 RECOVERY WELL |
| | AGRA 1996 PIEZOMETER |
| | AGRA 1996 DEWATERING WELL |
| | AGRA 1996 TEST PIT |
| | AGRA 1996 BOBCAT BORING |
| | KIMBERLEY CLARK 1998 GEOPROBE BORINGS |
| | KLEINFELDER 1999 RECOVERY WELL |
| | KLEINFELDER 1999 REPLACEMENT MONITORING WELL |
| | DAMES & MOORE GEOTECHNICAL BORING |
| | URS 2000 GEOPROBE BORING |
| | URS 2001 GEOPROBE BORING |
| | AMEC 2008 MONITORING WELL |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |
| | PUGET SOUND OUTFALL 5 OVERFLOW STRUCTURE PROJECT |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201





DWN BY: JRS / BRJ
 CHK'D BY: AS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'

PROJECT
EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728

TITLE
PROPOSED STORM SEWER UPGRADE
SOIL BORINGS

DATE: FEBRUARY 2010
 PROJECT NO: 0-915-15716-D
 REV. NO.: 1
 FIGURE No. 2



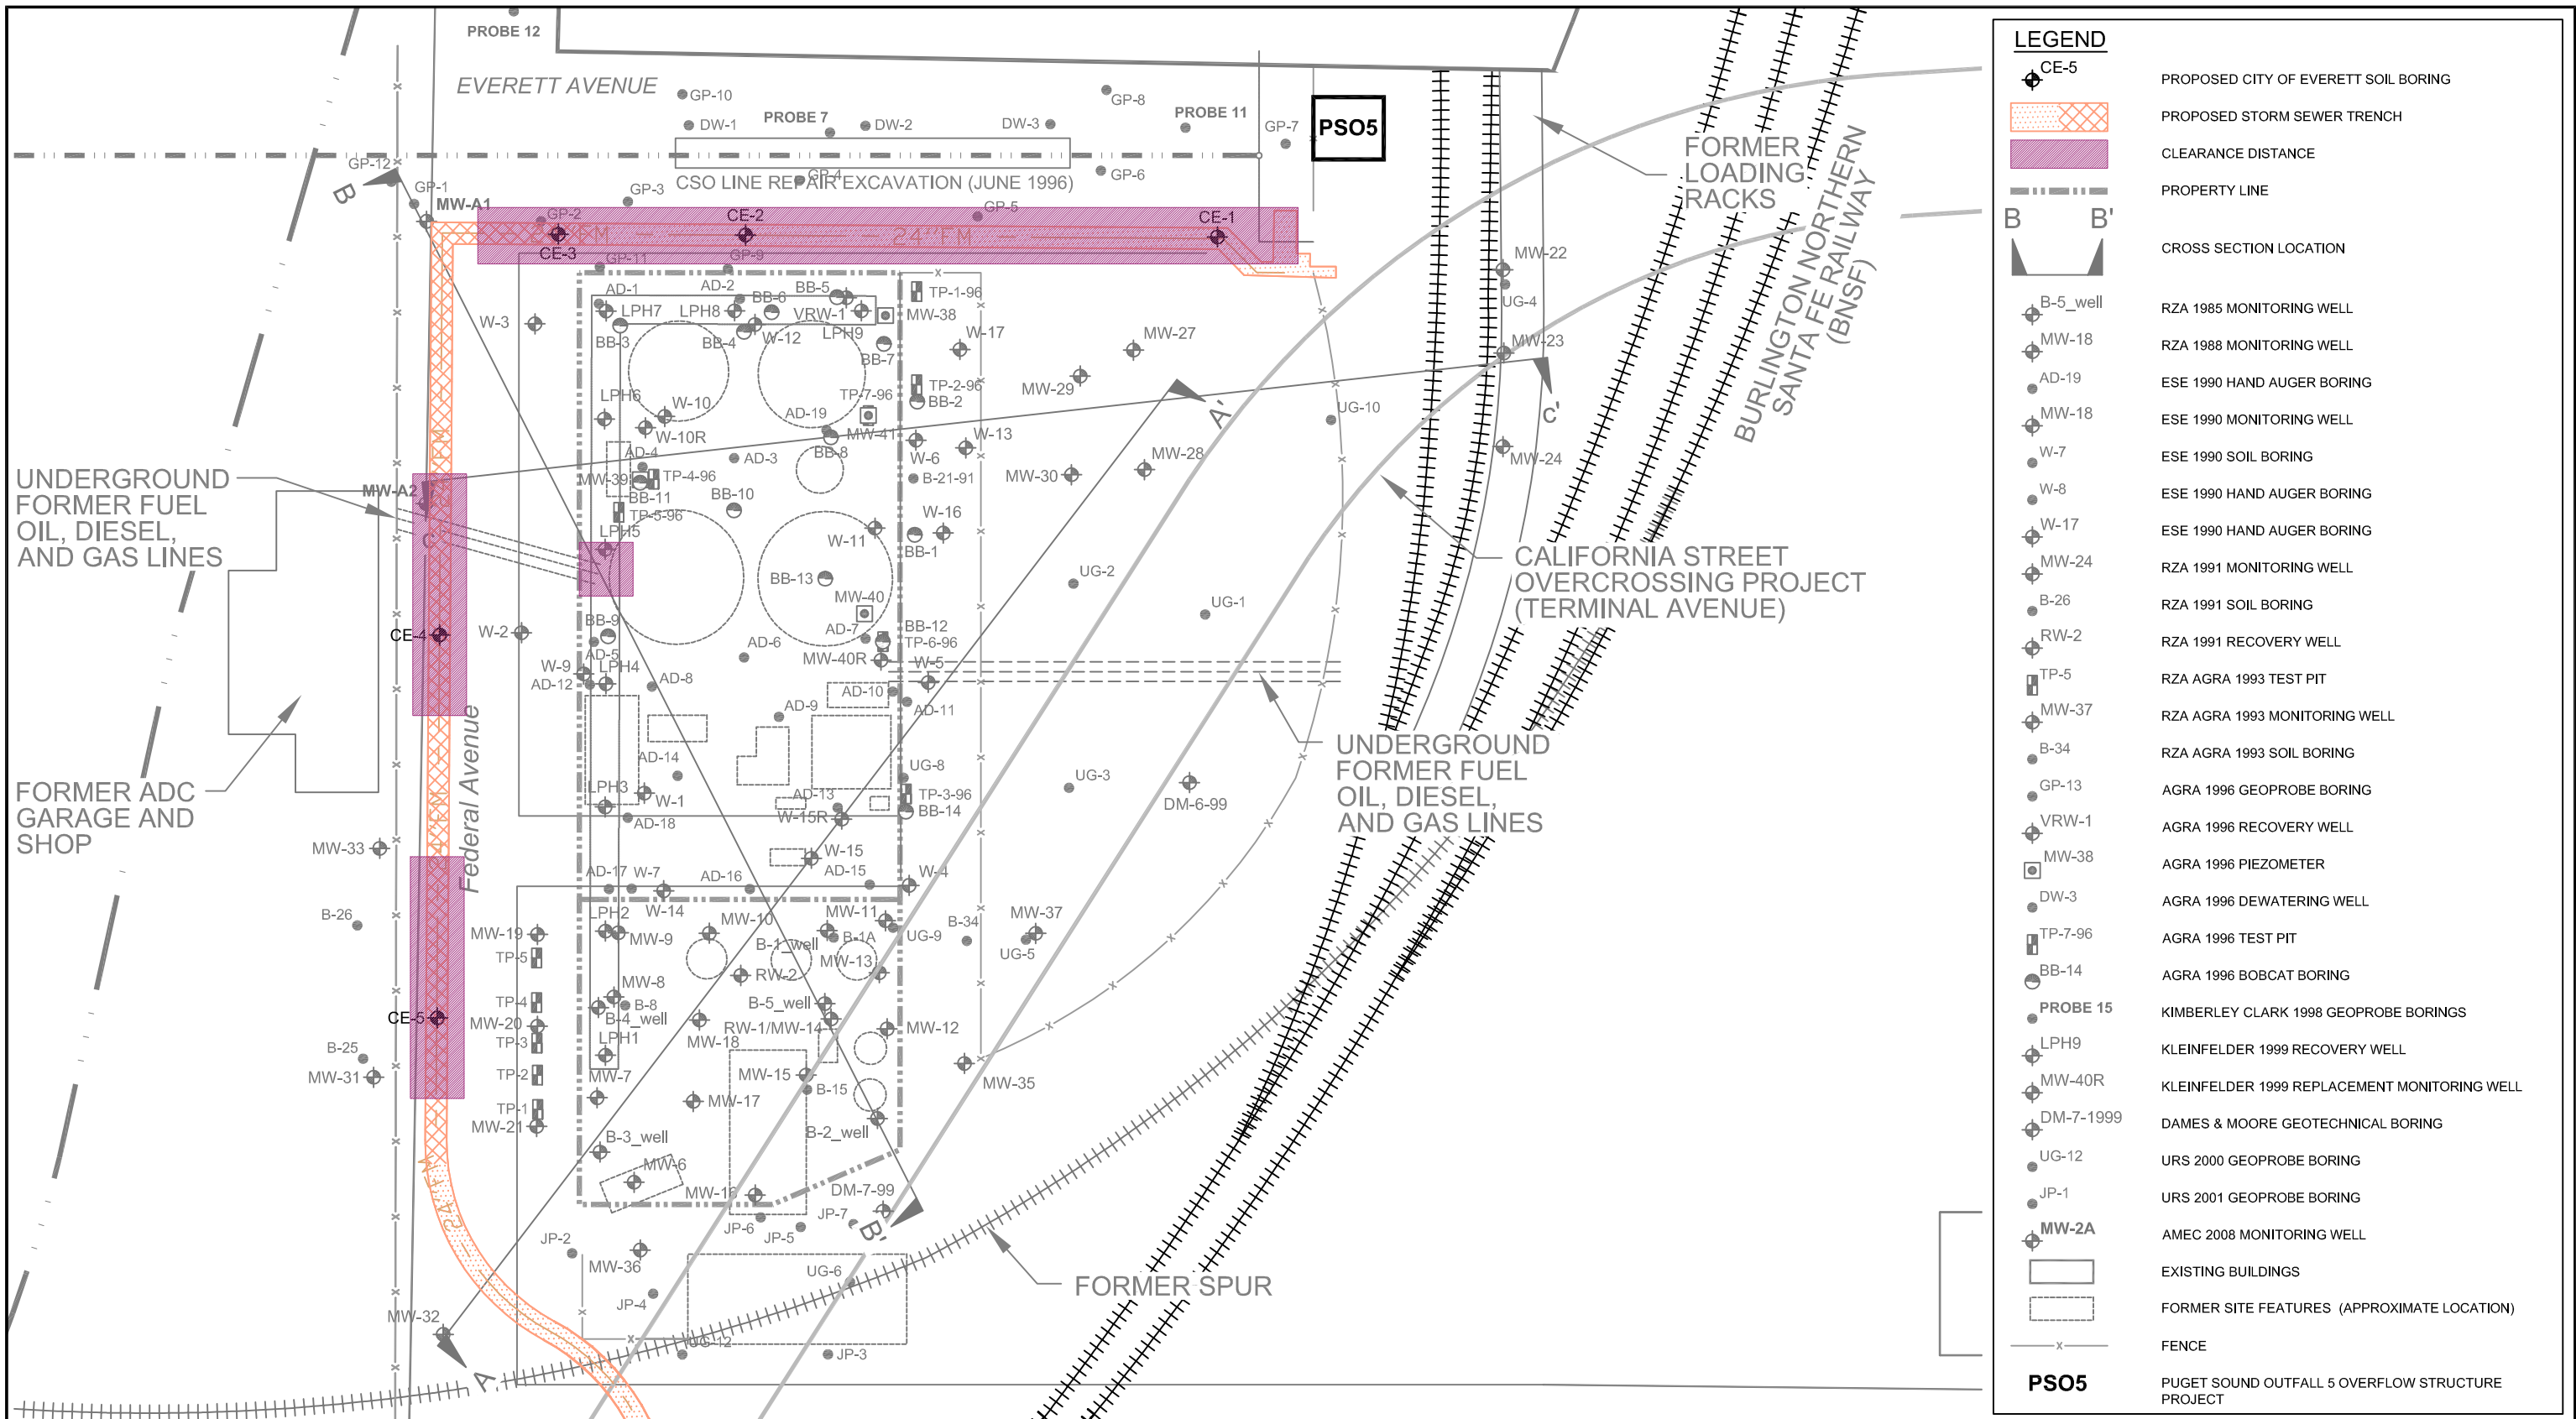

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201




DWN BY: JRS / BRJ
 CHK'D BY: AS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'

PROJECT
EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728

TITLE
CLEARANCE DISTANCE IN VICINITY OF PROPOSED BORINGS

DATE: FEBRUARY 2010
 PROJECT NO: 0-915-15716-D
 REV. NO.: 1
 FIGURE No. 3



ATTACHMENT A1

Boring Logs for MW-A1 and MW-A2

| O DEPTH (ft bgs) | GRAPHIC LOG | USCS SYMBOL | SOIL DESCRIPTION | SAMPLE | BLOW COUNT SPT N VALUE | VOLATILE READING (ppm) | GROUNDWATER | FIELD AND LABORATORY TESTING | WELL SCHEMATIC |
|------------------|-------------|-----------------|---|--------|---------------------------|---------------------------|-------------|--|--|
| 0 | | | Surface: 0.2 feet of asphalt over 1.6 feet of gray fine to medium angular moist, (crushed rock base course) A vac-truck was utilized from 0 to 5 feet below the ground surface to ensure utilities were cleared. | | | | | | Flush mount in cement seal Hydrated bentonite chip seal |
| 5 | | SP SM | Medium dense, moist, brown, fine to coarse SAND with some silt and trace fine gravel Moist to wet, wood; possibly a large block | | 22 | 0.0 | | | 2-inch PVC casing in 2/12 silica sand filter pack 2-inch PVC 10 slot screen in 2/12 silica sand filter pack |
| | | SP | Loose, wet, brown, fine to medium SAND with trace silt and petroleum odor Becomes saturated and gray at 8.3 feet Water appeared viscous and sediments appeared to have a metallic luster from 8.3 to 9 feet Becomes medium dense at 9.5 feet | | 6 | 0.0 | ▼ | A1_S-1_020408 Sheen Test None Observed A1_S-2_020408 | |
| 10 | | | Becomes gray and brown, with some fine gravel and trace silt and no odor observed at 10.4 feet Cobbel in sampler shoe | | 21 | 0.0 | | | |
| | | GP- GM SP | Medium dense, saturated, dark gray, fine GRAVEL with some fine to medium sand and silt, light to medium sheen Medium dense, saturated, gray fine to medium SAND with trace silt and fine gravel and occasional organics (wood splinters) Approximatley 0.01 foot thick layers of wood splinters at 13, 14, and 15 feet Becomes loose, with petroleum odor and no visible gravel at 14.5 feet | | 16 | 0.0 | | Sheen Test Light Observed | |
| 15 | | | Becomes loose, with petroleum odor and no visible gravel at 14.5 feet | | 14 | 0.0 | | | 2/12 silica sand Bentonite chips |
| | | | Approximatley 0.1 foot thick layer of stiff, moist, brown, SILT with numerous organics / organic SILT (plant fragments, wood fibers, roots) at 18 feet | | 14 | 0.0 | | Sheen Test Light Observed | |
| 20 | | | | | 24 | 0.0 | | Sheen Test None Observed | |
| | | ML | Very stiff, moist, brown, SILT with trace fine to coarse sand and numerous organics / organic SILT with trace fine to coarse sand | | 20 | 0.0 | | | |
| 25 | | SP | Becomes with occasional organics (roots) at 25 feet Medium dense, saturated, gray, fine to medium SAND with trace silt | | 17 | 0.0 | | | |
| | | | Exploration terminated at 26.5 feet below the existing ground surface. | | | | | | |

| | |
|--|---|
| BORING METHOD: HSA | ELEVATION REFERENCE: NA |
| BOREHOLE DIAMETER: 8 (in) | GROUND SURFACE ELEVATION: NA |
| DRILL RIG: CME | CASING ELEVATION: NA |
| CONTRACTOR: Cascade Drilling, Inc./Scott | START CARD/TAG ID: /BAB238 |
| LOGGED BY: LME | DRILLING DATES: 02/04/2008 - 02/04/2008 |

REMARKS:

ENVR+WELL-BORING FEDERALAVENUE.GPJ AMEC PORTLAND.GDT 3/17/08

ExxonMobil / American Distributing Company
7-915-15716-B

AMEC Earth and Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, Washington
USA 98034
Tel (425) 820-4669
Fax (425) 821-3914



LOG OF BORING MWA1
PAGE 1 OF 1

| DEPTH (ft bgs) | GRAPHIC LOG | USCS SYMBOL | SOIL DESCRIPTION | SAMPLE | BLOW COUNT SPT N VALUE | VOLATILE READING (ppm) | GROUNDWATER | FIELD AND LABORATORY TESTING | WELL SCHEMATIC |
|----------------|-------------|-------------|--|--------|---------------------------|---------------------------|-------------|--------------------------------------|--|
| 0 | | | Surface: moist, dark gray, angular fine to medium gravel (crushed rock) A vac-truck was utilized from 0 to 5 feet below the ground surface to ensure utilities were cleared. Approximatley 2 feet of wood with creosote odor (appeared to be blocks of wood treated with creosote) | | | | | | Flush mount in cement seal Hydrated bentonite chip seal |
| 5 | | SP | Very loose, moist, black, fine to medium SAND with some silt and numerous organics (wood splinters) | | 5 | 0.0 | ▼ | A2_S-1_020408 Sheen Test Light | 2-inch PVC casing in 2/12 silica sand filter pack 2-inch PVC 10 slot screen in 2/12 silica sand filter pack |
| | | SP | Very loose, moist, brown, fine to medium SAND with trace silt | | | | | Observed A2_S-2_020408 | |
| | | ML | Stiff, wet to saturated, blue-gray, sandy SILT with slight petroleum odor and light sheen | | | | | | |
| | | OL/ML | Stiff, moist, dark brown to black, organic SILT / SILT with numerous organics (roots, plant fragments) and petroleum odor | | 11 | 0.0 | ▼ | | |
| | | SM | Loose, wet to saturated, silty, fine to medium SAND with trace fine gravel and petroleum odor and light sheen | | | | | | |
| | | ML | Stiff, moist, brown, SILT with some clay and numerous organics (roots) | | 25 | 0.0 | | Sheen Test None Observed | |
| 10 | | SP | Loose, moist to wet, gray, fine to medium SAND with trace silt and scattered organics (roots) | | | | | | |
| | | SP | Medium dense, saturated, gray, fine to medium SAND with trace silt | | 17 | 0.0 | | | |
| 15 | | | Becomes with occasional organics (roots, plant fragments) at 15 feet Tip of sampler shoe contained wet, brown, organic SILT / SILT with numerous organics (roots, plant fragments) | | 11 | 0.0 | | Sheen Test None Observed | 2/12 silica sand Bentonite chips |
| | | | | | 14 | 0.0 | | | |
| 20 | | | | | 16 | 0.0 | | Sheen Test None Observed | |
| | | OL/ML | Stiff, moist, brown, organic stratified SILT with some clay and trace fine to medium sand / stratified SILT with some clay and trace fine to medium sand and numerous organics (roots, plant fragments) | | | | | | |
| | | SP | Medium dense, saturated, gray, fine to medium SAND with trace silt and occasional organics (roots, plant fragments) Becomes no visible organics at 22 feet | | 25 | 0.0 | | | |
| 25 | | | | | 25 | 0.0 | | Sheen Test None Observed | |
| 30 | | | Exploration terminated at 26.5 feet below the existing ground surface. | | | | | | |

BORING METHOD: HSA

ELEVATION REFERENCE: NA

BOREHOLE DIAMETER: 8 (in)

GROUND SURFACE ELEVATION: NA

DRILL RIG: CME

CASING ELEVATION: NA

CONTRACTOR: Cascade Drilling, Inc./Scott

START CARD/TAG ID: /BAB237

LOGGED BY: LME

DRILLING DATES: 02/04/2008 - 02/04/2008

REMARKS:

ENVR+WELL-BORING FEDERAL AVENUE GPJ AMEC PORTLAND.GDT 3/17/08

ExxonMobil / American Distributing Company

7-915-15716-B

AMEC Earth and Environmental, Inc.
11335 NE 122nd Way, Suite 100
Kirkland, Washington
USA 98034
Tel (425) 820-4669
Fax (425) 821-3914



**LOG OF BORING
MWA2**

PAGE 1 OF 1

ATTACHMENT A2

Site-Specific Health and Safety Plan

SITE SPECIFIC HEALTH AND SAFETY PLAN

Project Name: ExxonMobil/ADC Property, Ecology Site ID 2728
Project Location: 2717/2731 Federal Avenue, Everett, Washington
Project Number: 9-91-51571-6C

THIS SITE SPECIFIC HEALTH AND SAFETY PLAN APPLIES ONLY TO AMEC PERSONNEL.

All site personnel must have completed the 8-hour ExxonMobil LPS Training prior to undertaking any field work at the site.

A PRE-ENTRY BRIEFING MUST BE HELD PRIOR TO INITIATING ANY SITE ACTIVITY AND AT OTHER TIMES AS NECESSARY TO ENSURE EMPLOYEES ARE APPRAISED OF THE SITE HEALTH AND SAFETY PLAN.

SAFETY PERSONNEL:

Health and Safety Coordinators: Leah Vigoren and Anastasia Speransky
Project Engineers: Leah Vigoren
Project Managers: Meg Strong and Gary Dupuy
Site Safety Coordinator (SSC): Leah Vigoren
Client Contact: Joe Abel: ExxonMobil Environmental Services (EMES)

EMERGENCY CONTACTS:

Hospital / Emergency Room: **Providence Medical Center** **425-258-7555**

Map showing shortest route to Hospital is attached to this document.

Fire: 911
Police: 911
Poison Control Center: 1-800-222-1222
Emergency Water Shut-off: Everett 1-425-257-8821
Electric Utility: Snohomish County PUD 1-877-783-1000
Washington State Patrol: 911

Health and Safety Coordinator: Leah Vigoren (Cell Phone: 206-351-9449) 206-342-1760 (w)
Project Manager: Meg Strong (Cell Phone: 425-864-2096) 425-368-0966 (w)

AMEC Earth & Environmental, Inc.
11810 North Creek Parkway
Bothell, Washington
USA 98011
(425) 368-1000 Phone
(425) 368-1001 Facsimile

SITE HISTORY

The approximate 1-acre site was purchased by ExxonMobil's historic predecessors in 1922, and was utilized as a petroleum bulk storage distribution facility between 1922 and 1974. In 1974, the then Mobile Company sold two thirds of the site (northern portion) to A.P. Miller (Miller), for use by the American Distributing Company (ADC). In 1987, Mobile discontinued petroleum storage and dispensing operations on their portion of the site and removed all storage tanks and ancillary equipment. In 1990, petroleum distribution was discontinued on the ADC parcel, and some improvements and tanks were removed from the parcel. Since then, the site has been turned into a parking lot and is leased to the Kimberly Clark facility located to the north of the site. Activities that have occurred on the site since this time have been environmental investigations and remedial activities to address petroleum impacts to soil and groundwater.

In 1985, site characterization activities were initiated to define the nature and extent of petroleum impacts beneath the site. Between 1988 and 1996, a variety of Interim Remedial Action Measures (IRAMs) were implemented to address the free product. In 1998, a Remedial Investigation/Focused Feasibility Study (RI/FFS) was performed in coordination of the Washington State Department of Ecology (Ecology) under the Consent Order. Remedial Action Objectives (RAOs) were developed for the site based on the RI data and baseline human health risk assessment. The remedy selected to achieve RAOs included the following.

- 1) Construction of an interceptor trench along the down gradient margins of the site (entire western and northern boundaries) to mitigate the off-site migration of the light non-aqueous phase liquid (LNAPL) present on the shallow water table.
- 2) Placement of low-permeability cap across the entire site surface
- 3) Ongoing removal and disposal of recovered LNAPL from site monitoring wells and interceptor trench; and
- 4) Quarterly groundwater monitoring.

In addition, the City of Everett is planning to upgrade the storm sewer line that will result in trenching within Everett Avenue and Federal Avenue. In advance of trenching, samples of the soil and groundwater will be collected from borings to determine soil and groundwater disposal options. This HASP addresses the specific field sampling activities related to the advancement of the soil borings and soil and groundwater sampling.

ORGANIZATIONAL STRUCTURE

Project Manager(s):

Gary Dupuy (phone number 206-342-1777) and Meg Strong (phone number 425-368-0966) are the client managers for the project. Responsibilities include remaining in contact with regulatory agencies such as the Department of Ecology, overseeing the Project and ensuring client satisfaction from commencement to closeout.

Site Safety and Health Supervisor:

Leah Vigoren (phone number 206-838-8470) is the Project Manager and Health and Safety Coordinators (HSC). Primarily the duties of the HSC entail coordination with the Project Manager for preparation of site health and safety plans, assessment of chemical hazards and selection of safety / monitoring equipment.

Anastasia Speransky (phone number 206-838-1776) is the field geologist and is the Site Safety Coordinator (SSC). The SSC has the responsibility of implementing the Site Health and Safety Plan while at the Site. The SSC / HSC will be involved with the Project Manager in preparation of the Site Health and Safety Plan. If the plan is not being implemented or if unanticipated situations arise, the SSC / HSC may stop all proceedings and see that all personnel depart the site. The SSC / HSC will have charge of all instruments and see to their proper use and function.

Field Technicians:

Joseph C. Petrick is the Field Technician whose responsibilities include collecting soil and groundwater samples, keeping field records (I.e. Daily Field Logs) describing field activities, observations and site events. Supplying daily reports and reporting all incidents to the Project Engineer.

Subcontractor

Drilling company "Cascade Drilling, Inc." is responsible for the advancement of soil borings on the site.

ON SITE TASKS

Soil and groundwater will be characterized beneath Everett Avenue and Federal Avenue for disposal classification. Elements of this addendum are based on the Washington Administrative Code (WAC) Ecology Model Toxics Control Act (MTCA) Cleanup Regulations WAC 173-340-820 and City of Everett Waste Water discharge regulations.

The soil and groundwater sampling will include the following activities:

1. Advance five borings (three along Everett Avenue and two along Federal Avenue [Figure 2]) to evaluate the concentration of chemicals in soil and groundwater. The borings will be advanced at each location using a hollow stem auger (HSA) drill rig to the total depth of the proposed trench at the location of each boring. Two of the borings will be terminated at a minimum depth of 20 feet below ground surface (bgs) to provide soil lithology information for the City's geotechnical engineer.
2. Collect continuous samples from the borings using a standard penetration test (SPT) and a split spoon (SS).
3. Collect two to three composite soil samples from each boring for laboratory analyses. The first composite will be from the top four feet and the second from the lower four feet. Discreet samples for volatile organic compounds (VOC) analysis will be collected from the upper four feet and at regular intervals to the base of the boring. In areas where heavy contamination such as free product is observed a separate sample will be collected.
4. Collect "grab" water samples from each boring. If sheen or product is encountered, an additional water sample will be collected from just below the water table (a foot or two below).
5. Soil samples will be analyzed for CEMEX acceptance criteria and "grab" groundwater samples will be analyzed for the City of Everett sanitary sewer discharge criteria. The soil and groundwater samples will be performed on a one-week turn-around schedule.

SAFETY & HEALTH HAZARDS ANALYSIS

a) Physical Hazards

Physical hazards that may be encountered during site activities include noise, manual lifting, powerful moving parts and weather related hazards (cold, heat stress, wind). Hard hats, safety glasses, hearing protection and steel-toed boots will be required for all personnel working in the vicinity of heavy equipment.

Identified hazards may be mitigated by using safe work practices at all times. The SSC has total responsibility for ensuring that all AMEC personnel on-site perform work tasks in a safe and sensible manner. If at any time the SSC determines that safe work practices are not followed, the tasks will be suspended and corrective actions will be taken.

Because of the potential of explosion hazard presented during groundwater monitoring (i.e., W-2) **SMOKING WILL NOT BE ALLOWED WITHIN 50 FEET OF THE WORK ZONE.**

The following are all additional site related hazards:

- 1) **Traffic**
 - a. Cones will be set out around the work area and safety reflective vests will be worn.
 - b. All drilling will be conducted with the traffic control.
- 2) **Personnel or property damage from vehicle movement.**
 - a. When moving vehicles the following precautions must be taken
 - b. Equipment must be stowed and secured
 - c. A spotter must be used due to the presence of blind spots in the driver's field of vision.
 - d. The spotter must identify any surface obstruction / anomalies
 - e. Audible warning signals and hand signals must be used.
 - f. Operator must yield to pedestrians.
- 3) **Personal injury from handling heavy objects.**
 - a. Use proper lifting techniques; keeping back straight and lift with arms and legs; keep load near body; avoid reaching.
 - b. Do not attempting to lift anything that weighs more than 60 pounds.
 - c. Use mechanical equipment such as a cart to carry / lift large, heavy or awkward loads.
- 4) **Slips, trips and falls.**
 - a. Scan area prior to start of work.
 - b. Group all equipment and waste in one designated area.
 - c. Return tools not in use to storage.
- 5) **Pinch points on drum and well covers.**
 - a. Personnel will wear leather gloves when working with well and drum covers.
- 6) **Broken Glassware**
 - a. Personnel will use bubble wrap and blue ice when transporting samples in glass containers.
 - b. Personnel will not overtighten caps on glass bottles.

b) Chemical Hazards

Chemical hazards that could possibly be encountered include Gasoline, BTEX, hydrogen sulfide (H₂S), and methane (CH₄). The nature of this project precludes continuous exposure to any potential contaminant.

Per past anecdotal evidence, monitoring well (MW) 30 occasionally has contained small amounts of hydrogen sulfide gas. In addition, during installation, well (W) 2 contained methane gas exceeding the lower explosive limit (LEL). AMEC will conduct air monitoring using a photoionization detector (PID) during drilling and sampling.

- 1) **Personal Injury from chemical contact / exposure / inhalation.**
 - a. Inspect soil cuttings before handling with PID.
 - b. AMEC personnel will place themselves upwind during drilling.

c) Biological Hazards

The project site is a flat graded parking lot which eliminates biological hazards.

TRAINING

All AMEC personnel will review the site specific Health and Safety plan before accessing the site. Personnel onsite will also have current 40-Hour Hazardous Waste Operations and Emergency Response (HAZWOPER) Certification.

Certificates of HAZWOPER completion will be maintained at the Bothell office and will be available to regulatory personnel upon request. All Personnel shall carry current 40-hour HAZWOPER training cards or appropriate paperwork while working onsite. The SSC / HSC shall be first aid and CPR trained.

In addition all site personnel must have completed the **8 hour ExxonMobil LPS Training** prior to undertaking any field work.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

AMEC will wear Level D PPE which consists of steel-toed, chemical resistant rubber boots, inner glove of PVC or latex, outer gloves of Nitrile or equivalent, safety glasses, Tyvek coveralls, and a hard hat. During construction activities, minimal PPE hearing protection will consist of soft foam ear-bud style plugs.

MEDICAL SURVEILLANCE

Evidence of a current physical examination in the form of a letter from an examining physician will be maintained at the Bothell office and will be available to regulatory personnel upon request.

Air Monitoring

Air monitoring will be conducted during drilling and soil sampling activities. AMEC will conduct initial air monitoring using a photoionization detector (PID). PID utilizes ultraviolet light to ionize gas molecules and is commonly employed in the detection of volatile organic compounds (VOCs). AMEC will ensure that the concentrations of VOCs are less than 5 parts per million (ppm) in breathing zone prior to proceeding with sampling. Each well will be continuously monitored during sampling. The PID will alarm if VOC concentrations exceed the levels required for breathing.

AMEC will calibrate the PID both pre and post site visits using Isobutylene calibration gas with compatible regulator.

Decontamination

Disposable PPE will be stored in a secured 55-gallon drum onsite. A certified waste transporter and disposal company will be contacted to transport the drum for disposal in accordance with local, State, and Federal regulations at an offsite facility.

Site Control

AMEC personnel will be provided with a site map and be required to review the Health and Safety plan prior to entry into the site. A copy of this HASP shall be on hand at all times with emergency contact numbers and directions to the nearest medical facilities easily accessible. When necessary, cones, caution tape or a suitable alternative will be used to deny public access to the work area. Cones will also be used to define an exclusion zone redirecting motorists and pedestrians away from the work area.

In all emergencies AMEC is to document the action taken and notify the HSC, Project Manager and client official of the event and subsequent response.

In the Event of an Injury

If an injury is life-threatening, follow steps 1 through 8 below. If the injury is not life threatening, perform necessary first aid and consider the need for decontamination prior to transport. The SSC shall be first aid and CPR trained.

- 1) Perform first aid necessary to determine victim(s) medical status
- 2) Call emergency transport.
- 3) Give specific directions to location of emergency
- 4) Give phone from which you are calling;
- 5) Tell emergency services what happened. Inform that victim(s) may be wearing contaminated clothing.
- 6) Inform emergency services how many persons need help.
- 7) Inform emergency services what is being done for the victim(s)
- 8) Stay on telephone until told to hang up.

Transport to hospital, if possible.

Work Permits

Copies of the permits will be available onsite during drilling activities. Cascade Drilling will obtain start cards required for drilling from the Washington State Department of Ecology.

Security

No unauthorized persons will be allowed in the work zone. Unauthorized persons are those without appropriate training, without proof of medical surveillance, and those with no business on the site.

Confined Space Entry Procedures

AMEC will not be entering confined spaces at the Site.

Spill Containment Program

The site specific accidental spill / release action plan consists of the following:

- 1) Pick up, isolate, or contain spill;
- 2) Evacuate area, if necessary;
- 3) Contact emergency agencies, if necessary.

Incident Reporting Requirements

In all emergencies, document action taken and notify the HSC / SSC, Project Manager and client officials of occurrences.


AMEC will report all incidents and Near Loss Incidents (NLI) to the ExxonMobil contact within 24 hours of the occurrence along with a written report and the launching of an accident investigation.

EMERGENCY MEDICAL ROUTE DIRECTIONS

2717 Federal Avenue, Everett, WA 98201

1. Head south on Federal Avenue towards Terminal Avenue.
2. Turn left at Terminal Avenue.
3. Continue on Everett Avenue/WA-529.
4. Turn left on Grand Avenue.
5. Turn right at 14th Street.
6. Turn left at Colby Avenue.

1321 Colby Avenue, Everett, WA 98201

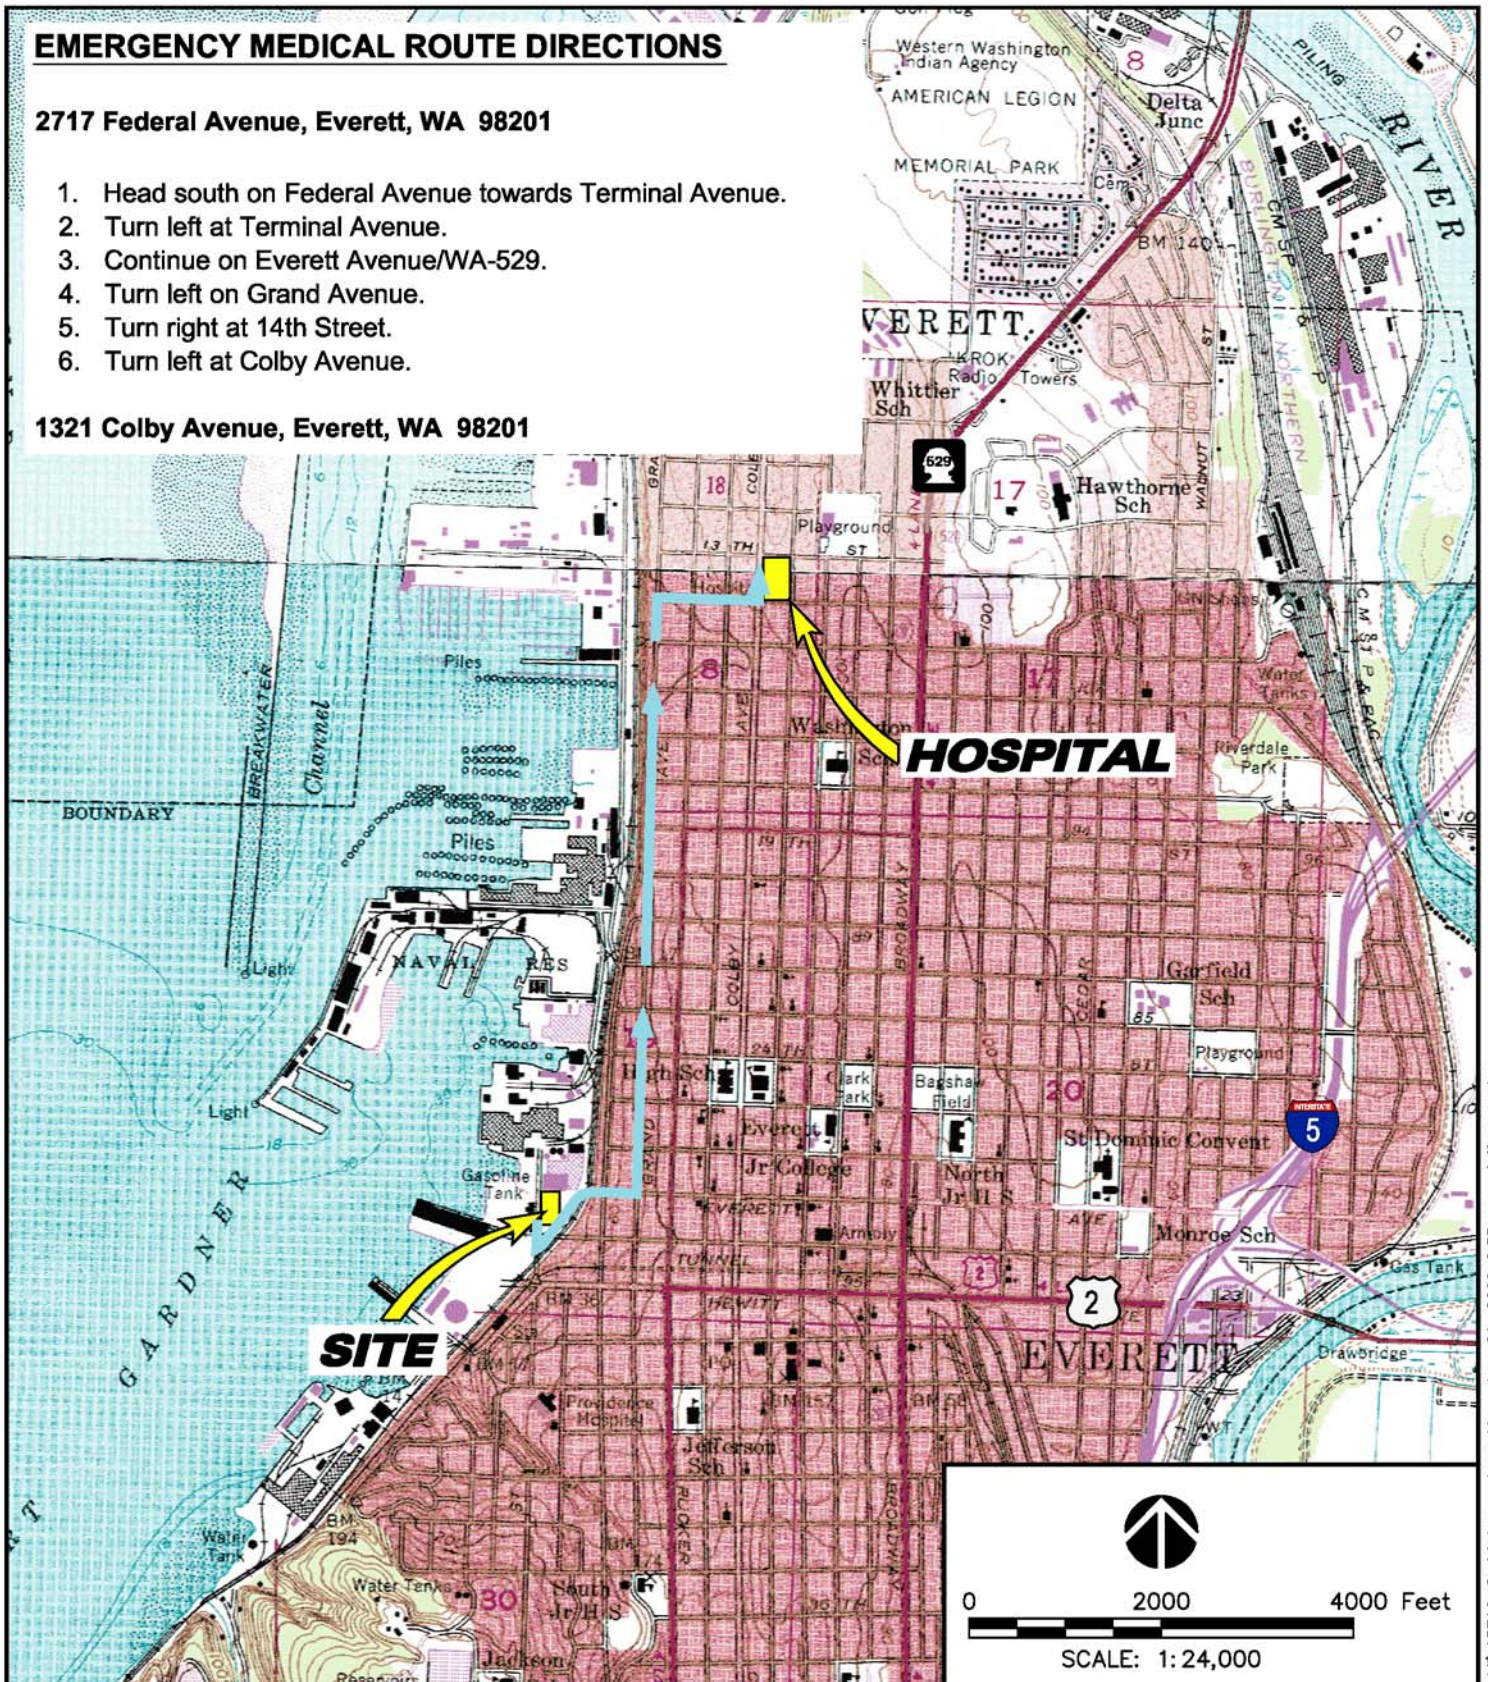

AMEC Earth & Environmental

11335 N.E. 122nd Way, Suite 100
Kirkland, WA, U.S.A. 98034-6918



CLIENT LOGO

CLIENT

**EXXONMOBIL AND
AMERICAN DISTRIBUTING COMPANY**

PROJECT: EXXONMOBIL/ADC PROPERTY, ECOLOGY SITE ID 2728

DWN BY:

JRS

DATUM:

NAD83

DATE: JUNE 2009

TITLE

EMERGENCY MEDICAL ROUTE

CHK'D BY:

AS

REV. NO.:

PROJECT NO:
9-915-15716-C

PROJECTION:
WA STATE PLANE

SCALE:
AS SHOWN

FIGURE No.

ATTACHMENT A3

Street Use Permit Documentation



**APPLICATION for
PUBLIC WORKS PERMIT**
PUBLIC WORKS DEPARTMENT
3200 Cedar Street
Everett, WA 98201 425 - 257-8810

Date 02/03/2010

Owner Name: City of Everett

Applicant Name: AMEC E&E / A. Spencovsky

Mailing Address: 3200 Cedar St.,
Everett, WA 98201

Mailing Address: 600 University St.
Suite 1020, Seattle, WA
98101

Phone Number: 425-257-8810


Phone Number: (206) 342-1760

Description of Work: Advance 5 soil borings (3 along Everett Ave ROW,
2- along Federal Av. ROW) for the City of Everett
utility upgrade work. See ATTACHED map
(A drawing or plans may be needed to illustrate work to be done) for boring
location

Site Address: 2717/2731 Federal Av, Everett, WA

Comments from Inspector during initial inspection:

Approved for issuance by: _____ Date: _____

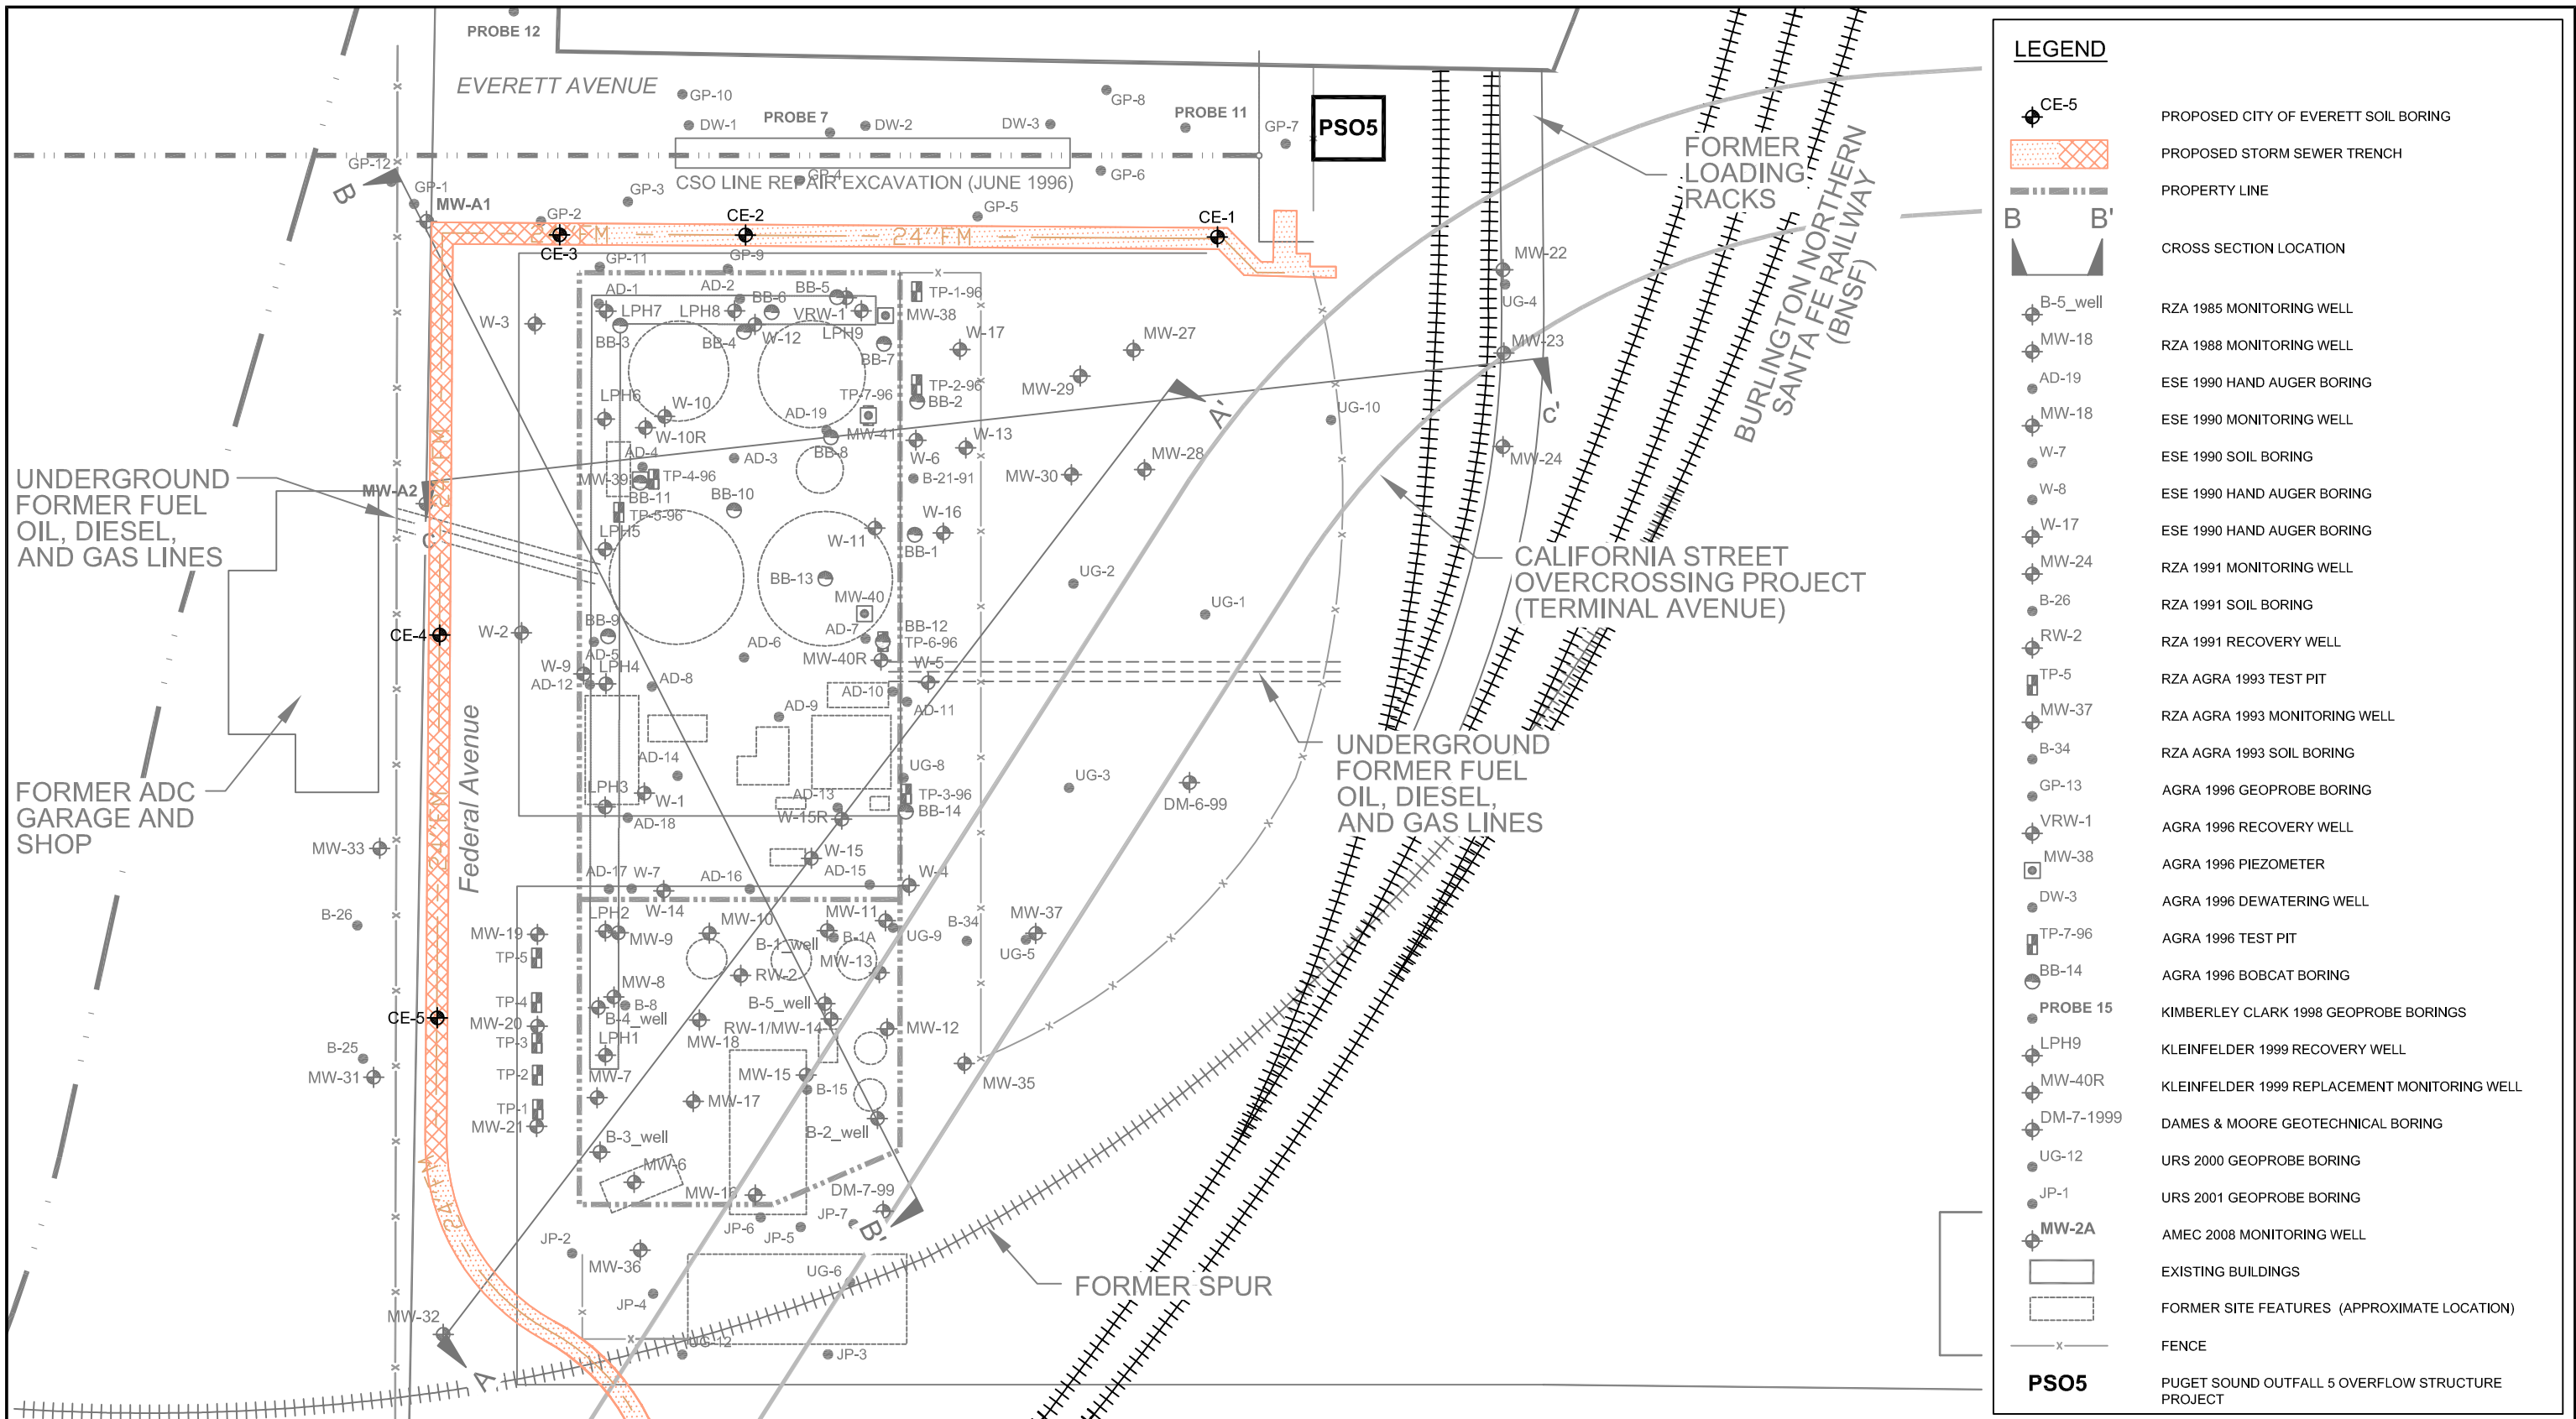

| LEGEND | |
|--------|--|
| | PROPOSED CITY OF EVERETT SOIL BORING |
| | PROPOSED STORM SEWER TRENCH |
| | PROPERTY LINE |
| | CROSS SECTION LOCATION |
| | RZA 1985 MONITORING WELL |
| | RZA 1988 MONITORING WELL |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 MONITORING WELL |
| | ESE 1990 SOIL BORING |
| | ESE 1990 HAND AUGER BORING |
| | ESE 1990 HAND AUGER BORING |
| | RZA 1991 MONITORING WELL |
| | RZA 1991 SOIL BORING |
| | RZA 1991 RECOVERY WELL |
| | RZA AGRA 1993 TEST PIT |
| | RZA AGRA 1993 MONITORING WELL |
| | RZA AGRA 1993 SOIL BORING |
| | AGRA 1996 GEOPROBE BORING |
| | AGRA 1996 RECOVERY WELL |
| | AGRA 1996 PIEZOMETER |
| | AGRA 1996 DEWATERING WELL |
| | AGRA 1996 TEST PIT |
| | AGRA 1996 BOBCAT BORING |
| | KIMBERLEY CLARK 1998 GEOPROBE BORINGS |
| | KLEINFELDER 1999 RECOVERY WELL |
| | KLEINFELDER 1999 REPLACEMENT MONITORING WELL |
| | DAMES & MOORE GEOTECHNICAL BORING |
| | URS 2000 GEOPROBE BORING |
| | URS 2001 GEOPROBE BORING |
| | AMEC 2008 MONITORING WELL |
| | EXISTING BUILDINGS |
| | FORMER SITE FEATURES (APPROXIMATE LOCATION) |
| | FENCE |
| | PUGET SOUND OUTFALL 5 OVERFLOW STRUCTURE PROJECT |

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

CLIENT LOGO

CLIENT:
EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
 11810 North Creek Parkway North
 Bothell, WA, U.S.A. 98011-8201





DWN BY: JRS / BRJ
 CHK'D BY: AS/MS
 DATUM: NONE
 PROJECTION: NONE
 SCALE: 1" = 60'

PROJECT
EXXONMOBIL/ADC PROPERTY
 ECOLOGY SITE ID 2728

TITLE
PROPOSED STORM SEWER UPGRADE
SOIL BORINGS

DATE: FEBRUARY 2010
 PROJECT NO: 0-915-15716-D
 REV. NO.: 1
 FIGURE No. 2



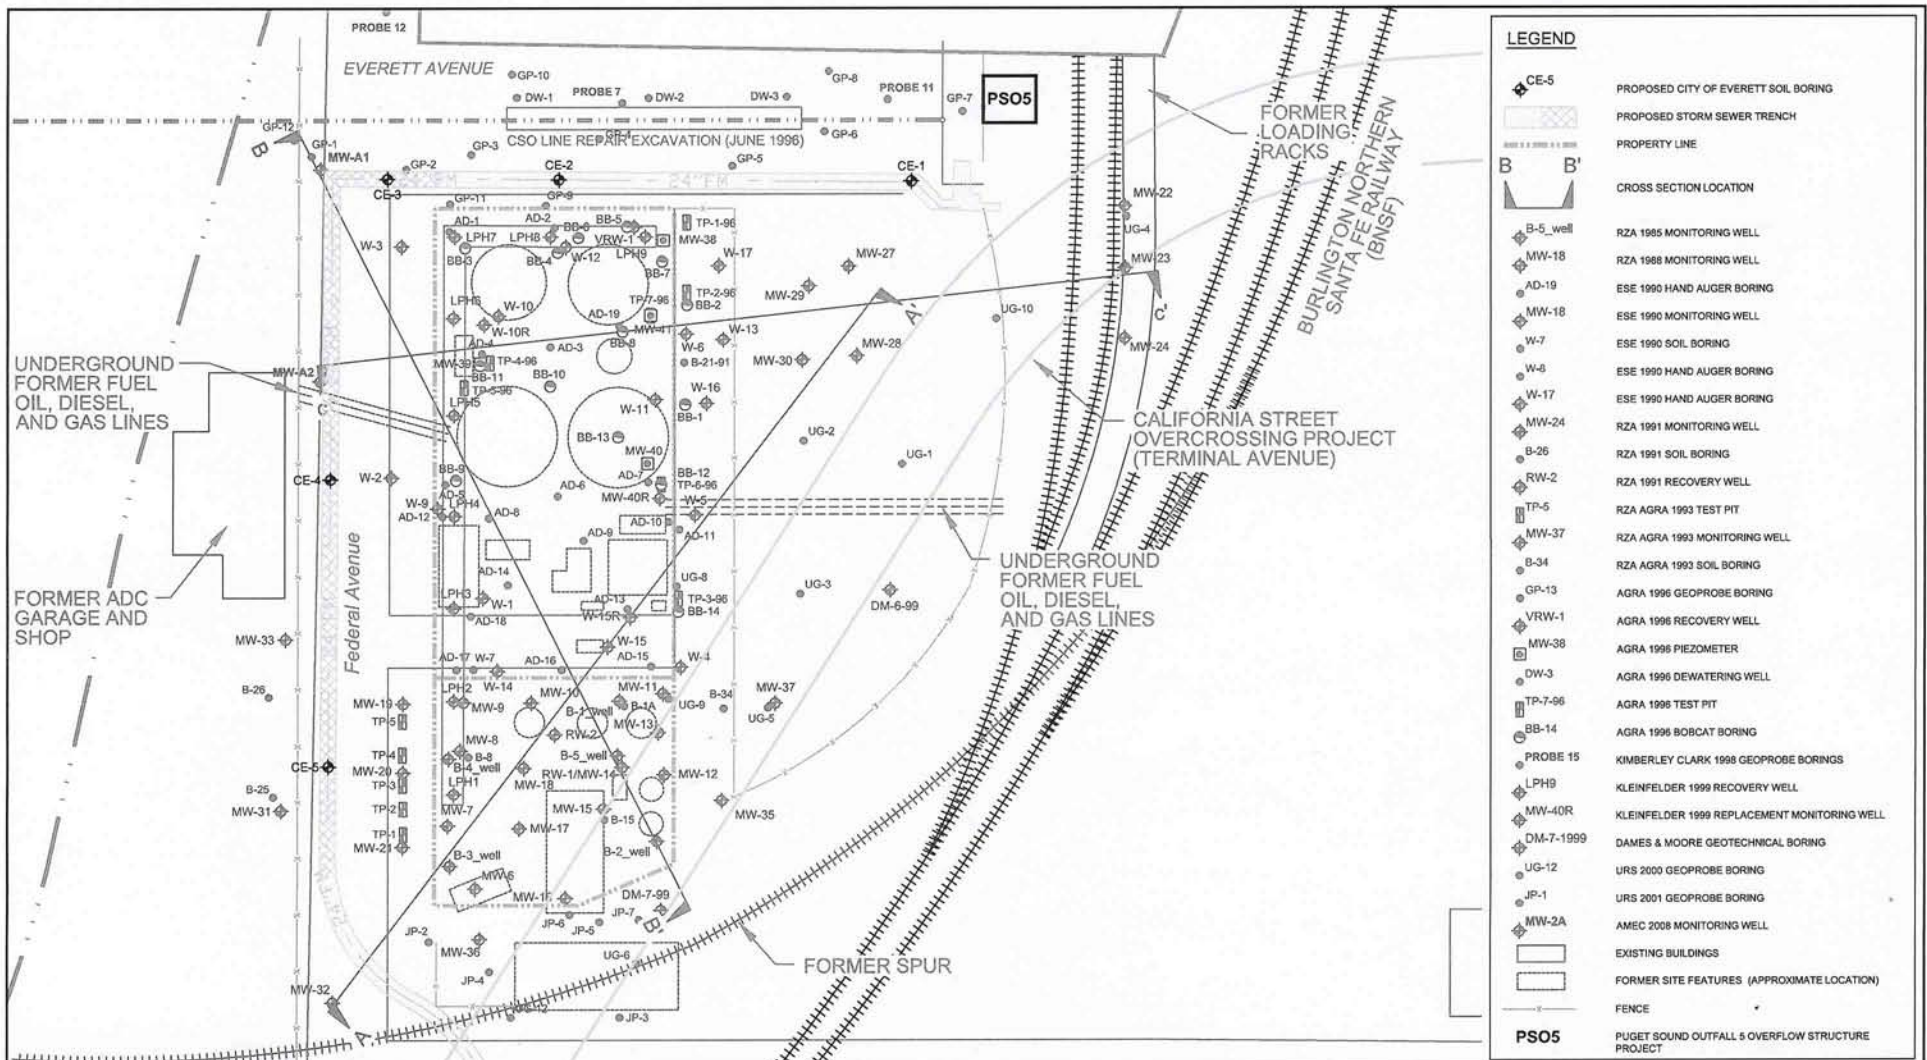

SOURCE: Modified from a map provided by City of Everett, ExxonMobil Oil Corporation and Environmental Resolution, Inc.

0 60 120
SCALE IN FEET

CLIENT LOGO

CLIENT:

EXXONMOBIL AND AMERICAN DISTRIBUTING COMPANY

AMEC Earth & Environmental
11810 North Creek Parkway North
Bothell, WA, U.S.A. 98011-8201


| | |
|-------------|-----------|
| DWN BY: | JRS / BRJ |
| CHKD BY: | AS/MS |
| DATUM: | NONE |
| PROJECTION: | NONE |
| SCALE: | 1" = 60' |

| | |
|---------|---|
| PROJECT | EXXONMOBIL/ADC PROPERTY ECOLOGY SITE ID 2728 |
| TITLE | PROPOSED STORM SEWER UPGRADE SOIL BORINGS |

| | |
|--------------|---------------|
| DATE: | FEBRUARY 2010 |
| PROJECT NO.: | 0-915-15716-D |
| REV. NO.: | 1 |
| FIGURE No.: | 2 |

GENERAL NOTES

1. HUMAN FLAGGER IS REQUIRED TO OPERATE EACH AFAD IN USE. THE HUMAN FLAGGER SHALL BE SAFELY LOCATED OUT OF THE LANE OF TRAFFIC TO PROMPTLY OPERATE THE DEVICE WHILE MAINTAINING VISUAL CONTACT WITH THE TRAFFIC.
2. NIGHTWORK REQUIRES ADDITIONAL ROADWAY LIGHTING AT FLAGGING STATIONS. REFER TO WSDOT STD. SPECIFICATIONS FOR ADDITIONAL DETAILS.
3. RECOMMEND EXTENDING CHANNELIZING DEVICE TAPER ACROSS SHOULDER.
4. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
5. SIGN SEQUENCE IS THE SAME FOR BOTH DIRECTIONS OF TRAVEL ON THE ROADWAY.
6. WHEN USED, THE DOWNSTREAM TAPER DEVICE SPACING SHOULD BE 20' O.C.
7. DEVICES ALONG CENTERLINE ARE RECOMMENDED.
8. FOR ADDITIONAL AFAD INFORMATION REFER TO CONTRACT SPECIFICATIONS.
9. AFAD LOCATION SHOWN IS TYPICAL FOR WIDE SHOULDER AREA. ACTUAL LOCATION MAY NEED TO BE IN LANE. PLACEMENT OF AFAD SHALL BE SUCH THAT THE GATE ARM DOES NOT ENCRUSH INTO ADJACENT LANE.

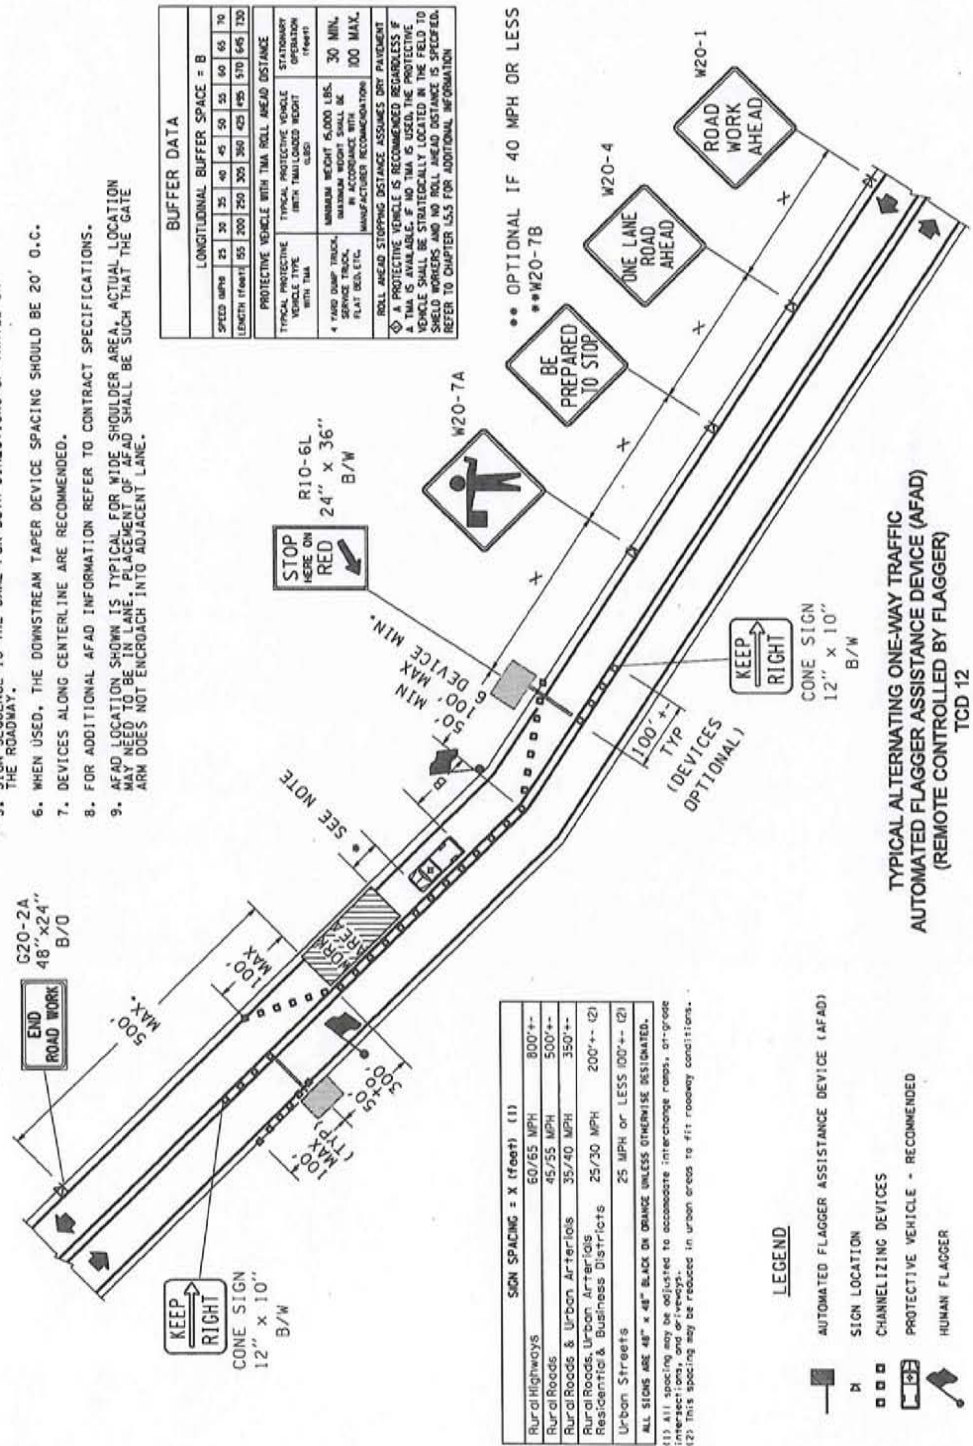

| LONGITUDINAL BUFFER SPACE = B | |
|-------------------------------|------------------------------------|
| SPEED MPH | 25 30 35 40 45 50 55 60 65 70 |
| LENGTH (feet) | 85 200 250 300 425 495 570 645 720 |

| PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE | |
|---|-----------------------------------|
| TYPICAL PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE | STANDARD STOPPING DISTANCE (feet) |
| MINIMUM WEIGHT 6,000 LBS. | 30 MIN. |
| MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH FLAT ROLL ETC. | 100 MAX. |
| MANUFACTURER RECOMMENDATION | |
| ROLL AHEAD STOPPING DISTANCE ASSUMES DIRT PAVEMENT | |

| ROADWAY TYPE | SIGN SPACING = X (feet) (1) |
|---|-----------------------------|
| Rural Highways | 60/65 MPH 800'+- |
| Rural Roads | 45/55 MPH 500'+- |
| Rural Roads & Urban Arterials | 35/40 MPH 350'+- |
| Rural Roads, Urban Arterials Residential & Business Districts | 25/30 MPH 200'+- (2) |
| Urban Streets | 25 MPH or LESS 100'+- (2) |

ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade

(2) This spacing may be reduced in urban areas to fit roadway conditions.

LEGEND

- AUTOMATED FLAGGER ASSISTANCE DEVICE (AFAD)
- SIGN LOCATION
- CHANNELIZING DEVICES
- PROTECTIVE VEHICLE - RECOMMENDED
- HUMAN FLAGGER

TYPICAL ALTERNATING ONE-WAY TRAFFIC
 AUTOMATED FLAGGER ASSISTANCE DEVICE (AFAD)
 (REMOTE CONTROLLED BY FLAGGER)
 TCD 12

| LONGITUDINAL BUFFER SPACE = B | |
|-------------------------------|--|
| SPEED MPH | 25 30 35 40 45 50 55 60 65 70 |
| LENGTH (feet) | 55 200 250 305 360 425 495 570 645 730 |

| PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE | TYPICAL PROTECTIVE VEHICLE OPERATION (feet) |
|---|---|
| 4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC. | MINIMUM WEIGHT 15,000 LBS. MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION |
| ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT | 30 MIN. 100 MAX. |

| CHANNELIZING DEVICE SPACING (FEET) | |
|------------------------------------|---------------|
| MPH | TAPER TANGENT |
| 50 / 65 | 40 80 |
| 35 / 45 | 30 60 |
| 25 / 30 | 20 40 |

| SIGN SPACING = X (FEET) (1) | |
|-------------------------------|--|
| RURAL HIGHWAYS | 80 / 65 MPH 800'± 45 / 65 MPH 500'± |
| RURAL ROADS & URBAN ARTERIALS | 35 / 40 MPH 350'± 25 / 30 MPH 200'± (2) |
| URBAN STREETS | 25 MPH OR LESS 100'± (2) |

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.



- NOTES**
- Night work requires additional roadway lighting at flagging stations, refer to WSDOT Standard Specifications for additional details.
 - Recommend extending channelizing device taper across shoulder.
 - Protective vehicle recommended - may be a work vehicle.
 - Sign sequence is the same for both directions of travel on the roadway.
 - When used, the downstream taper device spacing should be 20' O.C.
 - For low-volume situations with short work zones on straight roadways where the flagger is visible to road users approaching from both directions, a single flagger, positioned to be visible from both directions may be used.

TYPICAL ALTERNATING ONE-WAY TRAFFIC FLAGGER CONTROLLED TCP 1

ATTACHMENT A4

Field Documentation Forms

**AMEC Earth & Environmental, Inc.**11810 North Creek Parkway N
Bothell, Washington 98011Tel (425) 368-1000
Fax (425) 368-1001**DAILY FIELD REPORT**

| | | | |
|---|---------------------------------------|------------------------------------|------------------|
| PROJECT NAME Mobil/ADC Everett Facility | | PROJECT NO. 9915-15716-0 | FIELD REPORT NO. |
| ADDRESS 2717/2731 Federal Avenue | | DATE | PAGE OF |
| CITY OR COUNTY Everett, WA | PERMIT NO. | ARRIVAL TIME | DEPARTURE TIME |
| CLIENT ExxonMobil | AMEC PROJECT MANAGER/PHONE NO. | | |
| GENERAL CONTRACTOR | AMEC FIELD REPRESENTATIVE/ MOBILE NO. | | |
| SUBCONTRACTOR | WEATHER | | |
| TYPE OF WORK PERFORMED | | | |
| EQUIPMENT USED | | | |

COMMENTS

| |
|--|
| |
|--|

Table 749-1

Simplified Terrestrial Ecological Evaluation-Exposure Analysis Procedure

| Estimate the area of contiguous (connected) <u>undeveloped land</u> on the site or within 500 feet of any area of the site to the nearest 1/2 acre (1/4 acre if the area is less than 0.5 acre). | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--------------|--------|--------------|---|-----|---|-----|---|-----|---|-----|---|-----|---|-----|----|-----|----|-------------|----|---|
| 1) From the table below, find the number of points corresponding to the area and enter this number in the field to the right. | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Area (acres)</th> <th>Points</th> </tr> </thead> <tbody> <tr><td>0.25 or less</td><td>4</td></tr> <tr><td>0.5</td><td>5</td></tr> <tr><td>1.0</td><td>6</td></tr> <tr><td>1.5</td><td>7</td></tr> <tr><td>2.0</td><td>8</td></tr> <tr><td>2.5</td><td>9</td></tr> <tr><td>3.0</td><td>10</td></tr> <tr><td>3.5</td><td>11</td></tr> <tr><td>4.0 or more</td><td>12</td></tr> </tbody> </table> | Area (acres) | Points | 0.25 or less | 4 | 0.5 | 5 | 1.0 | 6 | 1.5 | 7 | 2.0 | 8 | 2.5 | 9 | 3.0 | 10 | 3.5 | 11 | 4.0 or more | 12 | 8 |
| Area (acres) | Points | | | | | | | | | | | | | | | | | | | | | |
| 0.25 or less | 4 | | | | | | | | | | | | | | | | | | | | | |
| 0.5 | 5 | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 6 | | | | | | | | | | | | | | | | | | | | | |
| 1.5 | 7 | | | | | | | | | | | | | | | | | | | | | |
| 2.0 | 8 | | | | | | | | | | | | | | | | | | | | | |
| 2.5 | 9 | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | 10 | | | | | | | | | | | | | | | | | | | | | |
| 3.5 | 11 | | | | | | | | | | | | | | | | | | | | | |
| 4.0 or more | 12 | | | | | | | | | | | | | | | | | | | | | |
| 2) Is this an <u>industrial</u> or <u>commercial</u> property? If yes, enter a score of 3. If no, enter a score of 1 | | 3 | | | | | | | | | | | | | | | | | | | | |
| 3) ^a Enter a score in the box to the right for the habitat quality of the site, using the following rating system ^b . High=1, Intermediate=2, Low=3 | | 3 | | | | | | | | | | | | | | | | | | | | |
| 4) Is the undeveloped land likely to attract wildlife? If yes, enter a score of 1 in the box to the right. If no, enter a score of 2. ^c | | 2 | | | | | | | | | | | | | | | | | | | | |
| 5) Are there any of the following soil contaminants present: Chlorinated dioxins/furans, PCB mixtures, DDT, DDE, DDD, aldrin, chlordane, dieldrin, endosulfan, endrin, heptachlor, benzene hexachloride, toxaphene, hexachlorobenzene, pentachlorophenol, pentachlorobenzene? If yes, enter a score of 1 in the box to the right. If no, enter a score of 4. | | 4 | | | | | | | | | | | | | | | | | | | | |
| 6) Add the numbers in the boxes on lines 2-5 and enter this number in the box to the right. If this number is larger than the number in the box on line 1, the simplified evaluation may be ended. | | 12 | | | | | | | | | | | | | | | | | | | | |

Notes for Table 749-1

^a It is expected that this habitat evaluation will be undertaken by an experienced field biologist. If this is not the case, enter a conservative score of (1) for questions 3 and 4.

^b **Habitat rating system.** Rate the quality of the habitat as high, intermediate or low based on your professional judgment as a field biologist. The following are suggested factors to consider in making this evaluation:

Low: Early successional vegetative stands; vegetation predominantly noxious, nonnative, exotic plant species or weeds. Areas severely disturbed by human activity, including intensively cultivated croplands. Areas isolated from other habitat used by wildlife.

High: Area is ecologically significant for one or more of the following reasons: Late-[successional](#) native plant communities present; relatively high species diversity; used by an uncommon or rare species; [priority habitat](#) (as defined by the Washington Department of fish and Wildlife); part of a larger area of habitat where size or fragmentation may be important for the retention of some species.

Intermediate: Area does not rate as either high or low.

^c Indicate "yes" if the area attracts wildlife or is likely to do so. Examples: Birds frequently visit the area to feed; evidence of high use b mammals (tracks, scat, etc.); habitat "island" in an industrial area; unusual features of an area that make it important for feeding animals; heavy use during seasonal migrations.

[\[Area Calculation Aid\]](#) [\[Aerial Photo with Area Designations\]](#) [\[TEE Table 749-1\]](#) [\[Index of Tables\]](#)

[\[Exclusions Main\]](#) [\[TEE Definitions\]](#) [\[Simplified or Site-Specific?\]](#) [\[Simplified Ecological Evaluation\]](#) [\[Site-Specific Ecological Evaluation\]](#) [\[WAC 173-340-7493\]](#)

[\[TEE Home\]](#)



Appendix G

ExxonMobil / ADC Property, Ecology Site ID 2728 Work Schedule 2717/2731 Federal Avenue, Everett, Washington

The potential liable parties (PLPs) shall perform the actions identified in this work plan and required under the Agreed Order according to the schedule presented below. Days are calendar days; if due dates fall on a weekend or holiday, deliverables will be submitted to Ecology on the next business day. Note, when Ecology provides comments in red-line strikeout format (i.e., comments made directly within the electronic version of the document), the PLPs may respond to those comments directly within the electronic document.

1.0 REMEDIAL INVESTIGATION FIELD WORK

FFS Field Work – Activities associated with the FFS shall be initiated within 15 days of Ecology's execution of the final Agreed Order. Analytical sampling data collected as part of the FFS shall be provided to Ecology within 45 days after receipt of the validated data. The initial analytical data gathered as part of the FFS shall be compiled for Ecology in the form of a technical memo. The technical memo should discuss the field activities and associated analytical results in addition to preliminary cleanup levels, the extent of contamination (plotted on maps), and any data gaps that need to be filled to define the nature and extent of contamination. Note that the preliminary cleanup levels may be different than the screening levels identified in this work plan based on a better understanding of the conceptual site model for the Site (e.g., it may be shown that contaminants in site soil and/or groundwater may not be impacting surface water).

The data and results associated with the tidal study shall be presented in the form of a technical memo to Ecology within 30 days after completion the tidal study field work. The data and results of the tidal study may be included in the technical memo described in the paragraph above, or as a separate document.

Information provided in the technical memo(s) described above will be used to make a determination with regard to whether additional investigation is required to define the full nature and extent of contamination (see next bullet).

Additional field FFS activities (if needed) – Additional field FFS activities may be required to adequately delineate the nature and extent of contamination at the Site, and/or to conduct pilot testing of a remedial alternative. The scope, schedule, and submittal requirements for additional field FFS activities shall be developed by the PLPs, and shall be submitted to Ecology for review and concurrence.

Environmental Data Submittals – All sampling data (including all historic data) shall be submitted to Ecology in both printed and electronic formats in accordance with Ecology's Toxics Cleanup Program Policy 840 (Data Submittal Requirements) and/or any subsequent procedures specified by Ecology for data submittal. Policy 840 is presented in Exhibit C of this Agreed Order. Historic data, in addition to new data collected as part of the initial or first phase of the FFS, shall be supplied to Ecology in electronic format (i.e., EIM and the PLPs original database format) 45 days after the new data has been validated. Data collected as part of any additional FFS field sampling activities shall also be supplied to Ecology in electronic format (i.e., EIM) 45 days after the data has been validated.

2.0 FFS REPORT SUBMITTAL

First Draft FFS Report – The first draft FFS report shall be due to Ecology 120 calendar days after receipt by the PLPs Project Manager of all final analytical data collected during the FFS. The first draft will then undergo a 30-day review period by Ecology.

Second Draft FFS Report – The second draft FFS report shall address any comments/suggestions submitted by Ecology. The second draft FFS report shall be due 60 days after Ecology provides its comments. The draft final version will undergo a 20-day review period by Ecology.

Draft Final FFS Report – The draft final FFS report shall be due 30 days after receipt of Ecology comments on the second draft FFS report.

Final FFS Report – The final FFS report shall be submitted to Ecology 45 days after Ecology's final review and comments. The final FFS will be included in the public comment period conducted for the Cleanup Action Plan (see 3. below)

3.0 CLEANUP ACTION PLAN (CAP) SUBMITTAL

Draft CAP – The draft CAP shall be submitted to Ecology 60 days after the draft final FFS Report is finalized and ready for public comment. This draft CAP will then undergo a 30-day review period by Ecology.

Draft Final CAP – The draft final CAP shall address comments submitted by Ecology on the draft CAP. This draft final CAP shall be due 60 days after submittal of Ecology comments of the draft CAP. The draft final CAP will undergo a 30-day public comment period under a second Agreed Order or Consent Decree before it becomes a final document. The comment period for the draft final FFS report will be combined with the comment period for the draft CAP/second Agreed Order or Consent Decree.

Appendix H

Applicable or Relevant and Appropriate Requirements (ARARs)

The starting point for ARARs is the MTCA cleanup levels and regulations that address implementation of a cleanup under MTCA (Chapter 173.105D RCW; Chapter 173-340 WAC).

Other potential ARARs may include the following:

1. State Water Pollution Control Act (Chapter 90.48 RCW).
2. Applicable surface water quality criteria published in the water quality standards for surface waters of the State of Washington, Chapter 173-201A WAC.
3. Applicable surface water quality criteria published under Section 304 of the Clean Water Act.
4. Applicable surface water quality criteria published under National Toxics Rule (40 C.F.R. Part 131).
5. Washington State Hazardous Waste Management Act (Chapter 70.105 RCW, and State Dangerous Waste Regulation (Chapter 173-303).
6. Solid Waste Management-Reduction and Recycling (Chapter 70.95 RCW).
7. Minimum Standards for Construction and Maintenance of Wells (Chapter 173-160 RCW).
8. Washington Clean Air Act (Chapter 70.94 WAC).
9. Puget Sound Clean Air Agency Regulations (<http://www.pscleanair.org>).
10. Occupational Safety and Health Act (OSHA), 29 CFR Subpart 1910.120.
11. Washington Industrial Safety and Health Act (WISHA).
12. Shoreline Management Act (Chapter 90.58 and Chapter 173-14-28 WAC)
13. Archaeological and Cultural Resources Act (Chapter 43.53 RCW)

EXHIBIT C

ECOLOGY POLICY 840 – DATA SUBMITTAL
REQUIREMENTS



Toxics Cleanup Program Policy

Policy 840

Resource Contact: Policy and Technical Support Staff *Effective:* August 1, 2005

References: WAC 173-340-840(5) *Revised:* September 9, 2005

<http://www.ecy.wa.gov/eim/>

<http://www.ecy.wa.gov/programs/tcp/smu/sedqualfirst.htm>

<http://www.ecy.wa.gov/biblio/0309043.html>

Replaces: Procedure 840

Policy 840: Data Submittal Requirements

Purpose: Contaminated site investigations and cleanups generate a large volume of environmental monitoring data that need to be properly managed to facilitate regulatory decisions and access to this data by site owners, consultants, and the general public. The purpose of this policy is to describe the requirements for submitting environmental monitoring data generated/collected during the investigation and cleanup of contaminated sites under the Model Toxics Control Act (MTCA) and the Sediment Management Standards.

Application: This policy applies to Ecology staff, potentially liable parties, prospective purchasers, state and local agencies, and Ecology contractors that investigate or manage the cleanup of contaminated sites.

1. Unless Otherwise Specified by Ecology, all Environmental Monitoring Data Generated during Contaminated Site Investigations and Cleanups shall be Required to be Submitted to Ecology in both a Written and Electronic Format.

Environmental monitoring data include biological, chemical, physical, and radiological data generated during site investigations and cleanups under the Model Toxics Control Act Cleanup Regulation (WAC 173-340) and the Sediment Management Standards (WAC 173-204).

Data generated/collected during site investigations and cleanups conducted under an order, agreed order or consent decree, permit, grant, loan, contract, interagency agreement, memorandum of understanding or during an independent remedial action, are considered environmental monitoring data under this policy.

Data generated/collected for non site-specific studies, site hazard assessments that result in no further action and initial site investigations are not considered environmental monitoring data under this policy.

2. Orders, Agreed Orders, Consent Decrees, or Permits Issued After the Effective Date of this Policy Shall Include a Condition that Site-Specific Data be Submitted in Compliance with this Policy.

Reports on such work that do not include documentation that the data have been submitted in compliance with this policy shall be deemed incomplete and a notice of such provided to the

submitter. These reports generally should not be reviewed until that information is provided. The assistant attorney general assigned to the site should be consulted in these situations.

3. Reports on Independent Remedial Actions Submitted for Review After October 1, 2005, Under Ecology's Voluntary Cleanup Program Shall Not be Reviewed Until the Data Have Been Submitted in Compliance with this Policy.

Such reports shall be deemed incomplete, and a notice to this effect provided to the submitter.

4. Grants, Contracts, Interagency Agreements or Memoranda of Understanding Issued After the Effective Date of this Policy Shall Include a Condition that Site-Specific Data be Submitted in Compliance with this Policy.

Reports on such work shall not be accepted as complete until the data have been submitted in compliance with this policy. If a payment or transfer of funds is involved in the transaction, the relevant payment or transfer shall be withheld until this requirement has been met.

Example language to include in these documents is attached in Appendix A.

5. Data Generated During Upland Investigations and Cleanups Shall be Submitted Electronically Using Ecology's Environmental Information Management System (EIM).

EIM is Ecology's main database for environmental monitoring data. Proper submission of data through this system meets the requirement of submitting such data in an electronic format. Electronic data shall be submitted to Ecology simultaneously with the accompanying printed report.

Additional information on EIM, including instructions for data submittal, can be found on Ecology's EIM web site at <http://www.ecy.wa.gov/eim/>. TCP's EIM Coordinator also is available for technical assistance to site managers and consultants using EIM.

6. Data Submitted Electronically Using EIM Shall be Checked by the Toxics Cleanup Program's EIM Coordinator Prior to Loading the Data into EIM.

Normally, notice that data have been submitted through EIM will come to TCP's EIM Coordinator. Upon receipt of such a notice the EIM Coordinator should notify the site manager. Similarly, if the Ecology site manager receives a notice of an EIM submittal, they should notify TCP's EIM Coordinator. Upon receipt of the data, TCP's EIM Coordinator reviews the submittal for quality control and officially loads the data into the system.

7. Data Generated During Sediment Investigations and Cleanups shall be Submitted Electronically Using Ecology's Sediment Quality Information System (SEDQUAL).

SEDQUAL is Ecology's data management system for sediment-related data. Proper submission of data through this system meets the requirement of submitting such data in an electronic format. Electronic data shall be submitted to Ecology simultaneously with the accompanying printed report.

8. Sediment Sampling Data Shall be Submitted to Ecology Using the SEDQUAL Data Entry Templates.

At a minimum, the following SEDQUAL data entry templates must be completed:

1. **Reference & Bibliography:** Describes lab reports and publications that relate to the data being entered;
2. **Survey:** Sample number;
3. **Station:** Specifies geographic location of the sediment sample. Sample latitude/longitude coordinates must be entered using the North American Datum of 1983 in U.S. Survey feet (NAD 83, U.S. feet);
4. **Sample:** Describes sample characteristics such as depth; and
5. **Sediment Chemistry:** Reports chemical concentration data in dry weight units.

The following additional templates must also be completed where these measurements/observations have been made:

1. **Bioassay:** Bioassay test results;
2. **Bioassay Control:** Bioassay control test results;
3. **Benthic Infauna:** Species abundance & diversity;
4. **Tissue:** Describes the organism collected;
5. **Bioaccumulation:** Reports tissue chemical concentrations; and
6. **Histopathology:** Reports tissue pathology such as tumors or lesions.

9. Electronic Data Formats Shall be Verified to be Compatible with SEDQUAL Prior to Submittal.

Because SEDQUAL uses ASCII protocol and comma delimited text files, data format verification shall be conducted prior to submittal to Ecology. Data shall be verified by downloading the SEDQUAL database, importing the data into the database, correcting errors, and then exporting the corrected templates.

For additional information on sediment sampling and analysis plan requirements, see Ecology publication 03-09-043 "Sediment Sampling and Analysis Plan Appendix", April, 2003. A copy of this document can be obtained from Ecology's publication office or downloaded from the following web site: <http://www.ecy.wa.gov/biblio/0309043.html>

Additional information on SEDQUAL can be found at:

<http://www.ecy.wa.gov/programs/tcp/smu/sedqualfirst.htm>. ICP's SEDQUAL Coordinator is also available for technical assistance to site managers and consultants using SEDQUAL.


10. Sediment Sampling Data Shall Also be Submitted to Ecology in a Printed Report.

Printed reports shall present the data in both dry weight and total organic carbon normalized units in data tables that compare the results to applicable state regulatory criteria.

11. Data Submitted Electronically Using SEDQUAL Shall be Checked by the Toxics Cleanup Program's SEDQUAL Coordinator Prior to Loading the Data into SEDQUAL.

Normally, SEDQUAL data submittals will come to TCP's SEDQUAL Coordinator. Upon receipt of a submittal, the Coordinator should notify the site manager. Similarly, if the Ecology site manager receives a SEDQUAL submittal, they should notify TCP's SEDQUAL Coordinator. Upon receipt of the data, TCP's SEDQUAL Coordinator reviews the submittal for quality control and officially loads the data into the system.

Approved



James J. Pendowski, Program Manager
Toxics Cleanup Program

Policy Disclaimer: This policy is intended solely for the guidance of Ecology staff. It is not intended, and cannot be relied on, to create rights, substantive or procedural, enforceable by any party in litigation with the state of Washington. Ecology may act at variance with this policy depending on site-specific circumstances, or modify or withdraw this policy at any time.

APPENDIX A: MODEL GRANT AND PERMIT CONDITION

The following condition is to be inserted in permits, grants, loans, contracts, interagency agreements, memorandum of understandings where site-specific environmental monitoring data is expected to be generated:

All sampling data shall be submitted to Ecology in both printed and electronic formats in accordance with WAC 173-340-840(5) and Ecology Toxics Cleanup Program Policy 840: Data Submittal Requirements. Electronic submittal of data is not required for site hazard assessments that result in no further action and initial site investigations. (FOR GRANTS & CONTRACTS ADD: Failure to properly submit sampling data will result in Ecology withholding payment and could jeopardize future grant funding)

Site Cleanup:

ExxonMobil ADC Site

2717 and 2731 Federal Avenue
Everett, Washington

PUBLIC PARTICIPATION PLAN

Prepared by:

Washington State Department of Ecology



WASHINGTON STATE
DEPARTMENT OF
E C O L O G Y

November 2008

This plan is for you!

This Public Participation Plan is prepared for the ExxonMobil ADC Site cleanup as part of the requirement of the Model Toxics Control Act (MTCA). The plan provides information about MTCA cleanup actions and requirements for public involvement, and identifies how Ecology, and ExxonMobil Oil Corporation and American Distributing Company (ADC) support public involvement throughout the cleanup. The plan is intended to encourage coordinated and effective public involvement tailored to the community's needs at the ExxonMobil ADC Site.

For additional copies of this document, please contact:

Washington State Department of Ecology
Andy Kallus, Site Manager
Toxics Cleanup Program
PO Box 47600
Olympia, WA 98504-7600
(360) 407-7259
Email: akal461@ecy.wa.gov

If you need this publication in an alternate format, please call the Toxics Cleanup Program at (360) 407-7170. Persons with hearing loss can call 711 for Washington Relay Service. Persons with a speech disability can call (877) 833-6341 (TTY).

Table of Contents

| | |
|---|----|
| 1.0: Introduction and Overview of the Public Participation Plan..... | 1 |
| 2.0: Site Background..... | 4 |
| Figures 1 and 2: Location of the ExxonMobil ADC Site..... | 5 |
| 3.0: Community Profile | 10 |
| 4.0: Public Participation Opportunities..... | 11 |
| Figure 3: Washington State Cleanup Process | 15 |
| Glossary | 16 |
| Appendix A: Fact Sheet for Agreed Order and Public Participation Plan | |

1.0: Introduction and Overview of the Public Participation Plan

This Public Participation Plan explains how you can become involved in improving the health of your community. It describes public participation opportunities that will be conducted during cleanup of a site on the Everett waterfront - the ExxonMobil ADC Site (Site). These opportunities are part of a cooperative agreement between the Washington State Department of Ecology (Ecology) and some of the owners and operators of the Site, which include Exxon Mobil Oil Corporation and American Distributing Company (ADC). These two companies are Potentially Liable Persons, or PLPs at the Site. The current agreement, called an Agreed Order (Order), is a legal document in which the PLPs and Ecology agree to decide on cleanup actions for the ExxonMobil ADC Site. ExxonMobil ADC is generally located at 2717 and 2713 Federal Avenue, near Port Gardner Bay, Everett, Washington.

Cleanup actions and the public participation process that helps guide them are established in Washington's Model Toxics Control Act (MTCA).¹ Under MTCA, Ecology is responsible for providing timely information and meaningful chances for the public to learn about and comment on important cleanup decisions before they are made. The goals of the public participation process are:

- To promote understanding of the cleanup process so that the public has the necessary information to participate.
- To encourage involvement through a variety of public participation opportunities.

This Public Participation Plan provides a framework for open dialogue about the cleanup among community members, Ecology, cleanup site owners, and other interested parties. It outlines basic MTCA requirements for community involvement activities that will help ensure that this exchange of information takes place during the investigation and cleanup, which include:

- Notifying the public about available reports and studies about the site.
- Notifying the public about review and comment opportunities during specific phases of the cleanup investigation.
- Providing appropriate public participation opportunities such as fact sheets to learn about cleanup documents, and if community interest exists, holding meetings to solicit input and identify community concerns.

¹ The Model Toxics Control Act (MTCA) is the hazardous waste cleanup law for the State of Washington. The full text of the law can be found in Revised Code of Washington (RCW), Chapter 70.105D. The legal requirements and criteria for public notice and participation during MTCA cleanup investigations can be found in Washington Administrative Code (WAC), Section 173-340-600.

- Considering public comments received during public comment periods.

In addition to these basic requirements, the plan may include additional site-specific activities to meet the needs of your community. Based upon the type of the proposed cleanup action, the level of public concern, and the risks posed by the site, Ecology may decide that additional public involvement opportunities are appropriate.

These opportunities form the basis for the public participation process. The intent of this plan is to:

- Provide complete and current information to all interested parties.
- Let you know when there are opportunities to provide input.
- Listen to concerns.
- Address those concerns.

Part of the Puget Sound Initiative

ExxonMobil ADC is one of several sites in the Everett area and is part of a larger cleanup effort called the Puget Sound Initiative (PSI). Governor Chris Gregoire and the Washington State Legislature authorized the PSI as a regional approach to protect and restore Puget Sound. The PSI includes cleaning up 50-60 contaminated sites within one-half mile of the Sound. These sites are grouped in several bays around the Sound for “baywide” cleanup efforts. As other sites in the Everett baywide area move forward into investigation and cleanup, information about them will be provided to the community as well as to interested people and groups.

Roles and Responsibilities

Ecology will lead public involvement activities, with support from the PLPs. Ecology maintains overall responsibility and approval authority for the activities outlined in this plan. The PLPs are responsible for cleanup at this Site. Ecology will ultimately oversee all cleanup activities, and ensure that contamination on this Site is cleaned up to concentrations that are established in state regulations and that protect human health and the environment.

Organization of this Public Participation Plan

The sections that follow in this plan provide:

- Section 2: Background information about the ExxonMobil ADC Site.

- Section 3: An overview of the local community that this plan is intended to engage.
- Section 4: Public involvement opportunities in this cleanup.

This Public Participation Plan addresses current conditions at the Site, but it is intended to be a dynamic working document that will be reviewed at each phase of the cleanup, and updated as needed. Ecology and the PLPs urge the public to become involved in the cleanup process.

2.0: Site Background

Site Description and Location

The ExxonMobil ADC Site is generally located at 2717 and 2731 Federal Way, in Everett, Snohomish County, Washington (see Figures 1 and 2). The Site is entirely upland and is about 0.86 acre in size. The ExxonMobil and ADC properties are bounded by Terminal Avenue and City of Everett property to the south; Kimberly-Clark Worldwide, Inc. property to the north; City of Everett right of way and Burlington Northern Santa Fe Railway property to the east; and Federal Avenue and Port of Everett property to the west. Port Gardner Bay is to the west of the Port property. The Site is currently an asphalt paved parking lot.

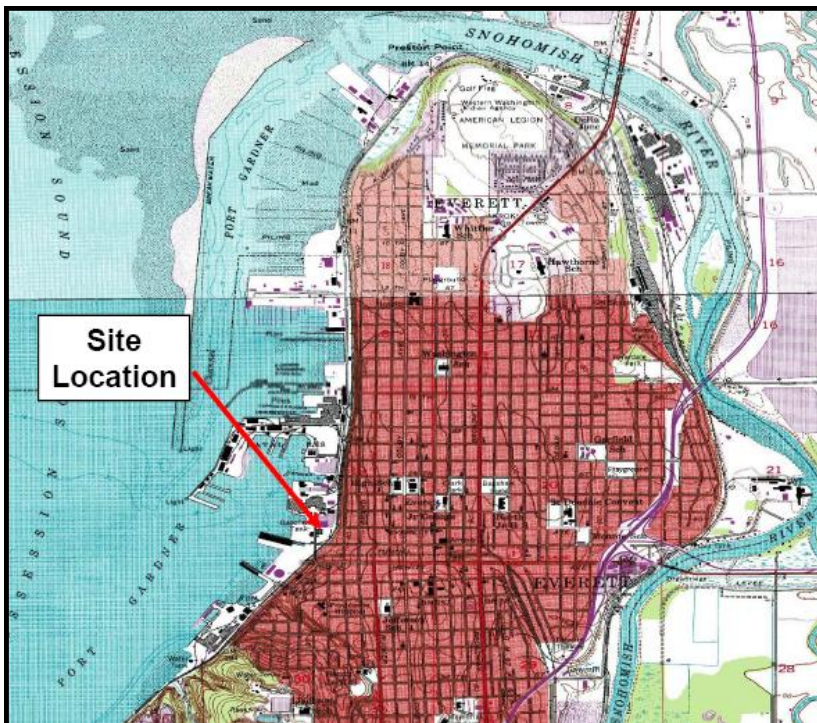


Figure 1: The ExxonMobil ADC Site, shown in the above map with an arrow, is generally located at 2717 and 2731 Federal Avenue, near Port Gardner Bay, Everett, WA. (Photo Source: USGS 7.5 Minute Quadrangle Maps (Everett and Marysville Quadrangle Maps; Photo Revised – 1968 and 1973))

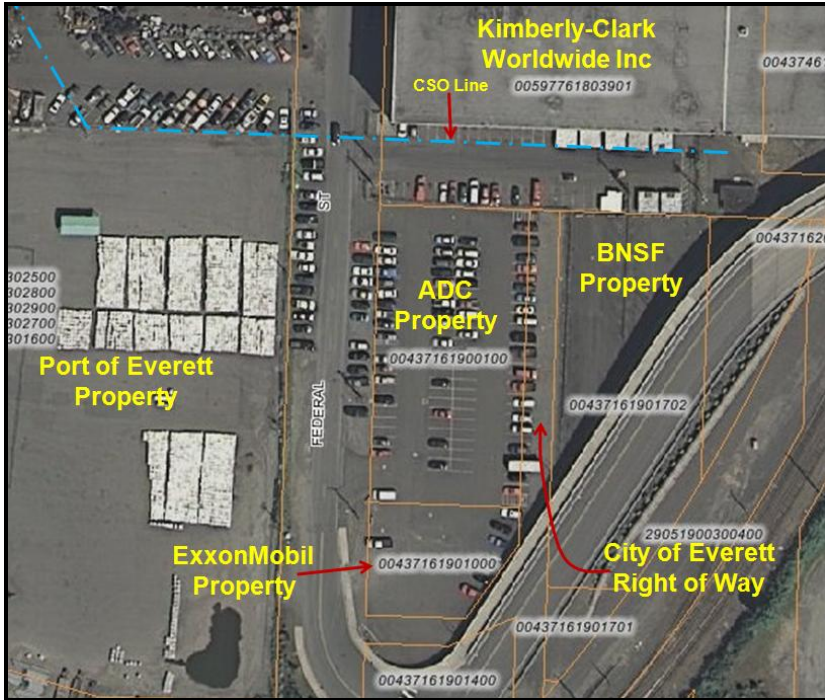


Figure 2: A current view of the ExxonMobil ADC Site. (Photo Source: October 2008 Snohomish County Online Property Information)

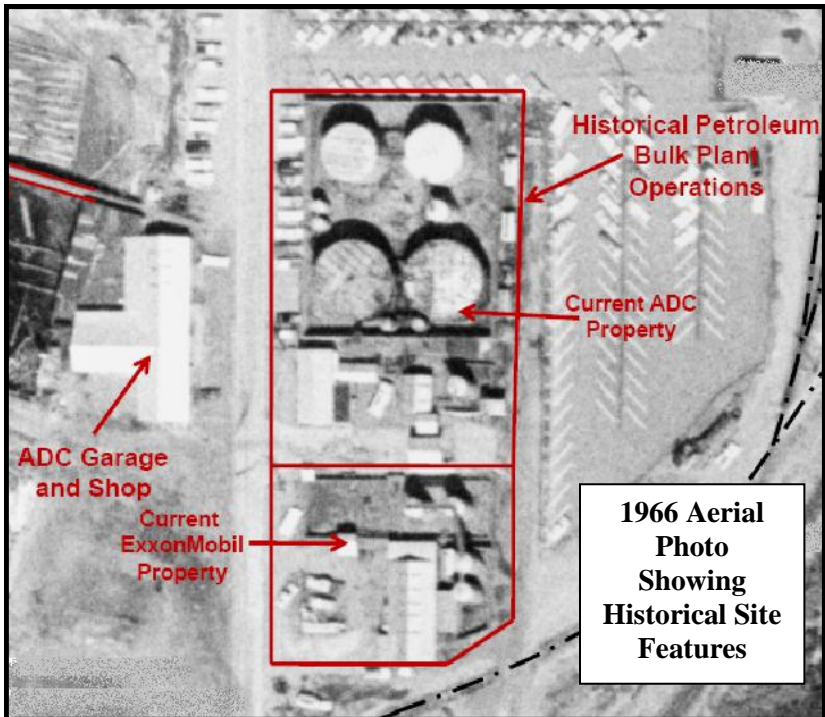


Figure 3: A historical view of the ExxonMobil ADC Site. (Photo Source: Washington State Department of Transportation Aerial Photograph, July 29, 1966.)

The City of Everett Comprehensive Plan land use map² indicates that the Site is zoned M-2 (Heavy Manufacturing). Zoning to the east is B-3 (Central Business District).

General Site History and Contaminants

The Site was used to receive, store and distribute petroleum fuel. The predecessors of ExxonMobil Oil Corporation owned the entire site from 1927 to 1974. Mobil Oil continued to operate the southern portion of the Site until 1987, but sold the northern portion to A.P. Miller for use by American Distributing Company (ADC). ADC conducted bulk petroleum operations on the northern portion from 1974 to 1990. All structures and pipes were removed between 1998 and 2000 from both portions of the Site.

Petroleum contamination has been found in Site soil and groundwater due to past operations. It also flowed along the City of Everett's combined sewer overflow (CSO) line into Port Gardner Bay. Studies and interim cleanup actions have been performed since 1985, and the pathway to the bay was removed (see 1996 Order below). Investigation results have found the following contaminants above state cleanup levels in soil and/or groundwater at the Site: total petroleum hydrocarbons (TPH), polycyclic aromatic hydrocarbons (PAHs), lead, benzene, ethylbenzene, and xylene.

Site cleanup has been addressed under two prior Orders as discussed below.

- **1996 Order** – In 1996, Ecology entered into an emergency Order with Mobil Oil, ADC, and A.P. Miller requiring the cleanup and elimination and/or containment of petroleum releases at and near the City of Everett's CSO discharge line into Port Gardner Bay. The releases were related to a severely corroded and collapsed section of the CSO line approximately 400 feet from Port Gardner Bay. Petroleum releases from the Site around the collapsed CSO section contributed to the discharge to Port Gardner Bay. Mobil Oil, ADC, and A.P. Miller agreed to perform corrective action work, including replacing the collapsed CSO section, sliplining another CSO section (to prevent leakage of petroleum through the CSO), and cleanup of rip rap, sheetpile seawall, and pilings and docks near the discharge to Port Gardner Bay. As a result of these actions, direct discharge of petroleum into Port Gardner via the CSO was eliminated. The Order also required pilot testing of petroleum recovery technologies and characterization of the areal and vertical distribution and concentration of the free-phase waste petroleum liquid and groundwater contamination. As a result of this Order, Ecology acknowledged that the interim containment measures and CSO repair and cleanup were satisfactorily completed with no evidence of on-going releases of heavy oil characteristic of the Mobil and ADC release. About 23,000 gallons of petroleum contamination was recovered within the vicinity of the CSO line.

² Planning and Community Development, City of Everett, WA
http://www.everettwa.org/Zoning_WEB_2008.pdf (Accessed November 4, 2008)

- **1998 Order** – In 1998, Ecology, Mobil Oil, ADC, and A.P. Miller entered into an Order which required the preparation of a Remedial Investigation/Focused Feasibility Study Report (RI/FFS Report), an Interim Action Work Plan, and the subsequent implementation and performance of the work described in the Interim Action Work Plan. The following interim remedial actions were performed (between 1998 and 2000) under the 1998 Order: demolition of site structures, monitoring well abandonment, construction of an interceptor trench (for petroleum recovery), and construction of a site cover to minimize infiltration of surface water into subsurface soil.

As a result of the RI/FFS and subsequent interim remedial actions conducted at the Site under the 1998 Order, the ExxonMobil and A.P. Miller properties were converted into a parking lot for Kimberly-Clark employees. This redevelopment option was selected to allow for possible future remediation activities at the Site. As a continued requirement under the 1998 Order, groundwater monitoring and petroleum recovery activities are ongoing at the Site. More study is needed to fully characterize the contamination at the ExxonMobil ADC Site.

The Cleanup Process

Washington State’s cleanup process and key opportunities for you to provide input are outlined in Figure 3. The general cleanup process includes the following steps:

- Remedial Investigation (RI) - investigates the site for types, locations, and amounts of contaminants.
- Feasibility Study (FS) - identifies cleanup options for those contaminants.
- Cleanup Action Plan (CAP) - selects the preferred cleanup option and explains how cleanup will be conducted.

Each of these steps are generally documented in reports and plans that will be available for public review. Public comment periods of at least 30 calendar days are usually conducted for the following documents:

- Draft RI report
- Draft FS report
- Draft CAP

These cleanup steps and documents are described in greater detail in the following subsections.

Interim Actions

Interim actions may be conducted during the cleanup if required by Ecology. An interim action partially addresses the cleanup of a site, and may be required if:

- It is technically necessary to reduce a significant threat to human health or the environment.
- It corrects a problem that may become substantially worse or cost substantially more to fix if delayed.
- It is needed to complete another cleanup activity, such as design of a cleanup plan.

Future interim actions are not currently anticipated on the ExxonMobil ADC Site.

Remedial Investigation/Feasibility Study Report

The PLPs have agreed to conduct a supplemental RI/FS on the Site. The RI determines which contaminants are on the Site, where they are located, and whether there is a significant threat to human health or the environment. The draft RI report provides baseline data about environmental conditions that will be used to develop cleanup options. The FS and report then identify and evaluate cleanup options, in preparation for the next step in the process. Since studies and some cleanup have been conducted on this Site since 1985, additional studies will be more specific; therefore, the RI/FS will be referred to as a Focused Feasibility Study (FFS).

The RI and FS processes typically include several phases:

- Scoping
- Site characterization
- Development and screening of cleanup alternatives
- Treatability investigations (if necessary to support decisions)
- Detailed analysis

The RI and FS reports are expected to be combined into a draft ExxonMobil ADC Site FFS report. The draft report is anticipated to be completed sometime in 2010 and will be made available for public review and comment.

Cleanup Action Plan

The PLPs and Ecology have agreed to develop a draft CAP for the Site. After public comment on the draft FFS report, a preferred cleanup alternative will be selected. The draft CAP explains the cleanup standards that will be applied at the Site, selects the preferred cleanup alternative(s), and outlines the work to be performed during the actual Site remediation. The CAP may also evaluate the completeness and effectiveness of any interim actions that were performed on the Site. The draft CAP will be available for public review and comment. Once public comments are reviewed and any changes are

made, Ecology provides final approval and Site cleanup can begin. Cleanup is anticipated to be completed sometime in 2011.

3.0: Community Profile

Community Profile

Everett is Snohomish County's largest city and the sixth largest city in the State of Washington. The current population of Everett is approximately 98,000³ situated within 47.7 square miles. Located on Port Gardner Bay, Everett hosts the West Coast's largest marina, U.S. Navy Homeport Naval Station Everett, and The Boeing Company's assembly plant. The city's 2006 labor workforce was more than 80,000, employed predominantly in technology, aerospace, and service-based industries.⁴

Key Community Concerns

An important part of the Public Participation Plan is to identify key community concerns for each cleanup site. Many factors are likely to raise community questions, such as the amount of contamination, how the contamination will be cleaned up, or future use of the Site. Community concerns often change over time, as new information is learned and questions are answered. Identifying site-specific community concerns at each stage of the cleanup process is helpful to ensure that they are adequately addressed. On-going key community concerns will be identified for the ExxonMobil ADC Site through public comments and other opportunities as detailed in Section 4.

³ US Census Bureau, City & Towns Estimates Data for July 1, 2006.
<http://www.census.gov/popest/estimates.php> (Accessed September 12, 2007)

⁴ City of Everett. <http://www.everettwa.org/default.aspx?ID=314> (Accessed September 12, 2007)

4.0: Public Participation Opportunities

Ecology and the PLPs invite you to share your comments and participate in the cleanup in your community. As we work to meet our goals, we will evaluate whether this public participation process is successful. This section describes the public participation opportunities for this Site.

Measuring Success

We want this public participation process to succeed. Success can be measured, at least in part, in the following ways:

- Number of written comments submitted that reflect understanding of the cleanup process and the site.
- Direct “in-person” feedback about the site cleanup or public participation processes, if public meetings are held.
- Periodic updates to this plan to reflect community concerns and responses.

If we are successful, this process will increase:

- Community awareness about plans for cleanup and opportunities for public involvement.
- Public participation throughout the cleanup.
- Community understanding regarding how their input will be considered in the decision-making process.

Activities and Information Sources

Ecology Contacts

Ecology is the lead contact for questions about the cleanup in your community. The Ecology staff person identified in this section is familiar with the cleanup process and activities at the Site. For more information about public involvement or the technical aspects of the cleanup, please contact:

Andy Kallus
Ecology Site Manager
WA State Dept. of Ecology
Toxics Cleanup Program
P.O. Box 47600
Olympia, WA 98504-7600
Phone: (360) 407-7259

E-mail: akal461@ecy.wa.gov

Ecology's Webpage

Ecology has created a webpage to provide convenient access to information. Documents such as the Agreed Order, draft reports, and cleanup plans, are posted as they are issued during the investigation and cleanup process. Visitors to the webpage can find out about public comment periods and meetings; download, print, and read information; and submit comments via e-mail. The webpage also provides links to detailed information about the MTCA cleanup process. The ExxonMobil ADC Site webpage is available at the following address:

http://www.ecy.wa.gov/programs/tcp/sites/ExxonMobilEverett/exxonBlkPlant_hp.htm

Information Centers/Document Repositories


The most comprehensive source of information about the ExxonMobil ADC Site is the information center, or document repository. Two repositories provide access to the complete list of site-related documents. All ExxonMobil ADC investigation and cleanup activity reports will be kept in print at those two locations and will be available for your review. They can be requested on compact disk (CD) as well. Document repositories are updated before public comment periods to include the relevant documents for review. Documents remain at the repositories throughout the investigation and cleanup. For this Site, the document repositories and their hours are:

- **Everett Public Library**
2702 Hoyt Ave.
Phone: (425) 257-8010
Hours: Mon.-Wed. 10 a.m.-9 p.m.,
Thurs.-Sat. 10 a.m.-6 p.m., Sun. 1-5 p.m.
- **WA Department of Ecology Headquarters**
300 Desmond Drive SE
Lacey, WA 98503
By appointment. Please contact Carol Dorn at
(360) 407-7224 or cesg461@ecy.wa.gov.

Look for document covers such as the illustration on the right.

Public Comment Periods

Public comment periods provide opportunities for you to review and comment on major documents, such as the Agreed Order, draft Public Participation Plan, and the draft RI/FS report. The typical public comment period is 30 calendar days.

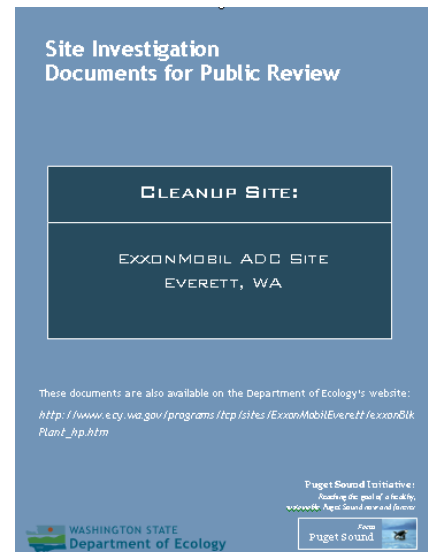

Notice of Public Comment Periods

Notices for each public comment period will be provided by local newspaper and by mail. These notices indicate the timeframe and subject of the comment period, and explain how you can submit your comments. For the ExxonMobil ADC Site, newspaper notices will be posted in The Daily Herald.

Notices are also sent by regular mail to the local community and interested parties. The community typically includes all residential and business addresses within one-quarter mile of the site, as well as potentially interested parties such as public health entities, environmental groups, and business associations.

Fact Sheets

One common format for public comment notification is the fact sheet. Like the newspaper notice, fact sheets explain the timeframe and purpose of the comment period, but also provide background and a summary of the document under review. A fact sheet has been prepared for the ExxonMobil ADC Site explaining the Agreed Order and this Public Participation Plan (See Appendix A). Future fact sheets will be prepared at key milestones in the cleanup process.

MTCA Site Register

Ecology produces an electronic newsletter called the MTCA Site Register. This semi-monthly publication provides updates of the cleanup activities occurring throughout the state, including public meeting dates, public comment periods, and cleanup-related reports. Individuals who would like to receive the MTCA Site Register can sign up three ways:

- Call (360) 407-6069
- Send an email request to ltho461@ecy.wa.gov or
- Register on-line at http://www.ecy.wa.gov/programs/tcp/pub_inv/pub_inv2.html

Mailing Lists

Ecology maintains both an e-mail and regular mail distribution list throughout the cleanup process. The list is created from carrier route delineations for addresses within one-quarter mile of the site, potentially interested parties, public meeting sign-in sheets, and requests made in person, or by regular mail or e-email. You may request to be on the mailing list by contacting the Ecology staff person listed earlier in this section.

Optional Public Meetings

A public meeting will be held during a comment period if requested by ten or more people, or if Ecology decides it would be useful. Public meetings provide additional opportunity to learn about the investigation or cleanup, and to enhance informed comment. If you are interested in a public meeting about the ExxonMobil ADC Site, please contact the Ecology staff person listed earlier in this section.

Submitting Comments

You may submit comments by regular mail or e-mail during public comment periods to the Ecology project manager listed earlier in this section.

Response to Comments

Ecology will review all comments submitted during public comment periods, and will modify documents as necessary. You will receive notice by regular mail or e-mail that Ecology has received your comments, along with an explanation about how the comments were addressed.


Other

Ecology and the PLPs are committed to the public participation process and will consider additional means for delivering information and receiving comments, including combining public comment periods for other actions (such as those associated with the State Environmental Policy Act).

Public Participation Grants

You may be eligible to apply for a Public Participation Grant from Ecology to provide additional public participation activities. Those additional activities will not reduce the scope of the activities defined by this plan. Activities conducted under this plan would coordinate with the additional activities defined under the grant.

Figure 3: Washington State Cleanup Process

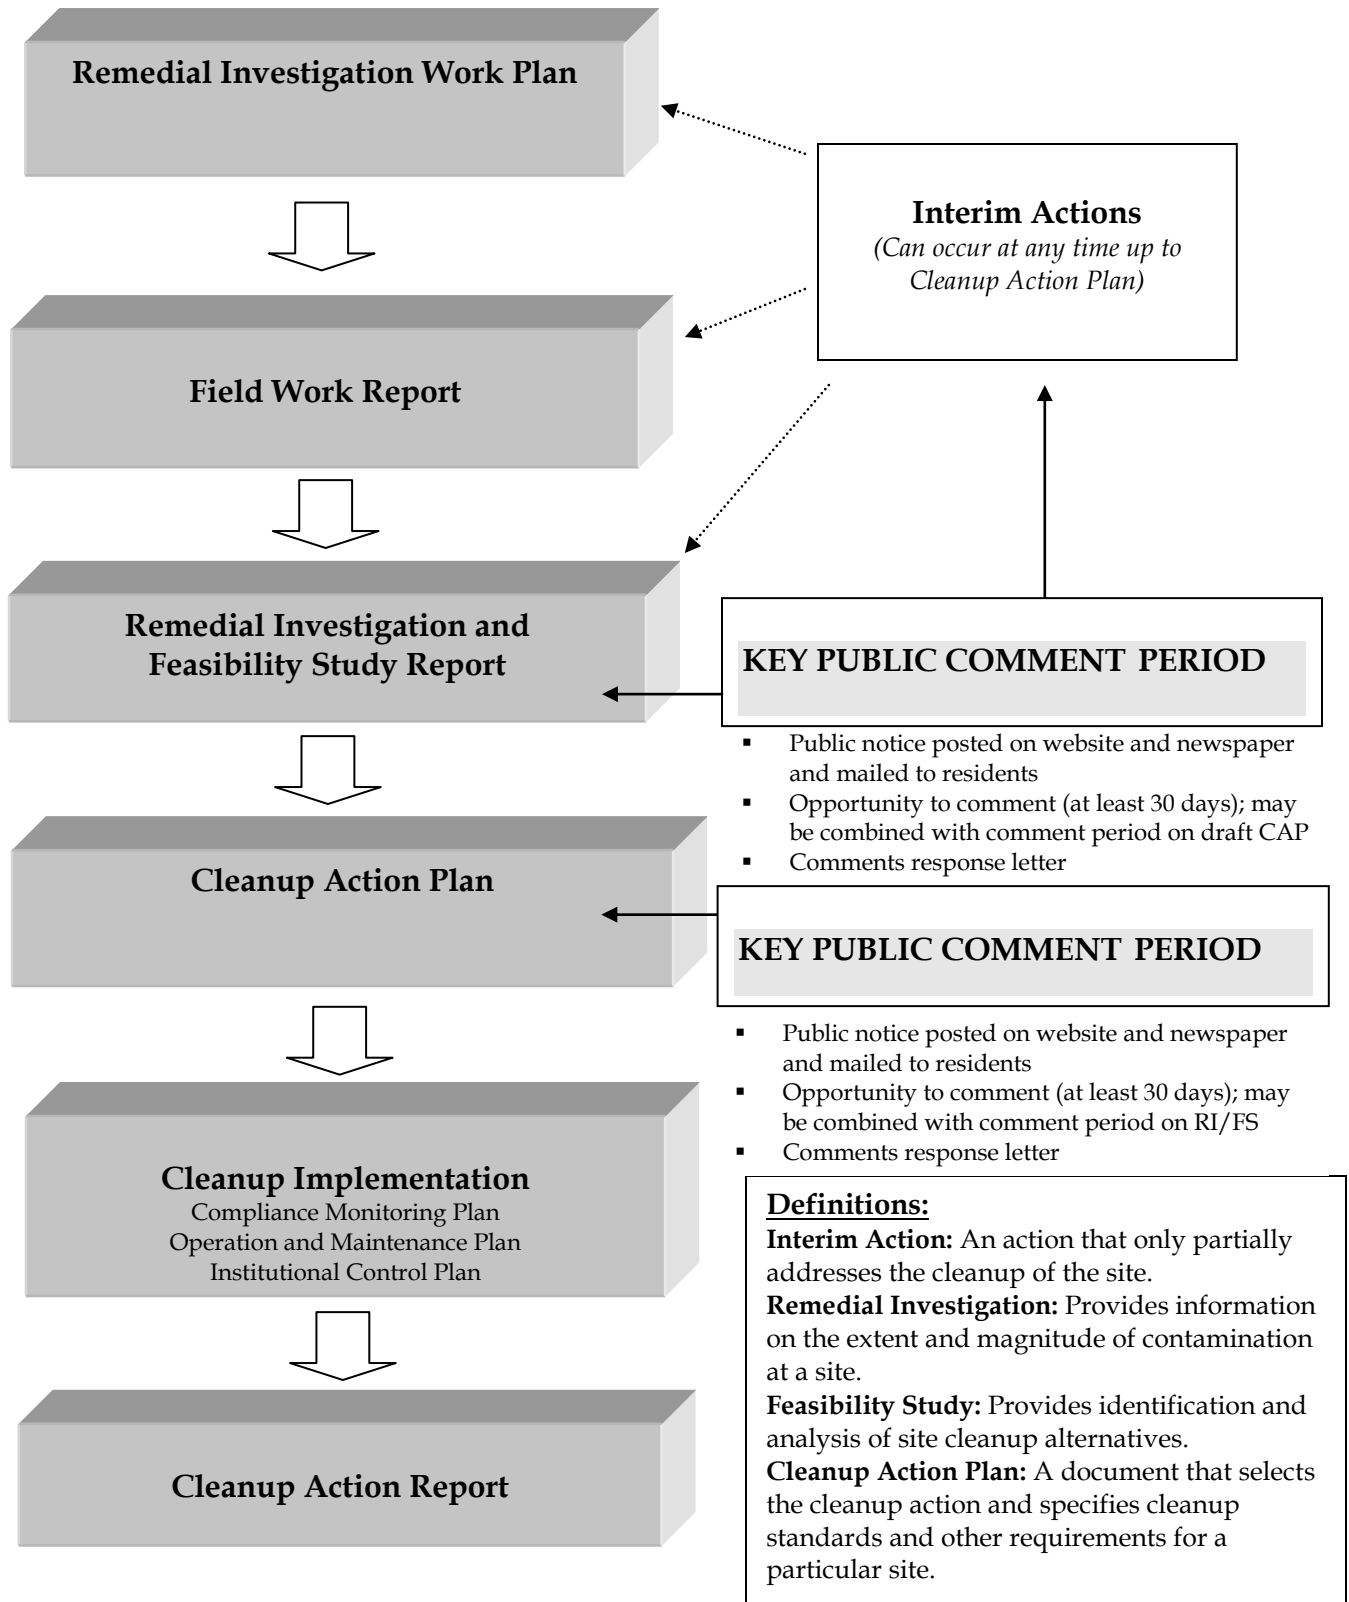

Glossary

Cleanup: The implementation of a cleanup action or interim action.

Cleanup Action: Any remedial action except interim actions, taken at a site to eliminate, render less toxic, stabilize, contain, immobilize, isolate, treat, destroy, or remove a hazardous substance that complies with MTCA cleanup requirements, including but not limited to: complying with cleanup standards, utilizing permanent solutions to the maximum extent practicable, and including adequate monitoring to ensure the effectiveness of the cleanup action.

Cleanup Action Plan: A document that selects the cleanup action and specifies cleanup standards and other requirements for a particular site. The cleanup action plan, which follows the remedial investigation/feasibility study report, is subject to a public comment period. After completion of a comment period on the cleanup action plan, Ecology finalizes the cleanup action plan.

Cleanup Level: The concentration (or amount) of a hazardous substance in soil, water, air, or sediment that protects human health and the environment under specified exposure conditions. Cleanup levels are part of a uniform standard established in state regulations, such as MTCA.

Cleanup Process: The process for identifying, investigating, and cleaning up hazardous waste sites.

Contaminant: Any hazardous substance that does not occur naturally or occurs at greater than natural background levels.

Feasibility Study: Provides identification and analysis of site cleanup alternatives and is usually completed within a year. Evaluates sufficient site information to enable the selection of a cleanup action. The entire Remedial Investigation/Feasibility Study (RI/FS) process takes about two years and is followed by the cleanup action plan.

Hazardous Site List: A list of ranked sites that require further remedial action. These sites are published in the Site Register.

Interim Action: Any remedial action that partially addresses the cleanup of a site. It is an action that is technically necessary to reduce a threat to human health or the environment by eliminating or substantially reducing one or more pathways for exposure to a hazardous substance at a facility; an action that corrects a problem that may become substantially worse or cost substantially more to address if the action is delayed; an action needed to provide for completion of a site hazard assessment, state remedial investigation/feasibility study, or design of a cleanup action.

Model Toxics Control Act: Refers to Chapter 70.105D RCW. Voters approved it in November 1988. The implementing regulation is found in Chapter 173-340 WAC.

Public Notice: At a minimum, adequate notice mailed to all persons who have made a timely request of Ecology and to persons residing in the potentially affected vicinity of the proposed action; mailed to appropriate news media; published in the local (city or county) newspaper of largest circulation; and the opportunity for interested persons to comment.

Public Participation Plan: A plan prepared under the authority of WAC 173-340-600 to encourage coordinated and effective public involvement tailored to the public's needs at a particular site.

Release: Any intentional or unintentional entry of any hazardous substance into the environment, including, but not limited to, the abandonment or disposal of containers of hazardous substances.

Remedial Action: Any action or expenditure consistent with MTCA to identify, eliminate, or minimize any threat posed by hazardous substances to human health or the environment, including any investigative and monitoring activities of any release or threatened release of a hazardous substance, and any health assessments or health effects studies conducted in order to determine the risk or potential risk to human health.

Remedial Investigation: Any remedial action that provides information on the extent and magnitude of contamination at a site. This usually takes 12 to 18 months and is followed by the feasibility study. The purpose of the Remedial Investigation/Feasibility Study is to collect and develop sufficient site information to enable the selection of a cleanup action.