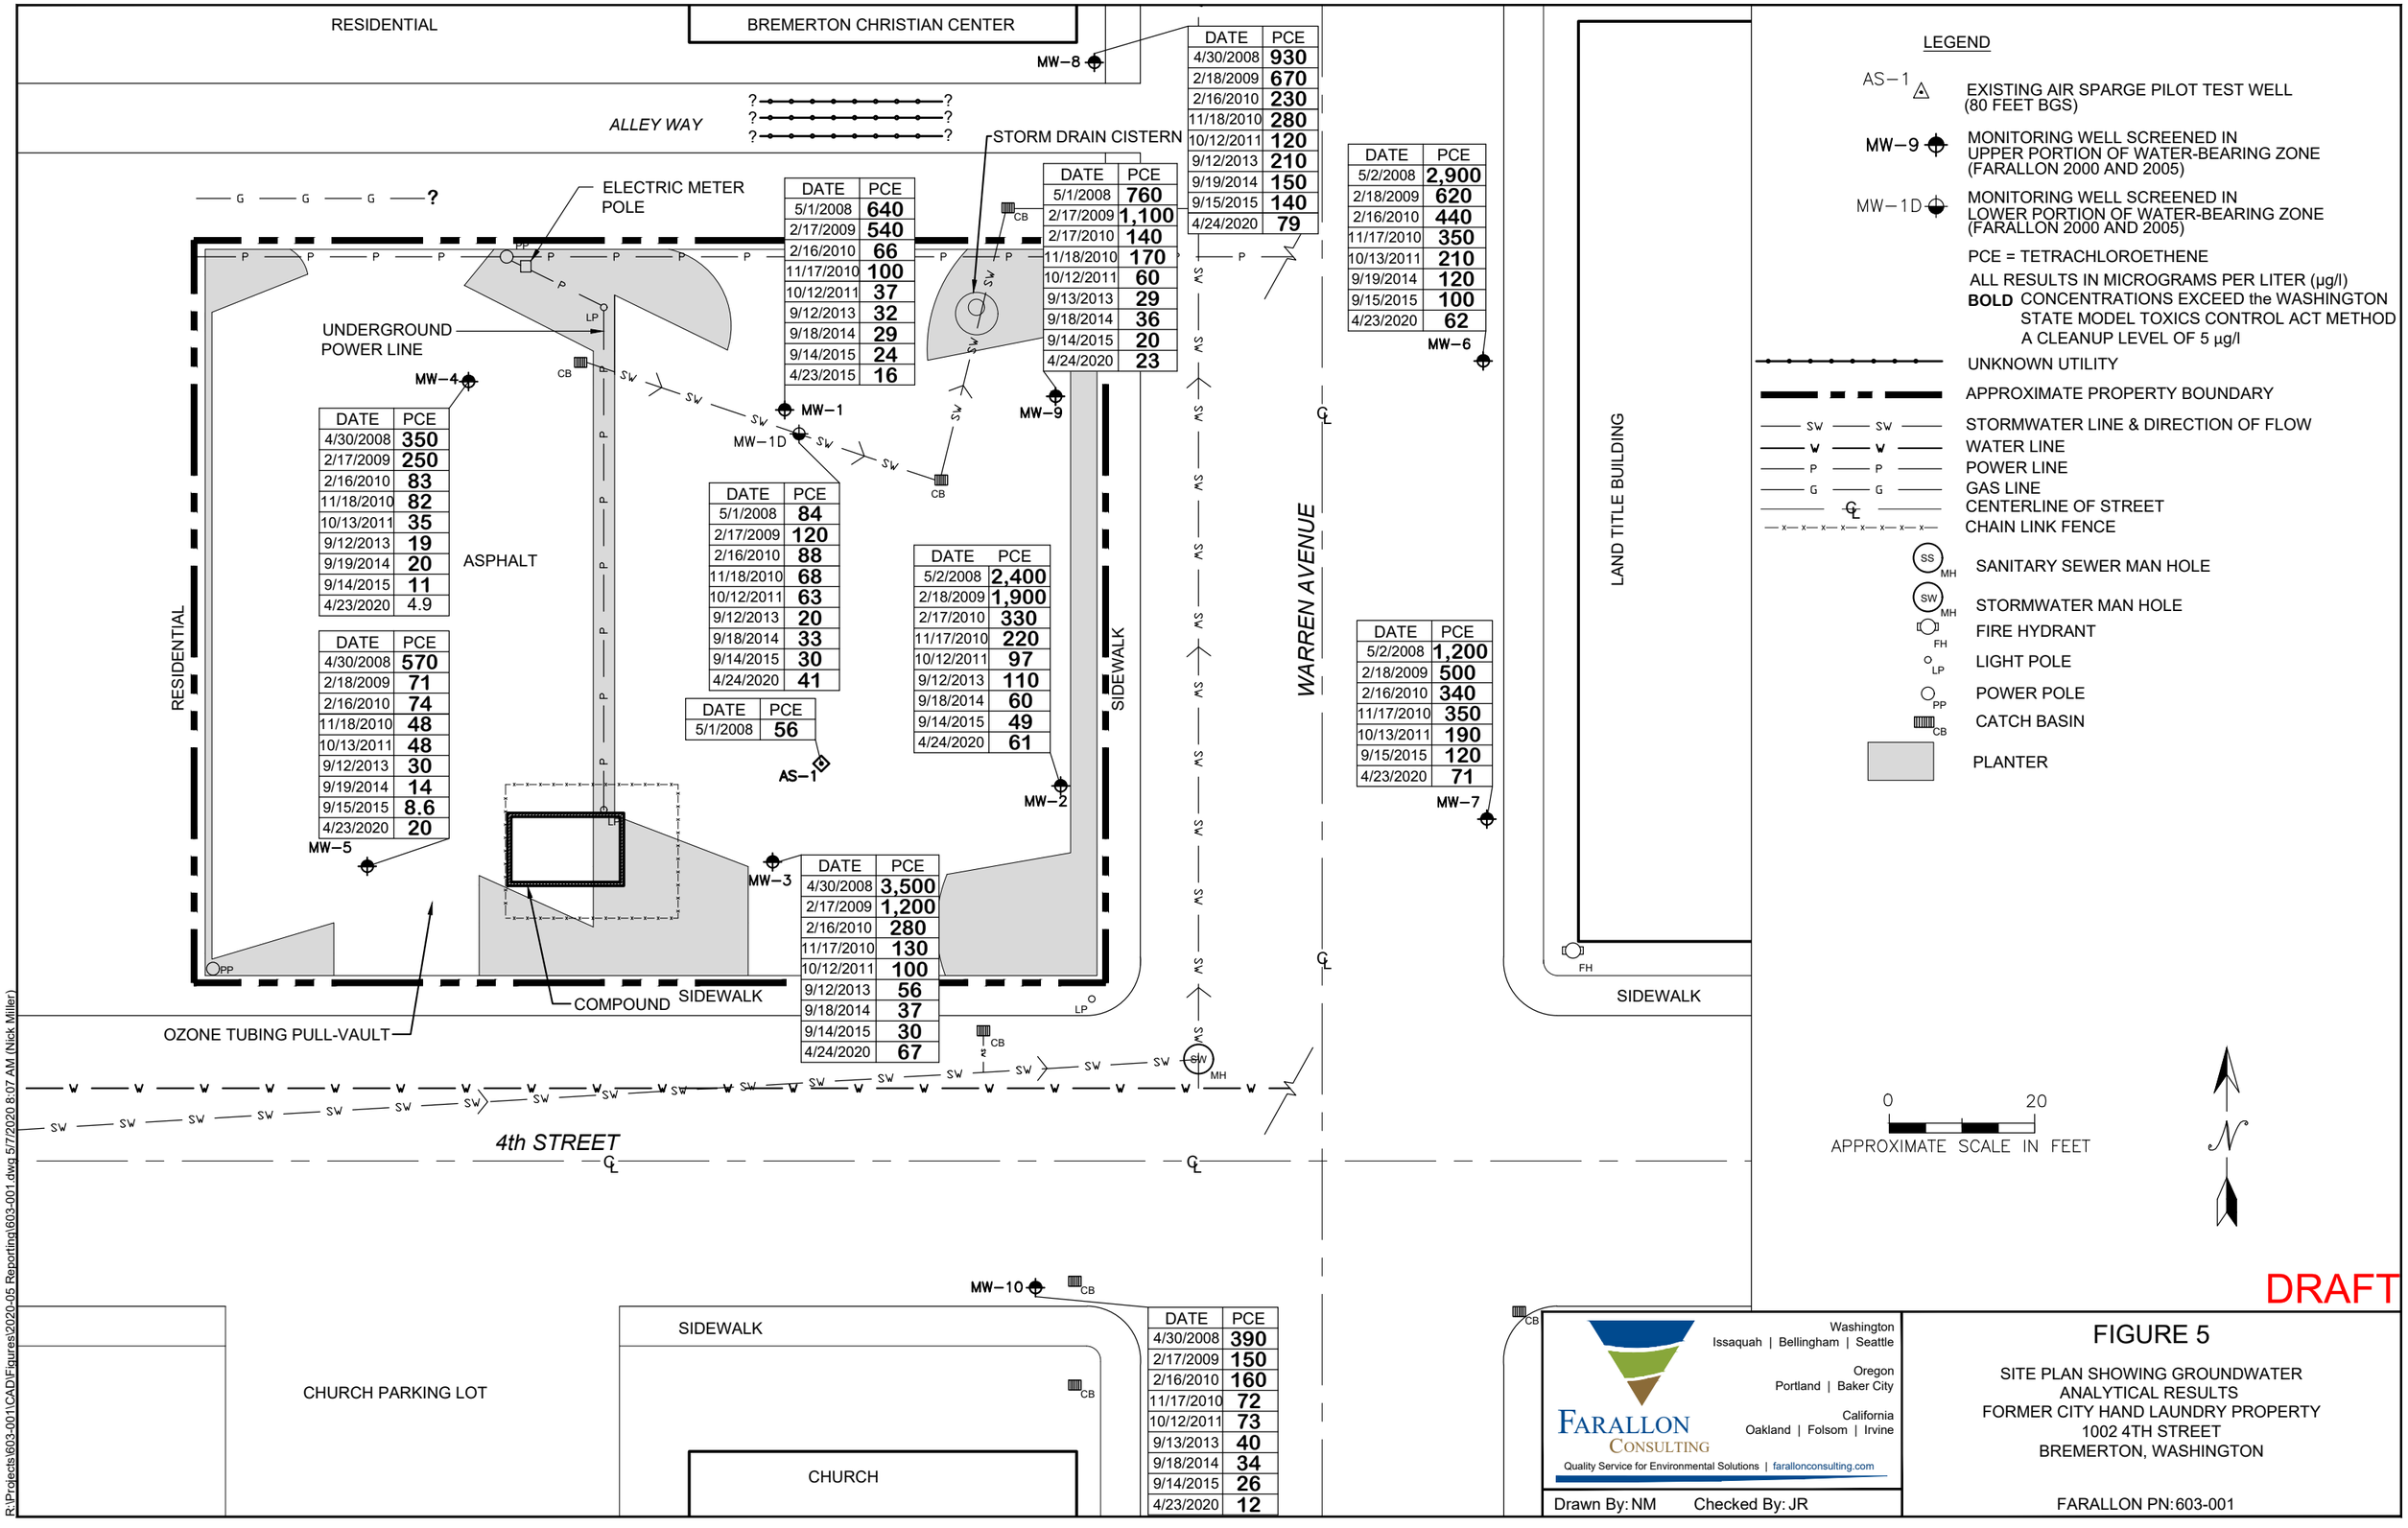
RESIDENTIAL
BREMERTON CHRISTIAN CENTER
ALLEY WAY
STORM DRAIN CISTERN
ELECTRIC METER POLE
UNDERGROUND POWER LINE
ASPHALT
RESIDENTIAL
SIDEWALK
WARREN AVENUE
LAND TITLE BUILDING
COMPOUND
SIDEWALK
OZONE TUBING PULL-VAULT
4th STREET
CHURCH PARKING LOT
SIDEWALK
CHURCH
MW-1
MW-1D
MW-2
MW-3
MW-4
MW-5
MW-6
MW-7
MW-8
MW-9
MW-10
AS-1
DATE PCE
4/30/2008 930
2/18/2009 670
2/16/2010 230
11/18/2010 280
10/12/2011 120
9/12/2013 210
9/19/2014 150
9/15/2015 140
4/24/2020 79
DATE PCE
5/2/2008 2,900
2/18/2009 620
2/16/2010 440
11/17/2010 350
10/13/2011 210
9/19/2014 120
9/15/2015 100
4/23/2020 62
DATE PCE
5/1/2008 640
2/17/2009 540
2/16/2010 66
11/17/2010 100
10/12/2011 37
9/12/2013 32
9/18/2014 29
9/14/2015 24
4/23/2015 16
DATE PCE
5/1/2008 760
2/17/2009 1,100
2/17/2010 140
11/18/2010 170
10/12/2011 60
9/13/2013 29
9/18/2014 36
9/14/2015 20
4/24/2020 23
DATE PCE
4/30/2008 350
2/17/2009 250
2/16/2010 83
11/18/2010 82
10/13/2011 35
9/12/2013 19
9/19/2014 20
9/14/2015 11
4/23/2020 4.9
DATE PCE
4/30/2008 570
2/18/2009 71
2/16/2010 74
11/18/2010 48
10/13/2011 48
9/12/2013 30
9/19/2014 14
9/15/2015 8.6
4/23/2020 20
DATE PCE
5/1/2008 84
2/17/2009 120
2/16/2010 88
11/18/2010 68
10/12/2011 63
9/12/2013 20
9/18/2014 33
9/14/2015 30
4/24/2020 41
DATE PCE
5/1/2008 56
DATE PCE
5/2/2008 2,400
2/18/2009 1,900
2/17/2010 330
11/17/2010 220
10/12/2011 97
9/12/2013 110
9/18/2014 60
9/14/2015 49
4/24/2020 61
DATE PCE
5/2/2008 1,200
2/18/2009 500
2/16/2010 340
11/17/2010 350
10/13/2011 190
9/15/2015 120
4/23/2020 71
DATE PCE
4/30/2008 3,500
2/17/2009 1,200
2/16/2010 280
11/17/2010 130
10/12/2011 100
9/12/2013 56
9/18/2014 37
9/14/2015 30
4/24/2020 67
DATE PCE
4/30/2008 390
2/17/2009 150
2/16/2010 160
11/17/2010 72
10/12/2011 73
9/13/2013 40
9/18/2014 34
9/14/2015 26
4/23/2020 12
LEGEND
AS-1 EXISTING AIR SPARGE PILOT TEST WELL (80 FEET BGS)
MW-9 MONITORING WELL SCREENED IN UPPER PORTION OF WATER-BEARING ZONE (FARALLON 2000 AND 2005)
MW-1D MONITORING WELL SCREENED IN LOWER PORTION OF WATER-BEARING ZONE (FARALLON 2000 AND 2005)
PCE = TETRACHLOROETHENE
ALL RESULTS IN MICROGRAMS PER LITER (µg/l)
BOLD CONCENTRATIONS EXCEED the WASHINGTON STATE MODEL TOXICS CONTROL ACT METHOD A CLEANUP LEVEL OF 5 µg/l
UNKNOWN UTILITY
APPROXIMATE PROPERTY BOUNDARY
STORMWATER LINE & DIRECTION OF FLOW
WATER LINE
POWER LINE
GAS LINE
CENTERLINE OF STREET
CHAIN LINK FENCE
SANITARY SEWER MAN HOLE
STORMWATER MAN HOLE
FIRE HYDRANT
LIGHT POLE
POWER POLE
CATCH BASIN
PLANTER
0 20
APPROXIMATE SCALE IN FEET
DRAFT
Washington
Issaquah | Bellingham | Seattle
Oregon
Portland | Baker City
California
Oakland | Folsom | Irvine
FARALLON CONSULTING
Quality Service for Environmental Solutions | farallonconsulting.com
Drawn By: NM
Checked By: JR
FIGURE 5
SITE PLAN SHOWING GROUNDWATER ANALYTICAL RESULTS
FORMER CITY HAND LAUNDRY PROPERTY
1002 4TH STREET
BREMERTON, WASHINGTON
FARALLON PN: 603-001
R:\Projects\603-001\CAD\Figures\2020-05 Reporting\603-001.dwg 5/7/2020 8:07 AM (Nick Miller)